



Bühler AG - Die Casting
Gupfenstrasse 5
CH-9240 Uzwil / Switzerland

Circuit diagram
700026276

Customer		Woo Su AMS	
City		Korea	
Project		Ecoline 84	
Machine number		700026276	
Network number		468048	
Order number		47886158	
Make		Ecoline	
Regulation		EN IEC 60204-1	
Power supply		380VAC	
Frequency		60Hz	
Control voltage		24VDC / 230VAC	
Rated current		83A	
Basic schematic		ESM-85061	
Schematics customer specific		ESF-74601	
Created on	2015/6/29		
Edit date	2015/6/29	by (short name)	
Number of pages			
254			

Table of contents

BDAG_F06_002

Higher-level function	Mounting location	Page	Page description	Schematic number customer specific	Date
INFO		1	제목 페이지/커버 시트 Title page / cover sheet		
		2;2.1...2.6	목차 Table of contents		
		3	개정 개요 Revision overview		2012/1/31
		4	구조 식별자 개요 Structure identifier overview		
		5	Standards & Regulations		2012/1/31
		6	High-voltage current		2012/1/31
		7;8	Instructions for electrical installations		2012/1/31
		9	Configuration Wago field bus coupler		2012/1/31
		10	Dummy plug		2012/1/31
LAYOUT	C72	15	Layout machine		2012/1/31
	C80	16	Layout connector plate		2012/1/31
	J1	18	Layout mounting panel		2012/1/31
	J2	19	Layout mounting panel		2012/1/31
	J3	20	Layout mounting panel		2012/1/31
	J4	21	Layout mounting panel		2012/1/31
	J5	22	Layout mounting panel		2012/1/31
	J7.1	23	Layout mounting panel		2012/1/31
	J7.2	24	Layout mounting panel		2012/1/31
	J49.1	25	Layout mounting panel		2012/1/31
	J49.2	26	Layout mounting panel		2012/1/31
	J61	27	Hole pattern front panel		2012/1/31
	J61	28	Layout control column		2012/1/31
A	C72	70	Disposition cable protective hoses		
	C72	80	Disposition control cabinet		
	C72	90	Layout mounting panel		
	C72	100	Power supply customer side 380-415VAC		
	C72	101	Distribution 230V power supply 380-415V		
	C72	102	Power supply 24VDC		

Table of contents

BDAG_F06_002

Higher-level function	Mounting location	Page	Page description	Schematic number customer specific	Date
A	C72	103	Distribution 24VDC		
	C72	108	Cooling device		
	C72	140	Main motor 37kW, 380-415VAC		
	C72	142	Main motor start		
	C72	146;371	Central lubrication system		
	C72	150	Emergency off toggle cover		
	C72	160	Emergency off spare 1-2		
	C72	161	Emergency off press rechts		
	C72	200;201;205;208...210;212;213;215;216	Control column		
	C72	214	Control column		
	C72	250	Emergency off saftey relais		
	C72	295	Power supply terminal box +J1		
	C72	296	Power supply terminal box +J2		
	C72	297	Power supply terminal box +J3		
	C72	298	Power supply terminal box +J4		
	C72	299	Power supply terminal box +J5		
	C72	301...303	Drive unit		
	C72	306...308	Valves die moving		
	C72	351	Safety gate left manual		
	C72	352	Limit switches safety gate left		
	C72	353	Safety relay safety gate left		
	C72	361	Safety gate right electric Gefran		
	C72	362	Limit switches safety gate right		
	C72	363	Safety relay safety gate right		
	C72	366	Safety relay fencing right		
	C72	367	Fencing right		
	C72	369	Fencing left or right		
	C72	373	Die stroke measuring system		

Table of contents

BDAG_F06_002

Higher-level function	Mounting location	Page	Page description	Schematic number customer specific	Date
A	C72	380	Die height adjustment		
	C72	382	Without mechanical locking security		
	C72	391;392	Withdrawal tie bar No. 2		
	C72	394;395	Without withdrawal tie bar No. 4		
	C72	398	이젝터 Ejector	ESF-74601	
	C72	399	??? ?? ??? Ejector quick coupling	ESF-74601	
	C72	401	Core pull M1		
	C72	404	Core pull M2		
	C72	407	Core pull M3		
	C72	410	코어 풀러 M4 Core pull M4	ESF-74601	
	C72	419	Core pull F1		
	C72	422	Core pull F2		
	C72	435;437...440	Injection unit		
	C72	447;448	Injection unit, remote control		
	C72	449	Casting plunger		
	C72	580	Water cooling		
	C72	636	Safety relay fencing metal feeding		
	C72	637;639	Fencing metal feeding		
	C72	801...804	Peripheral interface metal feeding		
	C72	805	Peripheral interface metal feeding		
	C72	811...813	Periphery interface spraying		
	C72	814	Periphery interface spraying		
	C72	821;822;824	Periphery interface extraction		
	C72	823;828	Periphery interface extraction		
	C72	831...833	Periphery interface vacuum		
	C72	870	Interface to integrated peripheral		
	C72	900	Keba Overview 0.0/CP250X		
	C72	901	Keba Overview 0.0/AM280A		

2.1

			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr		Machine-No.	700026276
Modification	Date	Name	Original		Replacement of	Replaced by



Bühler AG - Die Casting

목차
Table of contents

Table of contents

BDAG_F06_002

Higher-level function	Mounting location	Page	Page description	Schematic number customer specific	Date
A	C72	902	Keba Overview 0.0/AI240A		
	C72	903	Keba Overview 0.0/MM240A		
	C72	904	Keba Overview 0.0/DM272A		
	C72	905	Keba Overview 0.1/DM272A		
	C72	906	Keba Overview 0.2/DM272A		
	C72	907	Keba Overview 0.3/DM272A		
	C72	908	Keba Overview 0.4/DM272A		
	C72	910	Wago overview bus coupler		
	C72	911;915;917;918	Wago overview basic execution		
	C72	912	Wago overview option MZ, SP, EN		
	C72	913	Wago overview option SZ4, VA		
	C72	914	Wago overview option MSS, US		
	C72	919	Wago overview MZ outputs		
	C72	920	Wago overview SP outputs		
	C72	921	Wago overview EN outputs		
	C72	922	Wago overview bus supply		
	C72	923	Wago overview VA outputs		
	C72	929	Wago overview end clamp		
REPORT	STE	1000	플러그 다이어그램 =A+C72-C80-EX8 Plug diagram =A+C72-C80-EX8		
	STE	1001	플러그 다이어그램 =A+C72-EX23 Plug diagram =A+C72-EX23		
	STE	1002	플러그 다이어그램 =A+C72-EX34 Plug diagram =A+C72-EX34		
	STE	1003	플러그 다이어그램 =A+C80-EX6 Plug diagram =A+C80-EX6		
	STE	1004	플러그 다이어그램 =A+C80-EX7 Plug diagram =A+C80-EX7		
	STE	1005	플러그 다이어그램 =A+C80-EX8 Plug diagram =A+C80-EX8		
	STE	1006	플러그 다이어그램 =A+C80-EX9 Plug diagram =A+C80-EX9		
	STE	1007	플러그 다이어그램 =A+C80-EX23 Plug diagram =A+C80-EX23		
	STE	1008	플러그 다이어그램 =A+C80-EX27 Plug diagram =A+C80-EX27		
	STE	1009	플러그 다이어그램 =A+C80-EX33 Plug diagram =A+C80-EX33		

Higher-level function	Mounting location	Page	Page description	Schematic number customer specific	Date
REPORT	STE	1010	플러그 다이어그램 =A+C80-EX60 Plug diagram =A+C80-EX60		
	STE	1011	플러그 다이어그램 =A+J61-EX61.1 Plug diagram =A+J61-EX61.1		
	STE	1012	플러그 다이어그램 =A+J61-EX61.2 Plug diagram =A+J61-EX61.2		
	KLE	2000	터미널 다이어그램 =A+C72-EX106 Terminal diagram =A+C72-EX106		
	KLE	2001	터미널 다이어그램 =A+C72-EX107 Terminal diagram =A+C72-EX107		
	KLE	2002	터미널 다이어그램 =A+C72-EX109 Terminal diagram =A+C72-EX109		
	KLE	2003	터미널 다이어그램 =A+C72-XL1 Terminal diagram =A+C72-XL1		
	KLE	2004	터미널 다이어그램 =A+C72-XL2 Terminal diagram =A+C72-XL2		
	KLE	2005	터미널 다이어그램 =A+C72-XL3 Terminal diagram =A+C72-XL3		
	KLE	2006	터미널 다이어그램 =A+C72-XL4 Terminal diagram =A+C72-XL4		
	KLE	2007	터미널 다이어그램 =A+C72-XL5 Terminal diagram =A+C72-XL5		
	KLE	2008	터미널 다이어그램 =A+C72-XL10 Terminal diagram =A+C72-XL10		
	KLE	2009	터미널 다이어그램 =A+C72-XL61.1 Terminal diagram =A+C72-XL61.1		
	KLE	2010	터미널 다이어그램 =A+C72-XL61.2 Terminal diagram =A+C72-XL61.2		
	KLE	2011	터미널 다이어그램 =A+C72-XL61.3 Terminal diagram =A+C72-XL61.3		
	KLE	2012	터미널 다이어그램 =A+C72-XL61.4 Terminal diagram =A+C72-XL61.4		
	KLE	2013	터미널 다이어그램 =A+C72-XL83 Terminal diagram =A+C72-XL83		
	KLE	2014	터미널 다이어그램 =A+C72-XL84 Terminal diagram =A+C72-XL84		
	KLE	2015	터미널 다이어그램 =A+C72-XL86 Terminal diagram =A+C72-XL86		
	KLE	2016	터미널 다이어그램 =A+C72-XL88 Terminal diagram =A+C72-XL88		
	KLE	2017	터미널 다이어그램 =A+C72-XL89 Terminal diagram =A+C72-XL89		
	KLE	2018	터미널 다이어그램 =A+C72-XL90 Terminal diagram =A+C72-XL90		
	KLE	2019	터미널 다이어그램 =A+C72-XL91 Terminal diagram =A+C72-XL91		
	KLE	2020	터미널 다이어그램 =A+C72-XL92 Terminal diagram =A+C72-XL92		
	KLE	2021	터미널 다이어그램 =A+C72-XL94 Terminal diagram =A+C72-XL94		
	KLE	2022	터미널 다이어그램 =A+C72-XL96 Terminal diagram =A+C72-XL96		
	KLE	2023	터미널 다이어그램 =A+C72-XL97 Terminal diagram =A+C72-XL97		
	KLE	2024	터미널 다이어그램 =A+C72-XL128 Terminal diagram =A+C72-XL128		

Table of contents

BDAG_F06_002

Higher-level function	Mounting location	Page	Page description	Schematic number customer specific	Date
REPORT	KLE	2025...2027	터미널 다이어그램 =A+J1-XL3 Terminal diagram =A+J1-XL3		
	KLE	2028	터미널 다이어그램 =A+J1-XL4 Terminal diagram =A+J1-XL4		
	KLE	2029	터미널 다이어그램 =A+J1-XL5 Terminal diagram =A+J1-XL5		
	KLE	2030	터미널 다이어그램 =A+J1-XL6 Terminal diagram =A+J1-XL6		
	KLE	2031	터미널 다이어그램 =A+J1-XL7 Terminal diagram =A+J1-XL7		
	KLE	2032;2033	터미널 다이어그램 =A+J2-XL1 Terminal diagram =A+J2-XL1		
	KLE	2034	터미널 다이어그램 =A+J2-XL3 Terminal diagram =A+J2-XL3		
	KLE	2035	터미널 다이어그램 =A+J2-XL4 Terminal diagram =A+J2-XL4		
	KLE	2036	터미널 다이어그램 =A+J2-XL5 Terminal diagram =A+J2-XL5		
	KLE	2037	터미널 다이어그램 =A+J2-XL6 Terminal diagram =A+J2-XL6		
	KLE	2038;2039	터미널 다이어그램 =A+J3-XL1 Terminal diagram =A+J3-XL1		
	KLE	2040	터미널 다이어그램 =A+J3-XL2 Terminal diagram =A+J3-XL2		
	KLE	2041	터미널 다이어그램 =A+J3-XL3 Terminal diagram =A+J3-XL3		
	KLE	2042	터미널 다이어그램 =A+J3-XL4 Terminal diagram =A+J3-XL4		
	KLE	2043	터미널 다이어그램 =A+J4-XL1 Terminal diagram =A+J4-XL1		
	KLE	2044	터미널 다이어그램 =A+J4-XL2 Terminal diagram =A+J4-XL2		
	KLE	2045	터미널 다이어그램 =A+J4-XL3 Terminal diagram =A+J4-XL3		
	KLE	2046	터미널 다이어그램 =A+J4-XL4 Terminal diagram =A+J4-XL4		
	KLE	2047	터미널 다이어그램 =A+J5-XL1 Terminal diagram =A+J5-XL1		
	KLE	2048	터미널 다이어그램 =A+J5-XL2 Terminal diagram =A+J5-XL2		
	KLE	2049	터미널 다이어그램 =A+J5-XL3 Terminal diagram =A+J5-XL3		
	KLE	2050	터미널 다이어그램 =A+J5-XL5 Terminal diagram =A+J5-XL5		
	KLE	2051	터미널 다이어그램 =A+J5-XL6 Terminal diagram =A+J5-XL6		
	KLE	2052	터미널 다이어그램 =A+J5-XL7 Terminal diagram =A+J5-XL7		
	KLE	2053	터미널 다이어그램 =A+J7.1-XL6 Terminal diagram =A+J7.1-XL6		
	KLE	2054	터미널 다이어그램 =A+J7.2-XL7 Terminal diagram =A+J7.2-XL7		
	KLE	2055	터미널 다이어그램 =A+J49.1-XL27 Terminal diagram =A+J49.1-XL27		
	KLE	2056	터미널 다이어그램 =A+J49.3-XL60 Terminal diagram =A+J49.3-XL60		

Table of contents

BDAG_F06_002

Higher-level function	Mounting location	Page	Page description	Schematic number customer specific	Date
REPORT	KAB	3000	케이블 개요 : =A+C72-EW2 - =A+1-EW2 Cable overview : =A+C72-EW2 - =A+1-EW2		
	KAB	3001	케이블 개요 : =A+1-EW3 - =A+3-EW-EY12AB Cable overview : =A+1-EW3 - =A+3-EW-EY12AB		
	KAB	3002	케이블 개요 : =A+3-EW-EY14AB - =A+5-EW-EY5A Cable overview : =A+3-EW-EY14AB - =A+5-EW-EY5A		
	KAB	3003	케이블 개요 : =A+5-EW-EY15S - =A+49-EW-EB50.1 Cable overview : =A+5-EW-EY15S - =A+49-EW-EB50.1		
	KAB	3004	케이블 개요 : =A+49-EW1 - =A+61-EW4 Cable overview : =A+49-EW1 - =A+61-EW4		
	ART	4000...4034	부품 목록 Parts list		

Revision overview

[illegible]

			Date	2012/1/31	Customer		Woo Su AMS	 Bühler AG - Die Casting	개정 개요 Revision overview				= INFO		
			Ed.	DGS	Project		Ecoline 84						+		
			Appr	GY	Machine-No.		700026276								
Modification	Date	Name	Original		Replacement of	Replaced by									
										ESM-85061		Ecoline		Page	3

Structure identifier overview

BDAG_F24_003

Full designation	Structure description
Higher-level function	
=INFO	Project information
=LAYOUT	Project mounting and layout drawings
=A	Machine electrical circuit diagram
=REPORT	Project reports
+C72	Control cabinet
+C80	Control cabinet
+J1	Drive unit
+J2	Rear platen
+J3	Mobile clamping plate
+J4	Fix plate
+J5	Injection unit
+J7	Safety gates
+J7.1	Safety gate left
+J7.2	Safety gate right
+J49	Fencing
+J49.1	Fencing right
+J49.2	Fencing left
+J61	Control column
+1	Drive unit
+2	Rear platen
+3	Mobile clamping plate
+4	Fix plate
+5	Injection unit
+6	Cooling
+7	Protection devices
+8	Central lubrication system
+40	Metal ladling unit
+42	Extraction

+44	Spray unit
+49	Fencing
+52	Vaccum
+55	Periphery
+61	Control column
+STE	Plug diagram
+KLE	Terminal diagram
+KAB	Cable diagram
+ART	Article parts list
+53	
+J49.3	
+42/+55	
+44/+55	

Regulations

Standards:	EN 60204-1, IEC 60204-1
Degree of protection:	IP55
Cabinet ambient temperature:	+5 .. +40°C
Relative Humidity:	90%

Voltages

AC main voltage	3 Phase 400V	Black
Control wire AC	230V	Red
Reference conductor AC	0V	Red/White
Control wire DC	24V	Blue
Reference conductor DC	0V	
Neutral conductor N		Light blue
Protective conductor PE		Yellow/Green
Measuring wire		Purple

Wire Color

Weiss / White	WH
Braun / Brown	BN
Grün / Green	GN
Gelb / Yellow	YE
Grau / Grey	GY
Rosa / Pink	PK
Blau / Blue	BU
Rot / Red	RD
Schwarz / Black	BK
Violet / Purple	VT
Orange / Orange	OG
Türkis / Turquoise	TQ

Warning

The cable cross sections are dimensioned according to the nominal current of the motors (and not according to the setting range of the switches / circuit breakers). If more powerful motors are employed, then the wiring must be altered in accordance with the above standards..

전압 Voltage	Motor nominal current			Current star-delta			Max. slow blow fuse		
Machine type	26	42	66	26	42	66	26	42	66
	34	53	84	34	53	84	34	53	84
EN-Version	22kW	30kW	37kW	22kW	30kW	37kW	22kW	30kW	37kW
240V/50Hz 3Ph	68A	92A	121A	39A	53A	70A	100A	125A	160A
400V/50Hz 3Ph	41A	55A	72A	24A	32A	42A	63A	100A	100A
415V/50Hz 3Ph	40A	53A	70A	23A	31A	40A	63A	63A	100A
440V/50Hz 3Ph	37A	50A	66A	22A	29A	38A	63A	63A	100A
UL/CSA-Version	22kW	30kW	37kW	22kW	30kW	37kW	22kW	30kW	37kW
440V/60Hz 3Ph	38A	51A	63A	-	-	-	63A	63A	100A
460V/60Hz 3Ph	36A	49A	60A	-	-	-	63A	63A	100A
480V/60Hz 3Ph	34A	47A	58A	-	-	-	63A	63A	100A
575V/60Hz 3Ph	29A	39A	48A	-	-	-	63A	63A	63A

All current values are calculated values and may differ from the actual motor nameplate.
Alle Stromwerte sind gerechnete Werte und können vom tatsächlichen Motoren Typenschild abweichen.

Thermal blocs are set to the motor nameplate current.
Thermoauslöser sind auf den Motorenstrom gemäss Typenschild einzustellen.

Guidelines for electrical installations regarding Noise immunity

If these guidelines are not followed can be a sufficient interference immunity can not be ensured..
(EMC = electromagnetic compatibility)


It is also mandatory to comply with the corresponding locally Regulations for electrical installations are maintained..

1. Separation of signal lines to power lines < 500VAC


Cables with digital signal lines for direct current, and cables with shielded analog signal lines should preferably about high voltage cables up to 500 VAC, preferably in separate-Trasse will be laid

Example 1

< 500 VAC or switched direct voltages

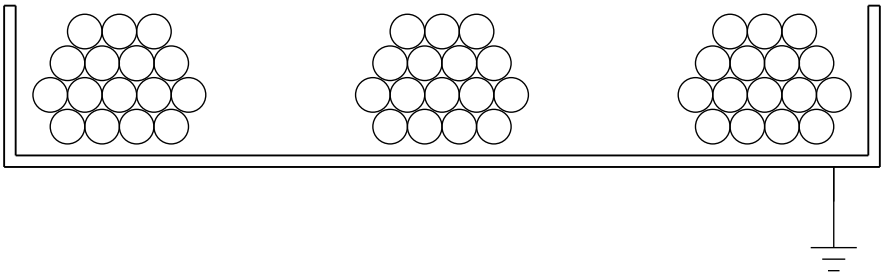

Digital signal lines for direct current
Analog signal lines
Serial data lines

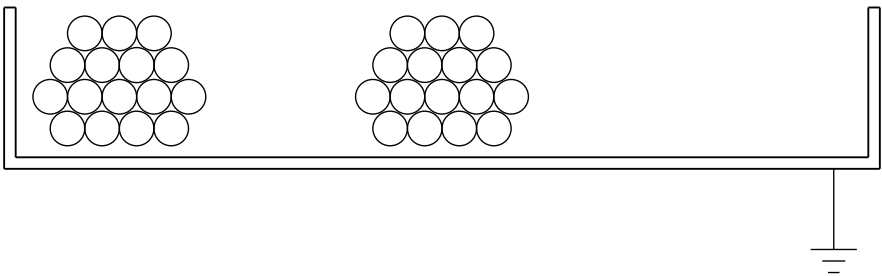

If the cables have to be installed in the same Trasse the following possibilities exist:


Example 2

(Preferably use metal cable trays)

< 500 VAC
or switched
DC voltages

Digital signal lines for direct current

Analog signal lines
Serial data lines

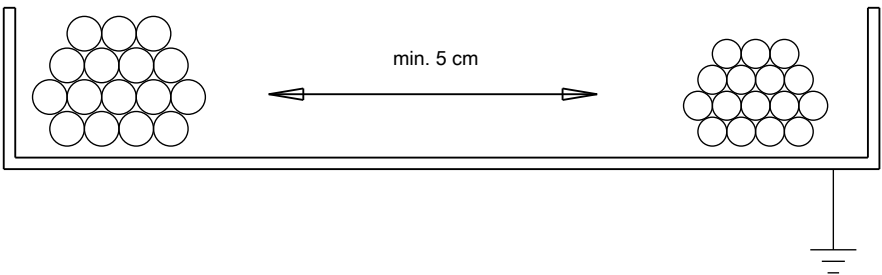


Example 3

- The line should be separated by a metal partition plate
The cable route, and the separating plate must be electrically connected together
(for reasons of electromagnetic interference and lightning strike protection).


< 500 VAC
or switched
DC voltages

Digital signal lines for direct current

Analog signal lines
Serial data lines

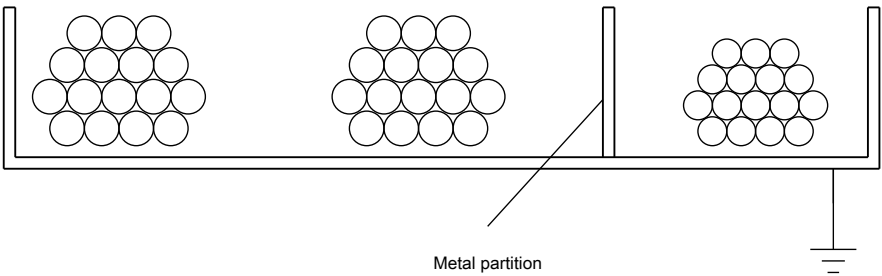

- Signal lines should, if way possible, be separated from power-voltage cables < 500 V by different terminal boxes. At the very least, the feed-through bushings should be at separate locations, and the terminals on theterminal strip should be separated from each other by at least 2 cm.

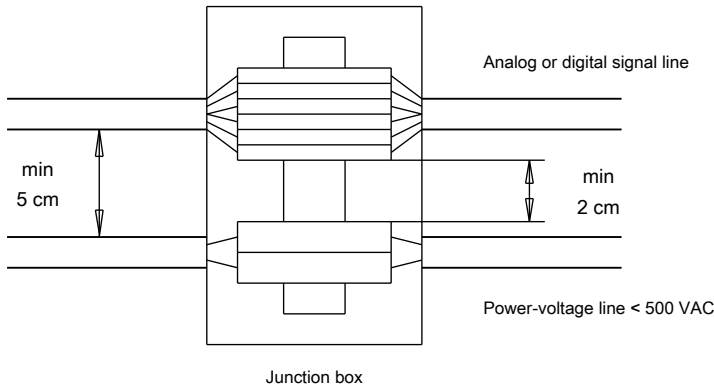


2. Separation of signal lines to power lines > 500VAC



Digital signal lines, analog signal lines and data transmission cables must be separated from power-voltage cables > 500 VAC to 1000 VAC by a minimum distance of 10 cm, and from power-voltage cables > 1kVAC by a distance greater than 30 cm, preferably in separate cable trays.

3. Analog signal lines

Analog signal lines must be installed with shielded cable. Connect the shielding according to the sketch, at one end or both, depending on what is specified in the schematic. It is preferable to use cable types with copper braid shielding. The inner conductors must be in twisted pairs for the lead and return signal conductors.

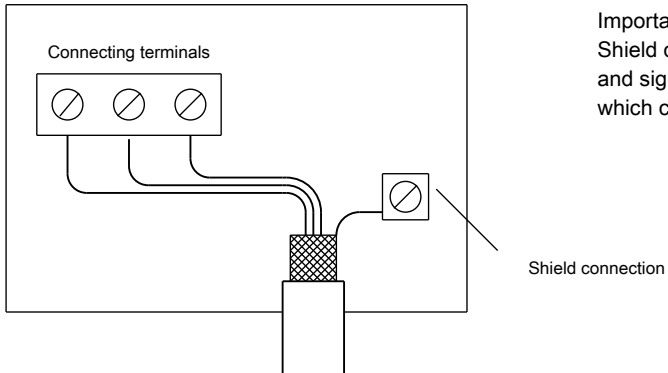

Important!
Shield connection short (< 3 cm)
and signal line separate from lines
which can generate interference.

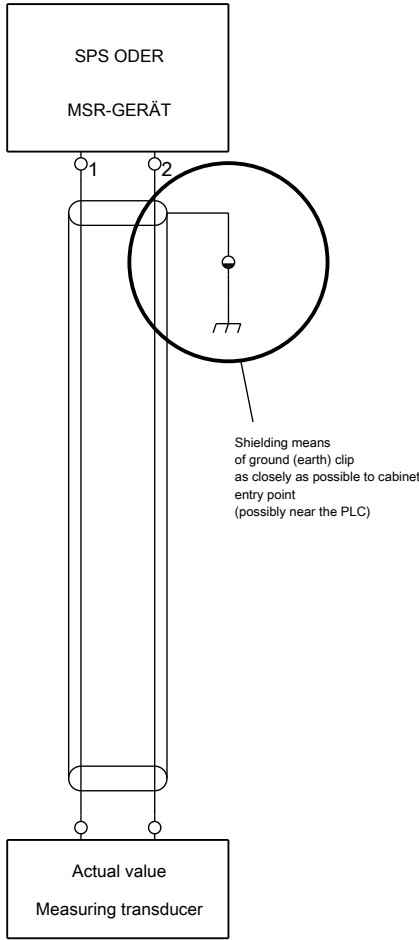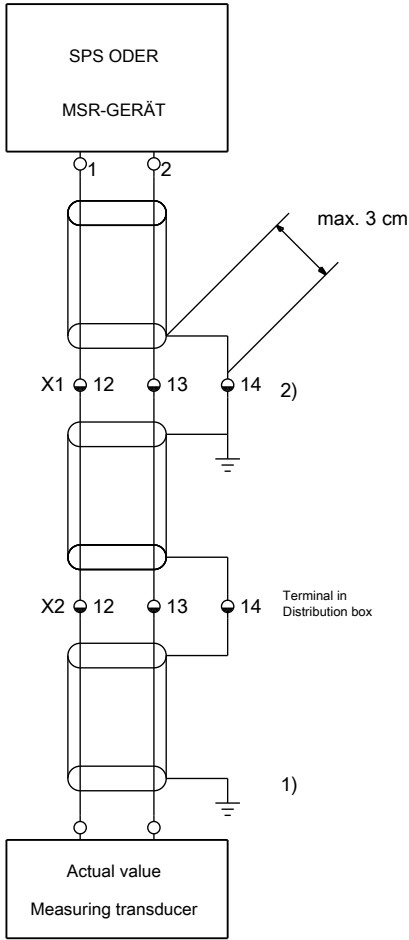

- 1) Only if specified in the schematic (shielding connected at both ends). If the shielding is connected at both ends, a voltage equalization conductor may possibly have to be provided, specially in case of greater distances or differing power supplies.
- 2) If a capacitive shielding connection is used at the MCR unit, the shielding must not be grounded (shielding connected to appropriate unit terminal or plugin connector). In this case, no separate voltage equalization conductor is required.

4. Motor cables

Motor cables with a high interference level, e.g. from

- frequency converters
- rectifiers
- timed DC motor controllers

must be installed shielded. The shielding must be connected as closely as possible to ground (earth) at the control cabinet end. Also on the motor side, the shield must be connected as short as possible to the chassis (earth grounding connection). If the shield is only connected on the cabinetside to earth, high emissions can be caused. If the motor lines are switched e. g. by a safety switch, the shield must be wired over these elements as short as possible. If this is not possible, exeptionally the shield can be connected on both sides to the chassis, because only the radiationdamages have to be blocked. Only shielded, symmetrical cables (from 30kW capacity or 10 mm² cable cross-section) should be used.

Step	Action	Dip Switch	LED
0	Control system turn off		
1		18OFF	
2	Control system turn on		
3	Control baudrate -> when ok forward to step 7		STOP ✕ RUN = 500kB = OK TX RX
4		18OFF	
5		18OFF	
6		18OFF	
7	Control system turn off		
8	Setting Node 7	18OFF	
9	Control system turn on		


Configuration Wago field bus coupler




0	1	2	3	4	5	6	7	8	9
11 13 33 34 72-EX8 Metal ladling unit Option		1 4 17 19 33 34 72-EX9 Extraction Option		1 4 12 14 21 22 72-EX23 Spraying Option		3 5 6 7 72-EX33 Vaccum Option		11 14 12 13 72-EX27 Fencing right Option	

9


=LAYOUT+C72/15

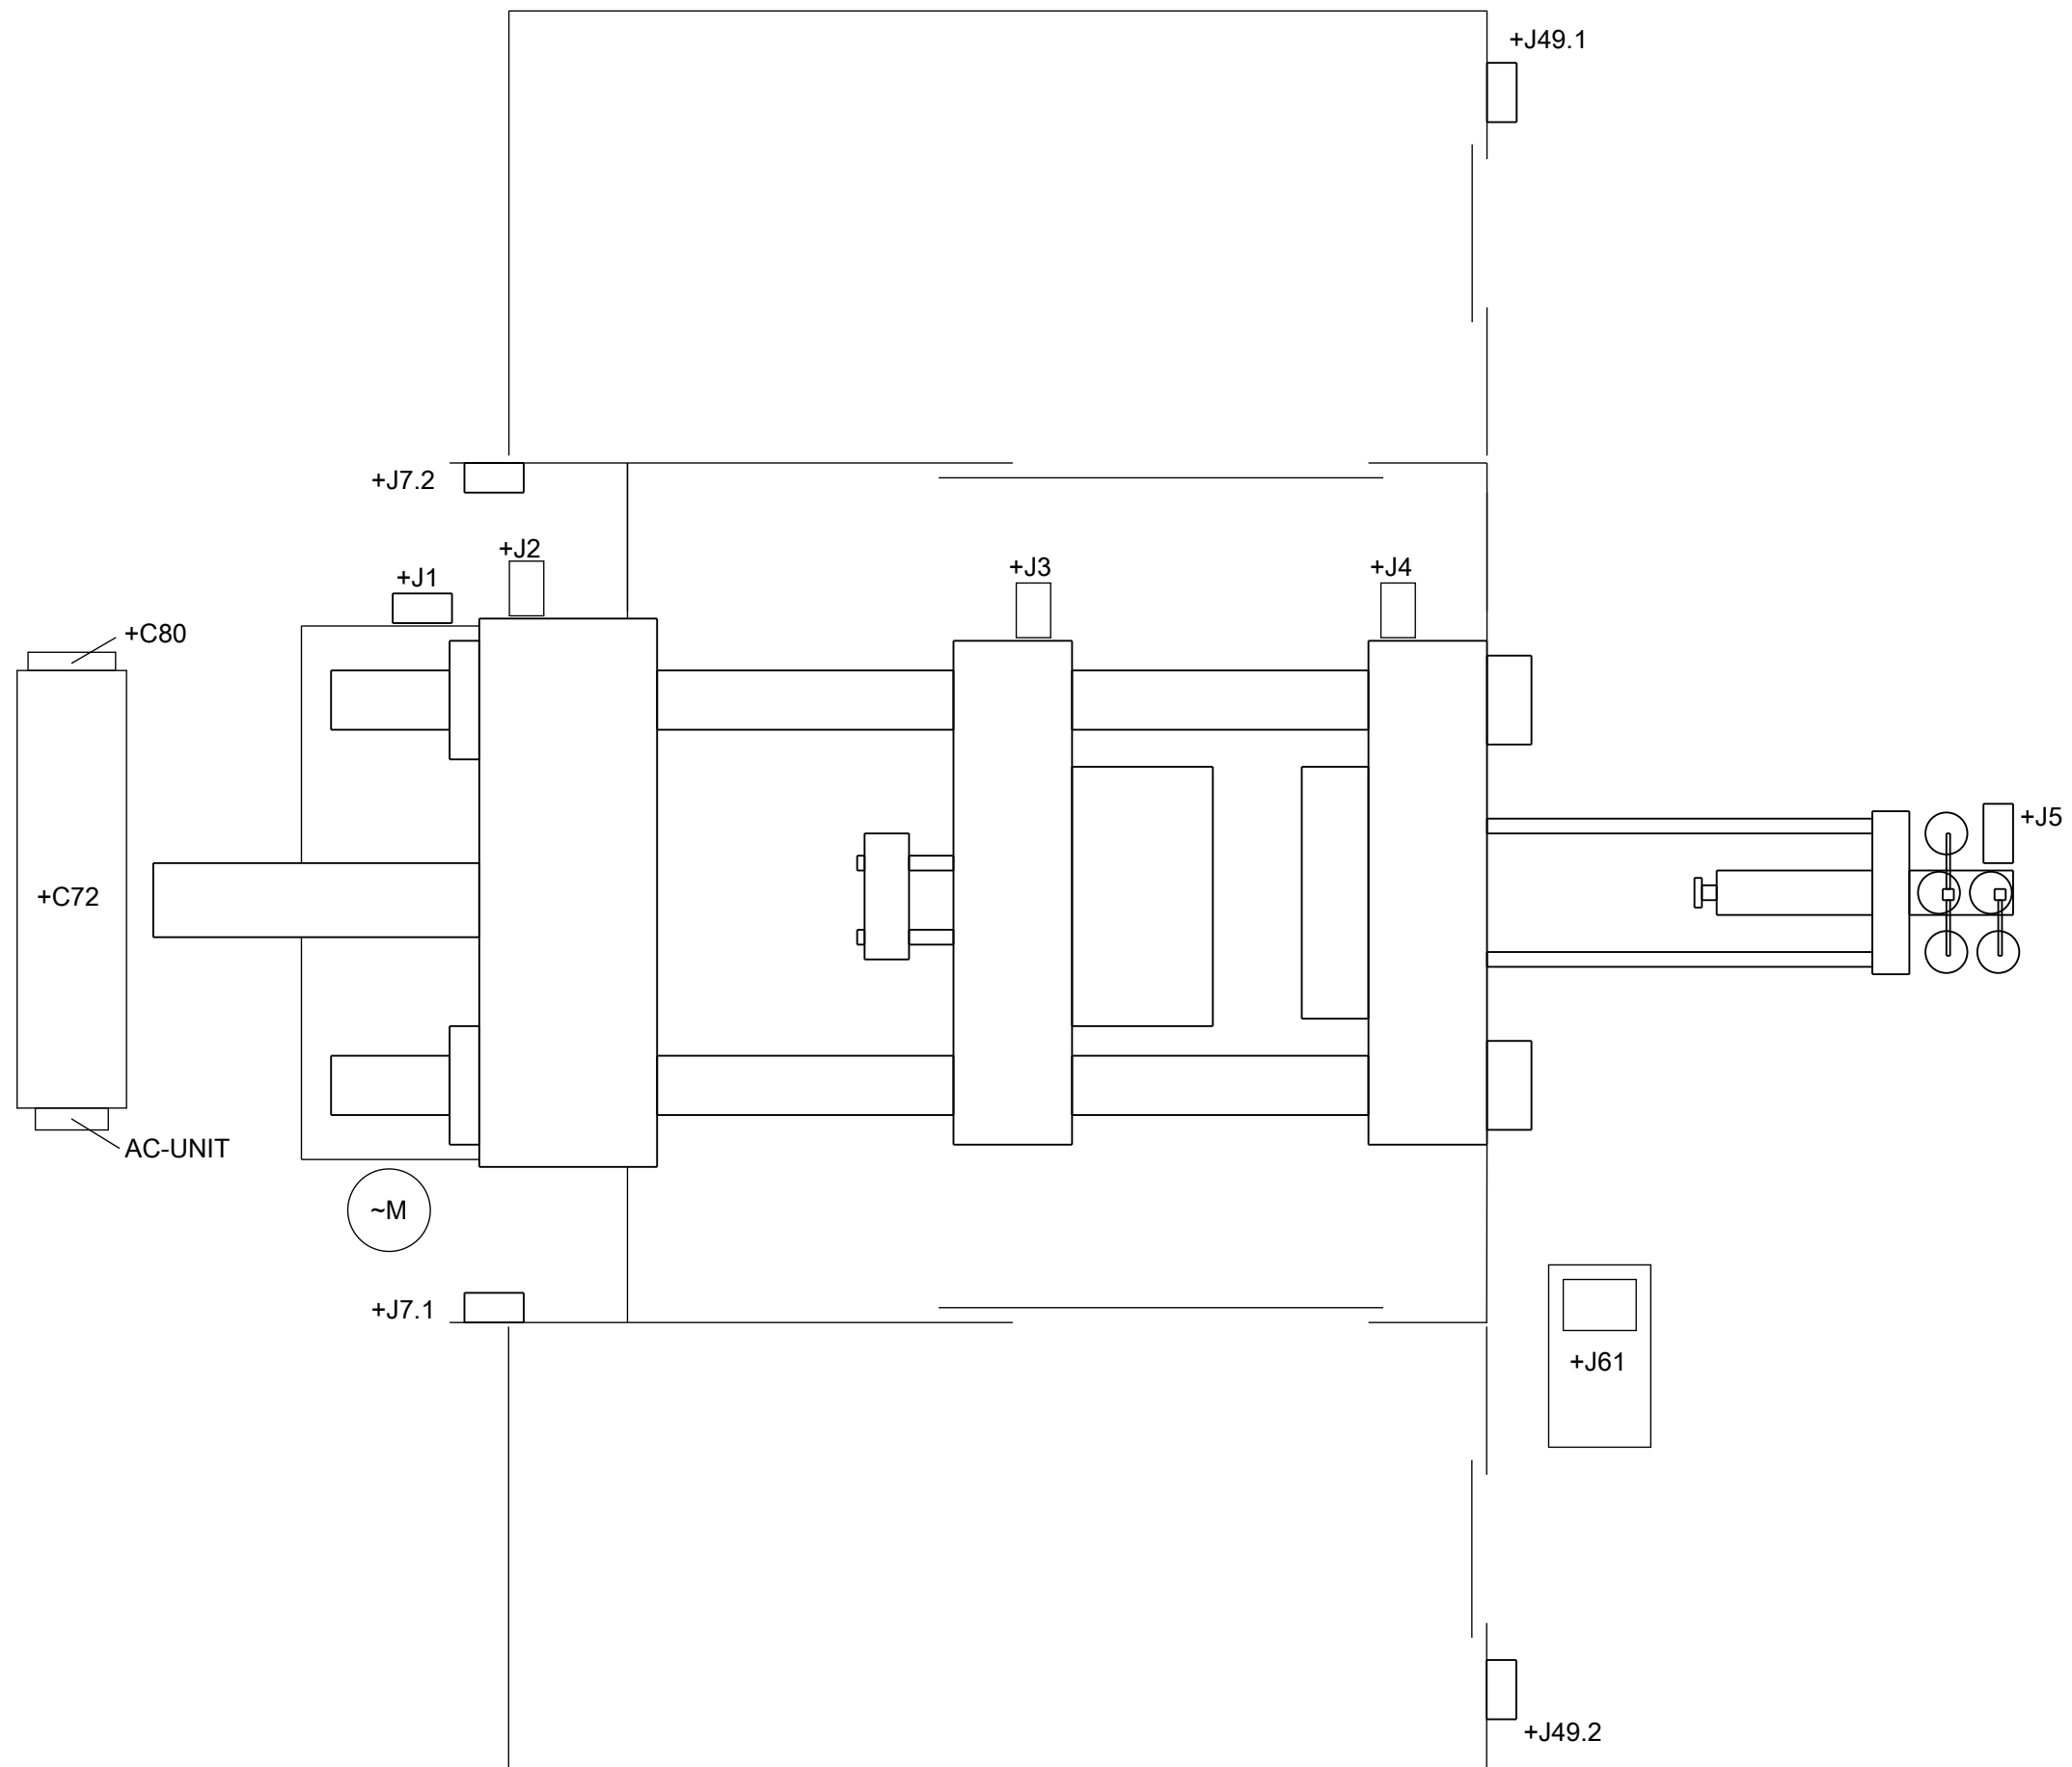


			Date	2012/2/3	Customer	Woo Su AMS		Layout machine				= LAYOUT
			Ed.	DGS	Project	Ecoline 84						+ C72
			Appr	GY	Machine-No.	700026276						
Modification	Date	Name	Original		Replacement of	Replaced by	Bühler AG - Die Casting		ESM-85061	Ecoline	EN/UL	Page 15

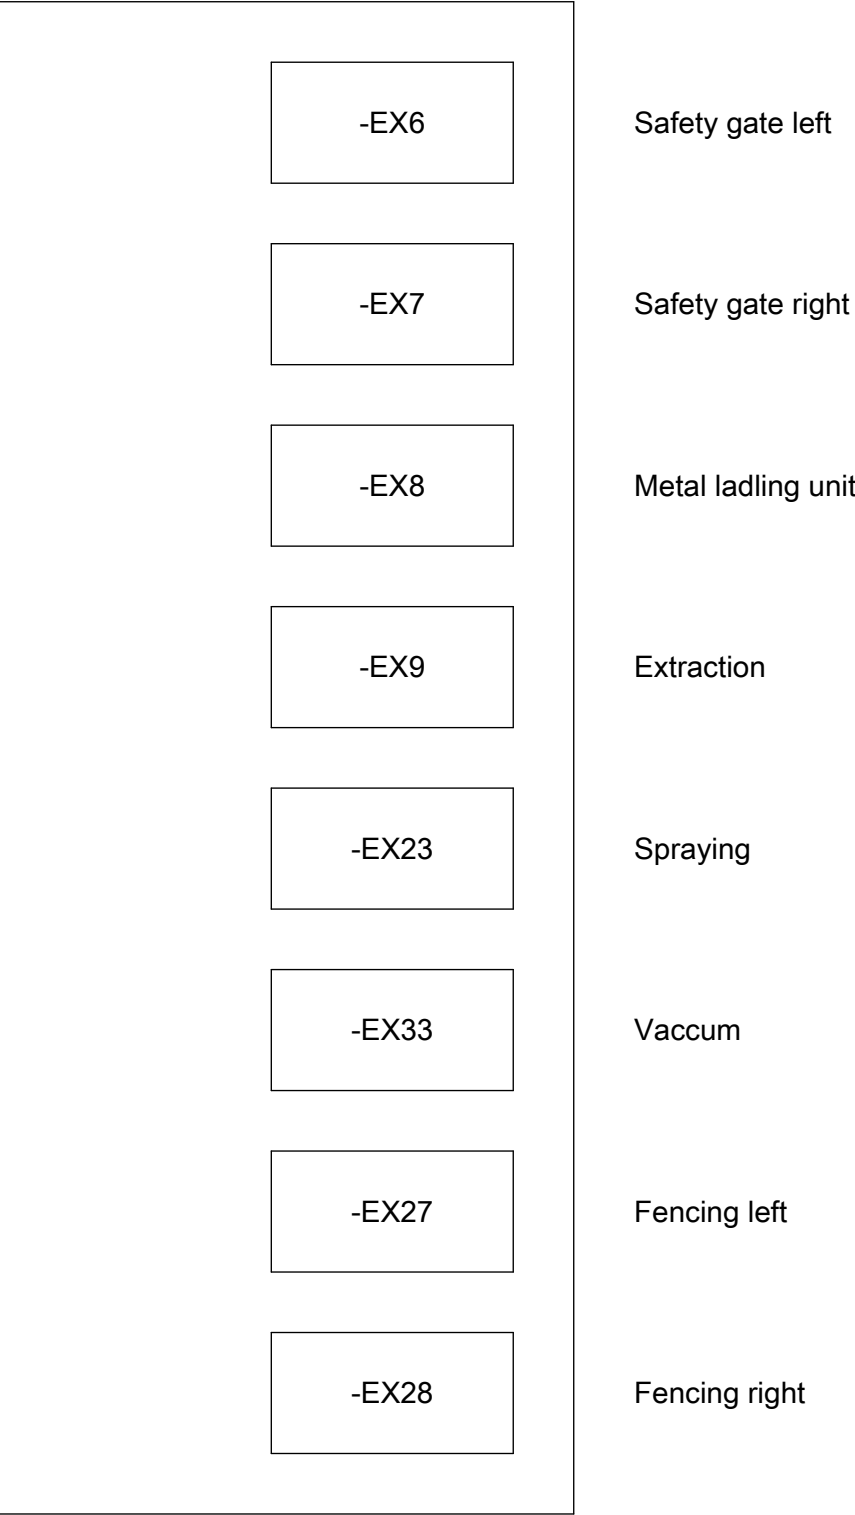

0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

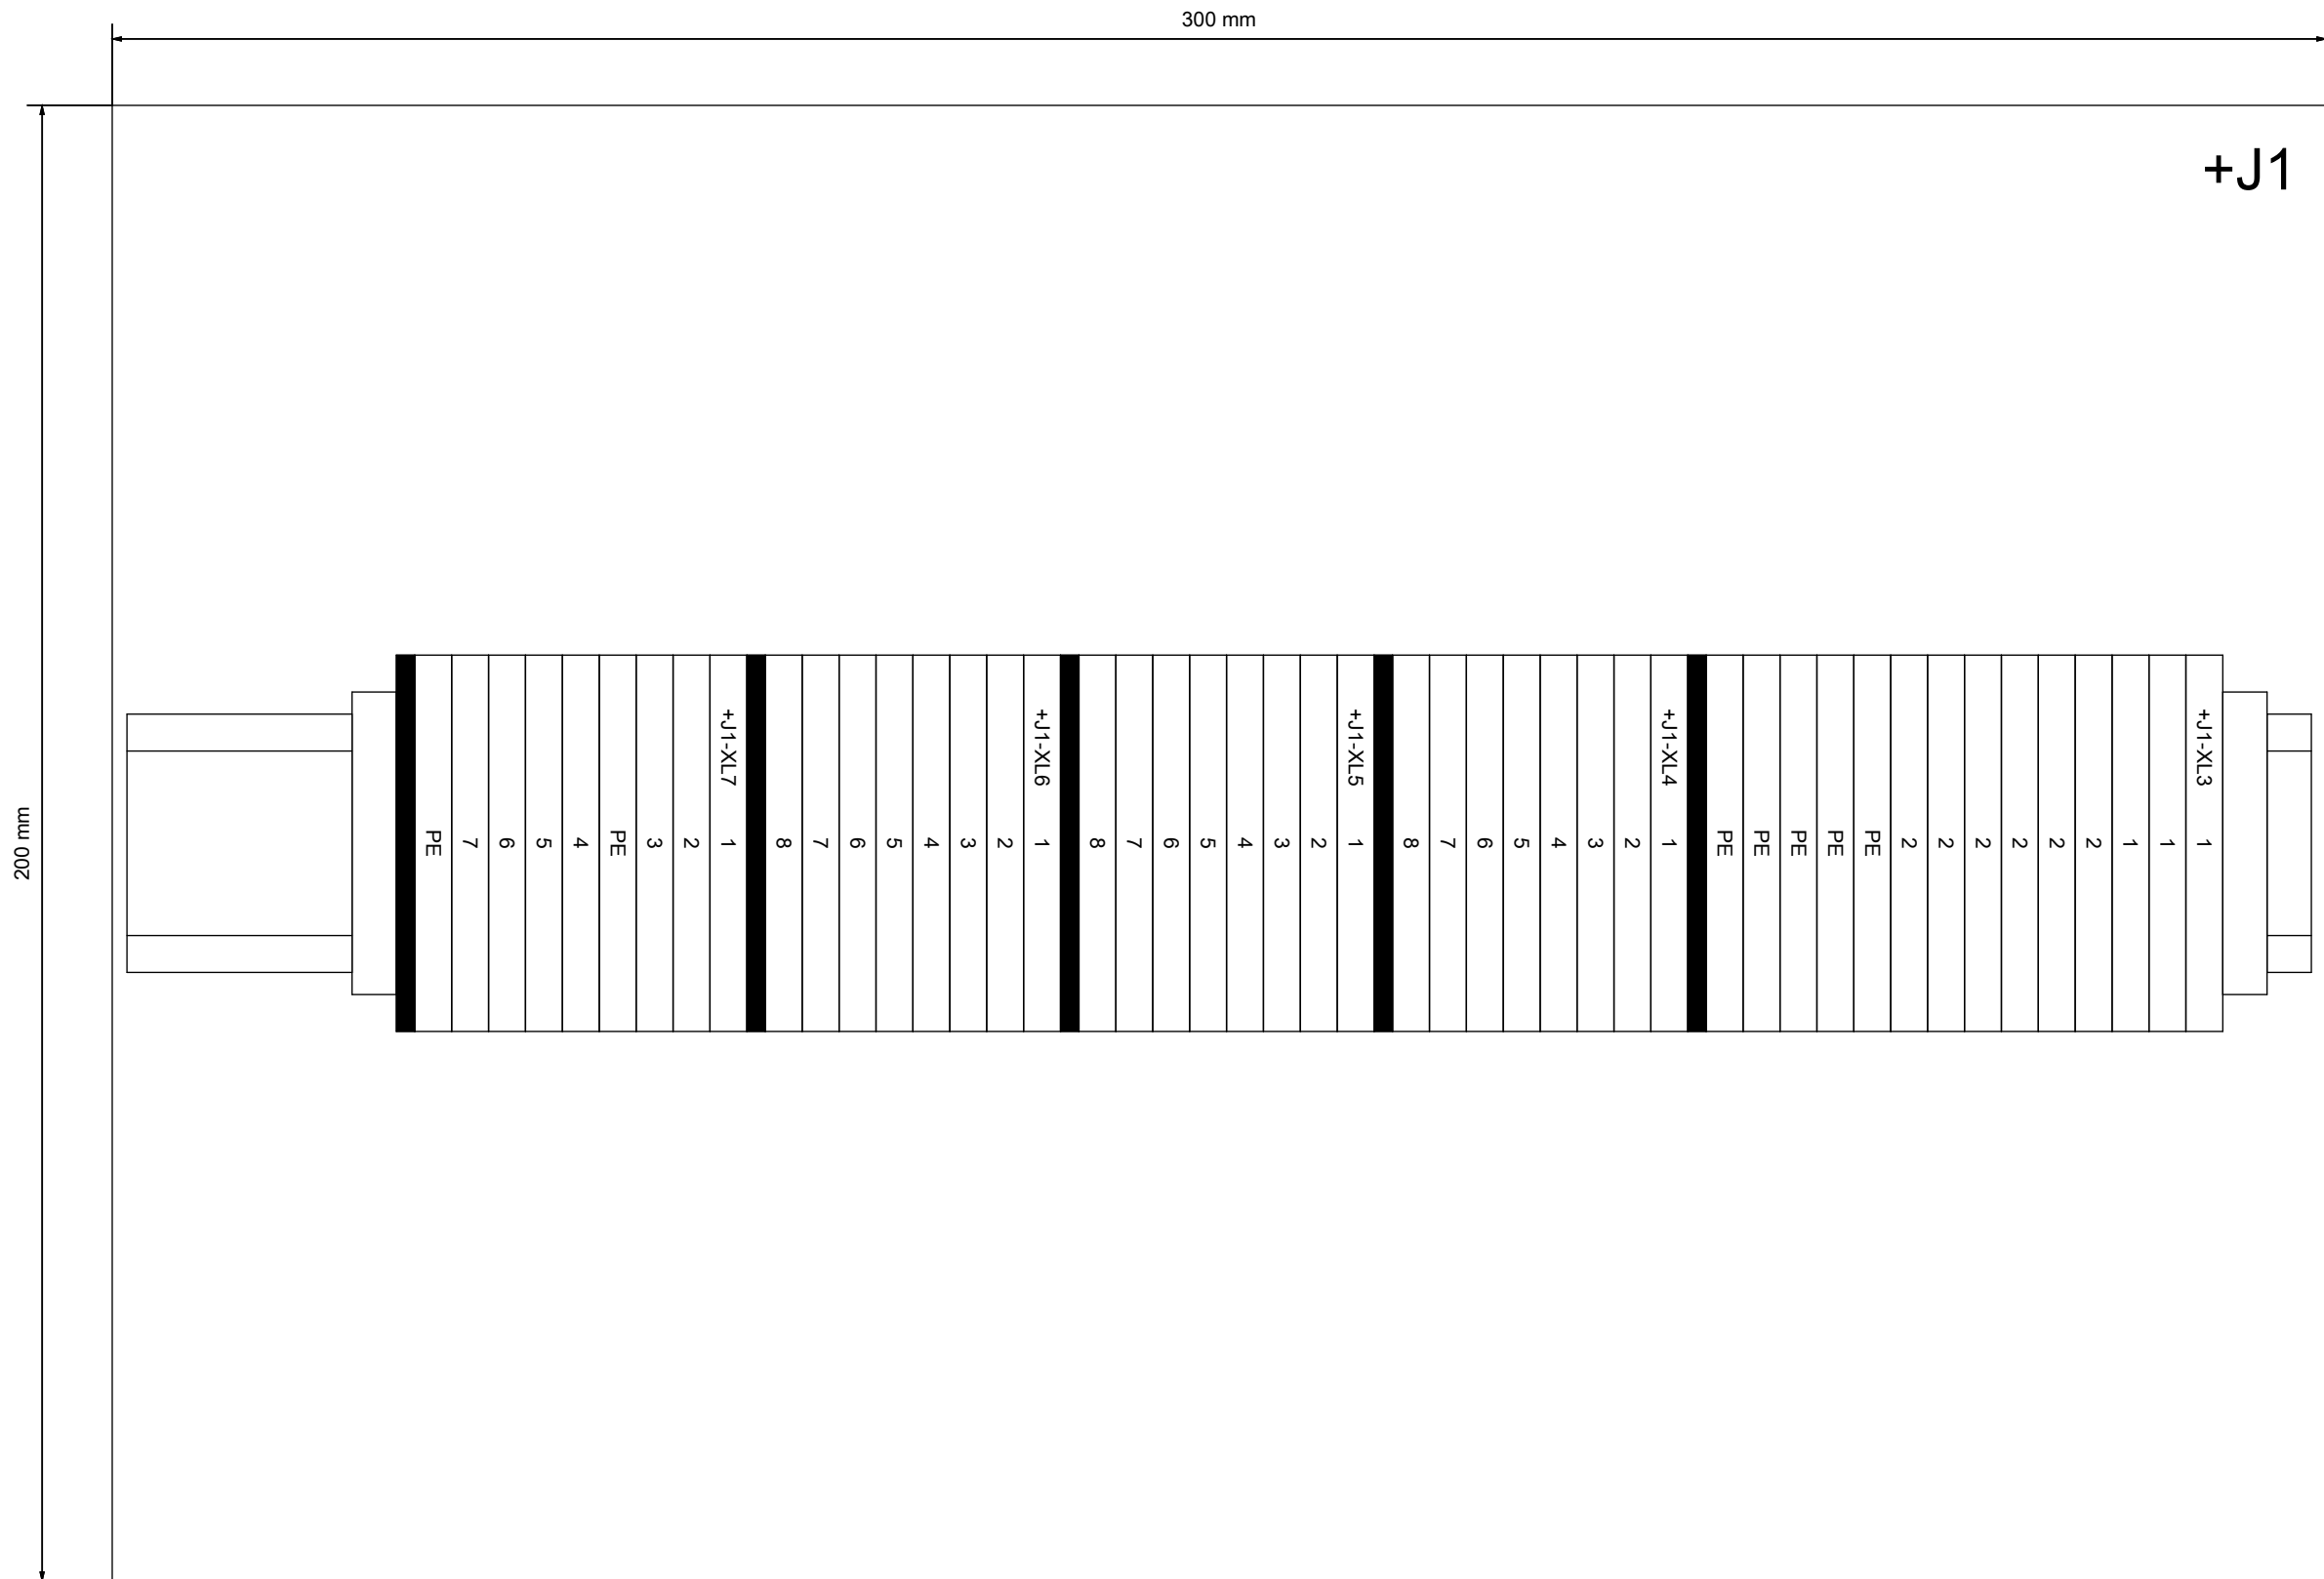

			Date	2012/1/31	Customer	Woo Su AMS		Layout mounting panel			= LAYOUT	
			Ed.	DGS	Project	Ecoline 84					+ J1	
			Appr	GY	Machine-No.	700026276						
Modification	Date	Name	Original		Replacement of	Replaced by	Bühler AG - Die Casting		ESM-85061	Ecoline	EN/UL	Page 18

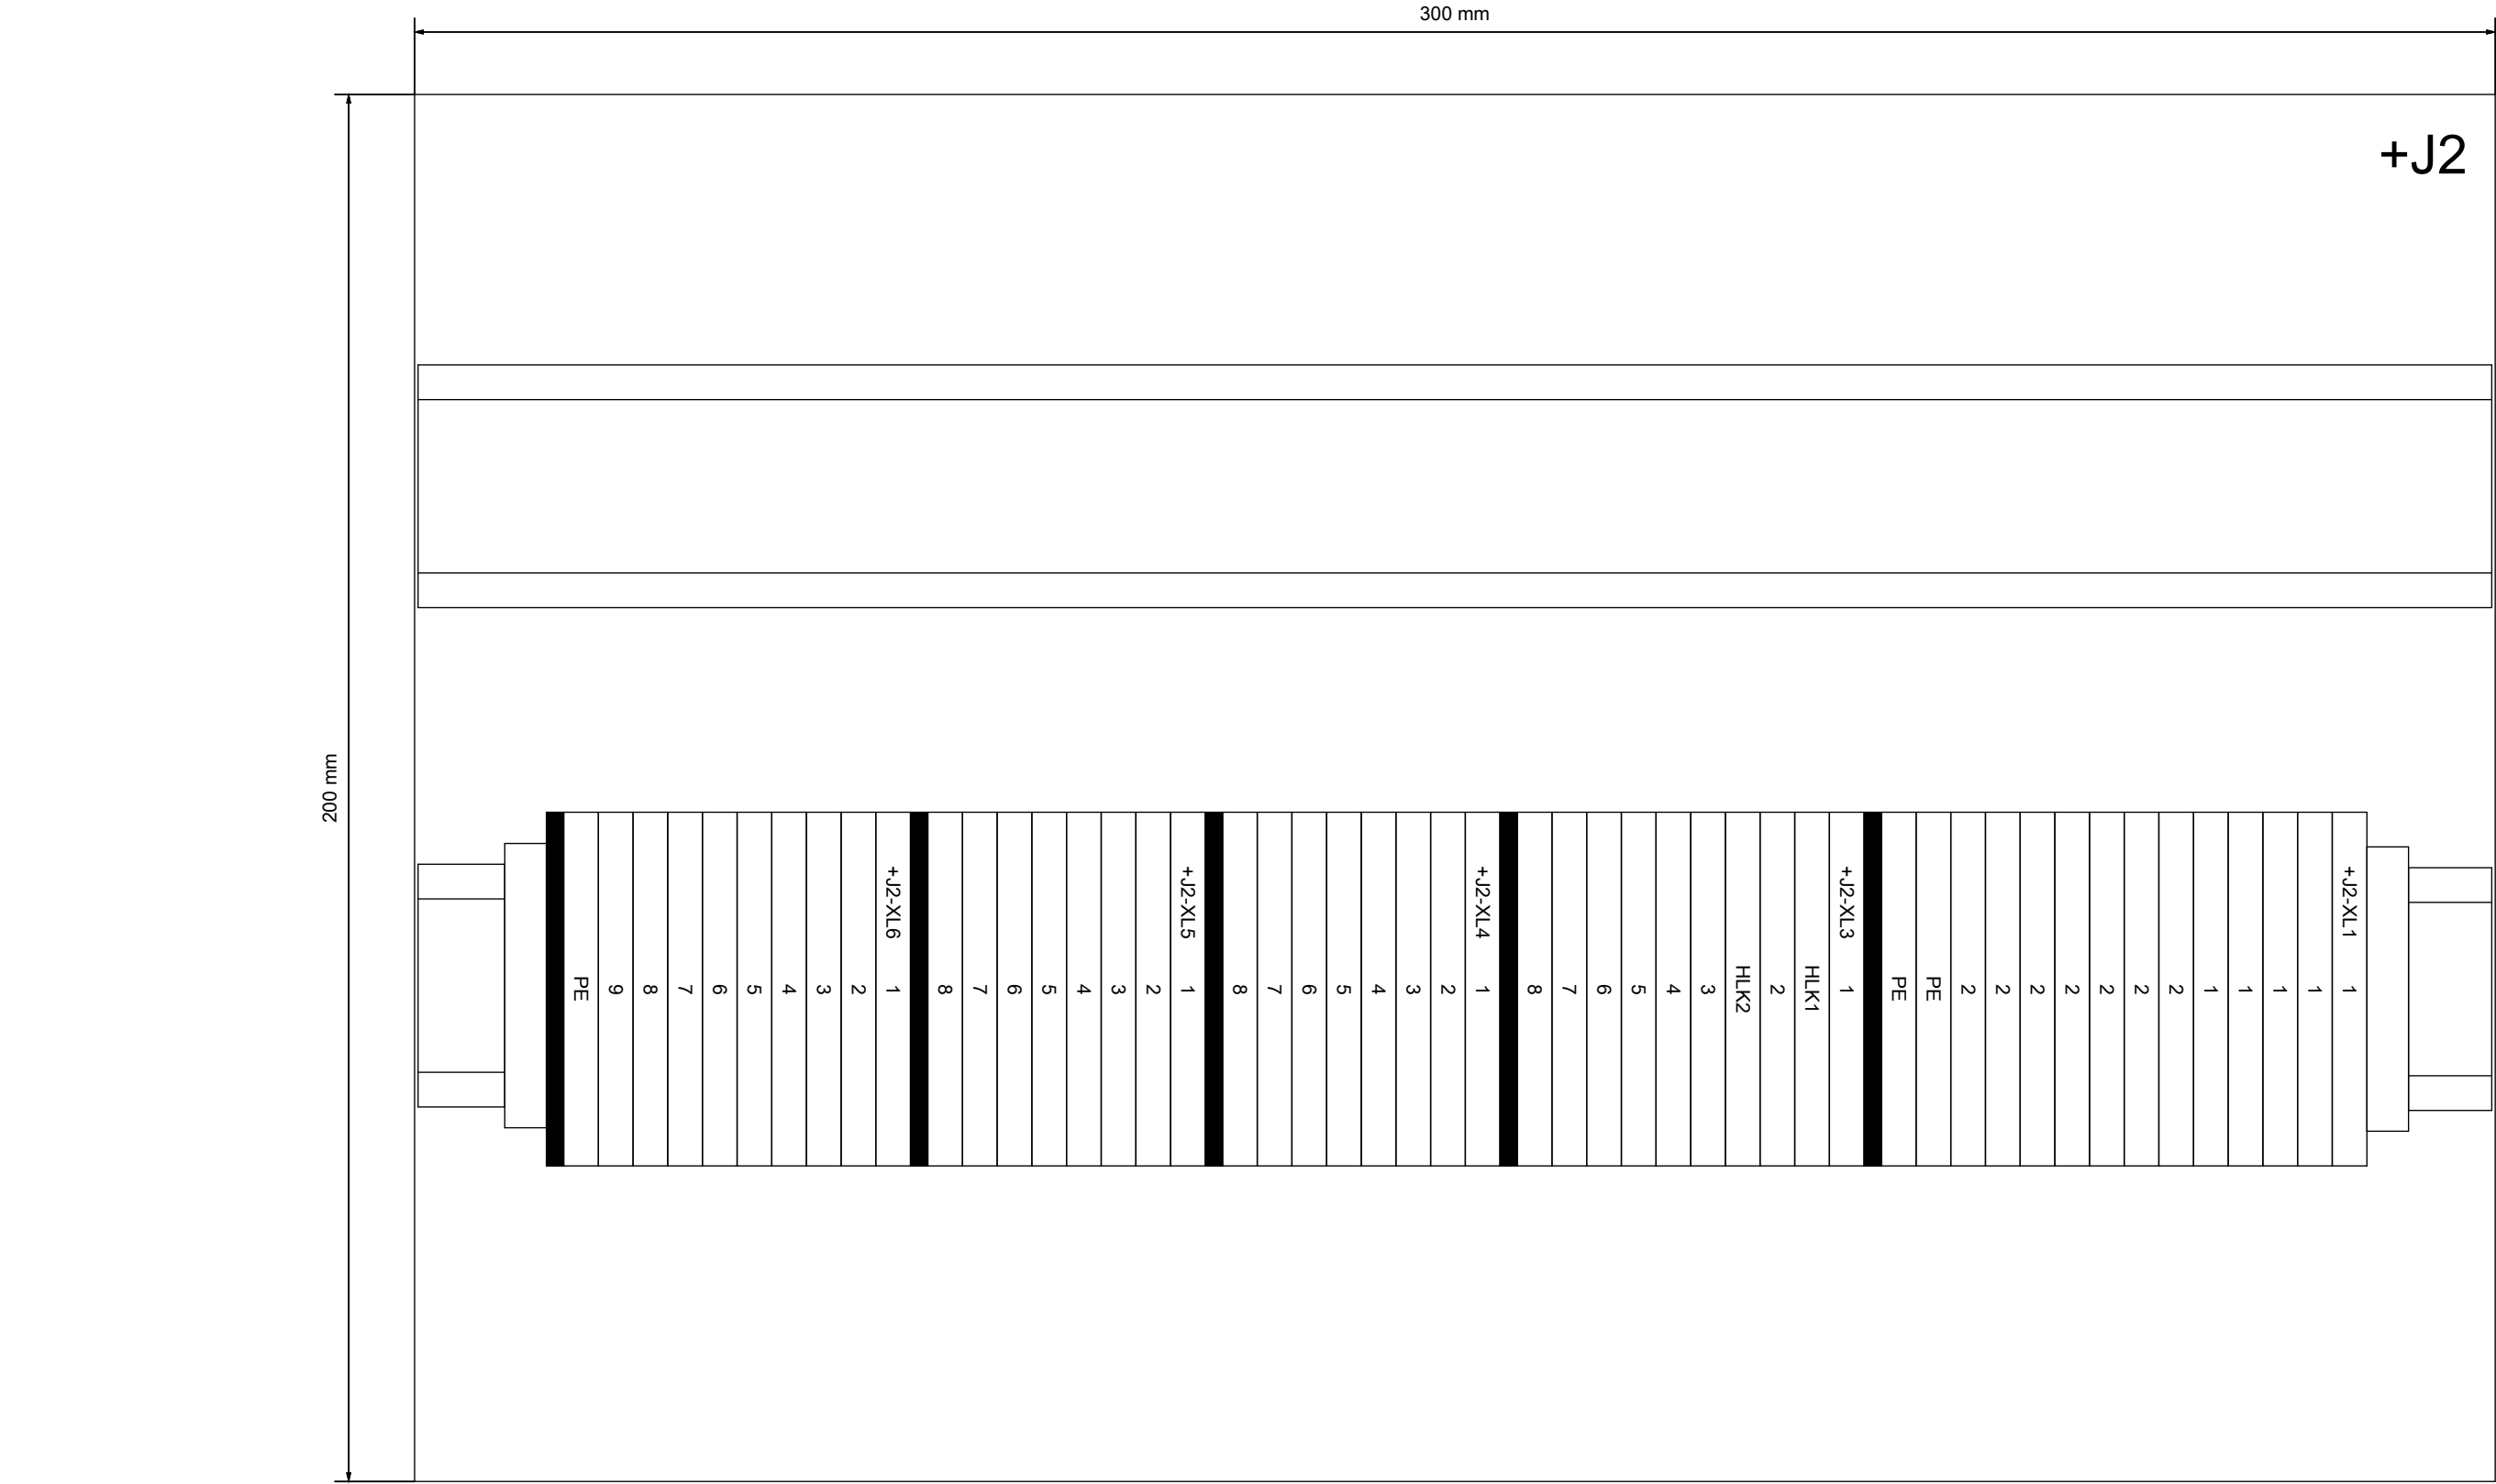


[illegible]

			Date	2012/1/31	Customer Woo Su AMS			Layout mounting panel			= LAYOUT	
			Ed.	DGS	Project Ecoline 84						+ J3	
			Appr	GY	Machine-No. 700026276							
Modification	Date	Name	Original		Replacement of	Replaced by	Bühler AG - Die Casting		ESM-85061	Ecoline	EN/UL	Page 20


Technical drawing of a panel with dimensions 300 mm (width) and 200 mm (height). The panel features a terminal block labeled **+J4** with the following pin configuration:

+J4-XL1	1
	1
	1
	1
	1
	2
	2
	2
	2
PE	
PE	
+J4-XL2	1
	2
	3
	4
	5
	6
	7
	8
+J4-XL3	1
	2
	3
	GND
	GND
	4
	5
	GND
	GND
	6
	7
	8
+J4-XL4	1
	2
	3
	4
	5
	6
	7
	8

+J5

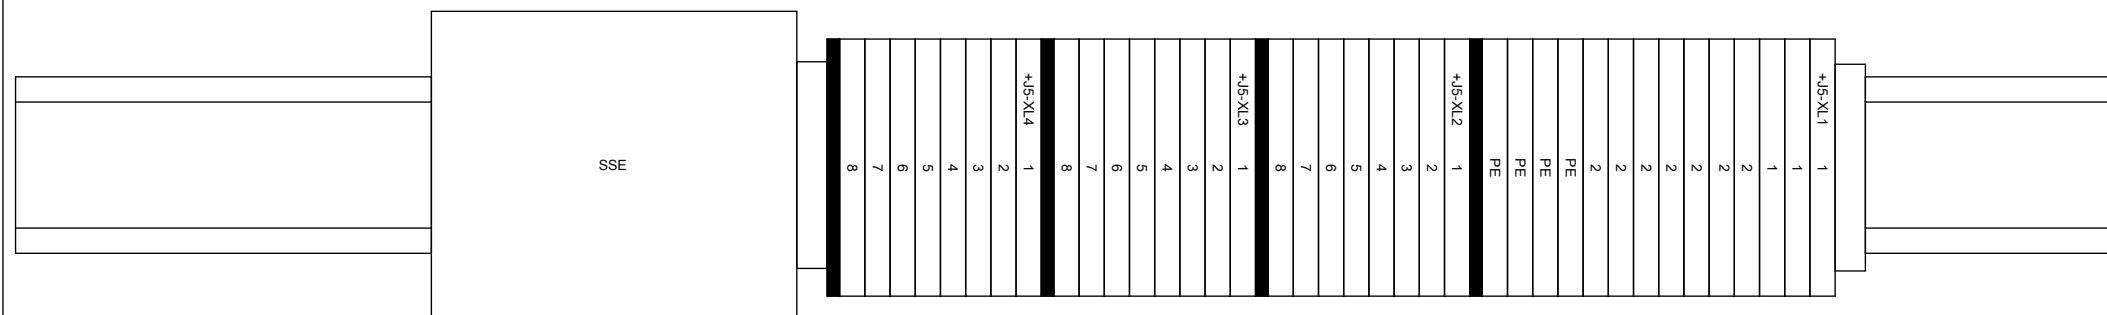


Cable channel

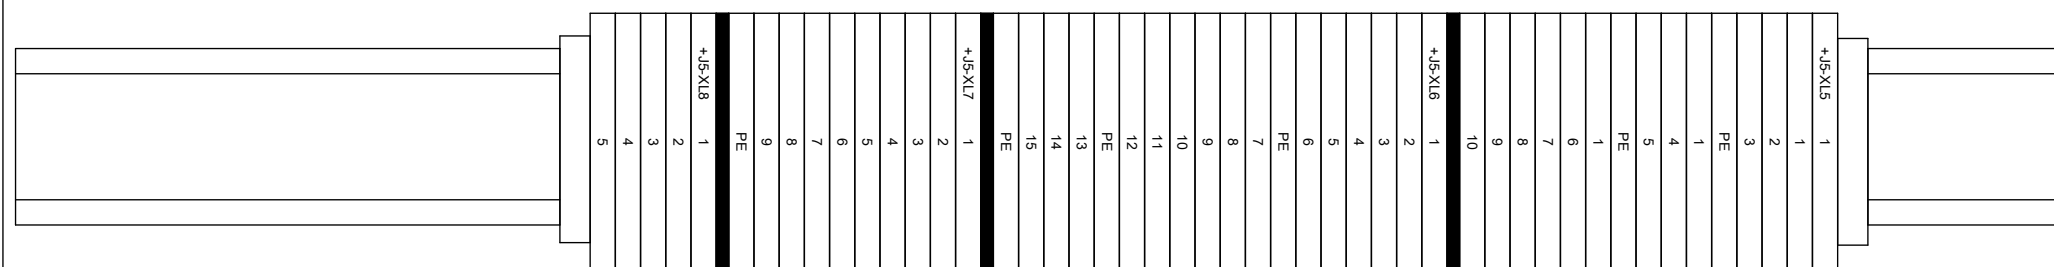



+J4/21

+J7.1/23

			Date	2014/9/11	Customer		Woo Su AMS	 Layout mounting panel			= LAYOUT	
			Ed.		Project		Ecoline 84				+ J5	
			Appr	GY	Machine-No.		700026276					
Modification	Date	Name	Original		Replacement of	Replaced by			ESM-85061		Ecoline	EN/UL

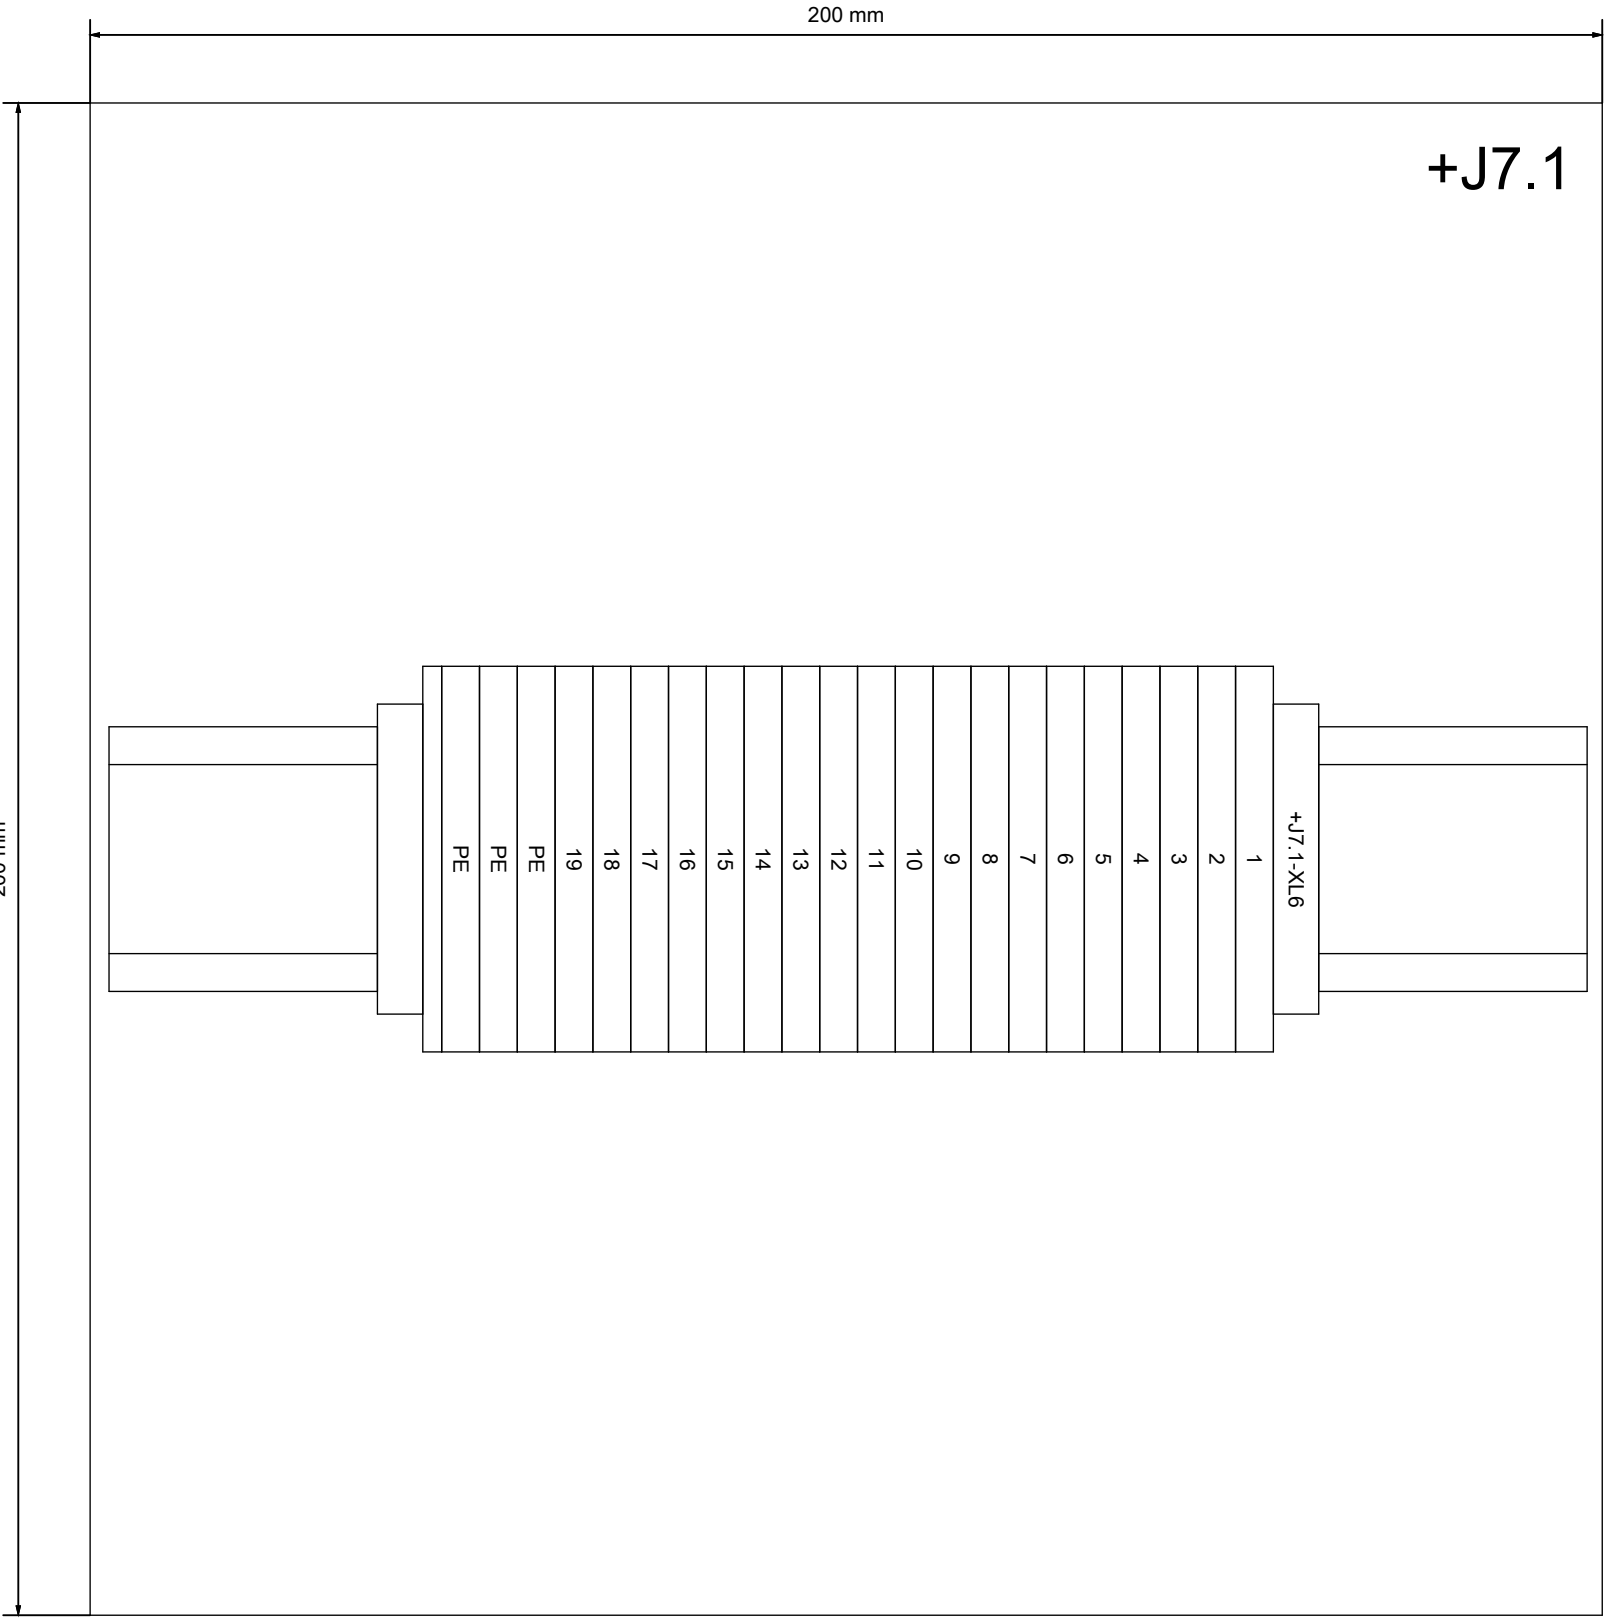


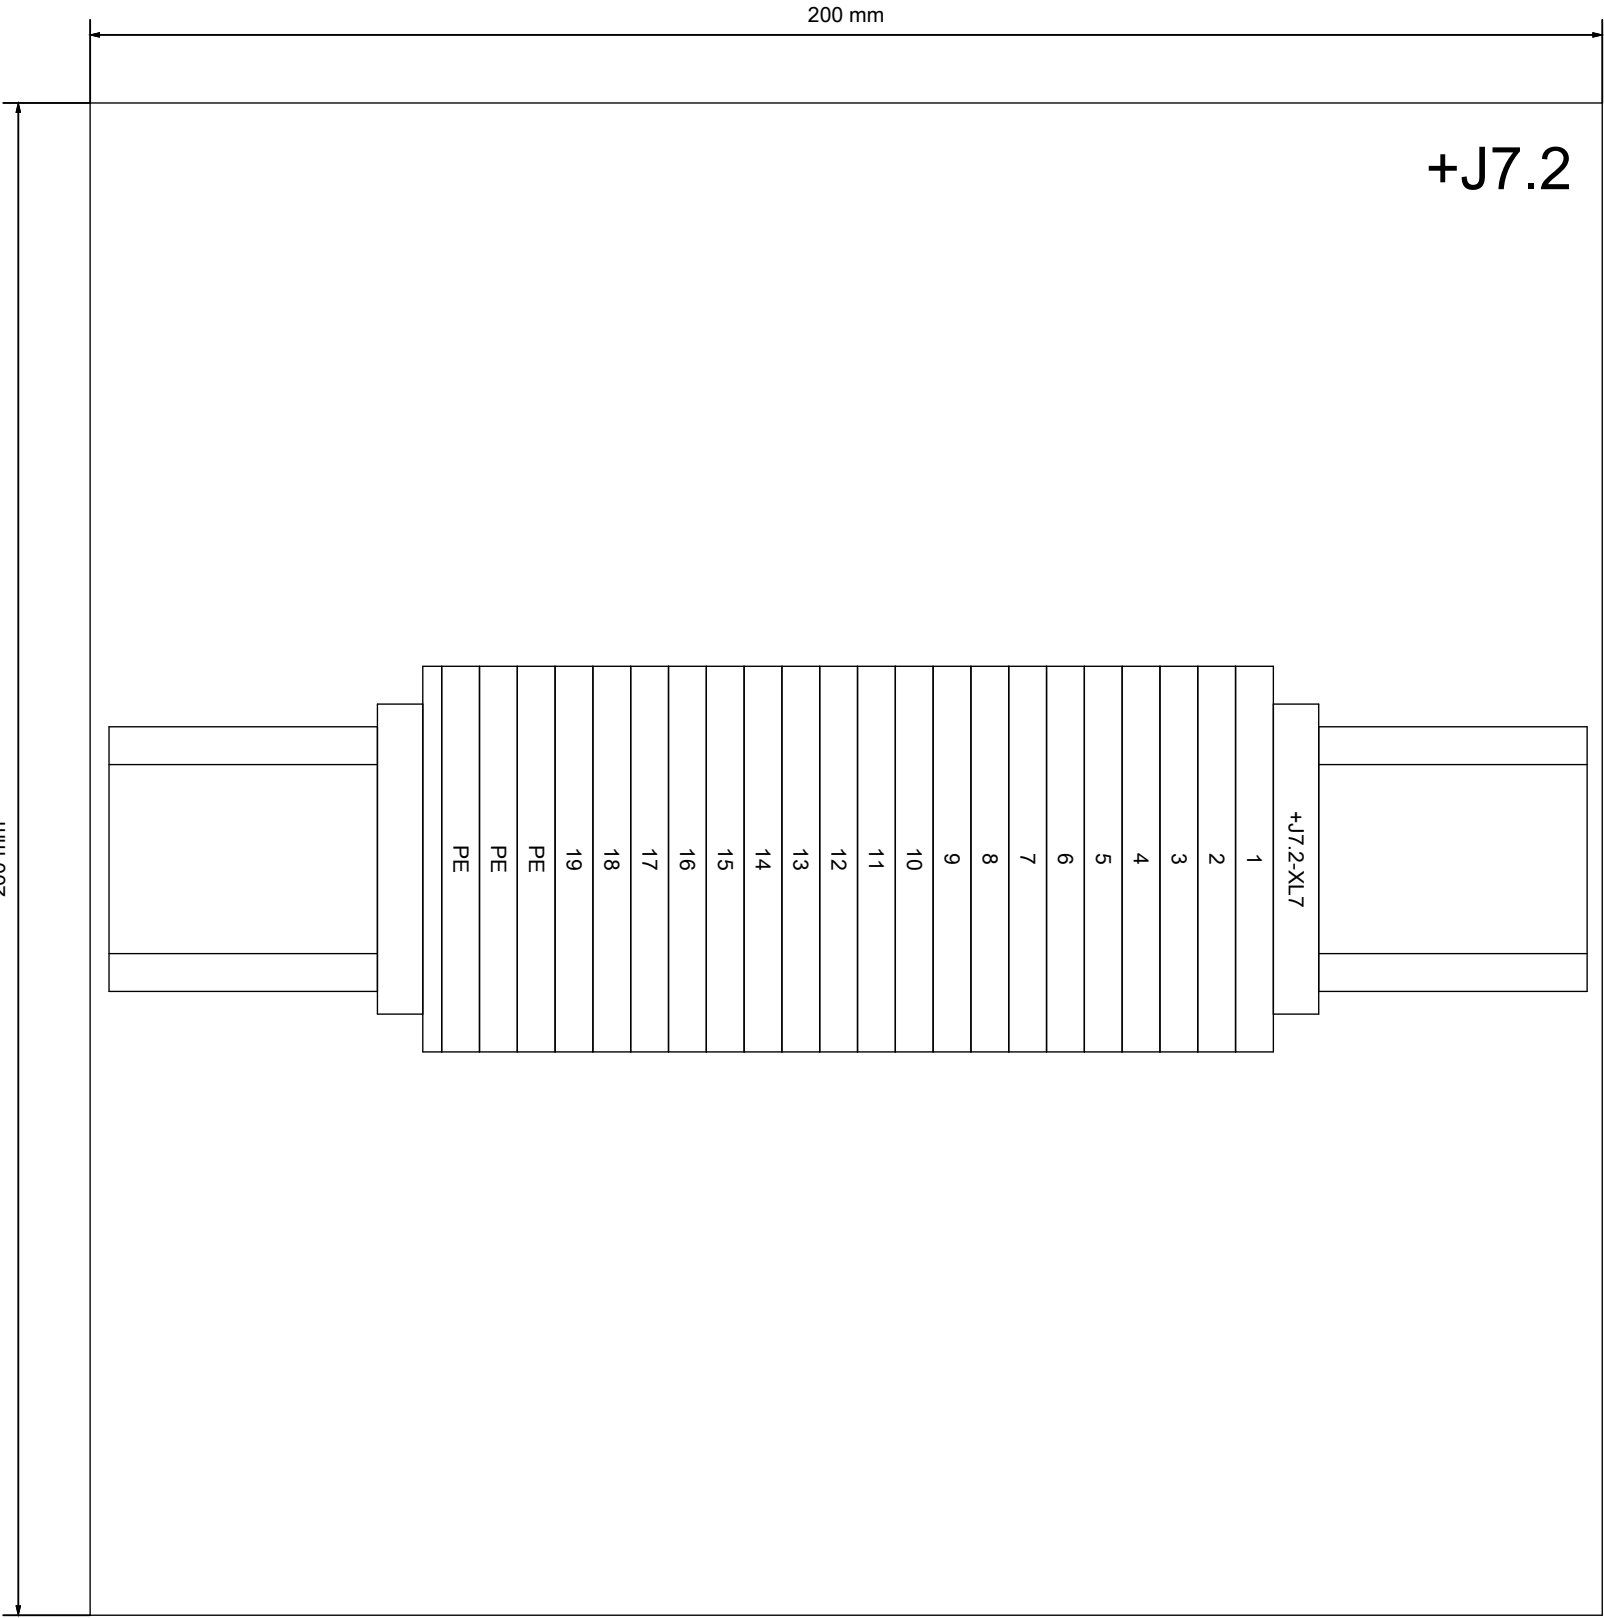

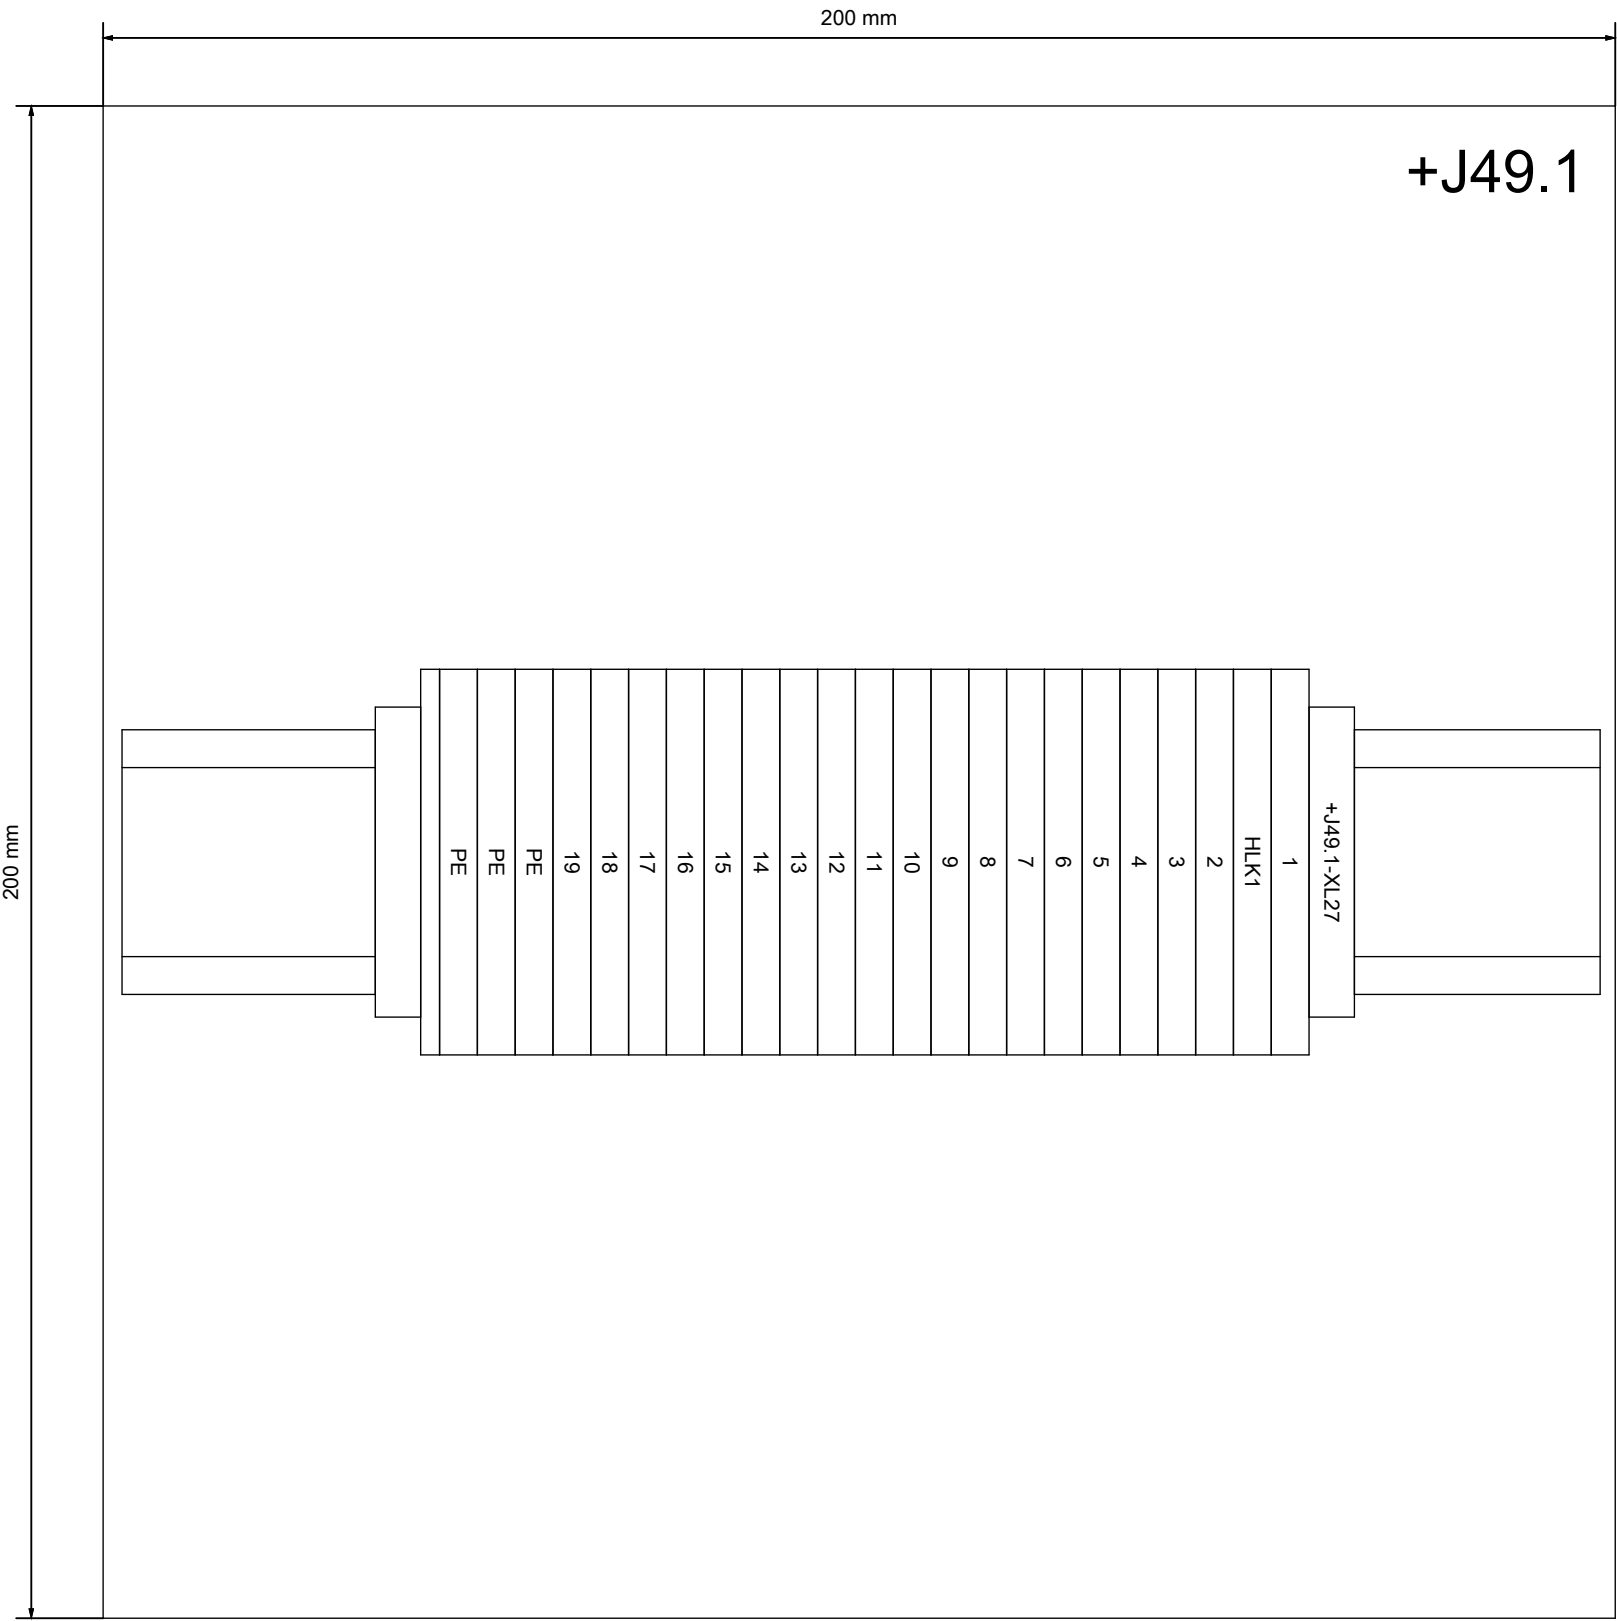


Option


0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

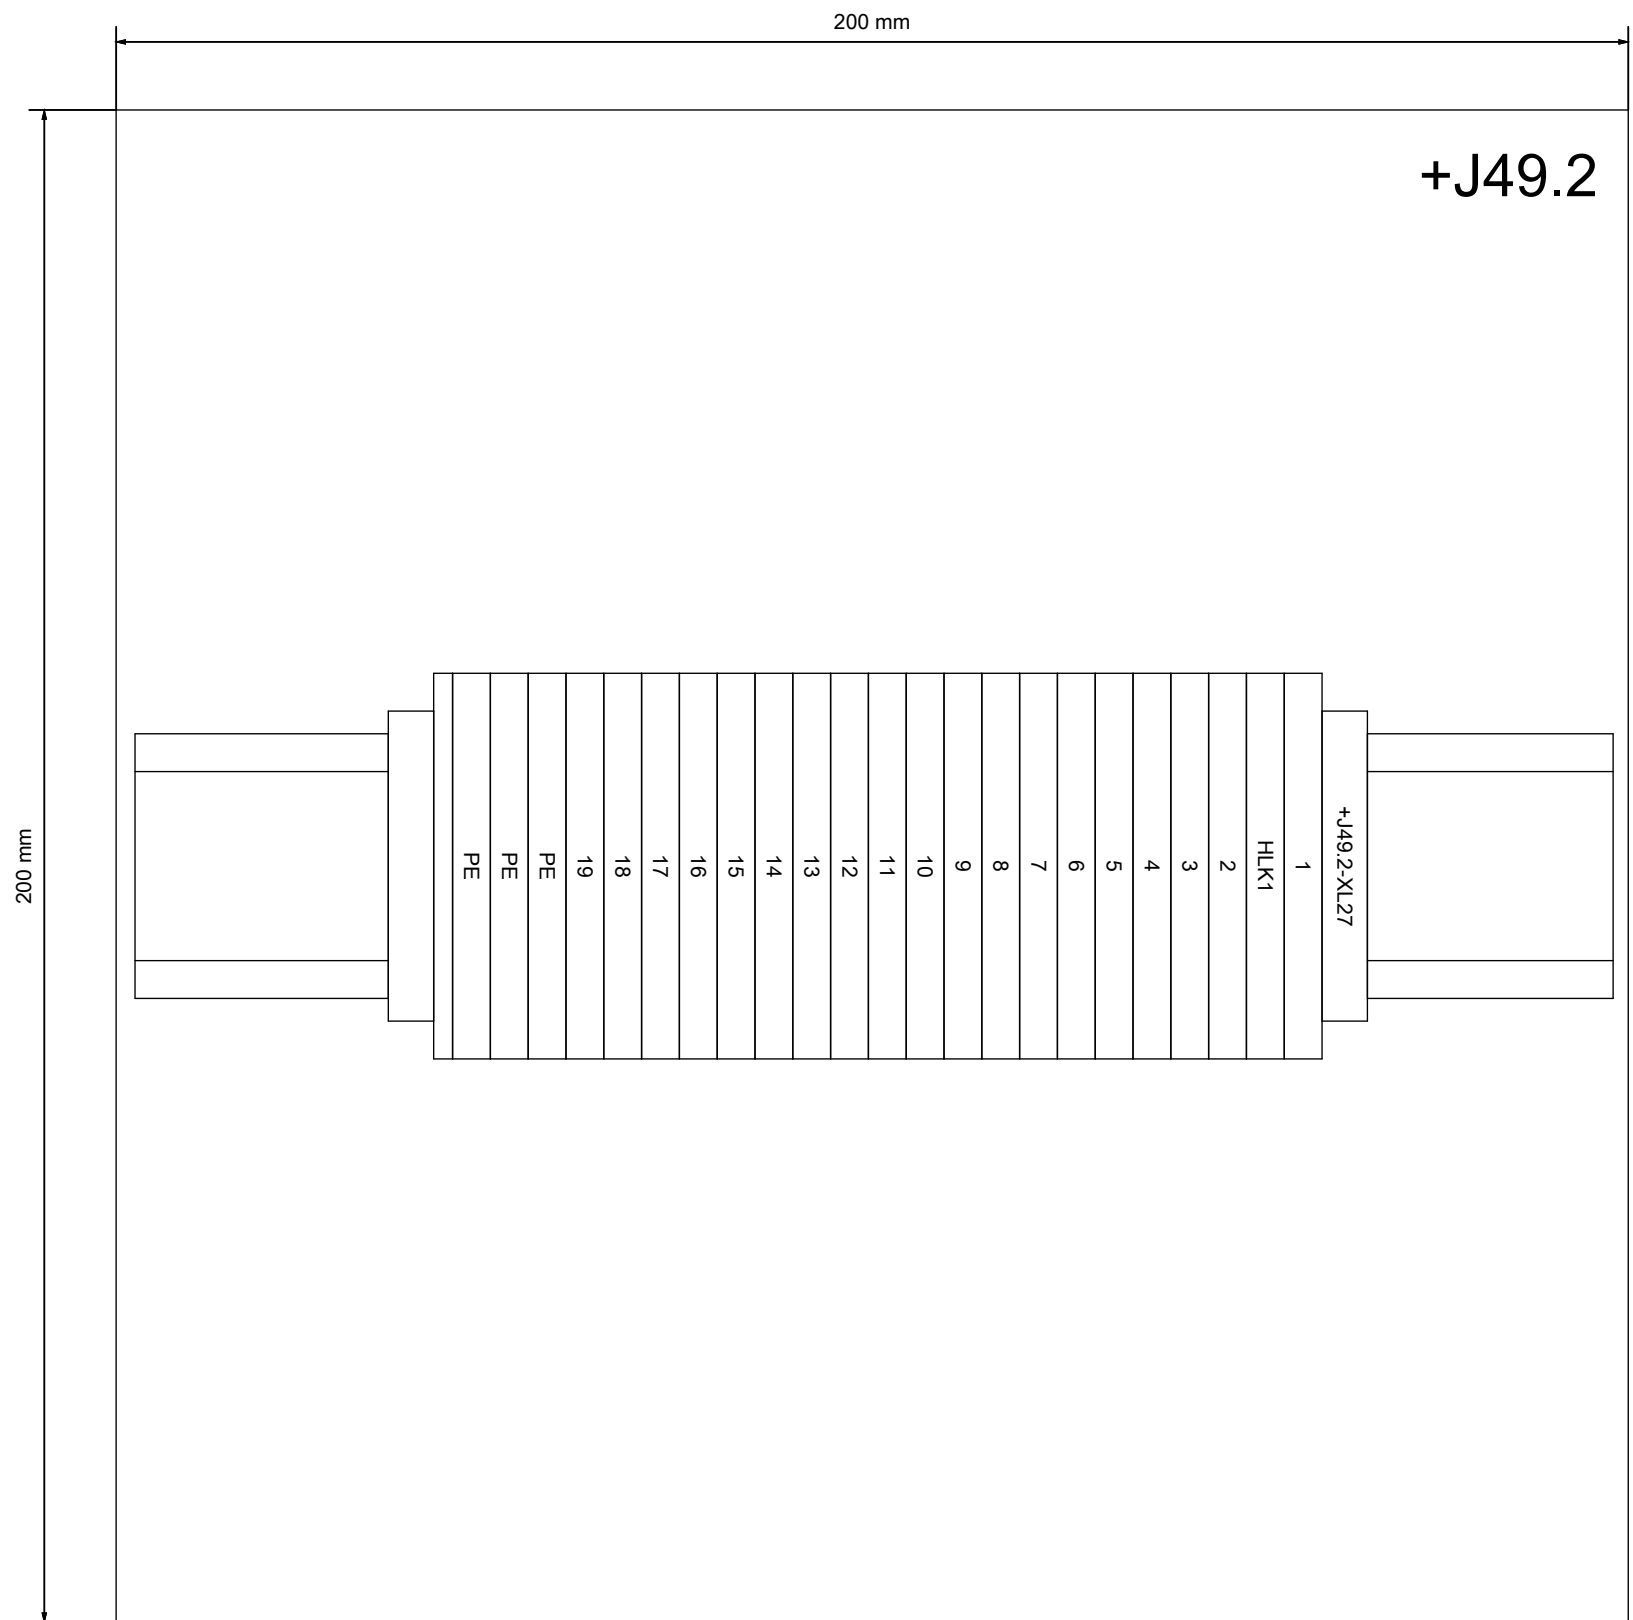


Option


			Date	2012/1/31	Customer Woo Su AMS			Layout mounting panel			= LAYOUT	
			Ed.	DGS	Project Ecoline 84						+ J49.2	
			Appr	GY	Machine-No. 700026276							
Modification	Date	Name	Original		Replacement of	Replaced by			ESM-85061		Ecoline	EN/UL

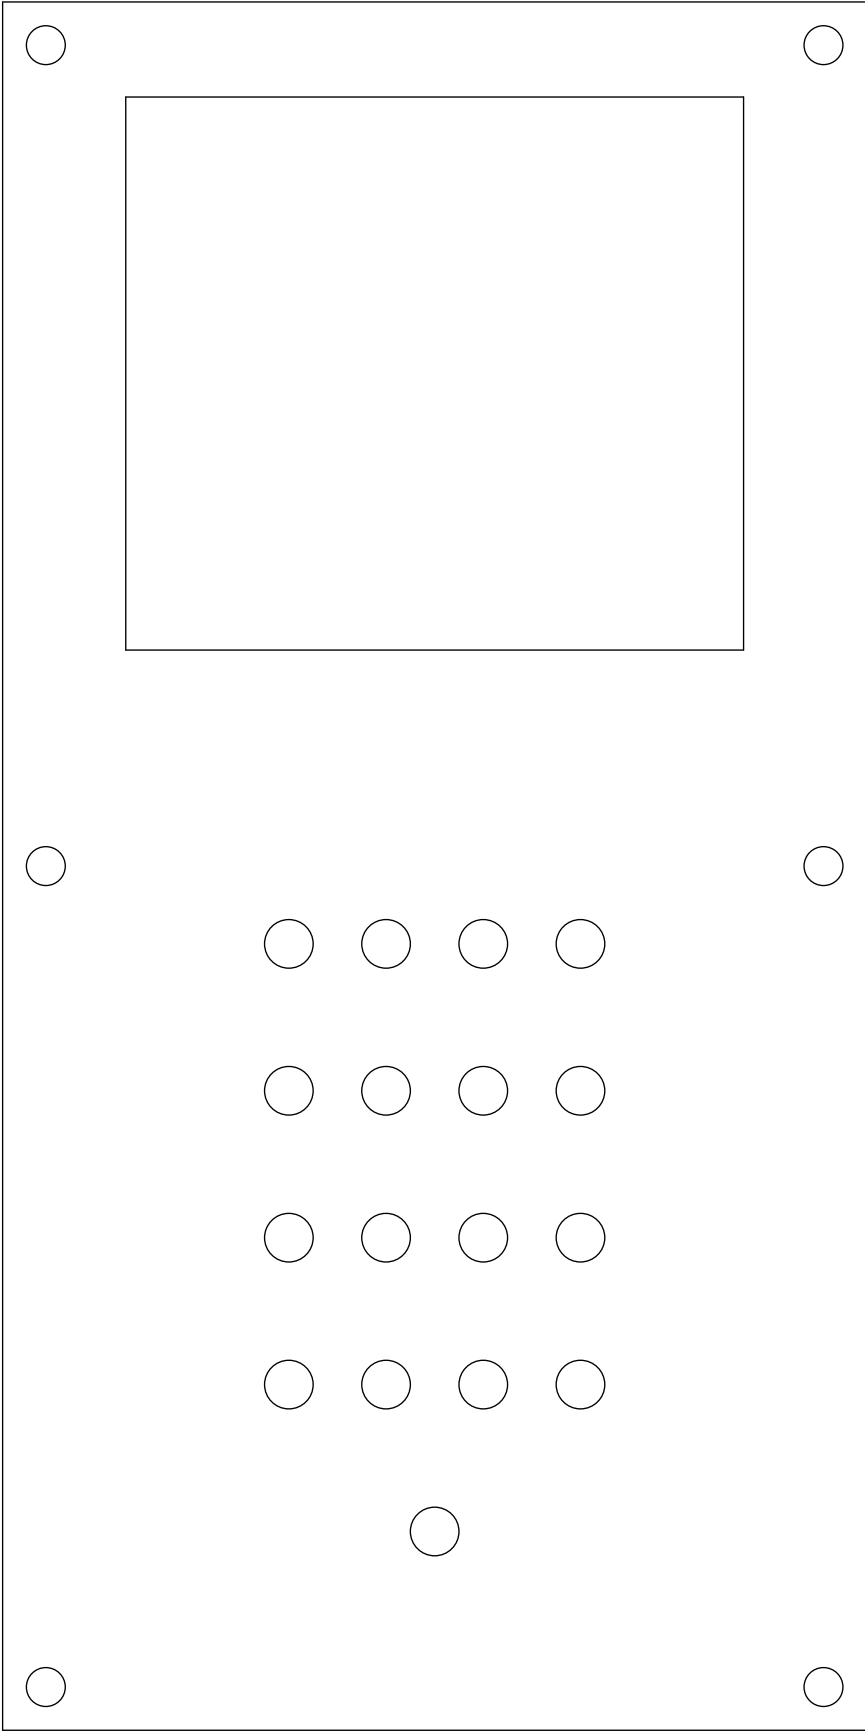

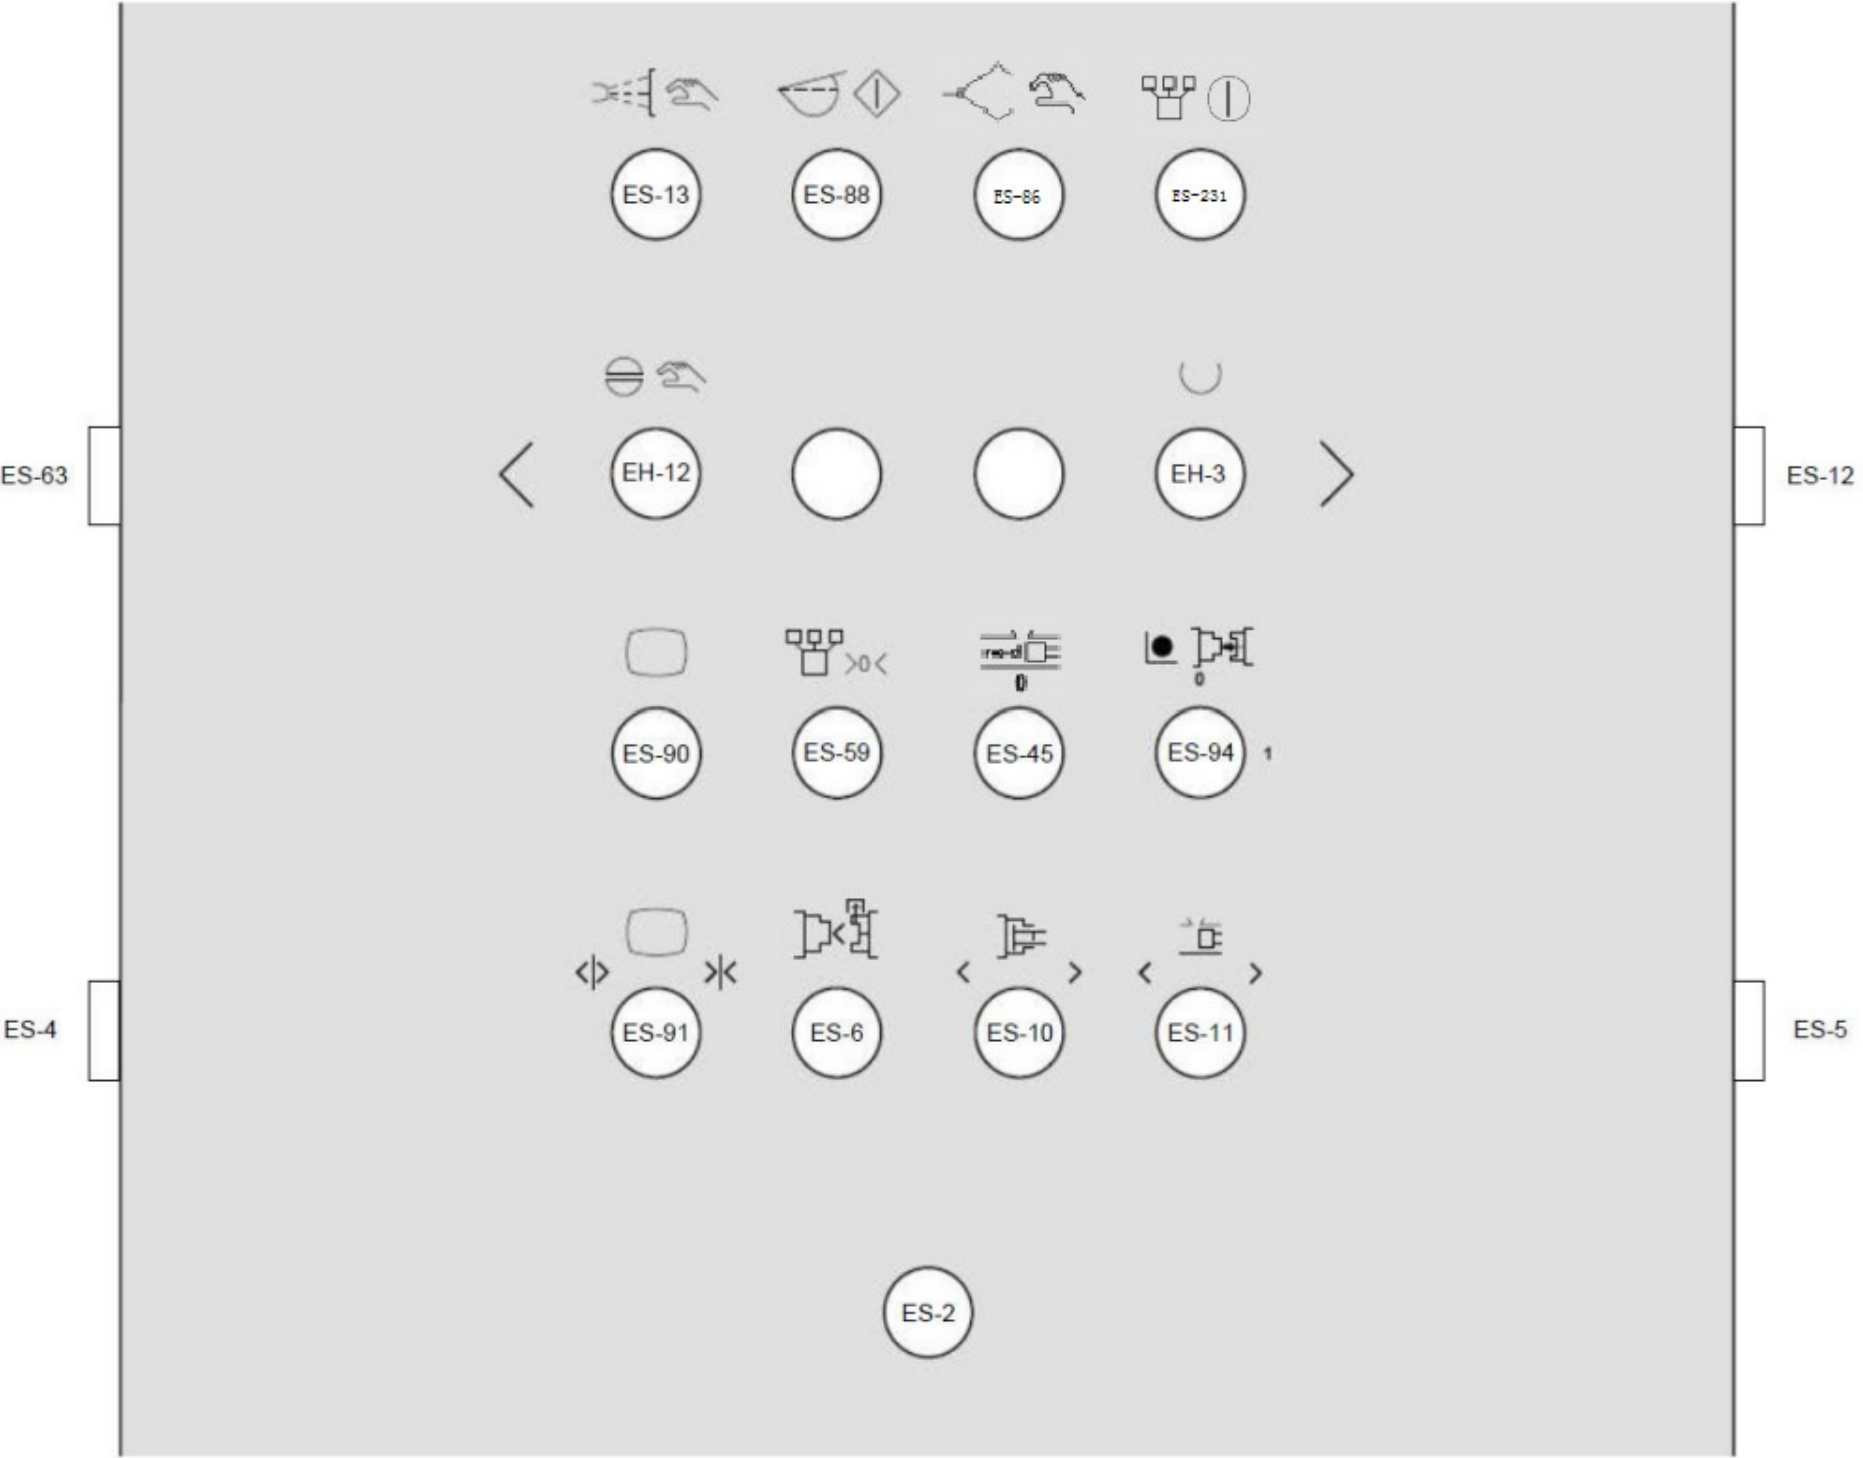

Ecoline 84

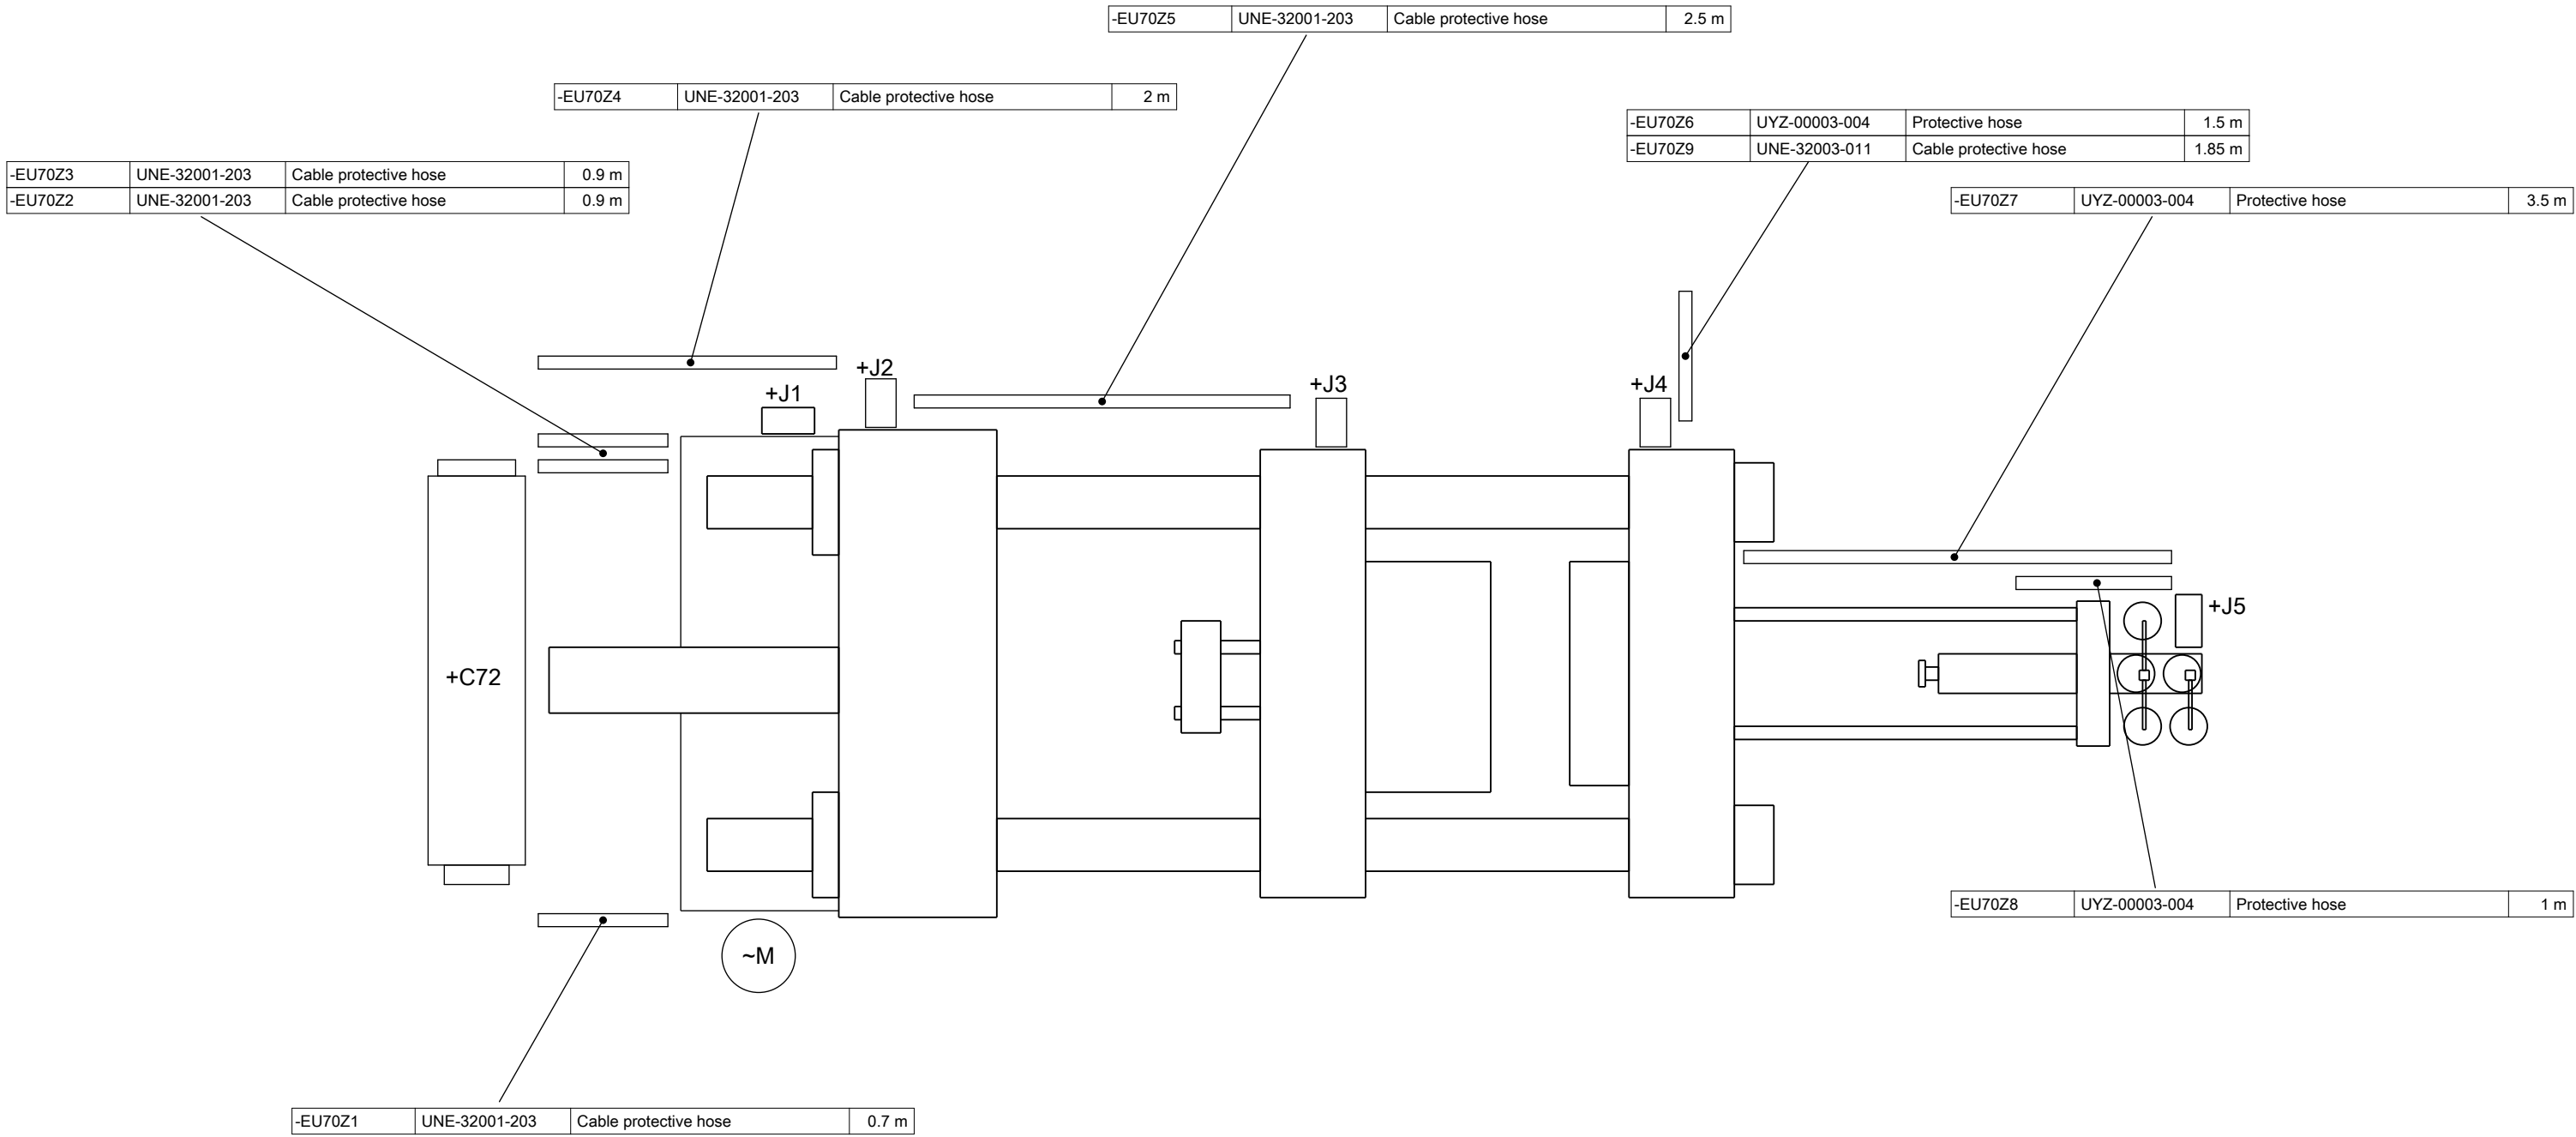

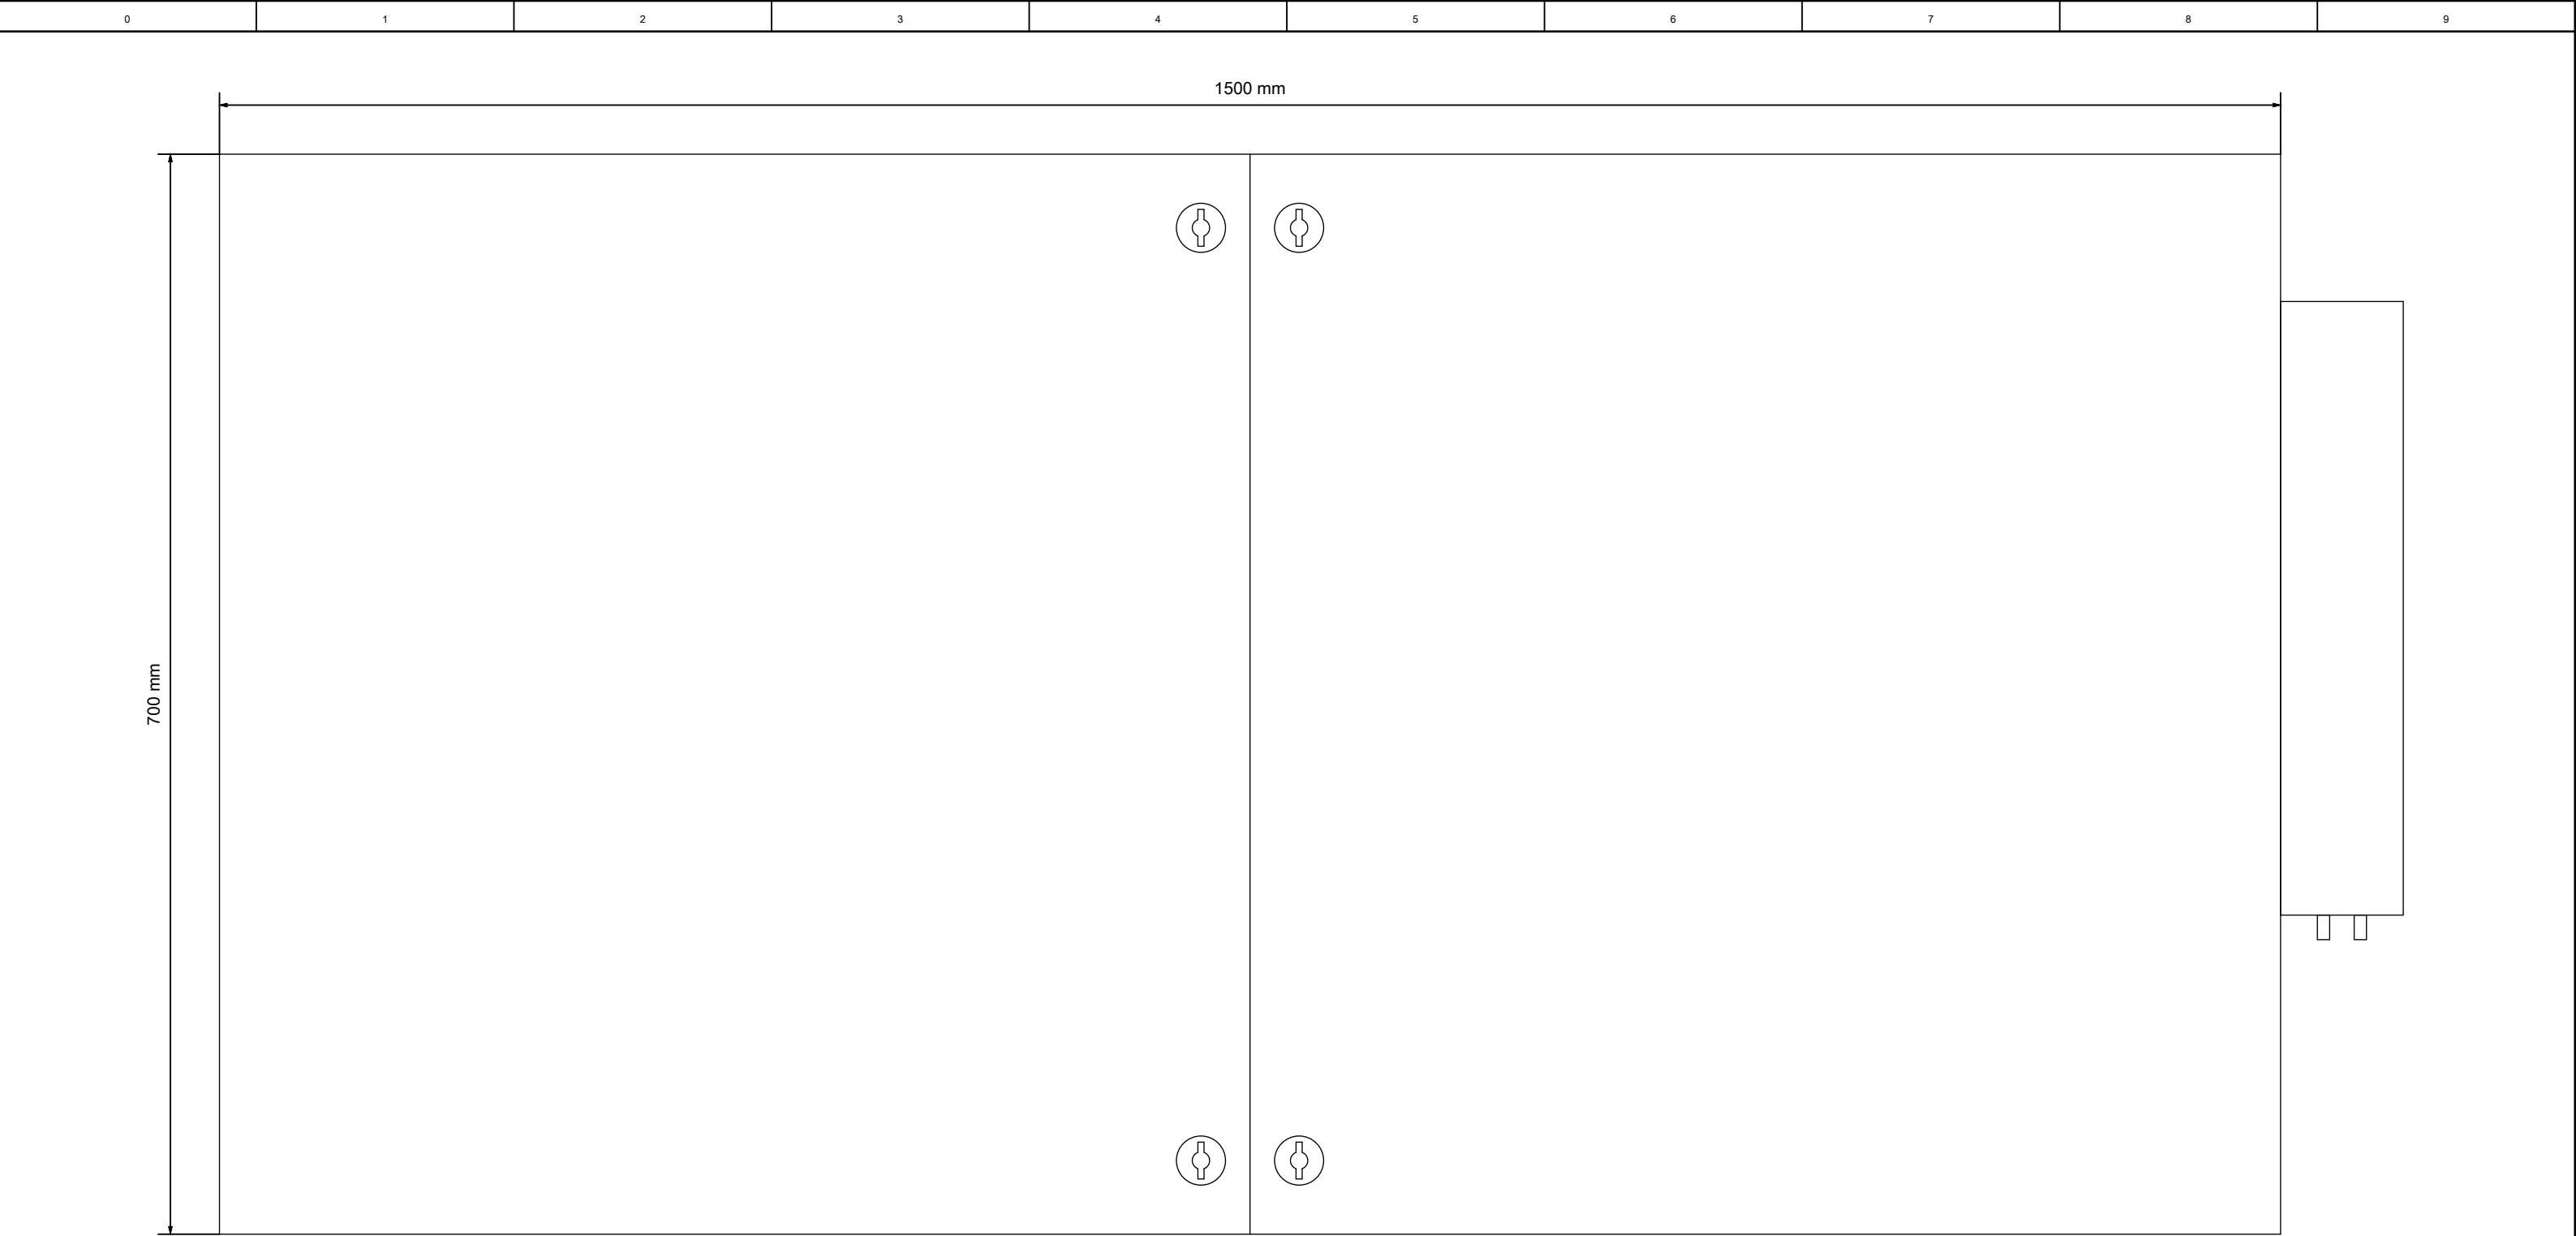


+C80-EU80Z1	UNE-32209-080	Top rail hat EN 50 022 (35x7.5)	0.6 m
+C80-EU80Z2	UNN-10170-005	Spacer bolt M6x30	3 ST
+C80-EU80Z3	GCEU-10549-001	Connector plate	1 ST
+C80-EU80Z4	GCEU-10552-001	Cover	1 ST
+C80-EU80Z5	GCEU-10555-001	Plate	1 ST
+C80-EU80Z6	UNR-53745-020	Sealing tape	2 m
+C80-EU80Z7	UNE-32023-417	Connection fitting	2 ST
+C80-EU80Z8	UNN-14002-001	U-Washer M6	12 ST
+C80-EU80Z9	UNN-12016-004	Lock nut M6	12 ST
+C80-EU80Z10	UNE-32023-530	Connection fitting	1 ST


-EU80Z1	GCEO-10435-001	Control cabinet Ecoline	1 ST
-EU80Z2	UNE-32209-080	Top rail hat EN 50 022 (35x7.5)	3.4 m
-EU80Z3	UXE-32213-011	Wiring channel 60x40mm	1.5 m
-EU80Z4	UNE-32203-025	Shield clamp	5 ST
-EU80Z5	UNE-32030-011	Mounting frame	1 ST
-EU80Z6	UNE-32030-021	Module	1 ST
-EU80Z7	UNE-32030-022	Module	4 ST
-EU80Z8	UNE-32030-024	Module	2 ST
-EU80Z19	UNE-32030-025	Module	1 ST
-EU80Z9	UNE-30013-xxx	Different types of wires	xx m
-EU80Z22	UNE-32110-106	Conductor end sleeve isolated	50 ST


-EU80Z10	UNE-32110-202	Doubles conductor end sleeve	25 ST
-EU80Z11	UNE-32114-007	Cable screwing M32x1.5	2 ST
-EU80Z12	UNE-32114-227	Counter nut EMC M32x1.5	2 ST
-EU80Z13	UNE-32114-008	Cable screwing M40x1.5	2 ST
-EU80Z14	UNE-32114-228	Counter nut EMC M40x1.5	2 ST
-EU80Z15	UNE-32114-362	Reduction metric M40x1.5	2 ST
-EU80Z17	UNE-32114-004	Cable screwing M16x1.5	19 ST
-EU80Z18	UNE-32114-254	Full dog point M16x1.5	4 ST
-EU80Z20	UNE-32000-xxx	Different types of shrink sleeves	xx m
-EU80Z21	UNE-32107-531	Cable shoe	6 ST


-EU80Z23	UNE-32205-151	End plate	1 ST
-EU80Z24	UNE-32214-311	Cable duct 40x80mm	2 m
-EU80Z25	UNN-10009-160	Hex cap screw M6x65	2 ST
-EU80Z26	UXE-32206-011	Central point of earthing	1 ST
-EU80Z27	UNR-51634-002	CR neoprene-elastomere plate	0.2 m
-EU80Z28	UXB-26010-082	Double-sided adhesive tape	6 m
-EU80Z29	DACHAN-0216	Cold terminal tubular bare end EN16-18	20 ST
-EU80Z30	UXN-14025-008	Serrated lock washer M6	10 ST
-EU80Z31	UNE-32114-229	Counter nut EMC M50x1.5	1 ST
-EU80Z33	UNE-32114-009	Cable screwing M50x1.5	1 ST

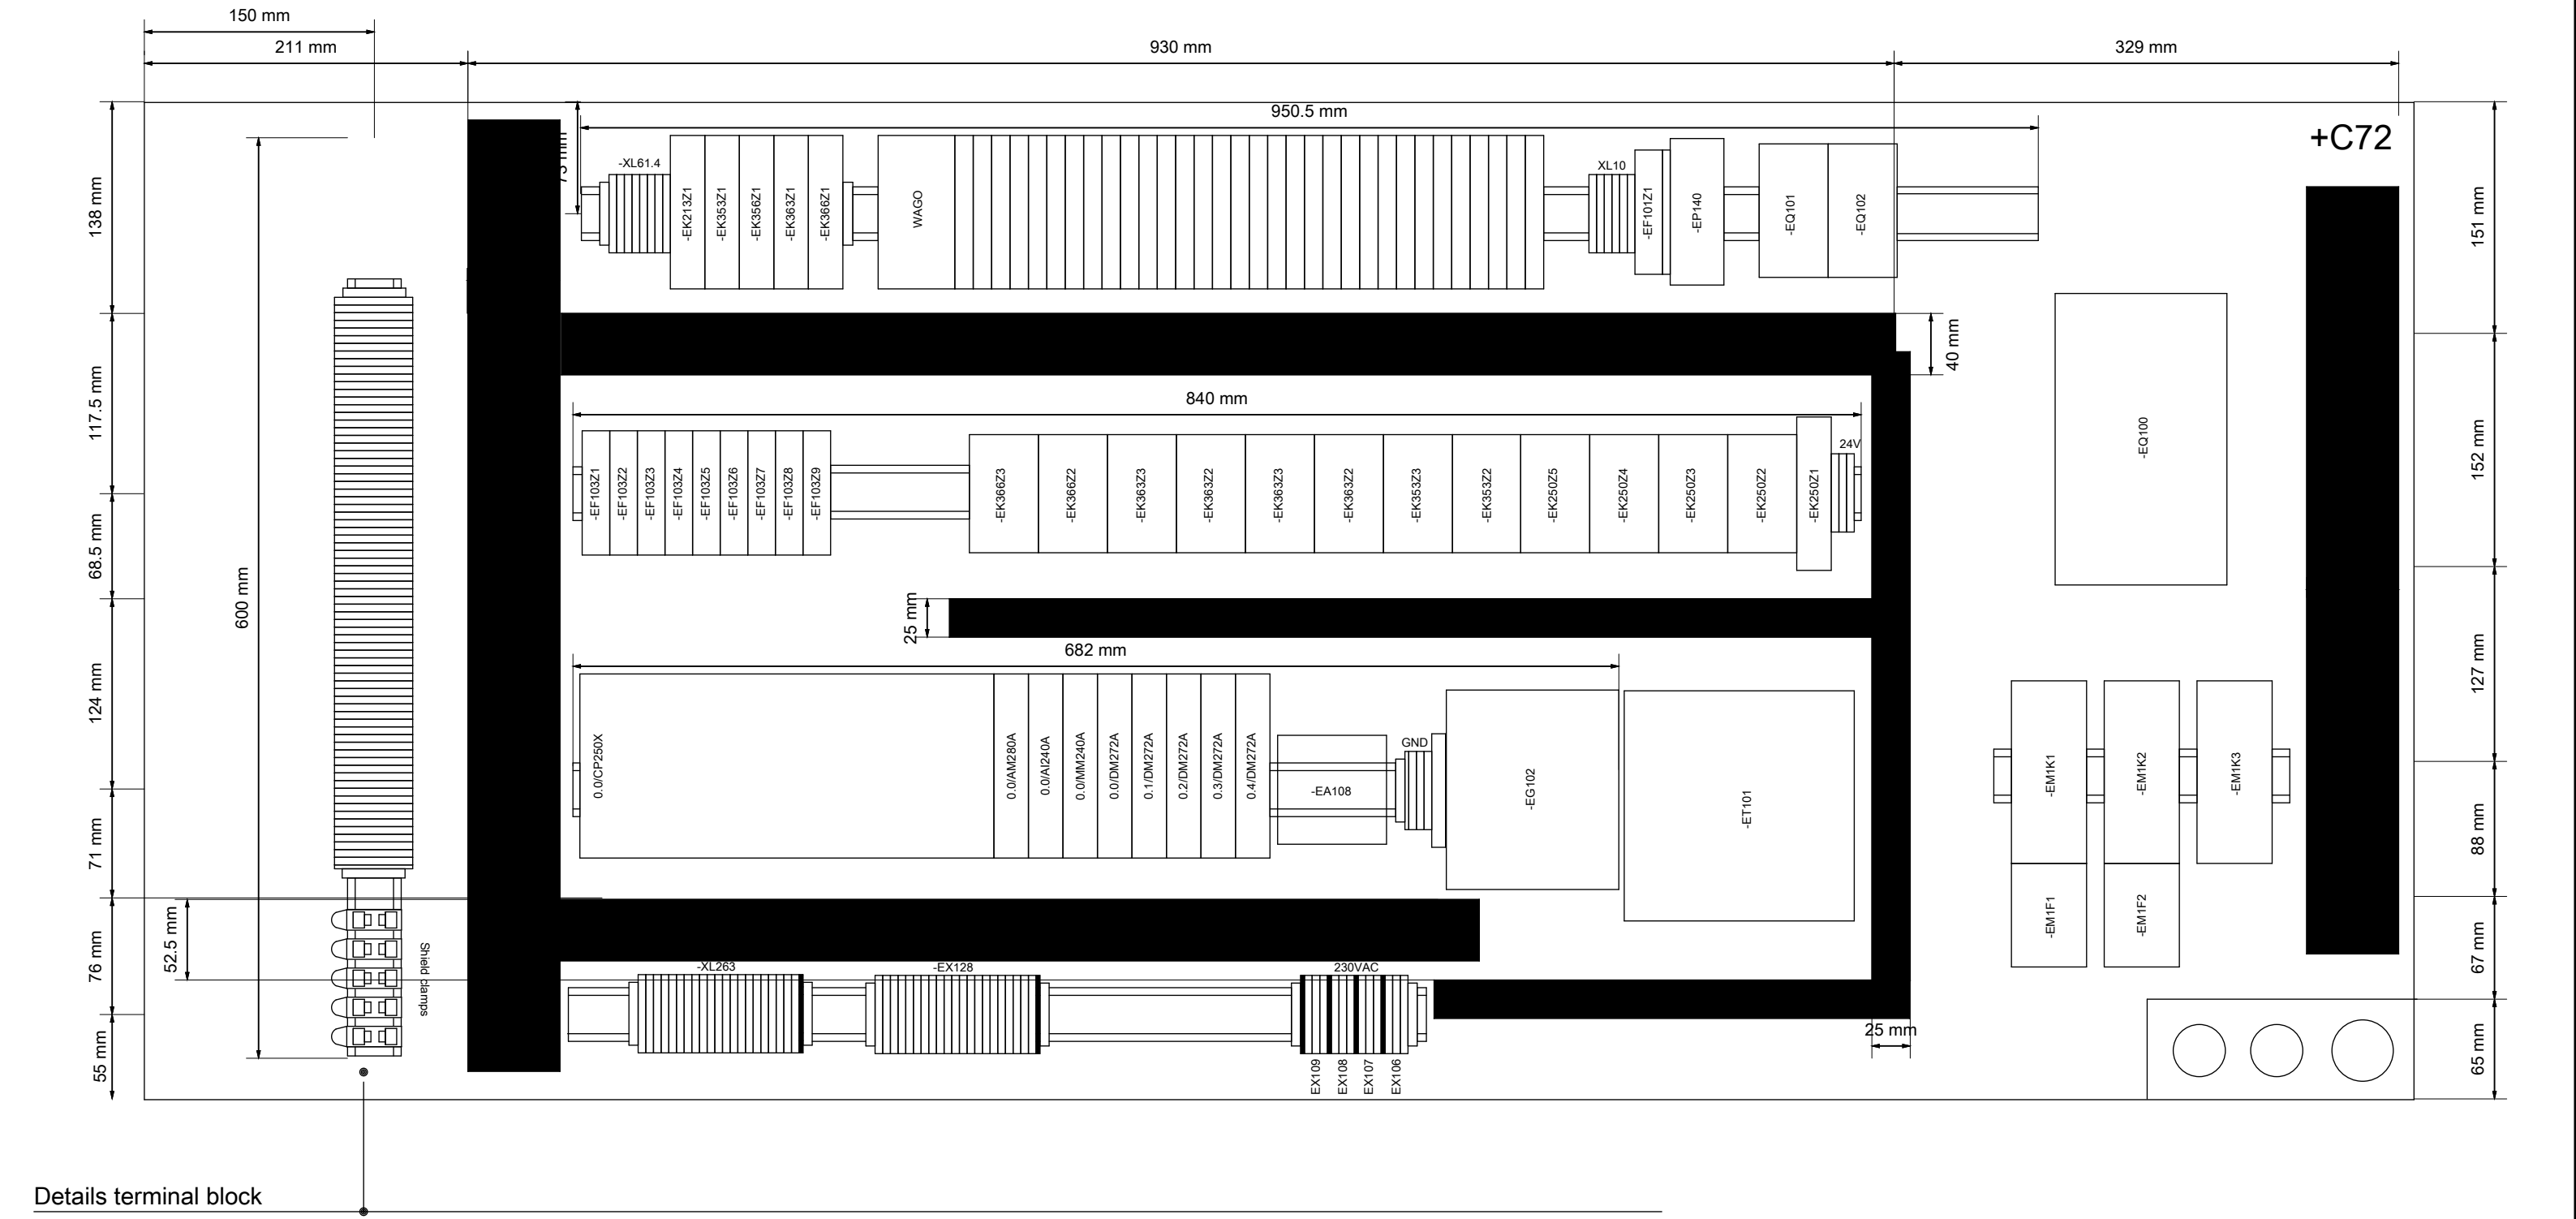



top	-XL98.1
	-XL98.2
	-XL98.3
	-XL98.4
	-XL98.5
	-XL98.6
	-XL98.7
	-XL98.8
	-XL98.9
	-XL98.2
	-XL98.3
	-XL98.4
	-XL98.5
	-XL98.6
	-XL98.7
	-XL98.8
	-XL98.9
	-XL98.10
	-XL98.11
	-XL98.12
	-XL98.13
	-XL98.14
	-XL98.15
	-XL98.16
	-XL98.17
	-XL98.18
	-XL98.19
	-XL98.20
	-XL98.21
	-XL98.22
	-XL98.23
	-XL98.24
	-XL98.25
	-XL98.26
	-XL98.27
	-XL98.28
	-XL98.29
	-XL98.30
	-XL98.31
	-XL98.32
	-XL98.33
	-XL98.34
	-XL98.35
	-XL98.36
	-XL98.37
	-XL98.38
	-XL98.39
	-XL98.40
	-XL98.41
	-XL98.42
	-XL98.43
	-XL98.44
	-XL98.45
	-XL98.46
	-XL98.47
	-XL98.48
	-XL98.49
	-XL98.50
	-XL98.51
	-XL98.52
	-XL98.53
	-XL98.54
	-XL98.55
	-XL98.56
	-XL98.57
	-XL98.58
	-XL98.59
	-XL98.60
	-XL98.61
	-XL98.62
	-XL98.63
	-XL98.64
	-XL98.65
	-XL98.66
	-XL98.67
	-XL98.68
	-XL98.69
	-XL98.70
	-XL98.71
	-XL98.72
	-XL98.73
	-XL98.74
	-XL98.75
	-XL98.76
	-XL98.77
	-XL98.78
	-XL98.79
	-XL98.80
	-XL98.81
	-XL98.82
	-XL98.83
	-XL98.84
	-XL98.85
	-XL98.86
	-XL98.87
	-XL98.88
	-XL98.89
	-XL98.90
	-XL98.91
	-XL98.92
	-XL98.93
	-XL98.94
	-XL98.95
	-XL98.96
	-XL98.97
	-XL98.98
	-XL98.99
	-XL99.00
	-XL99.01
	-XL99.02
	-XL99.03
	-XL99.04
	-XL99.05
	-XL99.06
	-XL99.07
	-XL99.08
	-XL99.09
	-XL99.10
	-XL99.11
	-XL99.12
	-XL99.13
	-XL99.14
	-XL99.15
	-XL99.16
	-XL99.17
	-XL99.18
	-XL99.19
	-XL99.20
	-XL99.21
	-XL99.22
	-XL99.23
	-XL99.24
	-XL99.25
	-XL99.26
	-XL99.27
	-XL99.28
	-XL99.29
	-XL99.30
	-XL99.31
	-XL99.32
	-XL99.33
	-XL99.34
	-XL99.35
	-XL99.36
	-XL99.37
	-XL99.38
	-XL99.39
	-XL99.40
	-XL99.41
	-XL99.42
	-XL99.43
	-XL99.44
	-XL99.45
	-XL99.46
	-XL99.47
	-XL99.48
	-XL99.49
	-XL99.50
	-XL99.51
	-XL99.52
	-XL99.53
	-XL99.54
	-XL99.55
	-XL99.56
	-XL99.57
	-XL99.58
	-XL99.59
	-XL99.60
	-XL99.61
	-XL99.62
	-XL99.63
	-XL99.64
	-XL99.65
	-XL99.66
	-XL99.67
	-XL99.68
	-XL99.69
	-XL99.70
	-XL99.71
	-XL99.72
	-XL99.73
	-XL99.74
	-XL99.75
	-XL99.76
	-XL99.77
	-XL99.78
	-XL99.79
	-XL99.80
	-XL99.81
	-XL99.82
	-XL99.83
	-XL99.84
	-XL99.85
	-XL99.86
	-XL99.87
	-XL99.88
	-XL99.89
	-XL99.90
	-XL99.91
	-XL99.92
	-XL99.93
	-XL99.94
	-XL99.95
	-XL99.96
	-XL99.97
	-XL99.98
	-XL99.99
	-XL100.00
	-XL100.01
	-XL100.02
	-XL100.03
	-XL100.04
	-XL100.05
	-XL100.06
	-XL100.07
	-XL100.08
	-XL100.09
	-XL100.10
	-XL100.11
	-XL100.12
	-XL100.13
	-XL100.14
	-XL100.15
	-XL100.16
	-XL100.17
	-XL100.18
	-XL100.19
	-XL100.20
	-XL100.21
	-XL100.22
	-XL100.23
	-XL100.24
	-XL100.25
	-XL100.26
	-XL100.27
	-XL100.28
	-XL100.29
	-XL100.30
	-XL100.31
	-XL100.32
	-XL100.33
	-XL100.34
	-XL100.35
	-XL100.36
	-XL100.37
	-XL100.38
	-XL100.39
	-XL100.40
	-XL100.41
	-XL100.42
	-XL100.43
	-XL100.44
	-XL100.45
	-XL100.46
	-XL100.47
	-XL100.48
	-XL100.49
	-XL100.50
	-XL100.51
	-XL100.52
	-XL100.53
	-XL100.54
	-XL100.55
	-XL100.56
	-XL100.57
	-XL100.58
	-XL100.59
	-XL100.60
	-XL100.61
	-XL100.62
	-XL100.63
	-XL100.64
	-XL100.65
	-XL100.66
	-XL100.67
	-XL100.68
	-XL100.69
	-XL100.70
	-XL100.71
	-XL100.72
	-XL100.73
	-XL100.74
	-XL100.75
	-XL100.76
	-XL100.77
	-XL100.78
	-XL100.79
	-XL100.80
	-XL100.81
	-XL100.82
	-XL100.83
	-XL100.84
	-XL100.85
	-XL100.86
	-XL100.87
	-XL100.88
	-XL100.89
	-XL100.90
	-XL100.91
	-XL100.92
	-XL100.93
	-XL100.94
	-XL100.95
	-XL100.96
	-XL100.97
	-XL100.98
	-XL100.99
	-XL101.00
	-XL101.01
	-XL101.02
	-XL101.03
	-XL101.04
	-XL101.05
	-XL101.06
	-XL101.07
	-XL101.08
	-XL101.09
	-XL101.10
	-XL101.11
	-XL101.12
	-XL101.13
	-XL101.14
	-XL101.15
	-XL101.16
	-XL101.17
	-XL101.18
	-XL101.19
	-XL101.20
	-XL101.21
	-XL101.22
	-XL101.23
	-XL101.24
	-XL101.25
	-XL101.26
	-XL101.27
	-XL101.28
	-XL101.29
	-XL101.30
	-XL101.31
	-XL101.32
	-XL101.33
	-XL101.34
	-XL101.35
	-XL101.36
	-XL101.37
	-XL101.38
	-XL101.39
	-XL101.40
	-XL101.41
	-XL101.42
	-XL101.43
	-XL101.44
	-XL101.45
	-XL101.46
	-XL101.47
	-XL101.48
	-XL101.49
	-XL101.50
	-XL101.51
	-XL101.52
	-XL101.53
	-XL101.54
	-XL101.55
	-XL101.56
	-XL101.57
	-XL101.58
	-XL101.59
	-XL101.60
	-XL101.61
	-XL101.62
	-XL101.63
	-XL101.64
	-XL101.65
	-XL101.66
	-XL101.67
	-XL101.68
	-XL101.69
	-XL101.70
	-XL101.71
	-XL101.72
	-XL101.73
	-XL101.74
	-XL101.75
	-XL101.76
	-XL101.77
	-XL101.78
	-XL101.79
	-XL101.80
	-XL101.81
	-XL101.82
	-XL101.83
	-XL101.84
	-XL101.85
	-XL101.86
	-XL101.87
	-XL101.88
	-XL101.89
	-XL101.90
	-XL101.91
	-XL101.92
	-XL101.93
	-XL101.94
	-XL101.95
	-XL101.96
	-XL101.97
	-XL101.98
	-XL101.99
	-XL102.00

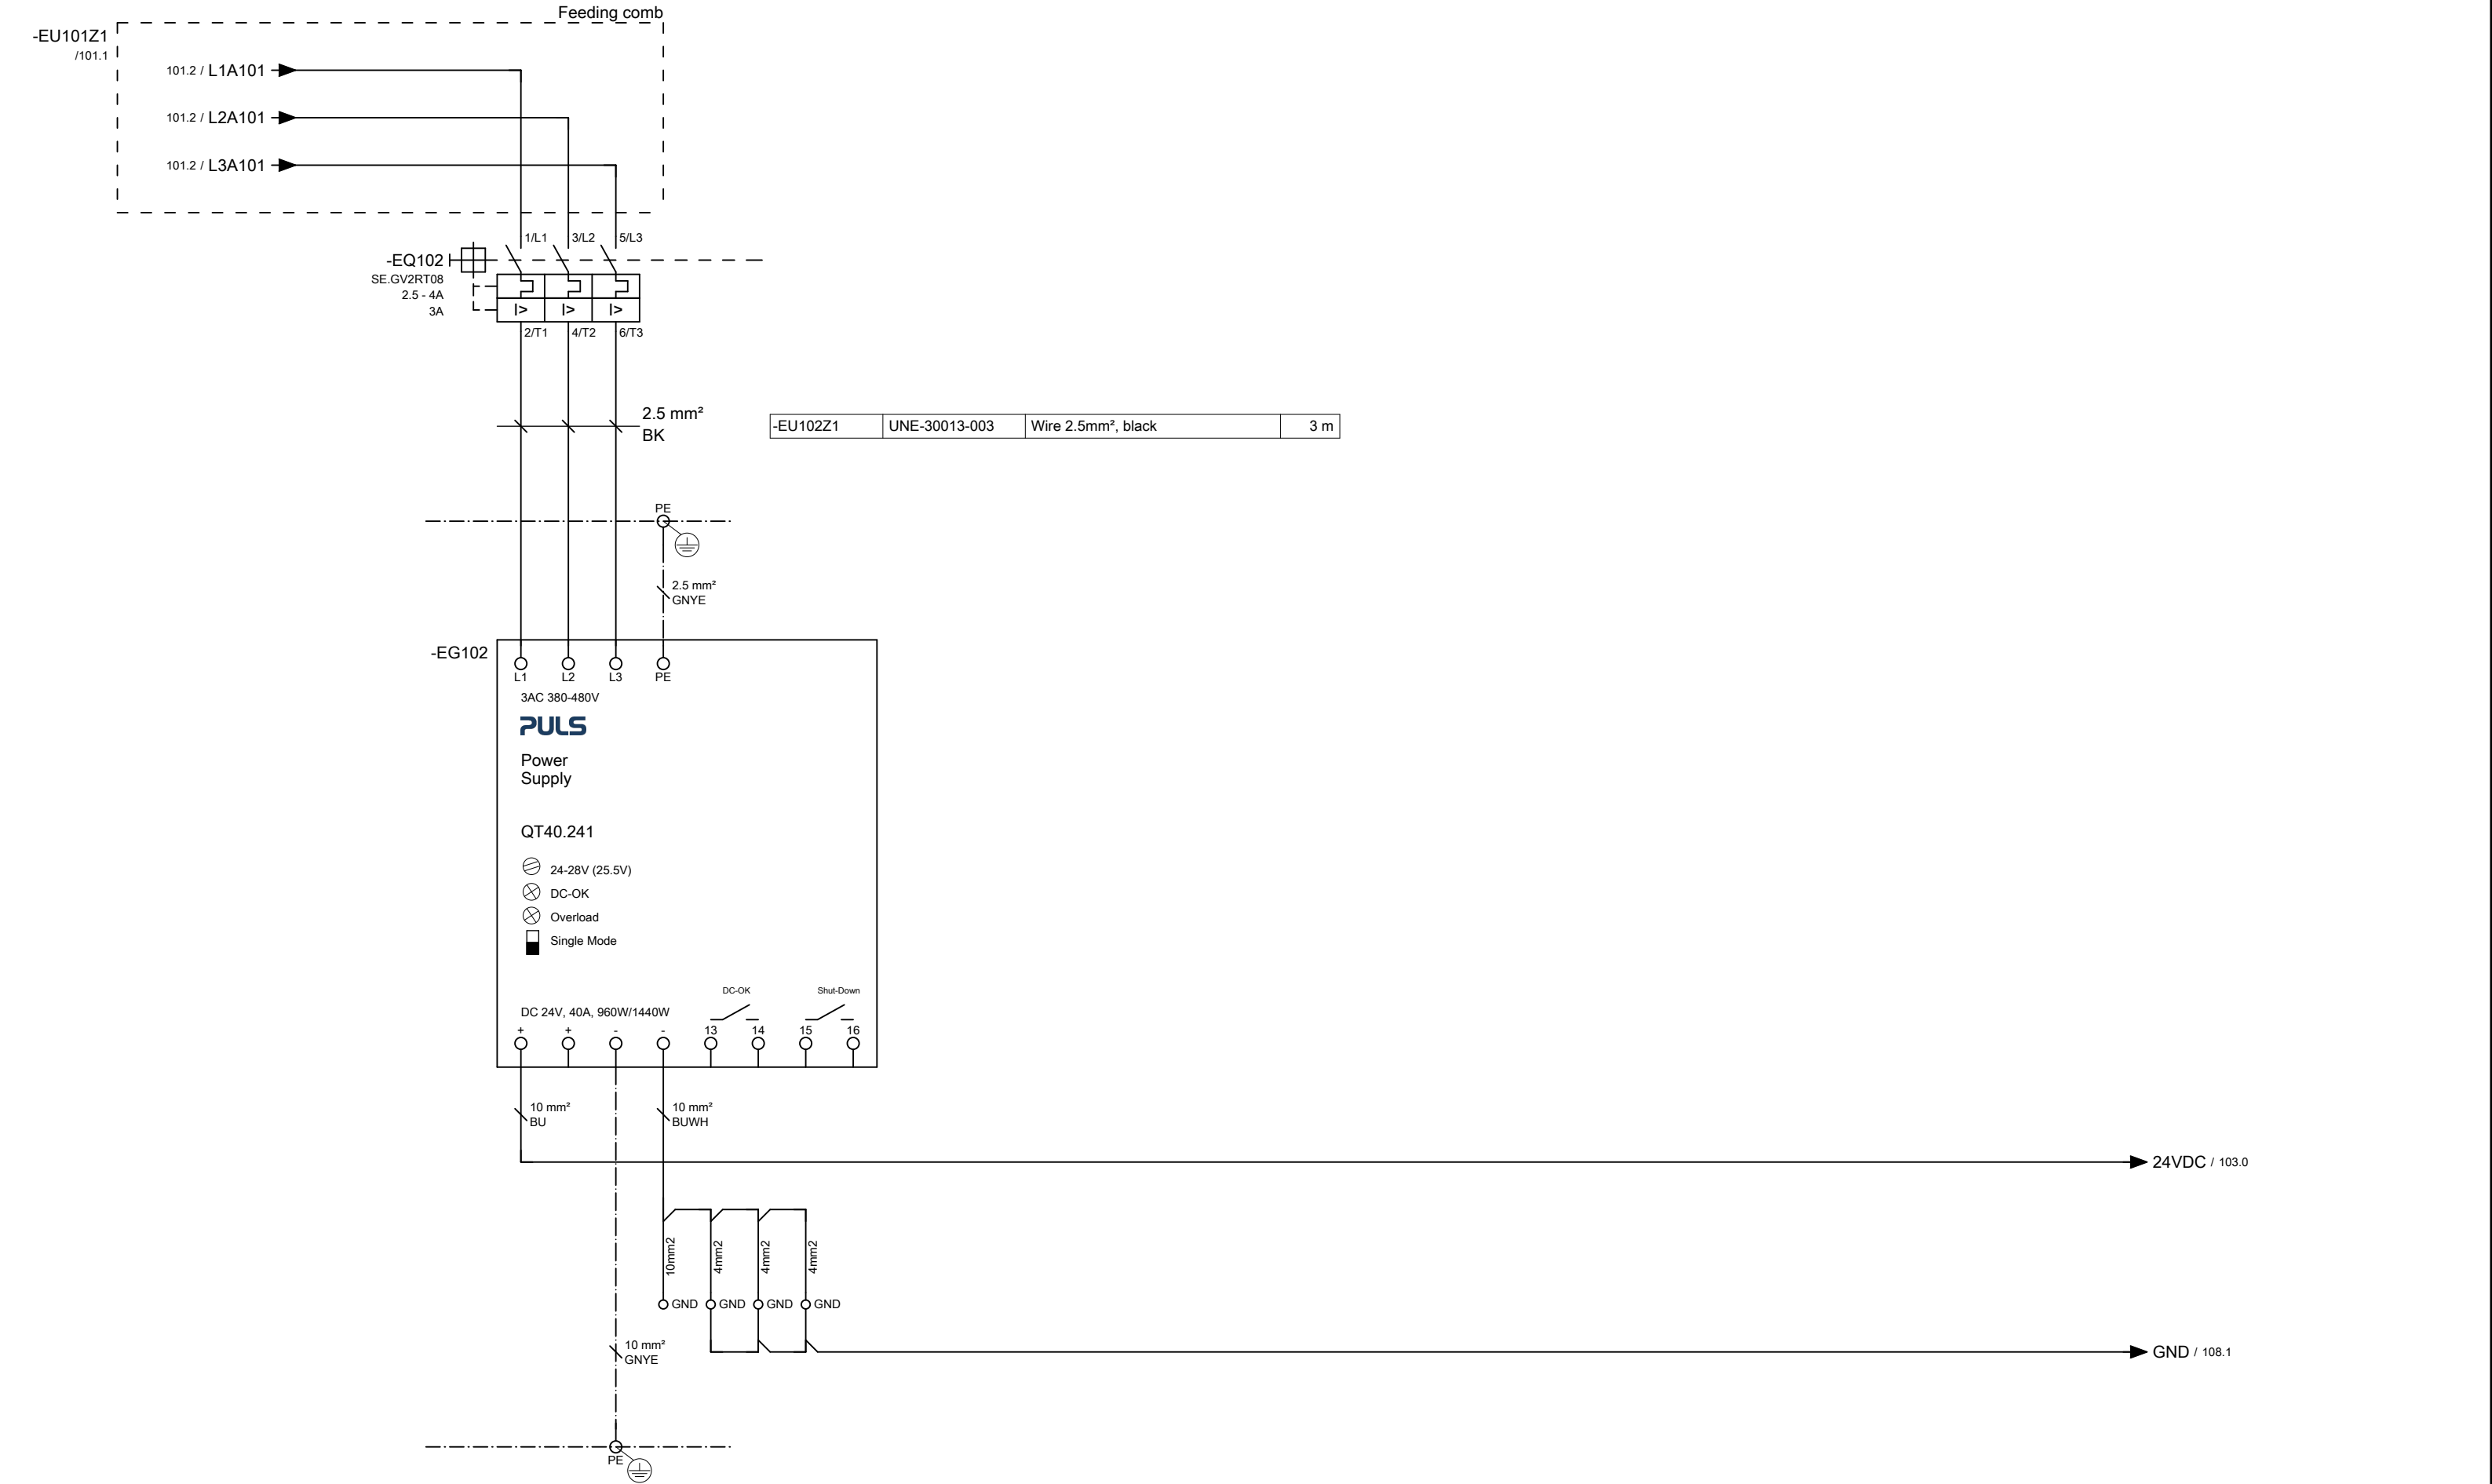


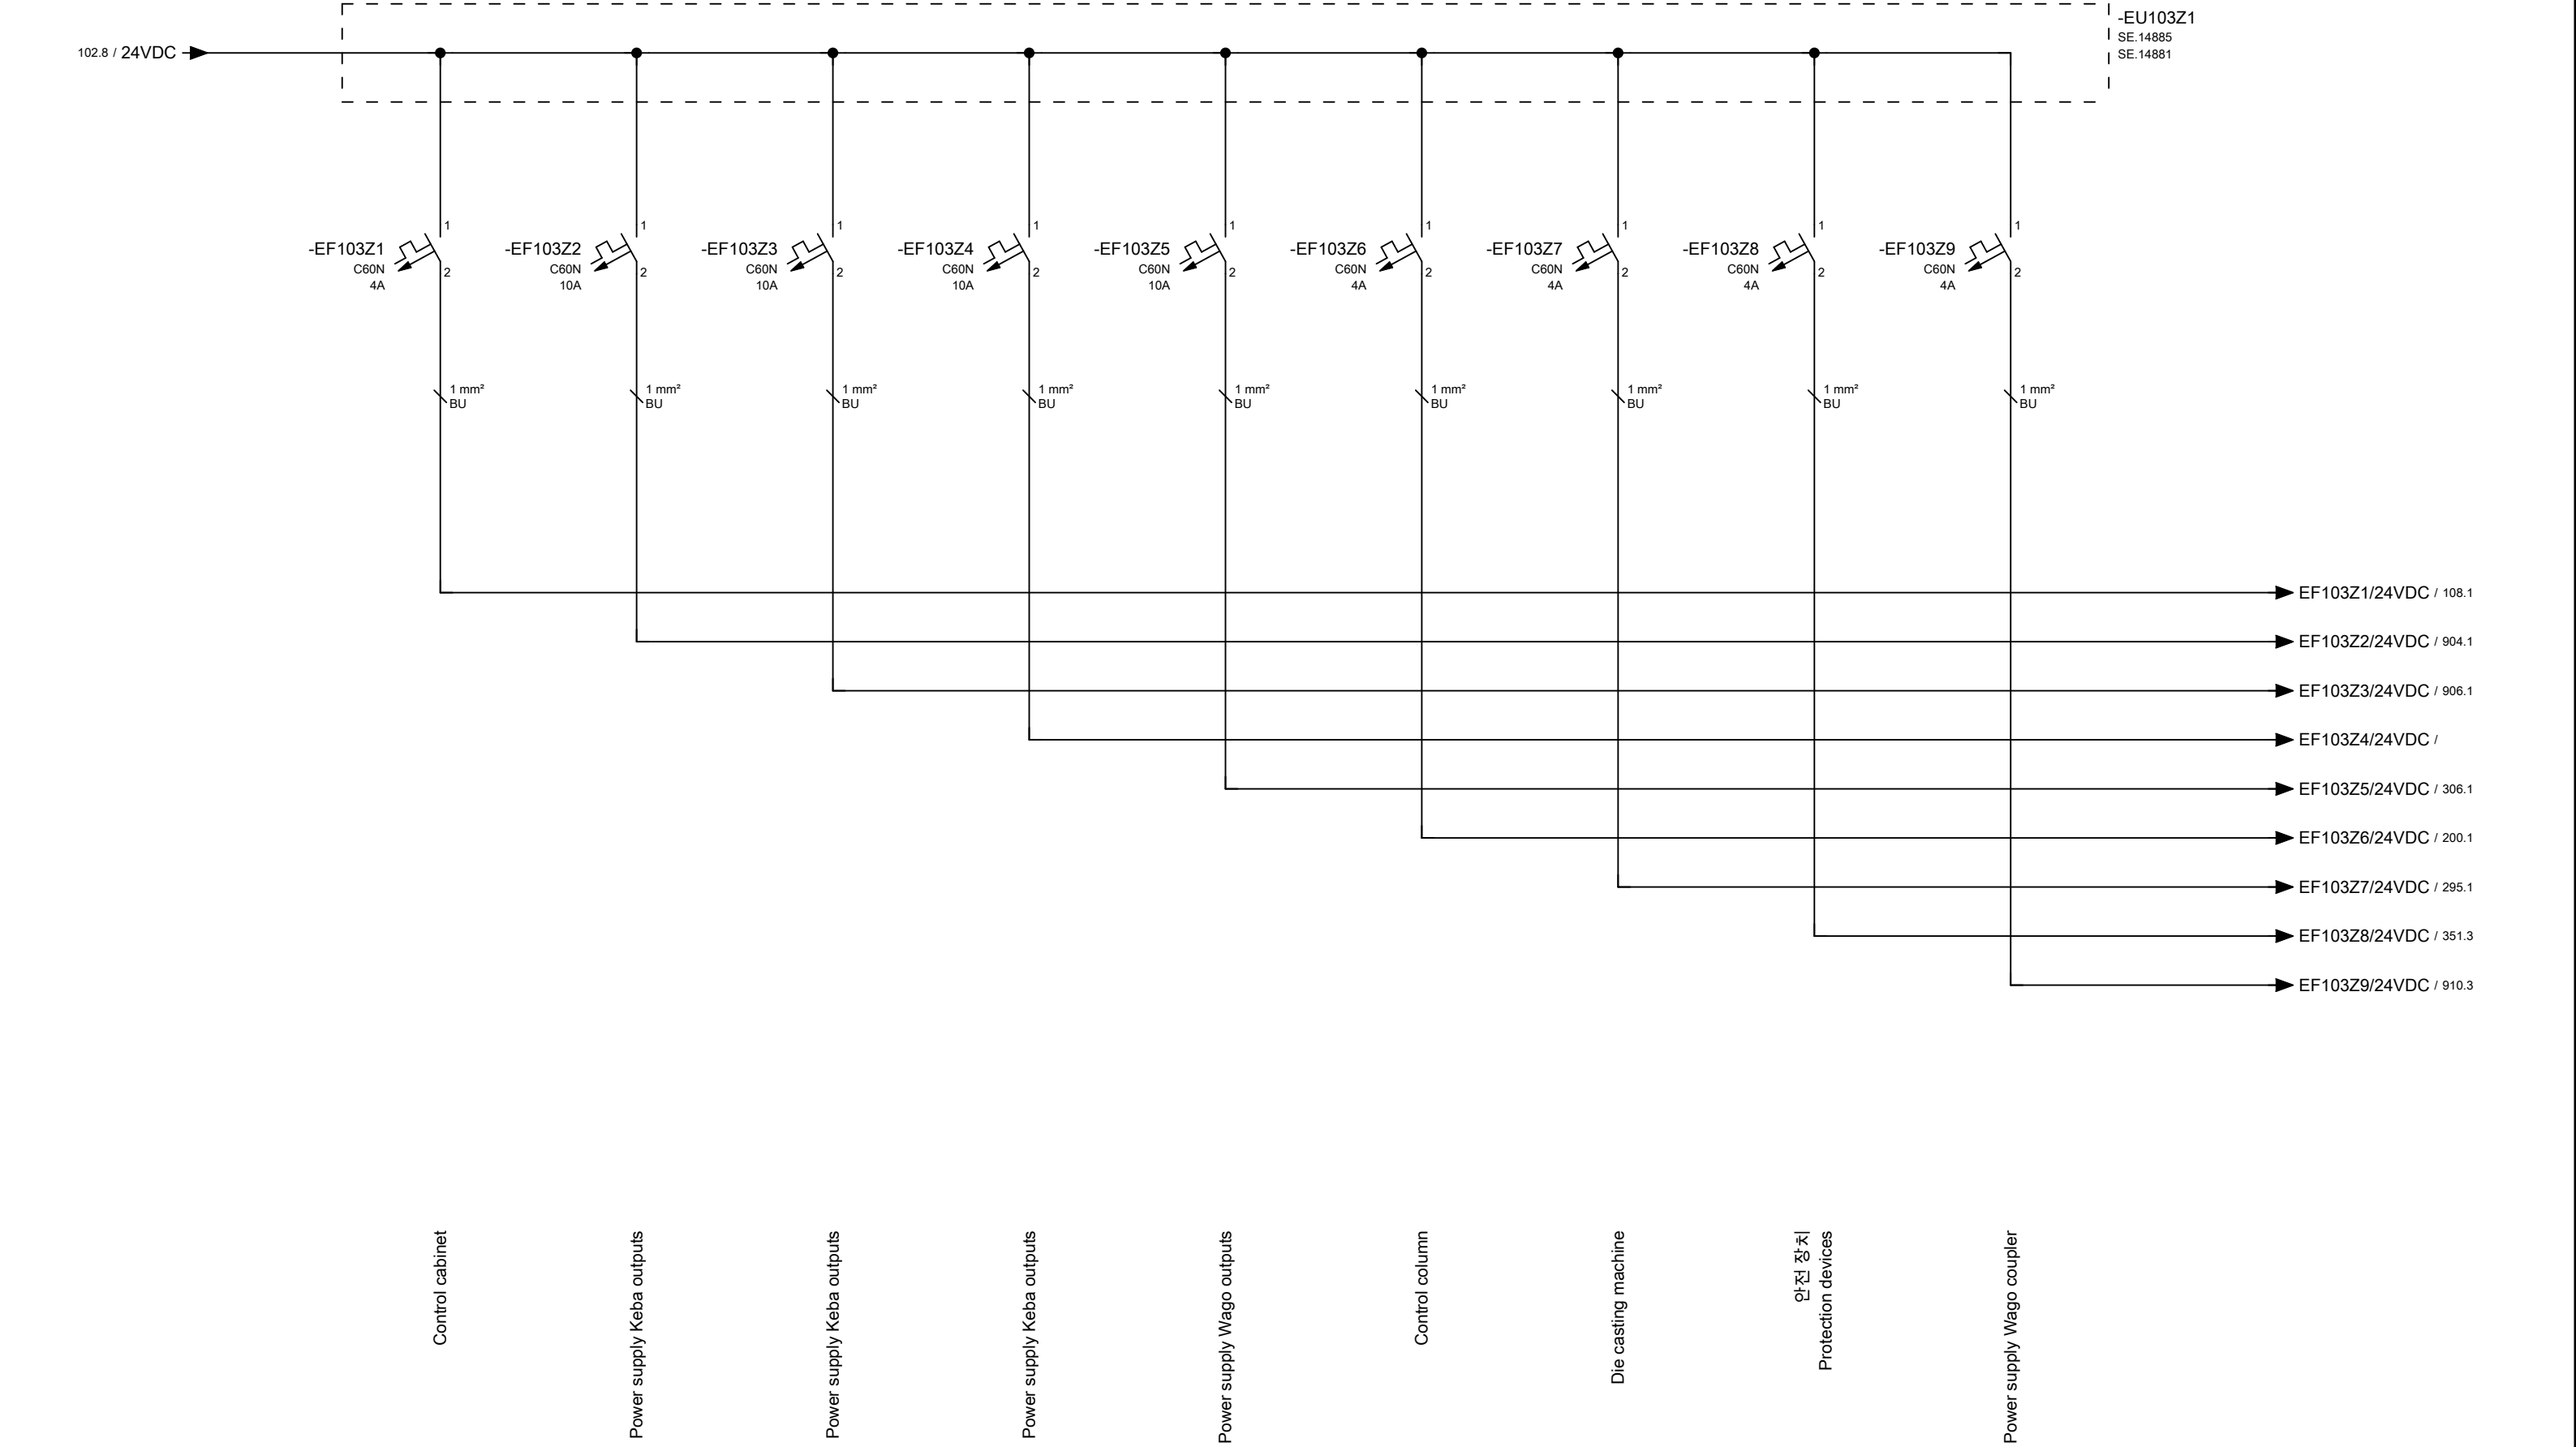


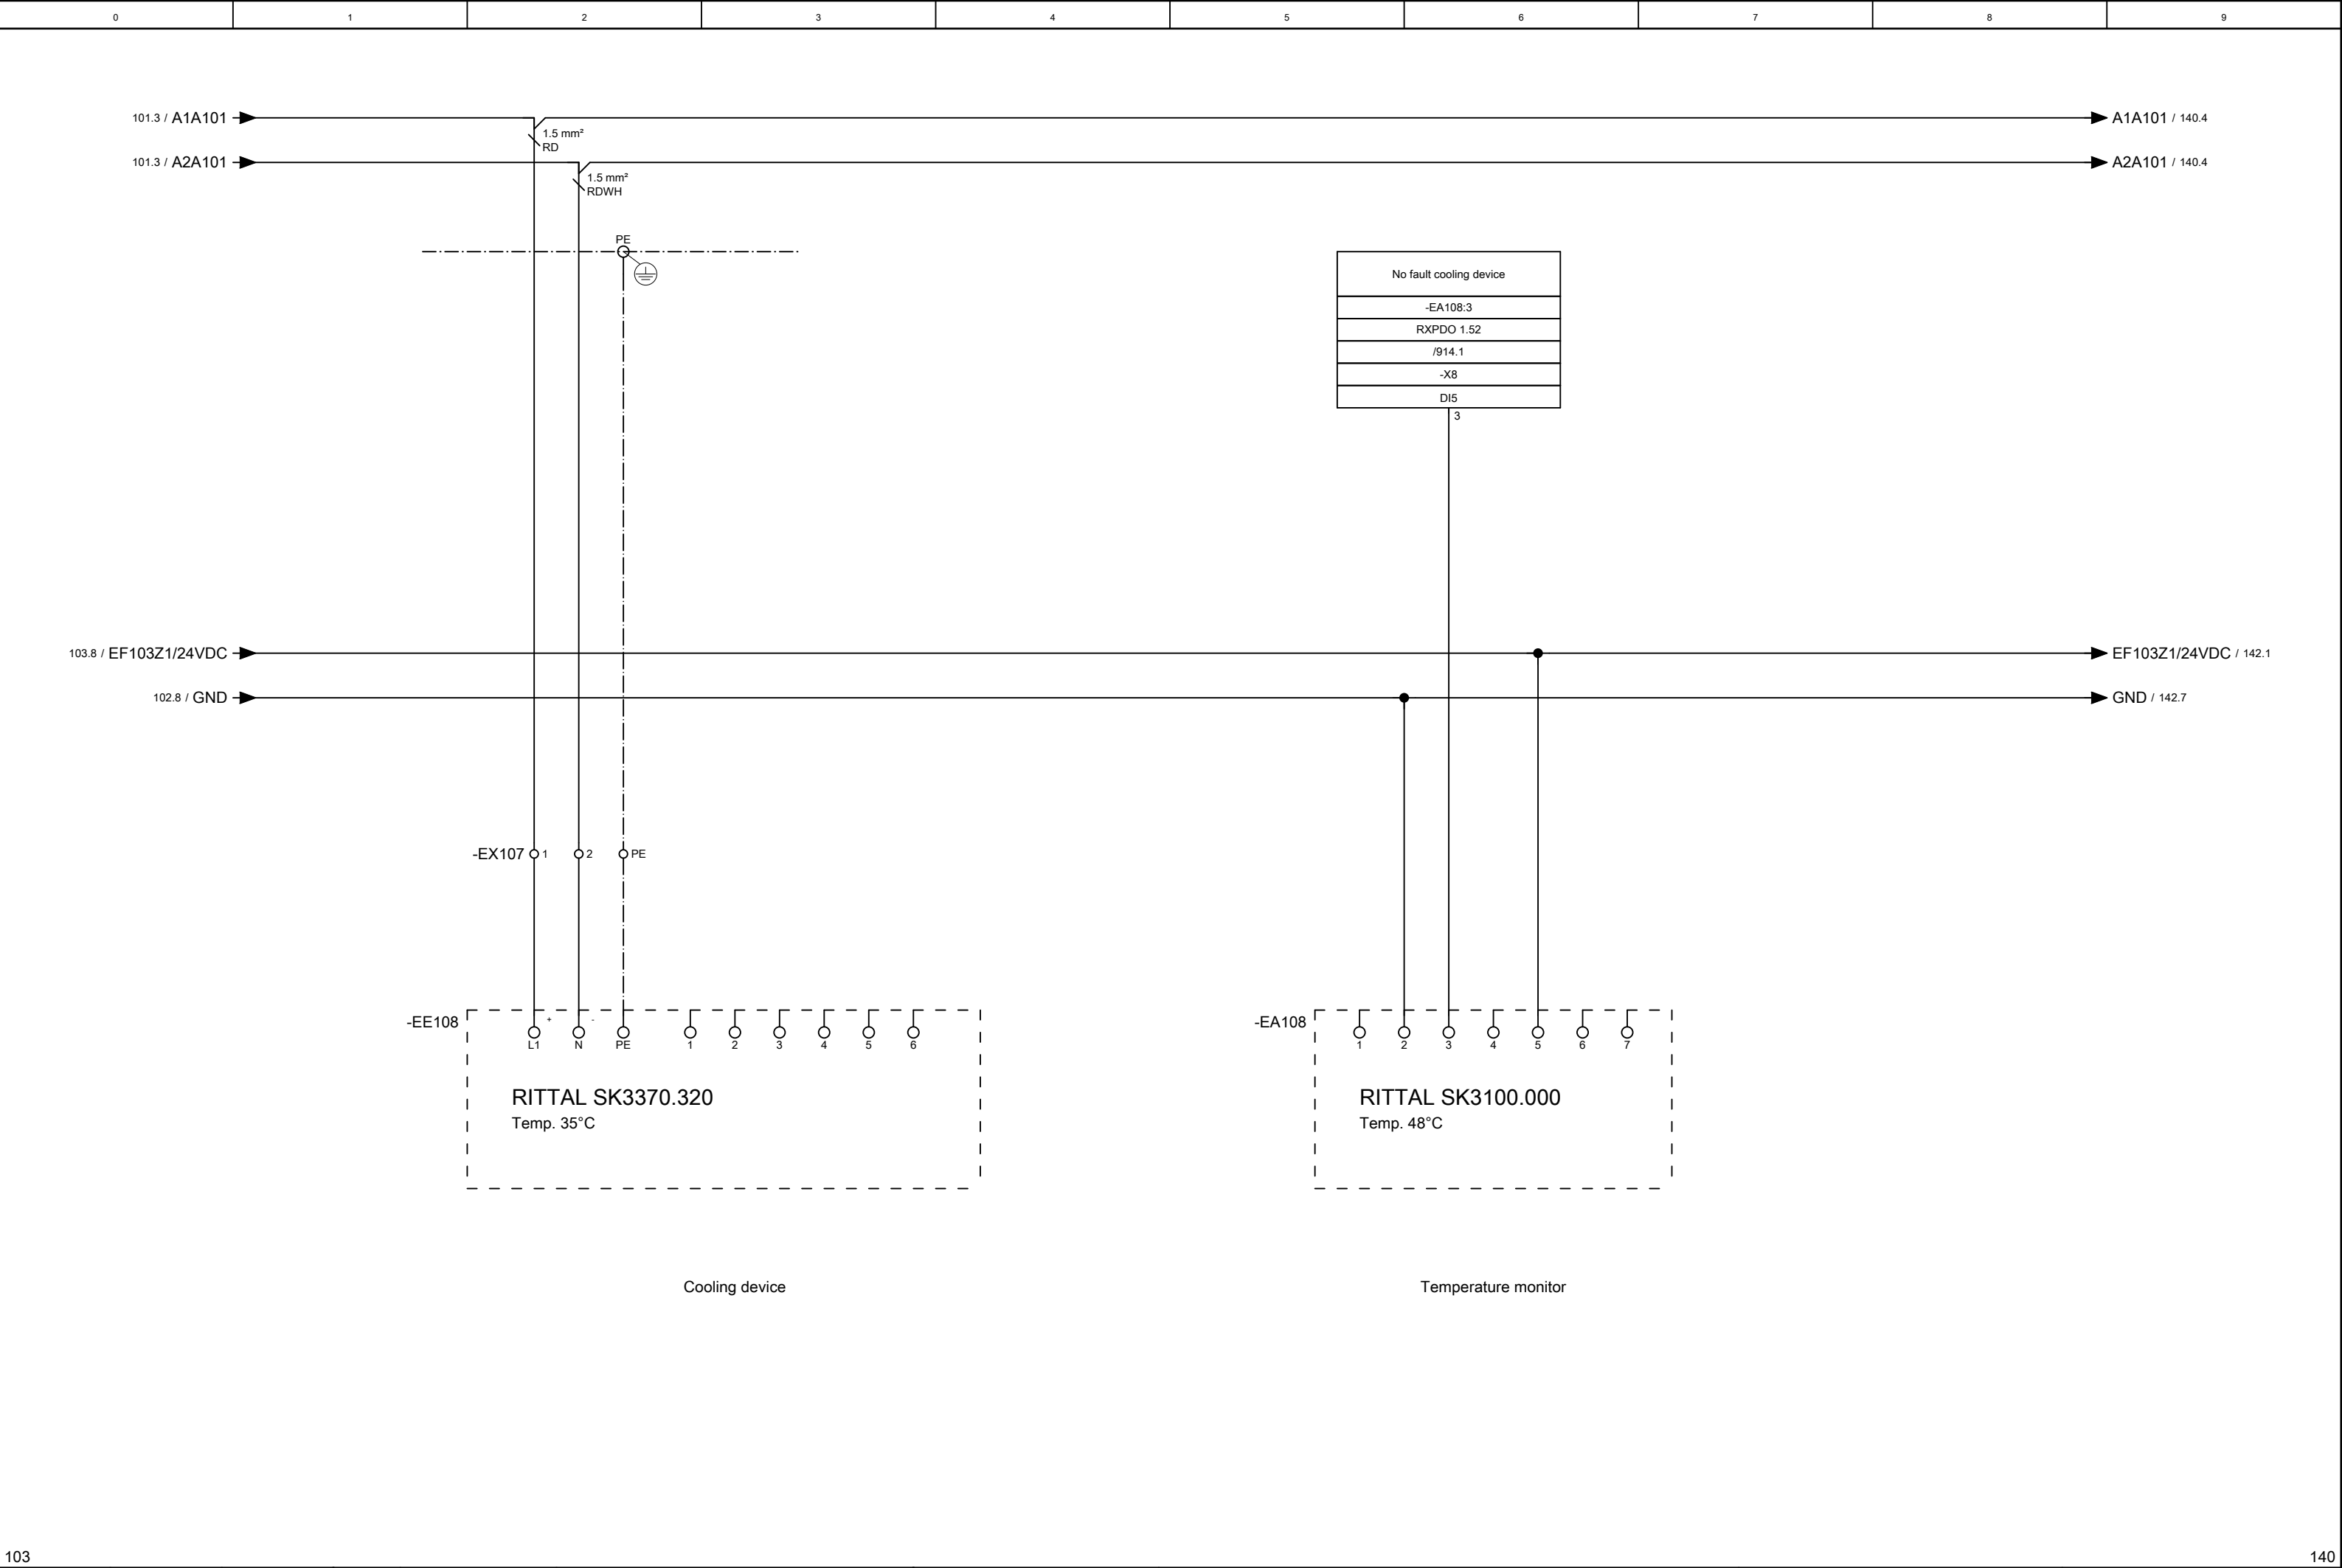

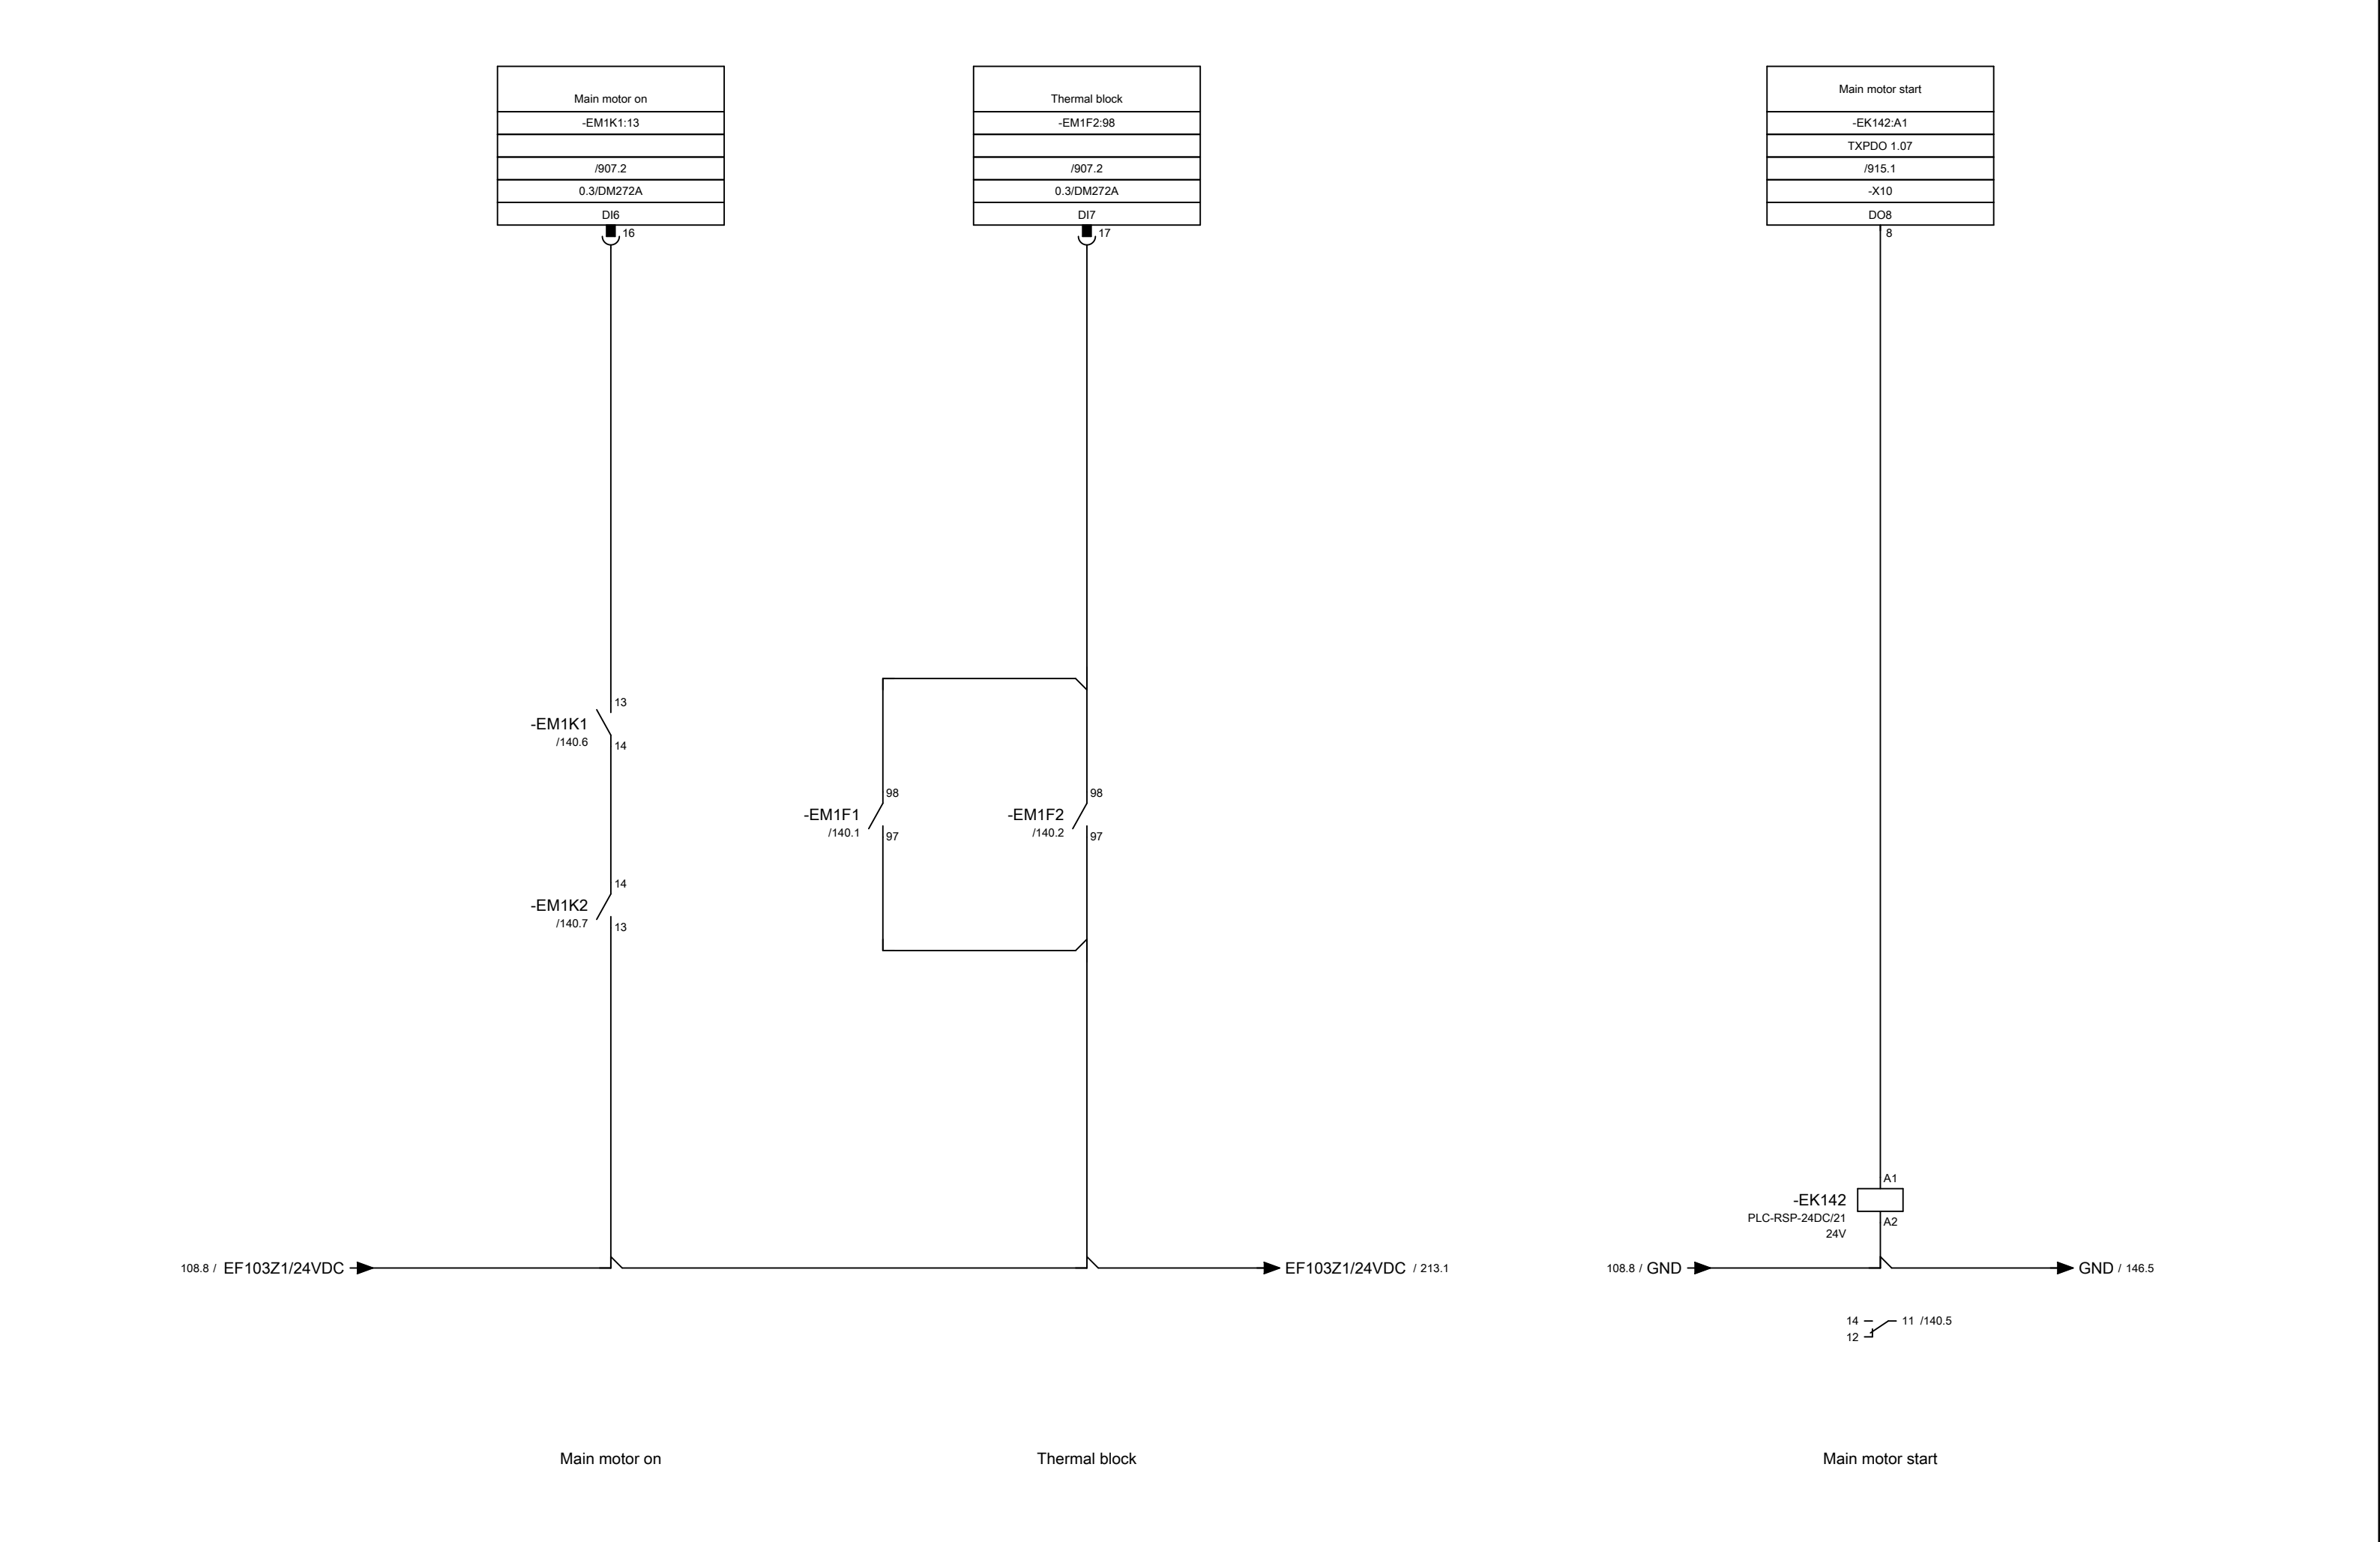

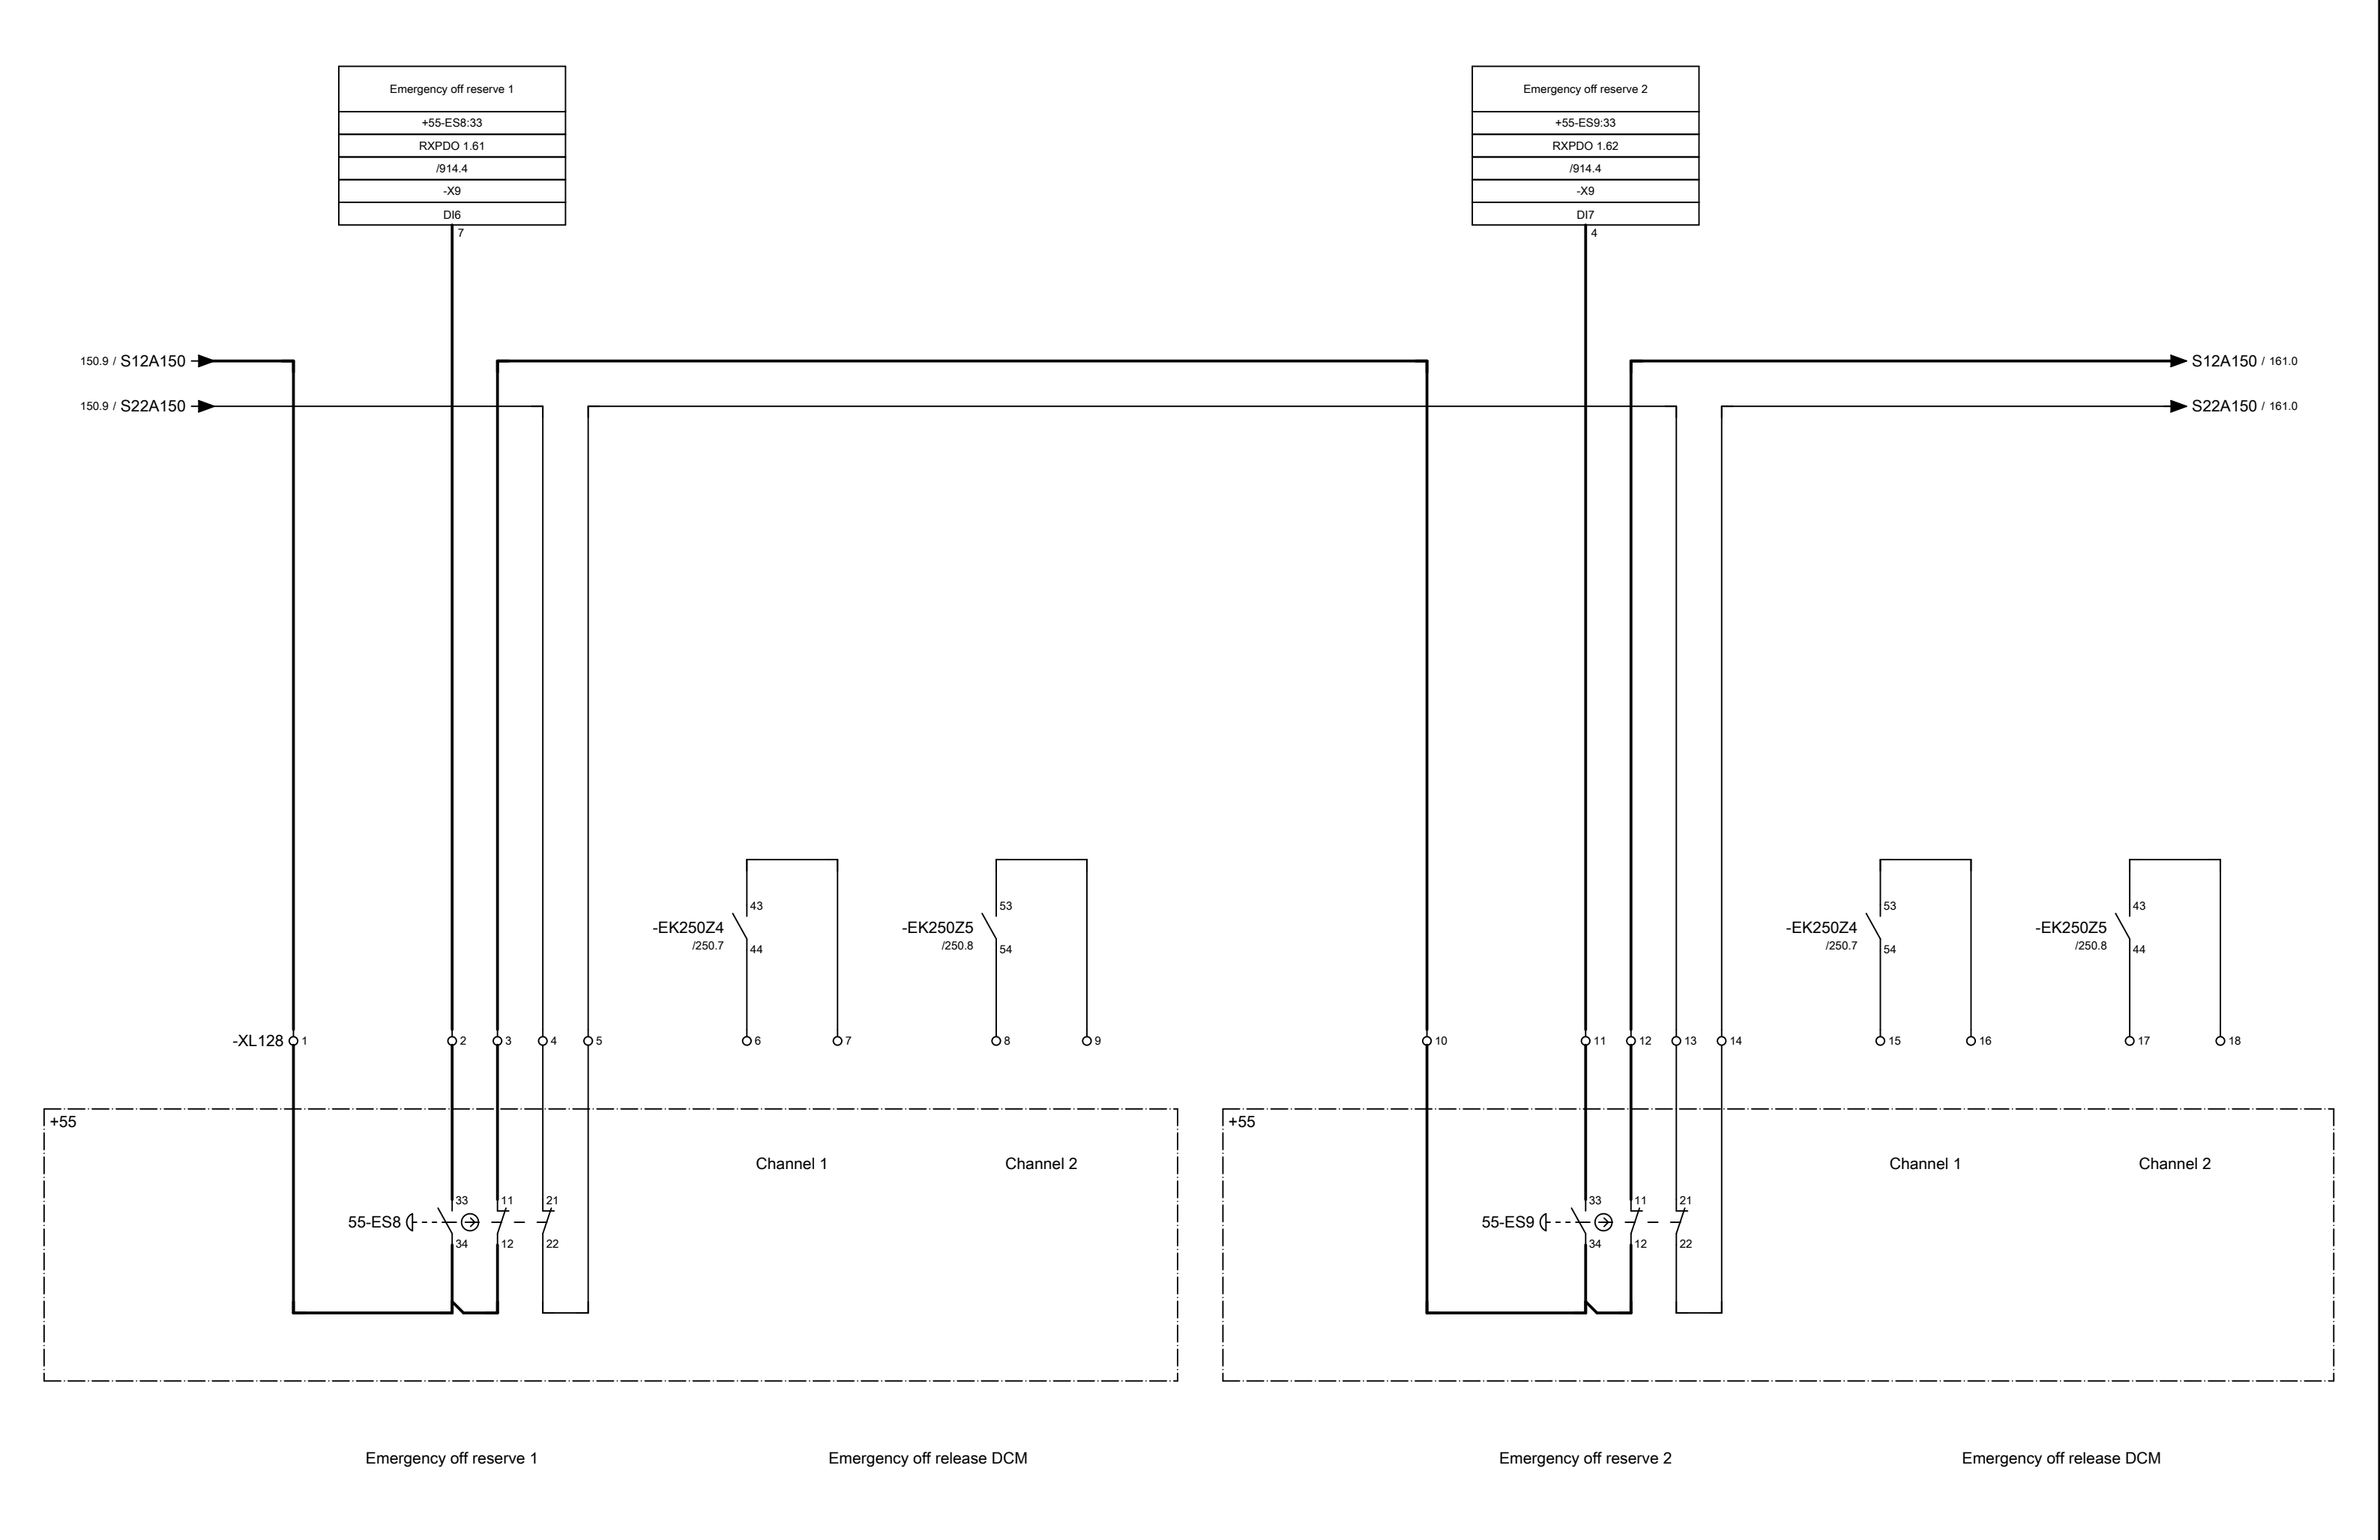

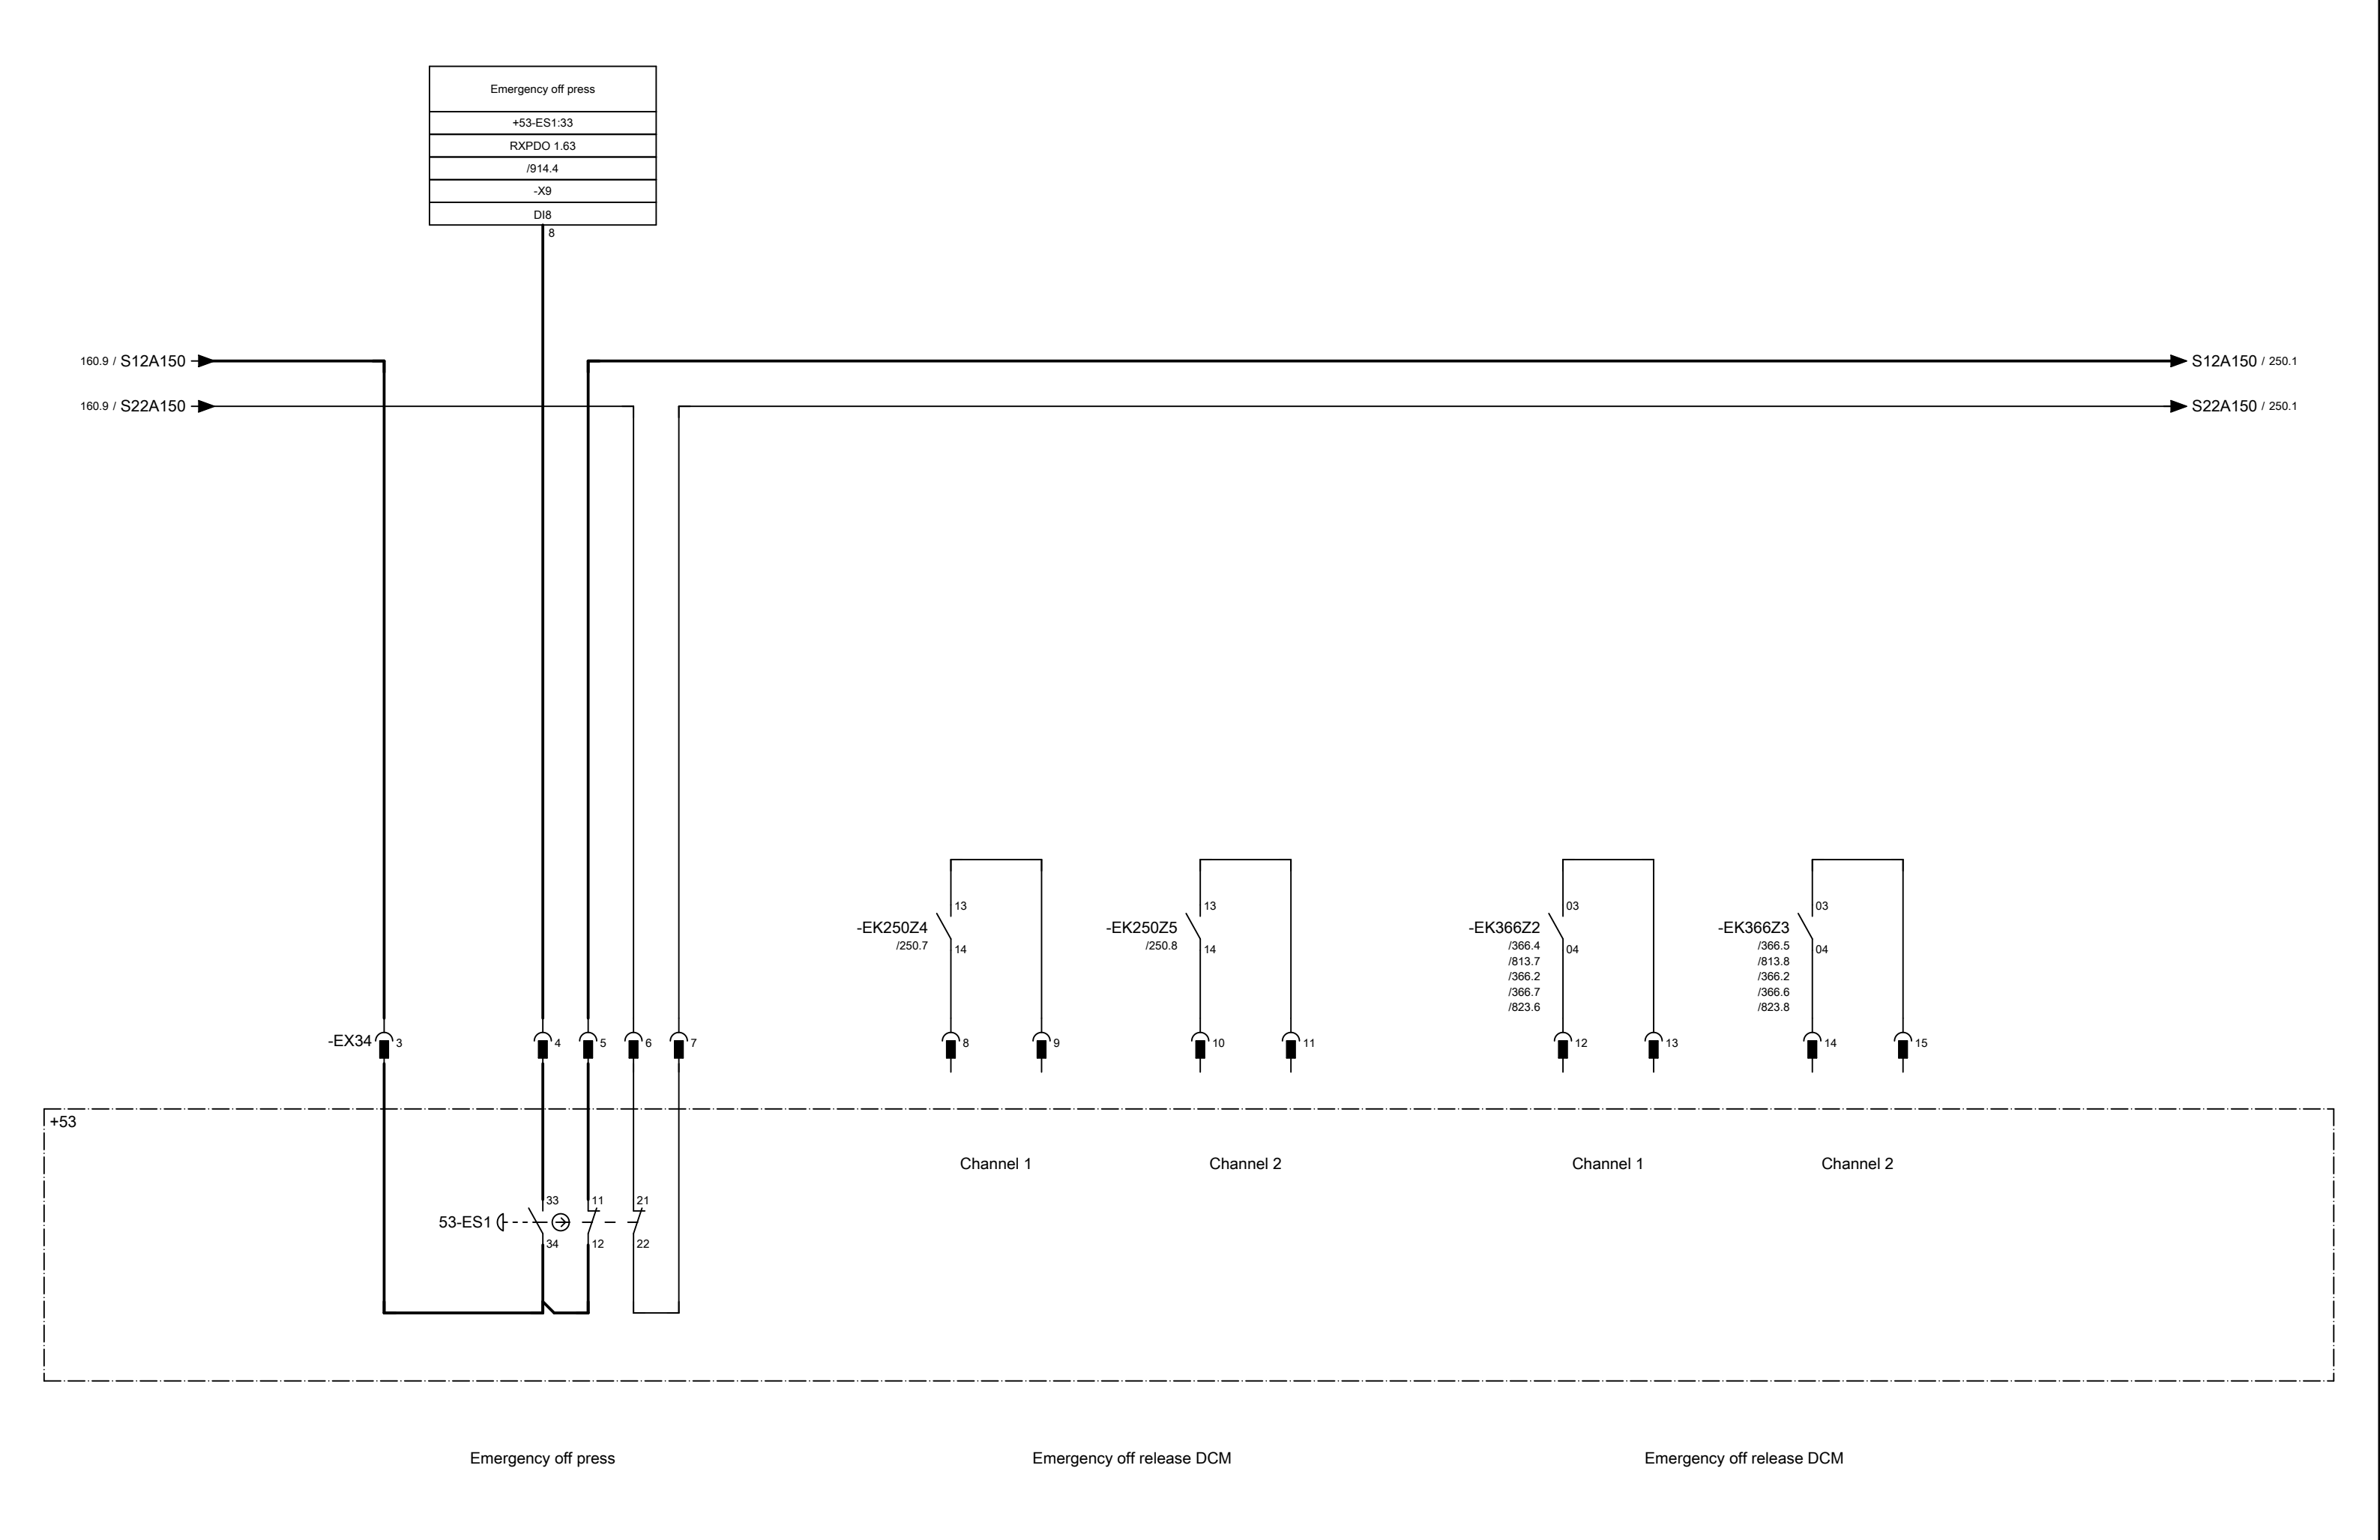

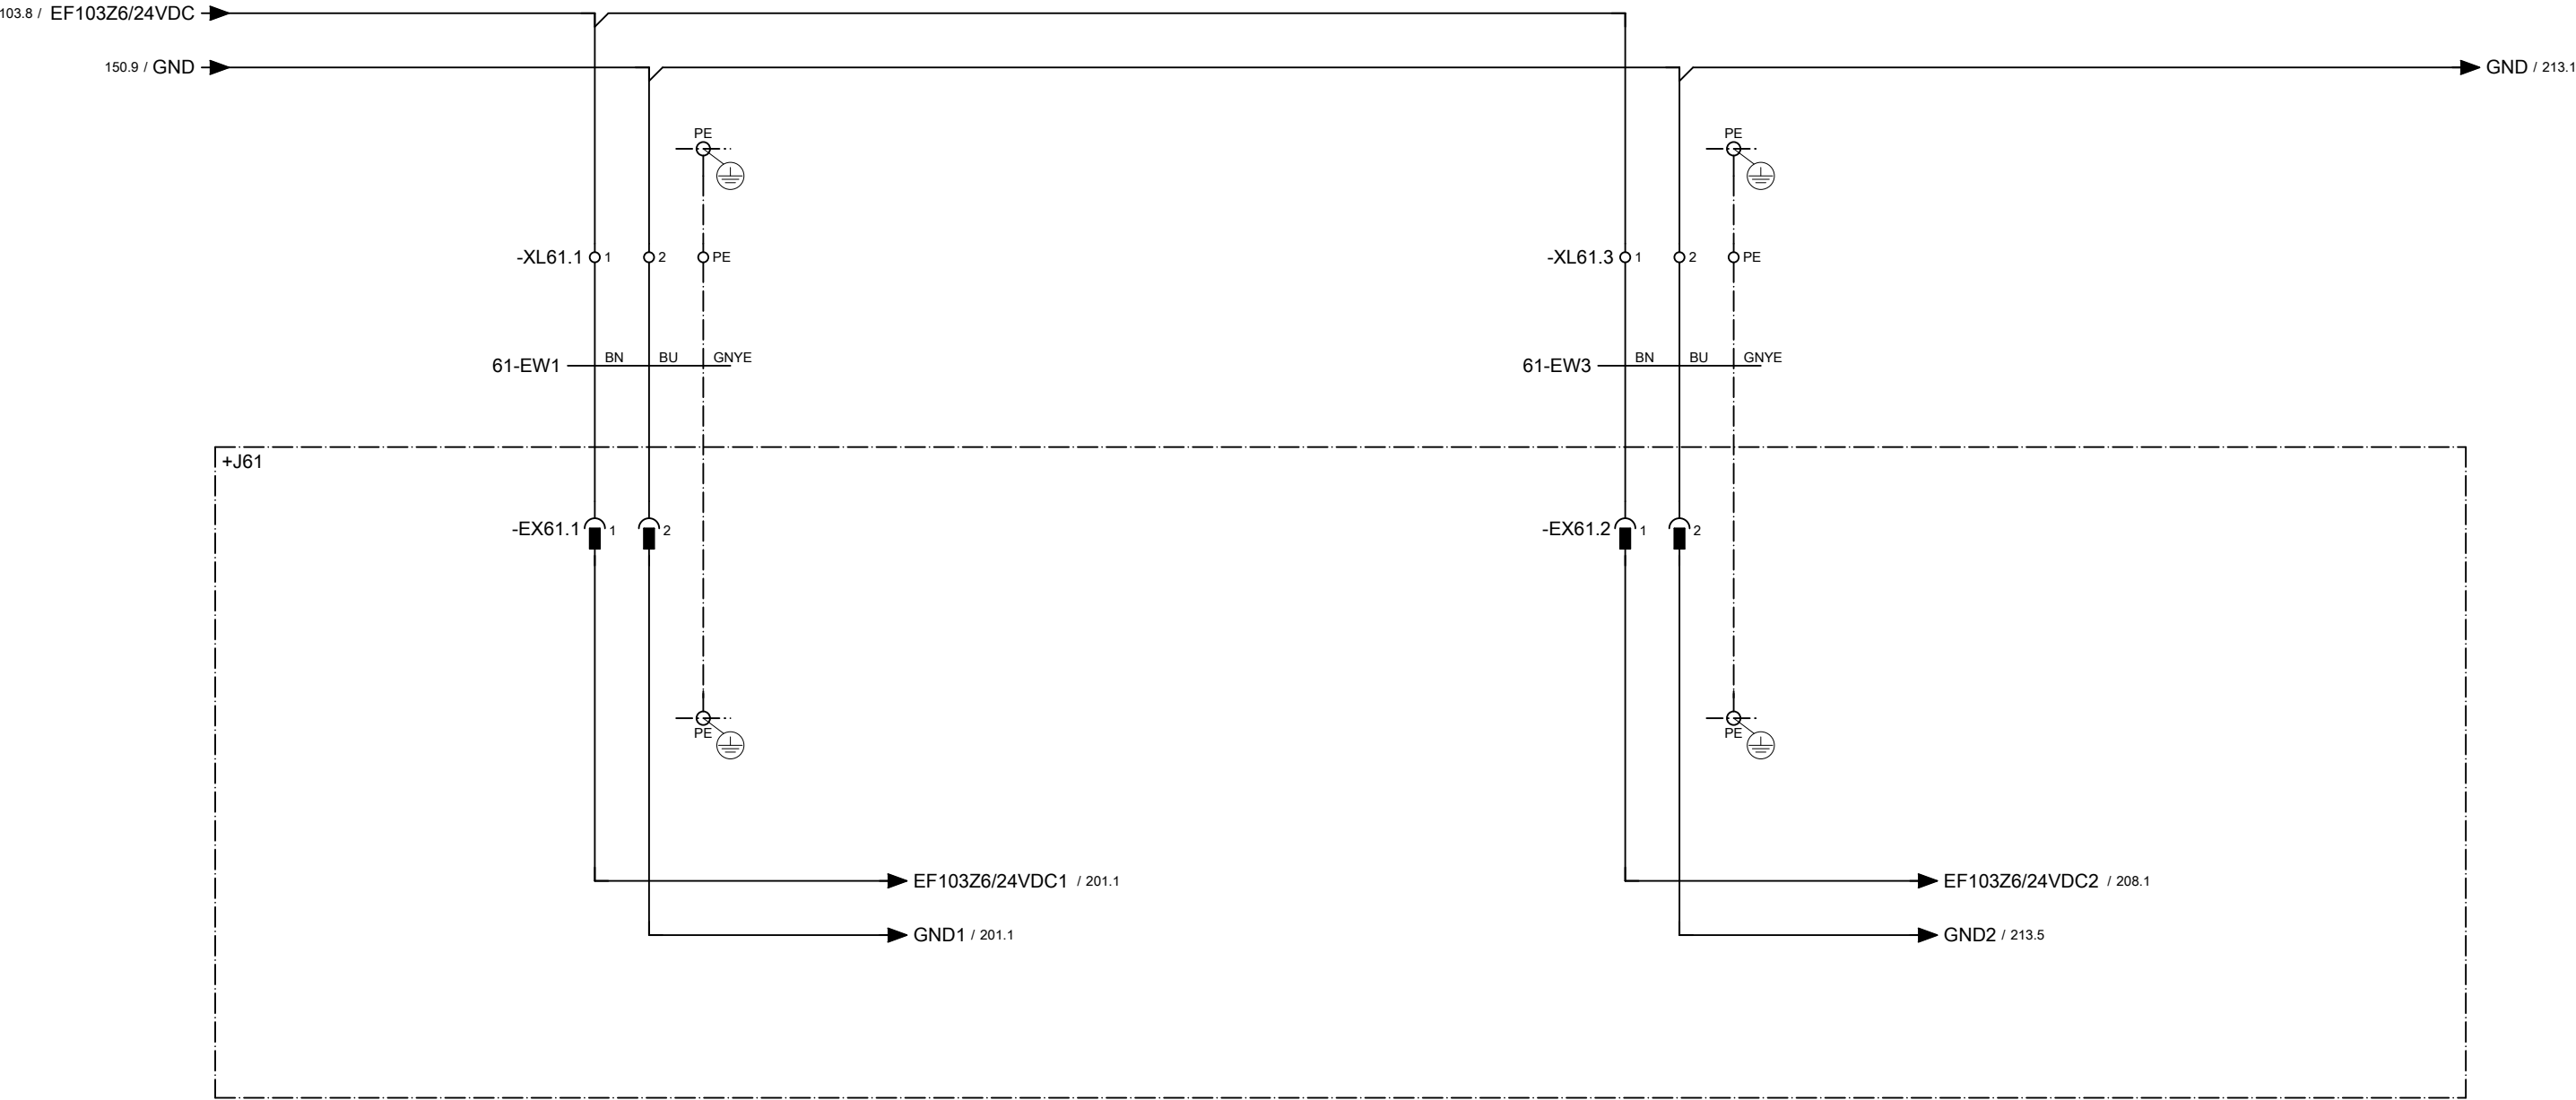

+J61-EU1	GCEO-10607-001	Terminal box control column	1 ST
+J61-EU2	GCEO-10597-001	Front cover control column	1 ST
+J61-EU3	UNE-32030-012	Mounting frame	1 ST
+J61-EU4	UNE-32030-022	Module	2 ST
+J61-EU5	GCEO-10562-001	Sub-plates	2 ST
+J61-EU6	GCEO-10563-001	Cover	5 ST
+J61-EU8	GCEU-10507-001	Support	1 ST
+J61-EU9	UNE-32020-209	Hose screw connector	2 ST
+J61-EU10	UNE-32001-509	Metallic hose	2 m
+J61-EU11	UNE-32114-210	Counter nut M63x1.5	1 ST
+J61-EU20	UND-75500-124	Protective foil 8.4"	1 ST


+J61

OP430

ONBOARD IO-MODULE

DI0		/215.3	+J61-ES88:14	Dosing manually
DI1		/216.3	+J61-ES13:14	Spraying manual
DI2		/210.9	+J61-ES12:14	Release shot
DI3		/209.4	+J61-ES90:14	Preselection qick tooling
DI4		/209.5	+J61-ES91:14	Quick retooling on
DI5		/209.6	+J61-ES91:24	Quick retooling off
DI6		/209.1	+J61-ES59:14	Move plant to initial position
DI7		/210.1	+J61-ES10:14	Move ejector forward
DI8		/210.3	+J61-ES10:24	Move ejector back
DI9		/210.4	+J61-ES11:14	Move casting plunger back
DI10		/210.5	+J61-ES11:24	Move casting plunger forward
DI11		/210.6	+J61-ES6:14	Die opening
DI12		/208.4	+J61-ES63:14	Acknowledge manual operation
DI13		/212.1	+J61-ES2:33	Emergency off control column
DI14		/205.2	+J61-ES45:14	Production start
DI15		/214.2	+J61-ES94:14	Pre selection die closing in set-up mode

200.3 / EF103Z6/24VDC1 → EF103Z6/24VDC1 / 205.1
200.3 / GND1 → GND1 / 208.1



OP430

+24V
0V
PE

ONBOARD IO-MODULE

GRAFIK

+C72-GRAPHICS / 900.8

			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 201.01	Replacement of	Replaced by



Bühler AG - Die Casting

Control column

ESM-85061

Ecoline

EN / UL

Page

201

= A

+ C72

+J61

Production start
+J61-ES45;14
/201.3
OP430
DI14

14

-ES45

14

13

201.3 / EF103Z6/24VDC1


EF103Z6/24VDC1 / 209.1


Production start

			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 205.01	Replacement of	Replaced by



Control column

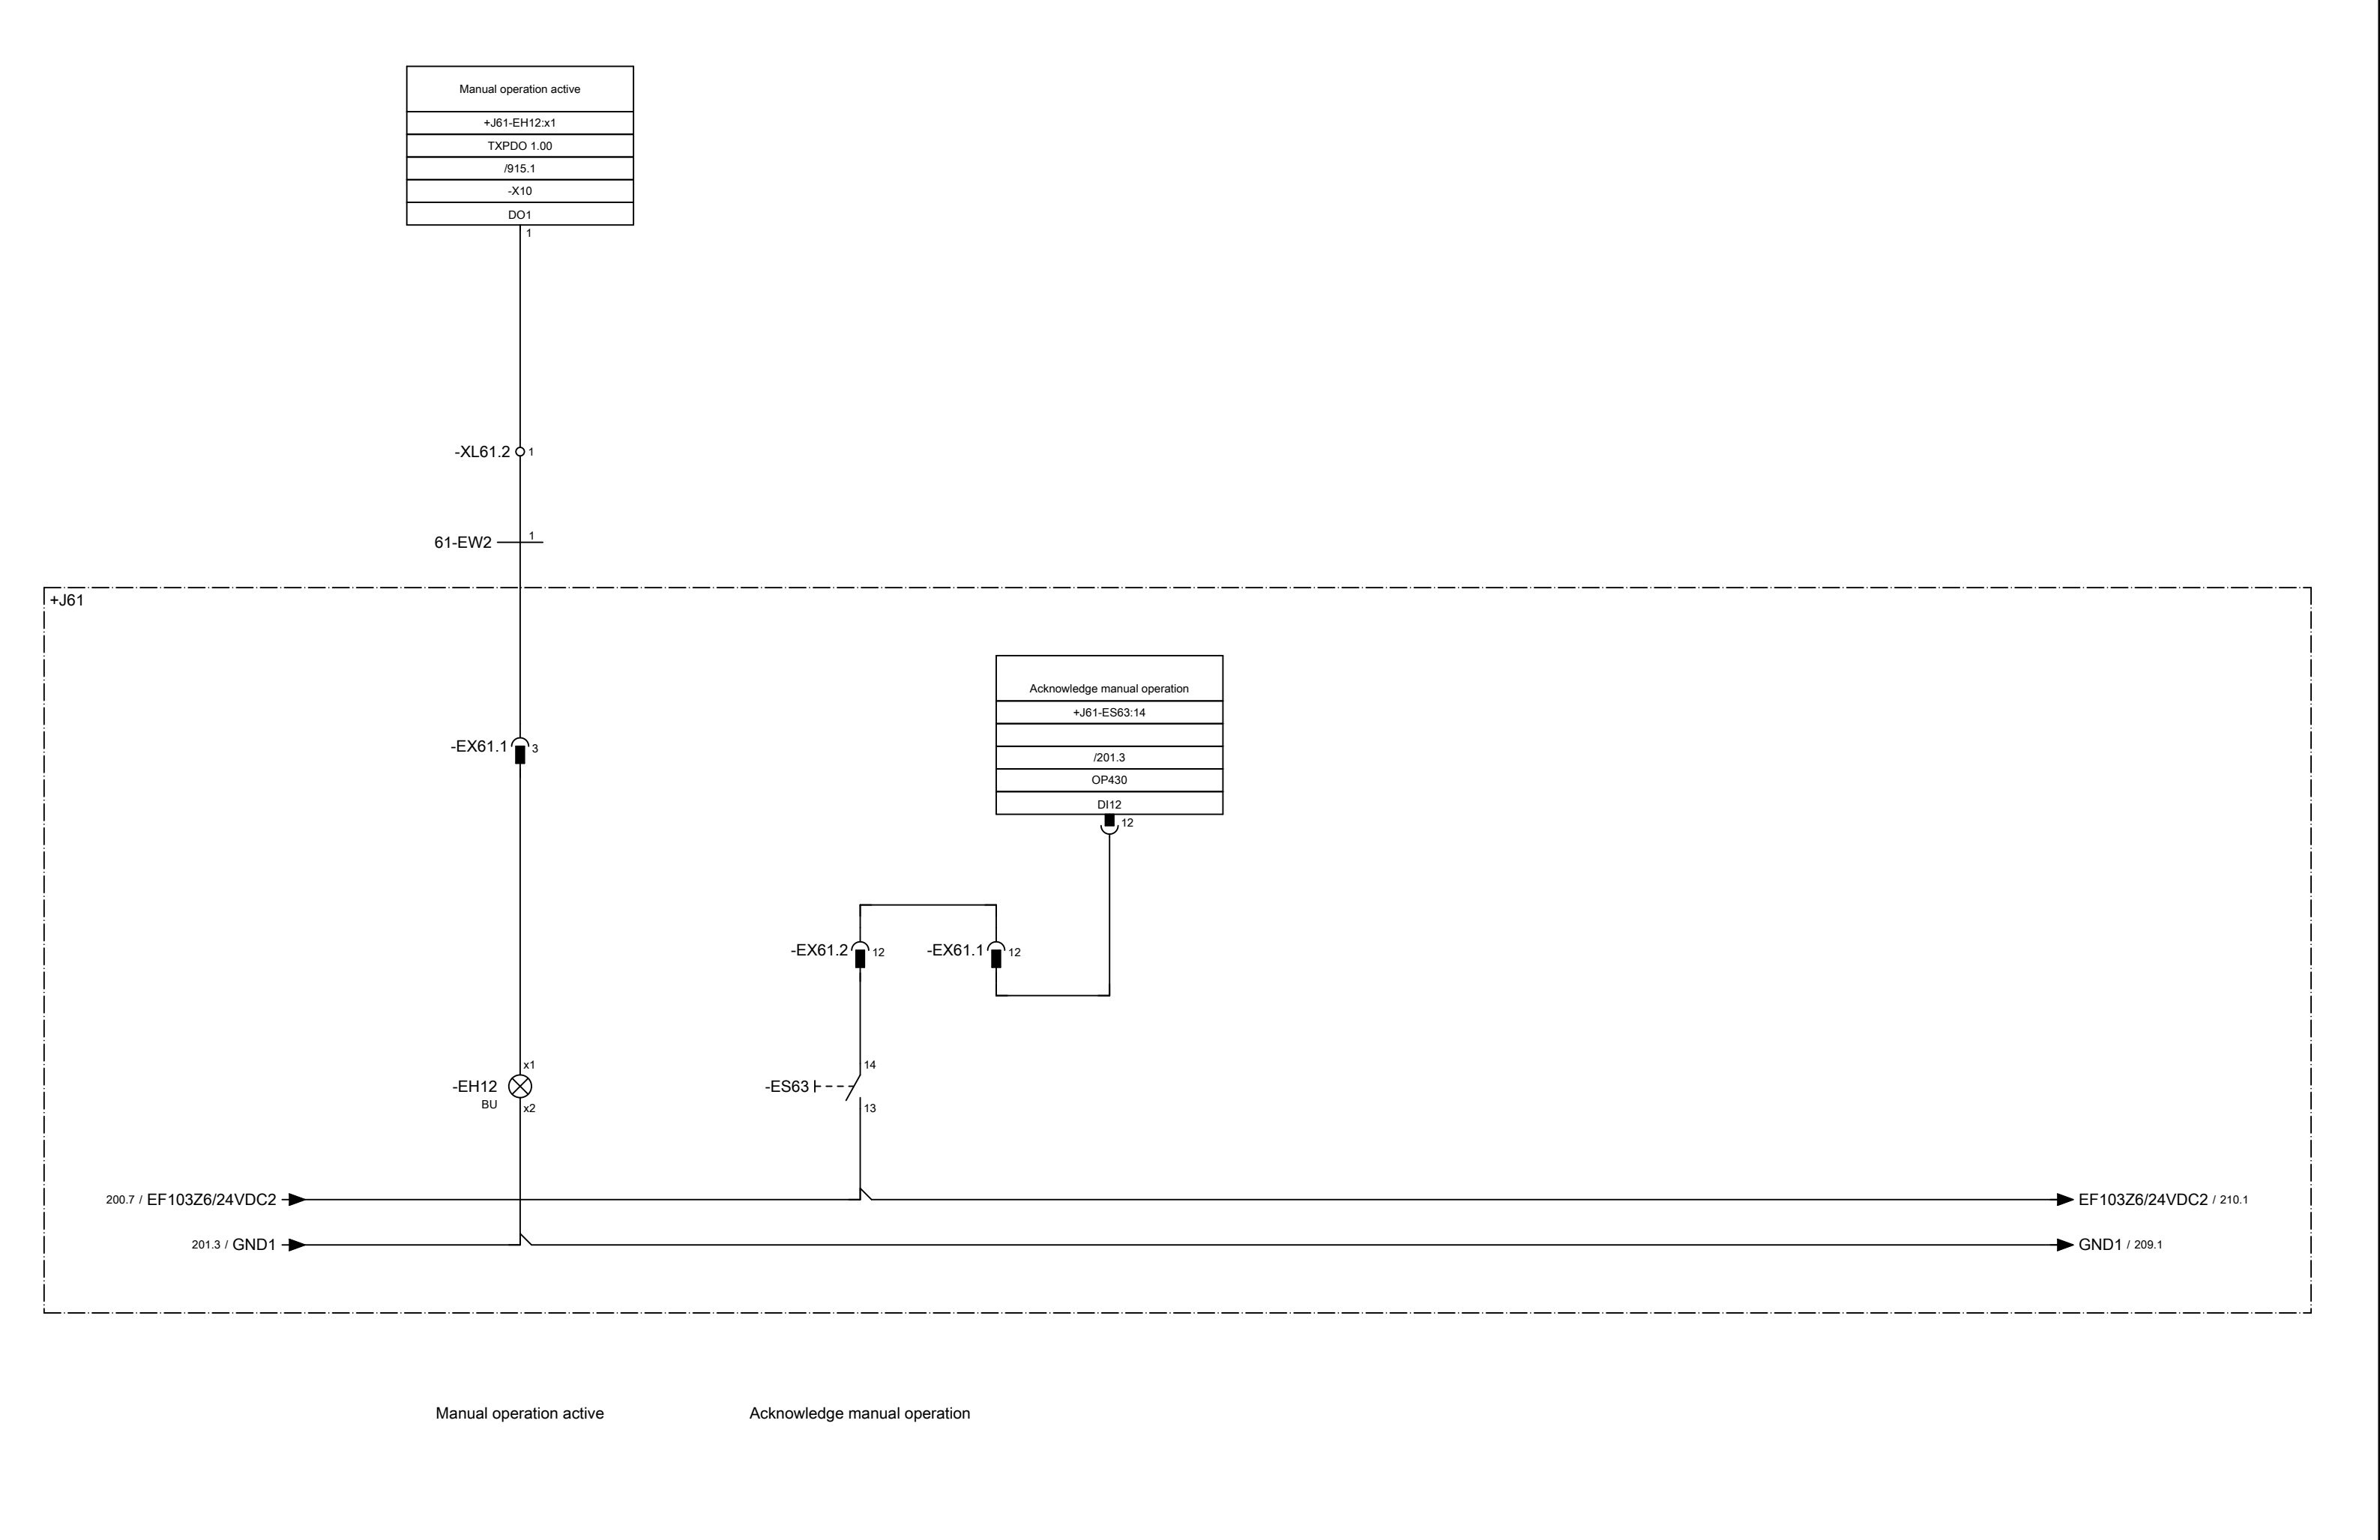

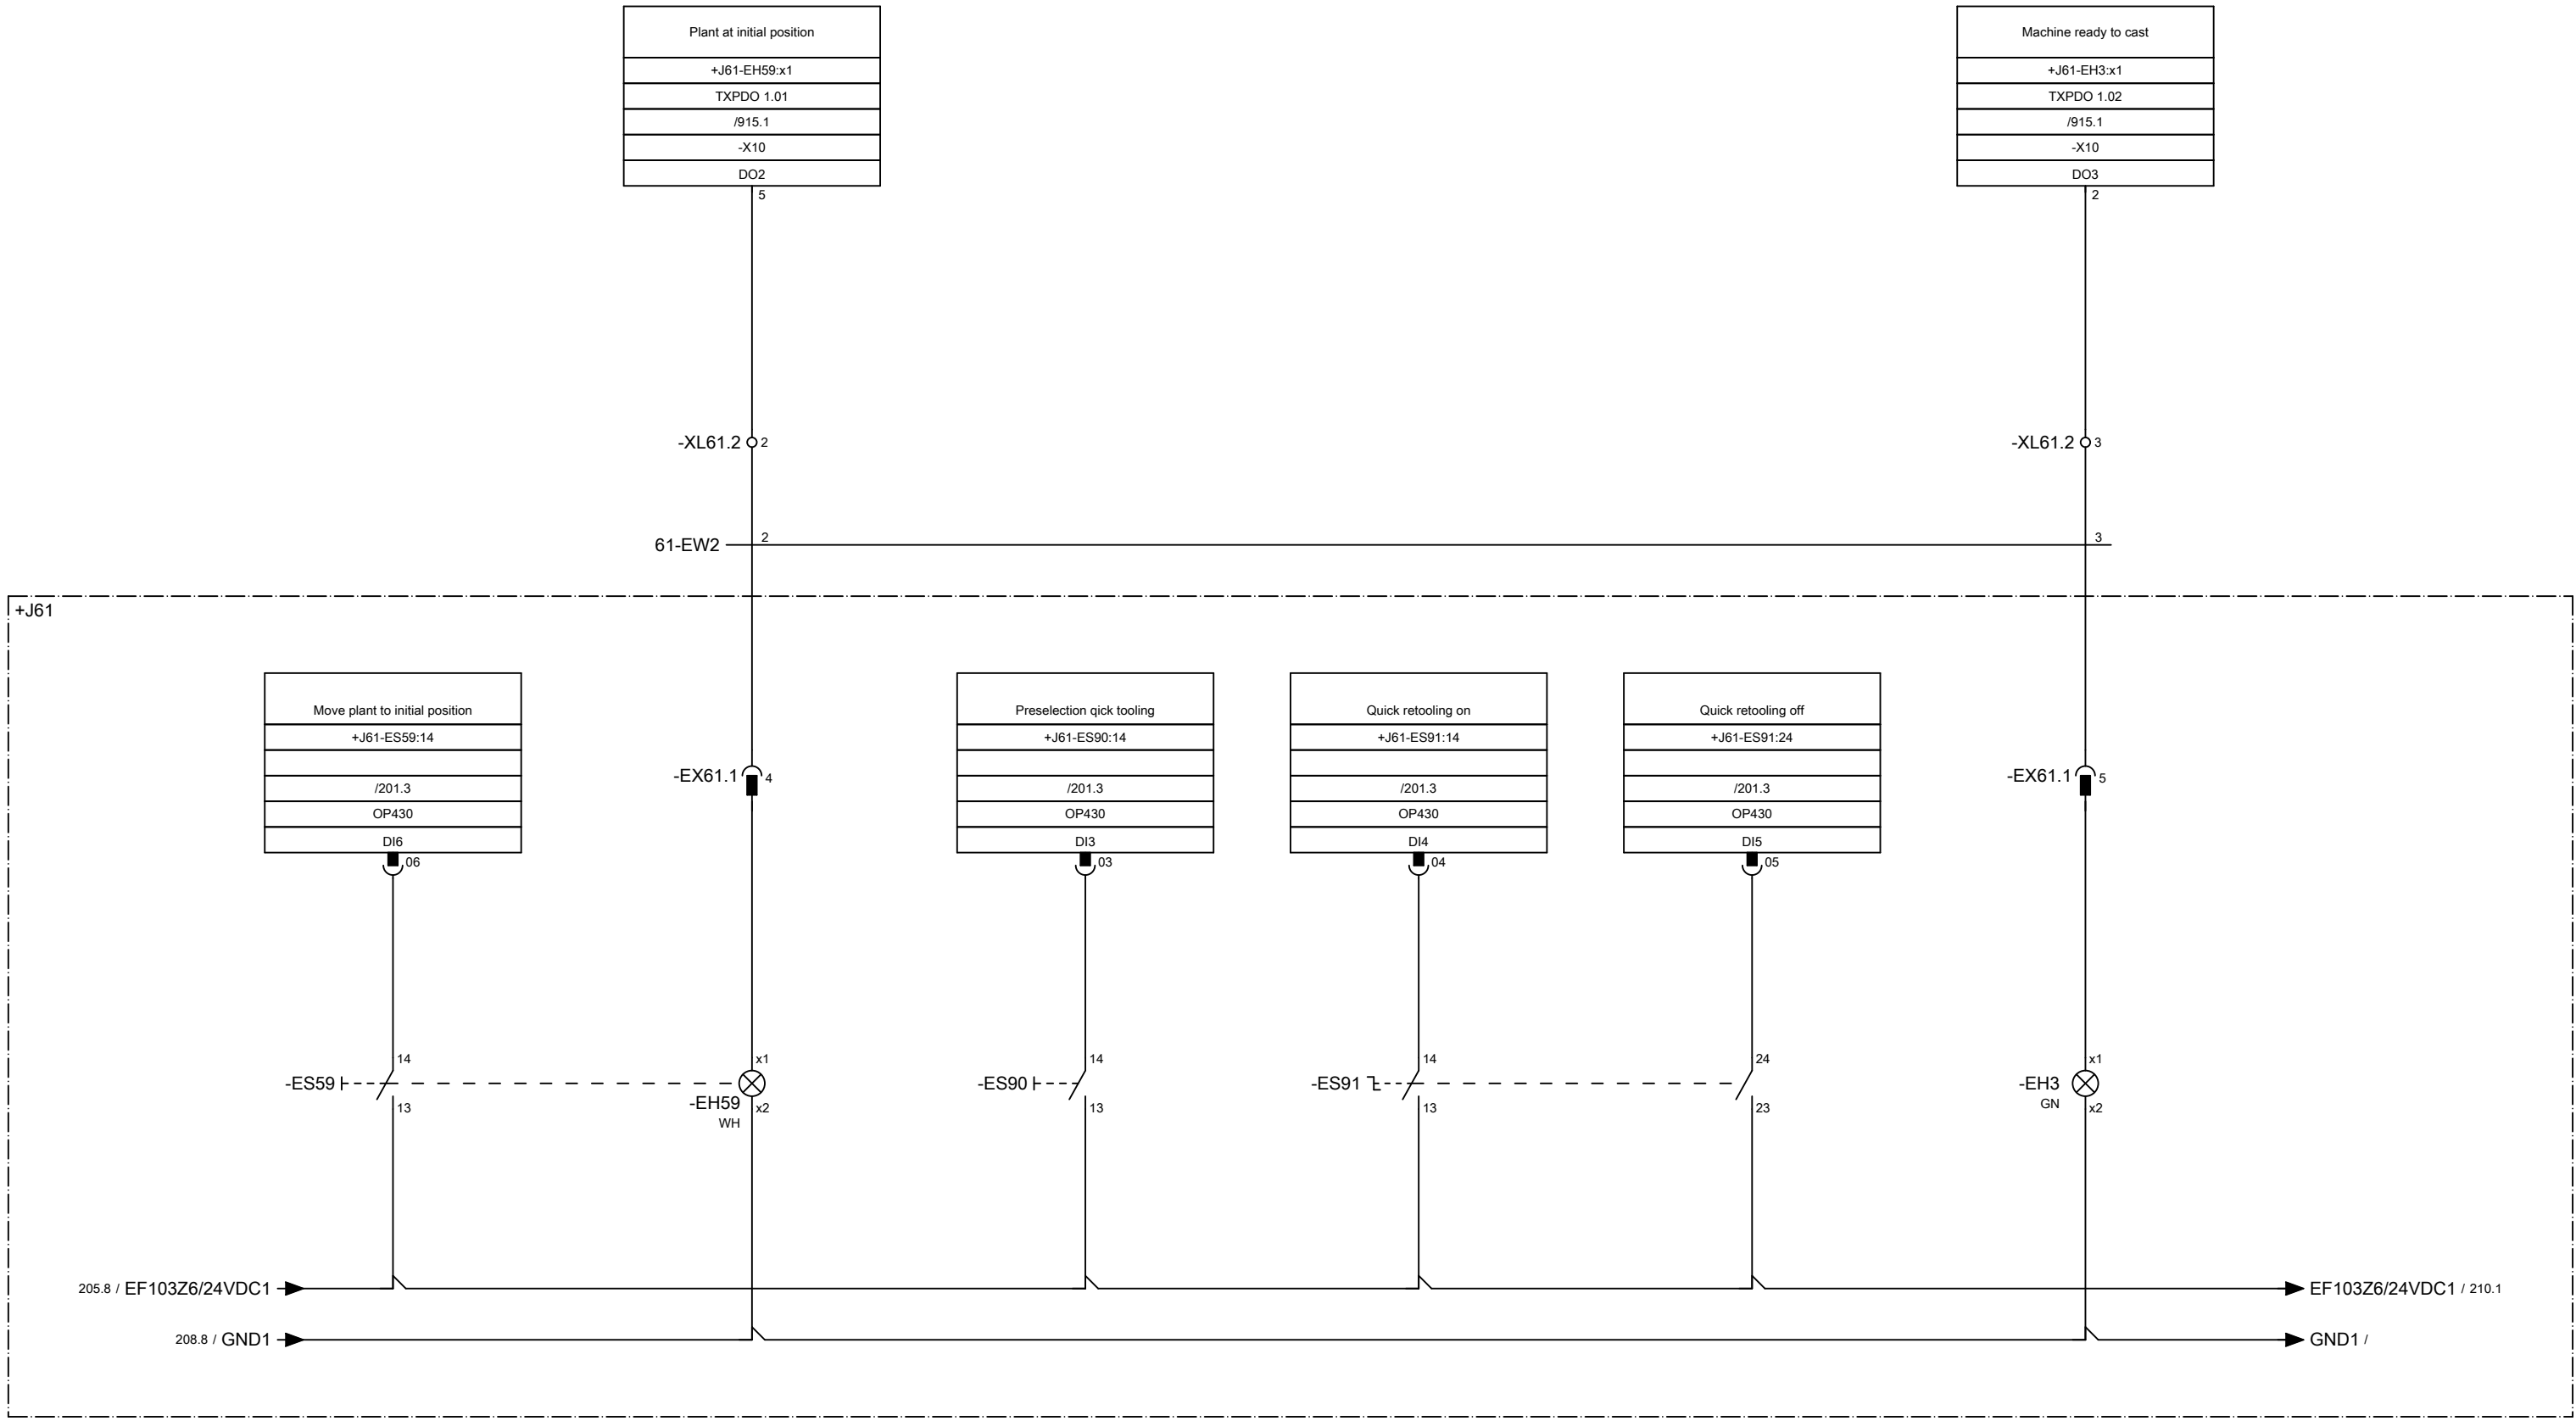

Move plant to initial position

Plant at initial position

Preselection qick tooling

Quick retooling on

Quick retooling off

Machine ready to cast


			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 209.01	Replacement of	Replaced by



Bühler AG - Die Casting

Control column

			= A
			+ C72
ESM-85061	Ecoline	EN	Page 209

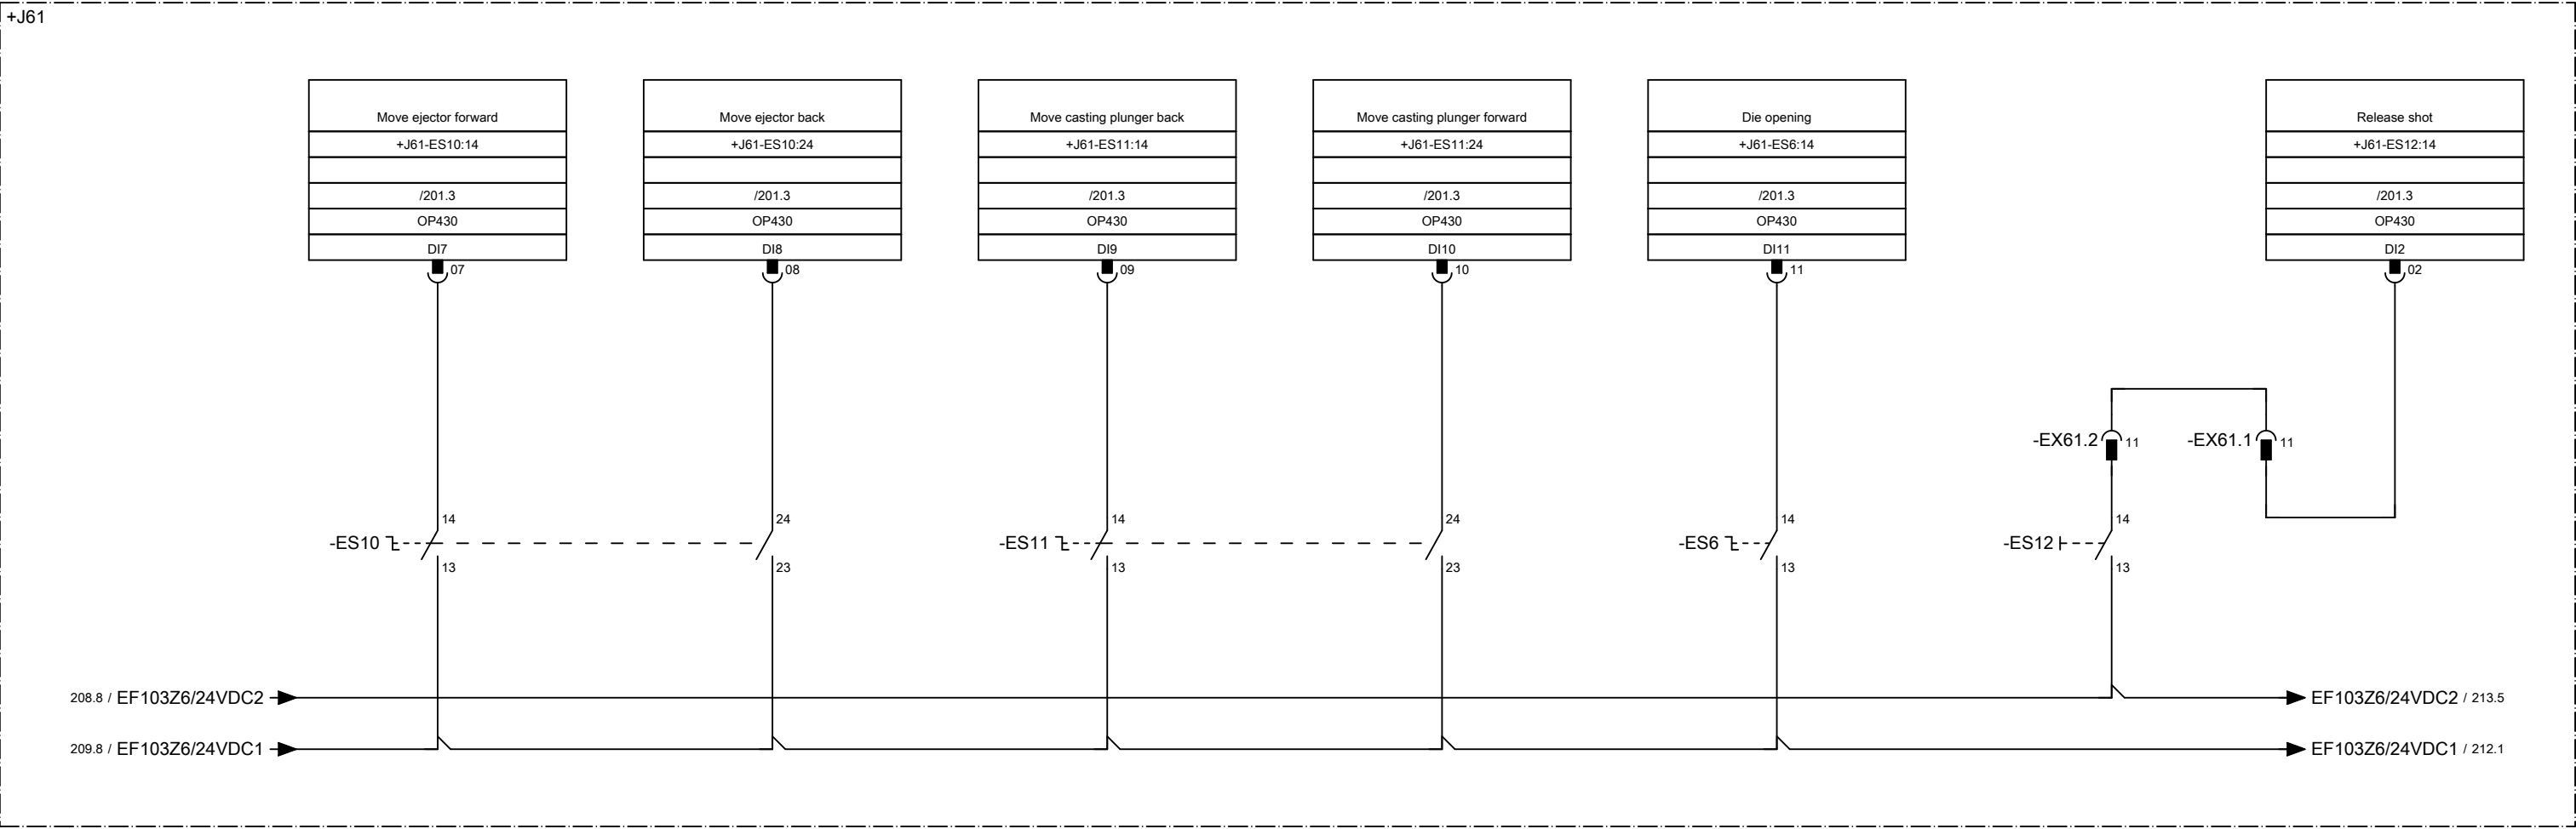

Move ejector forward


Move ejector back

Move casting plunger back


Move casting plunger forward


Die opening


Release shot

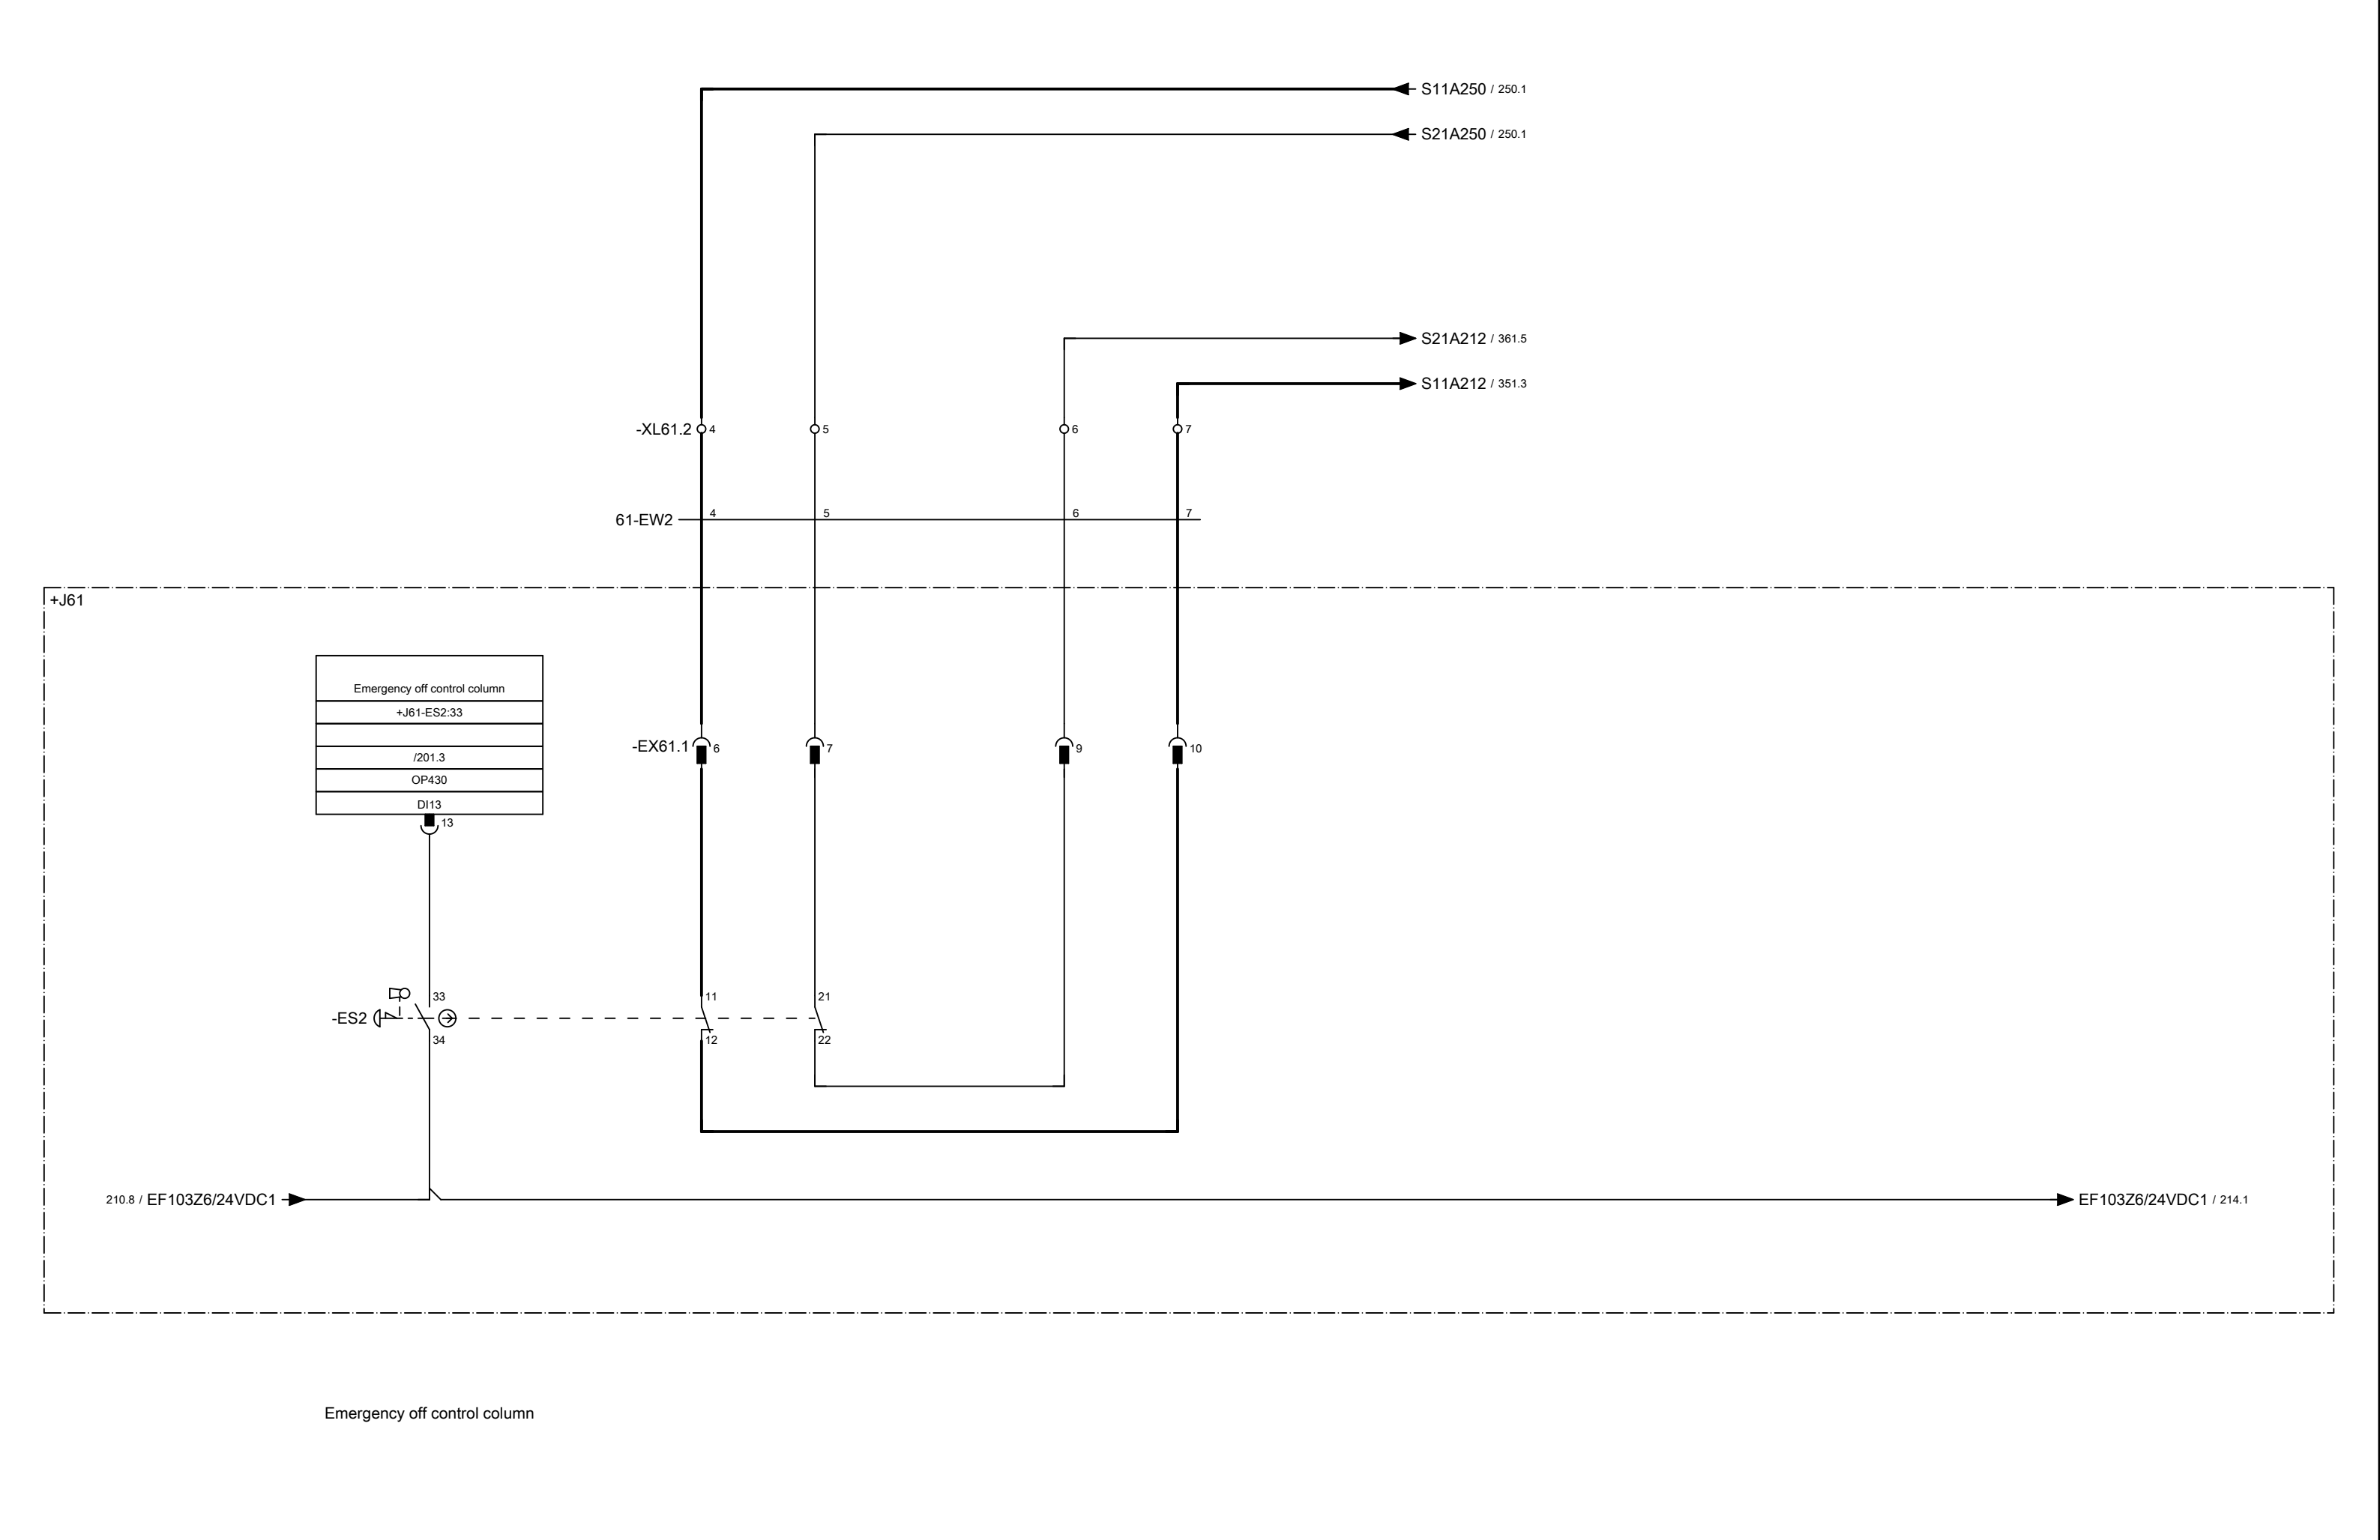


Emergency off control column

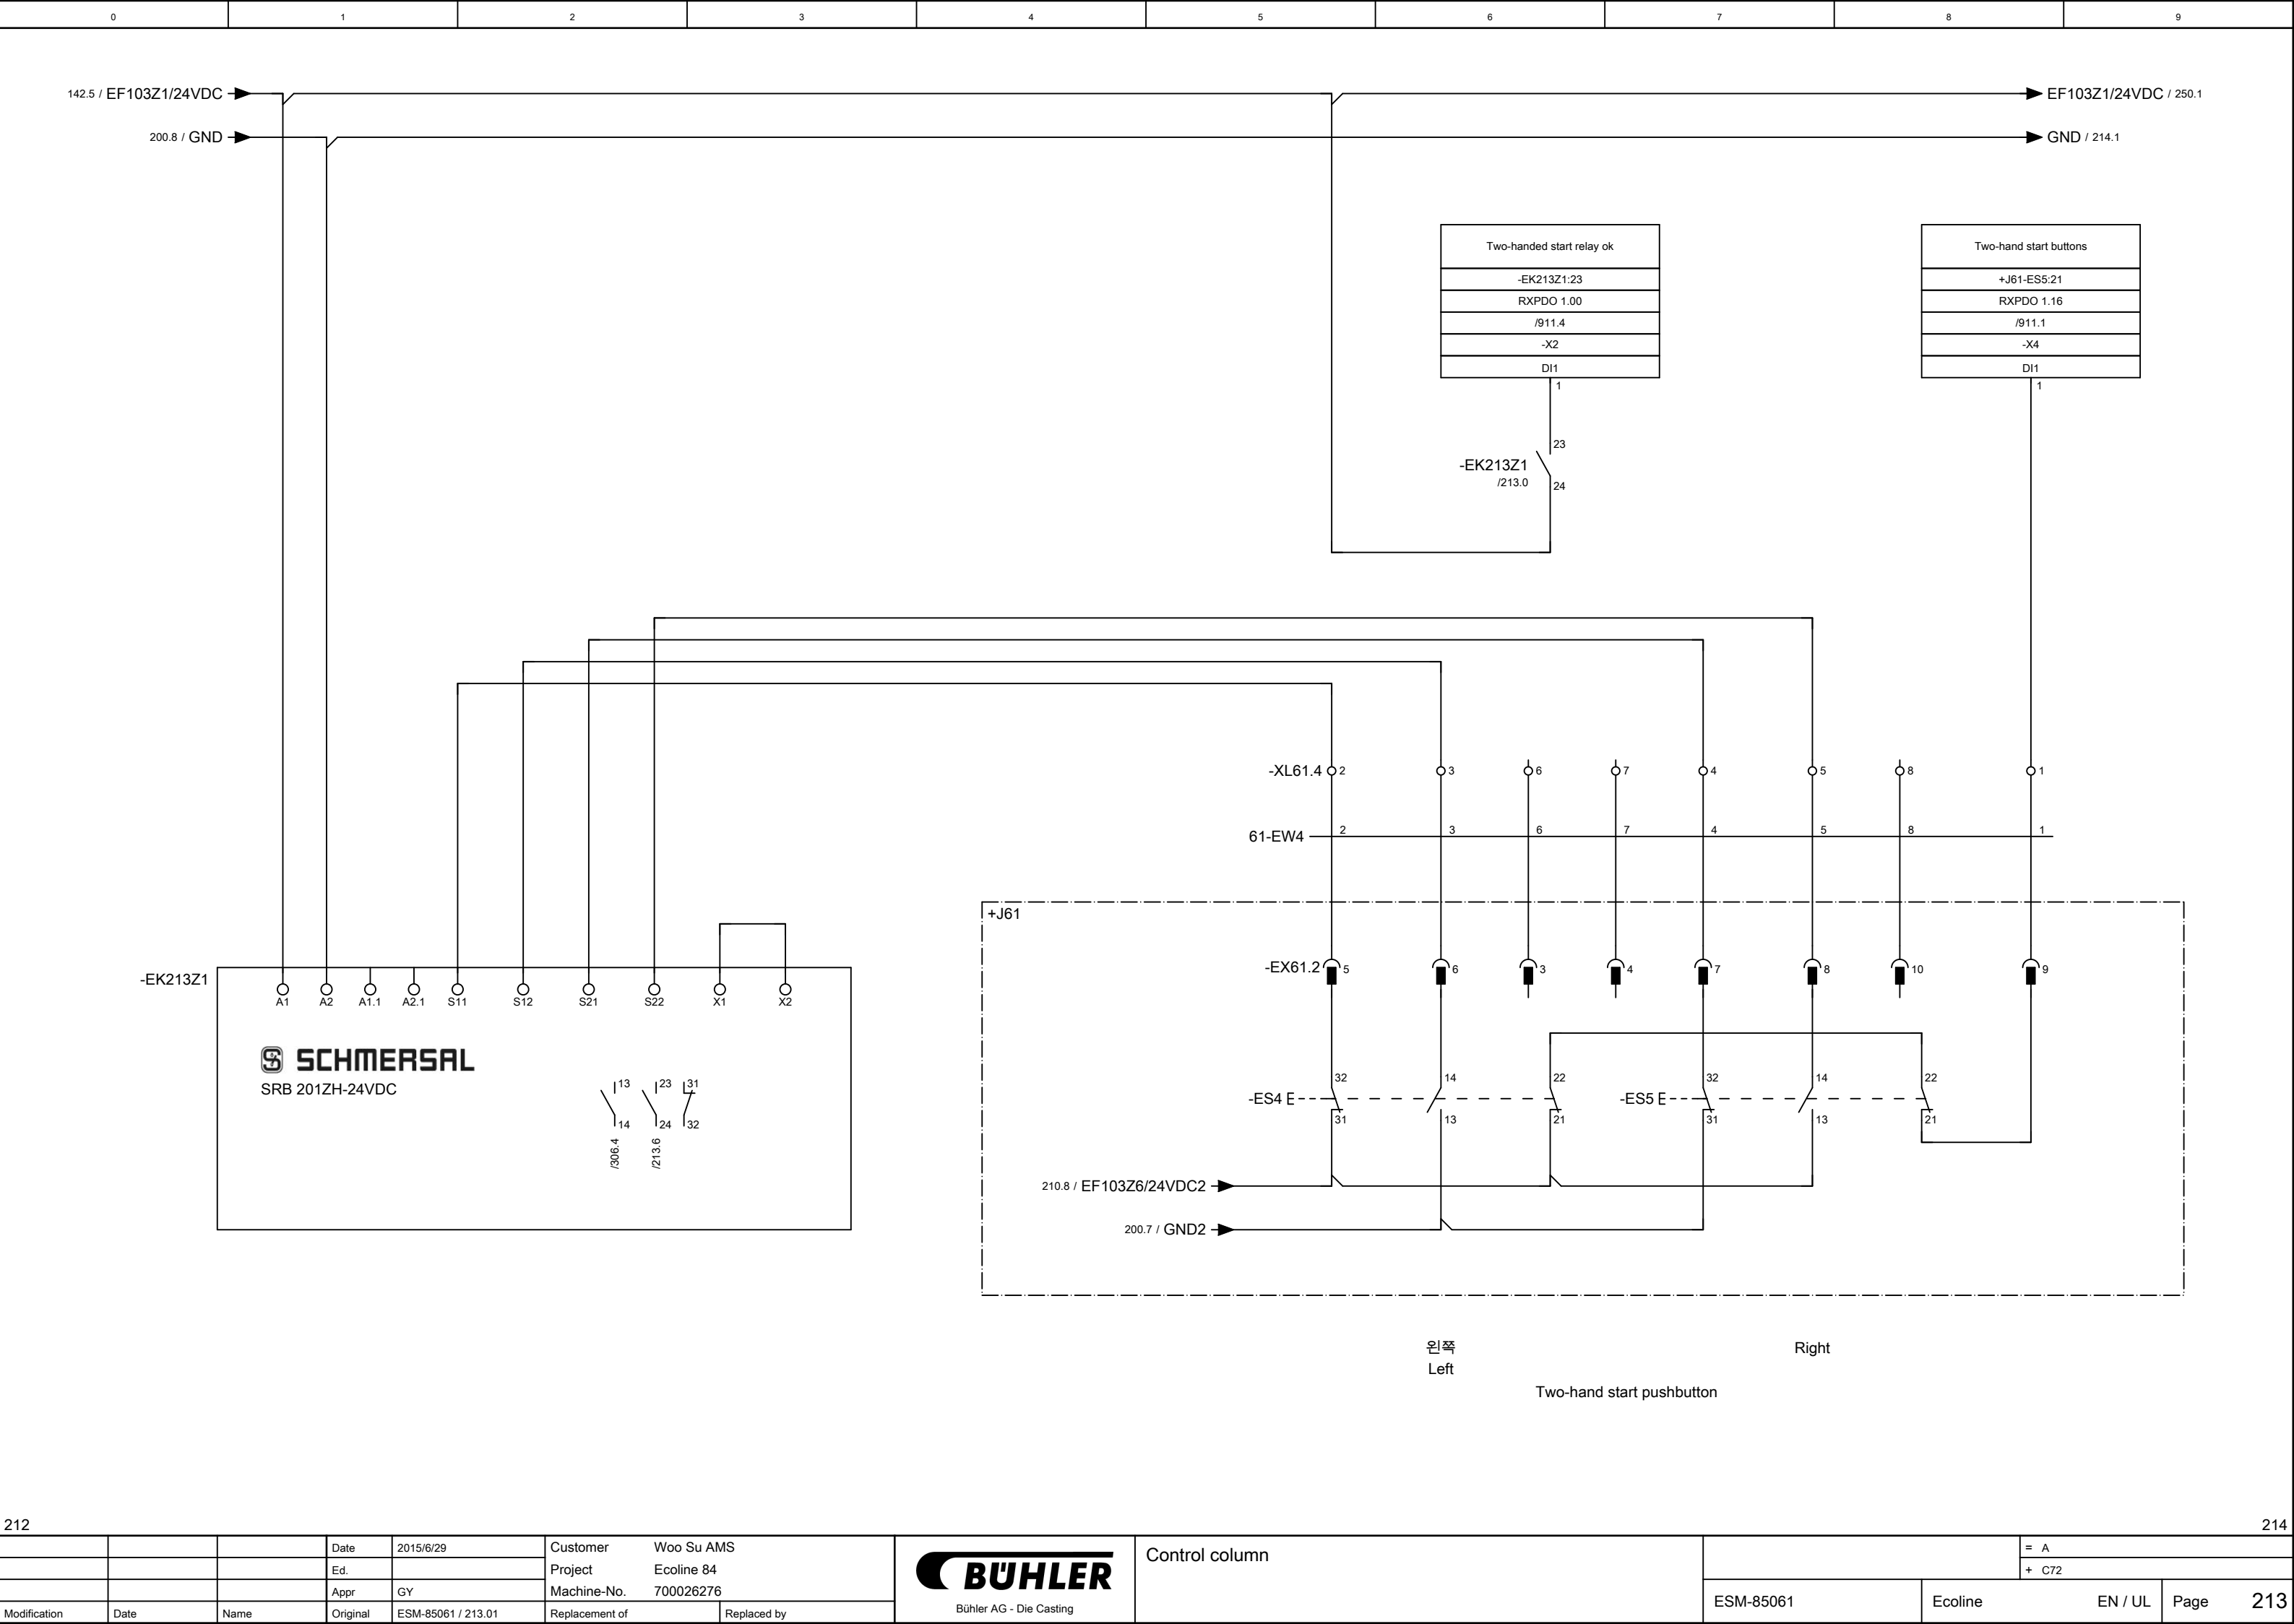

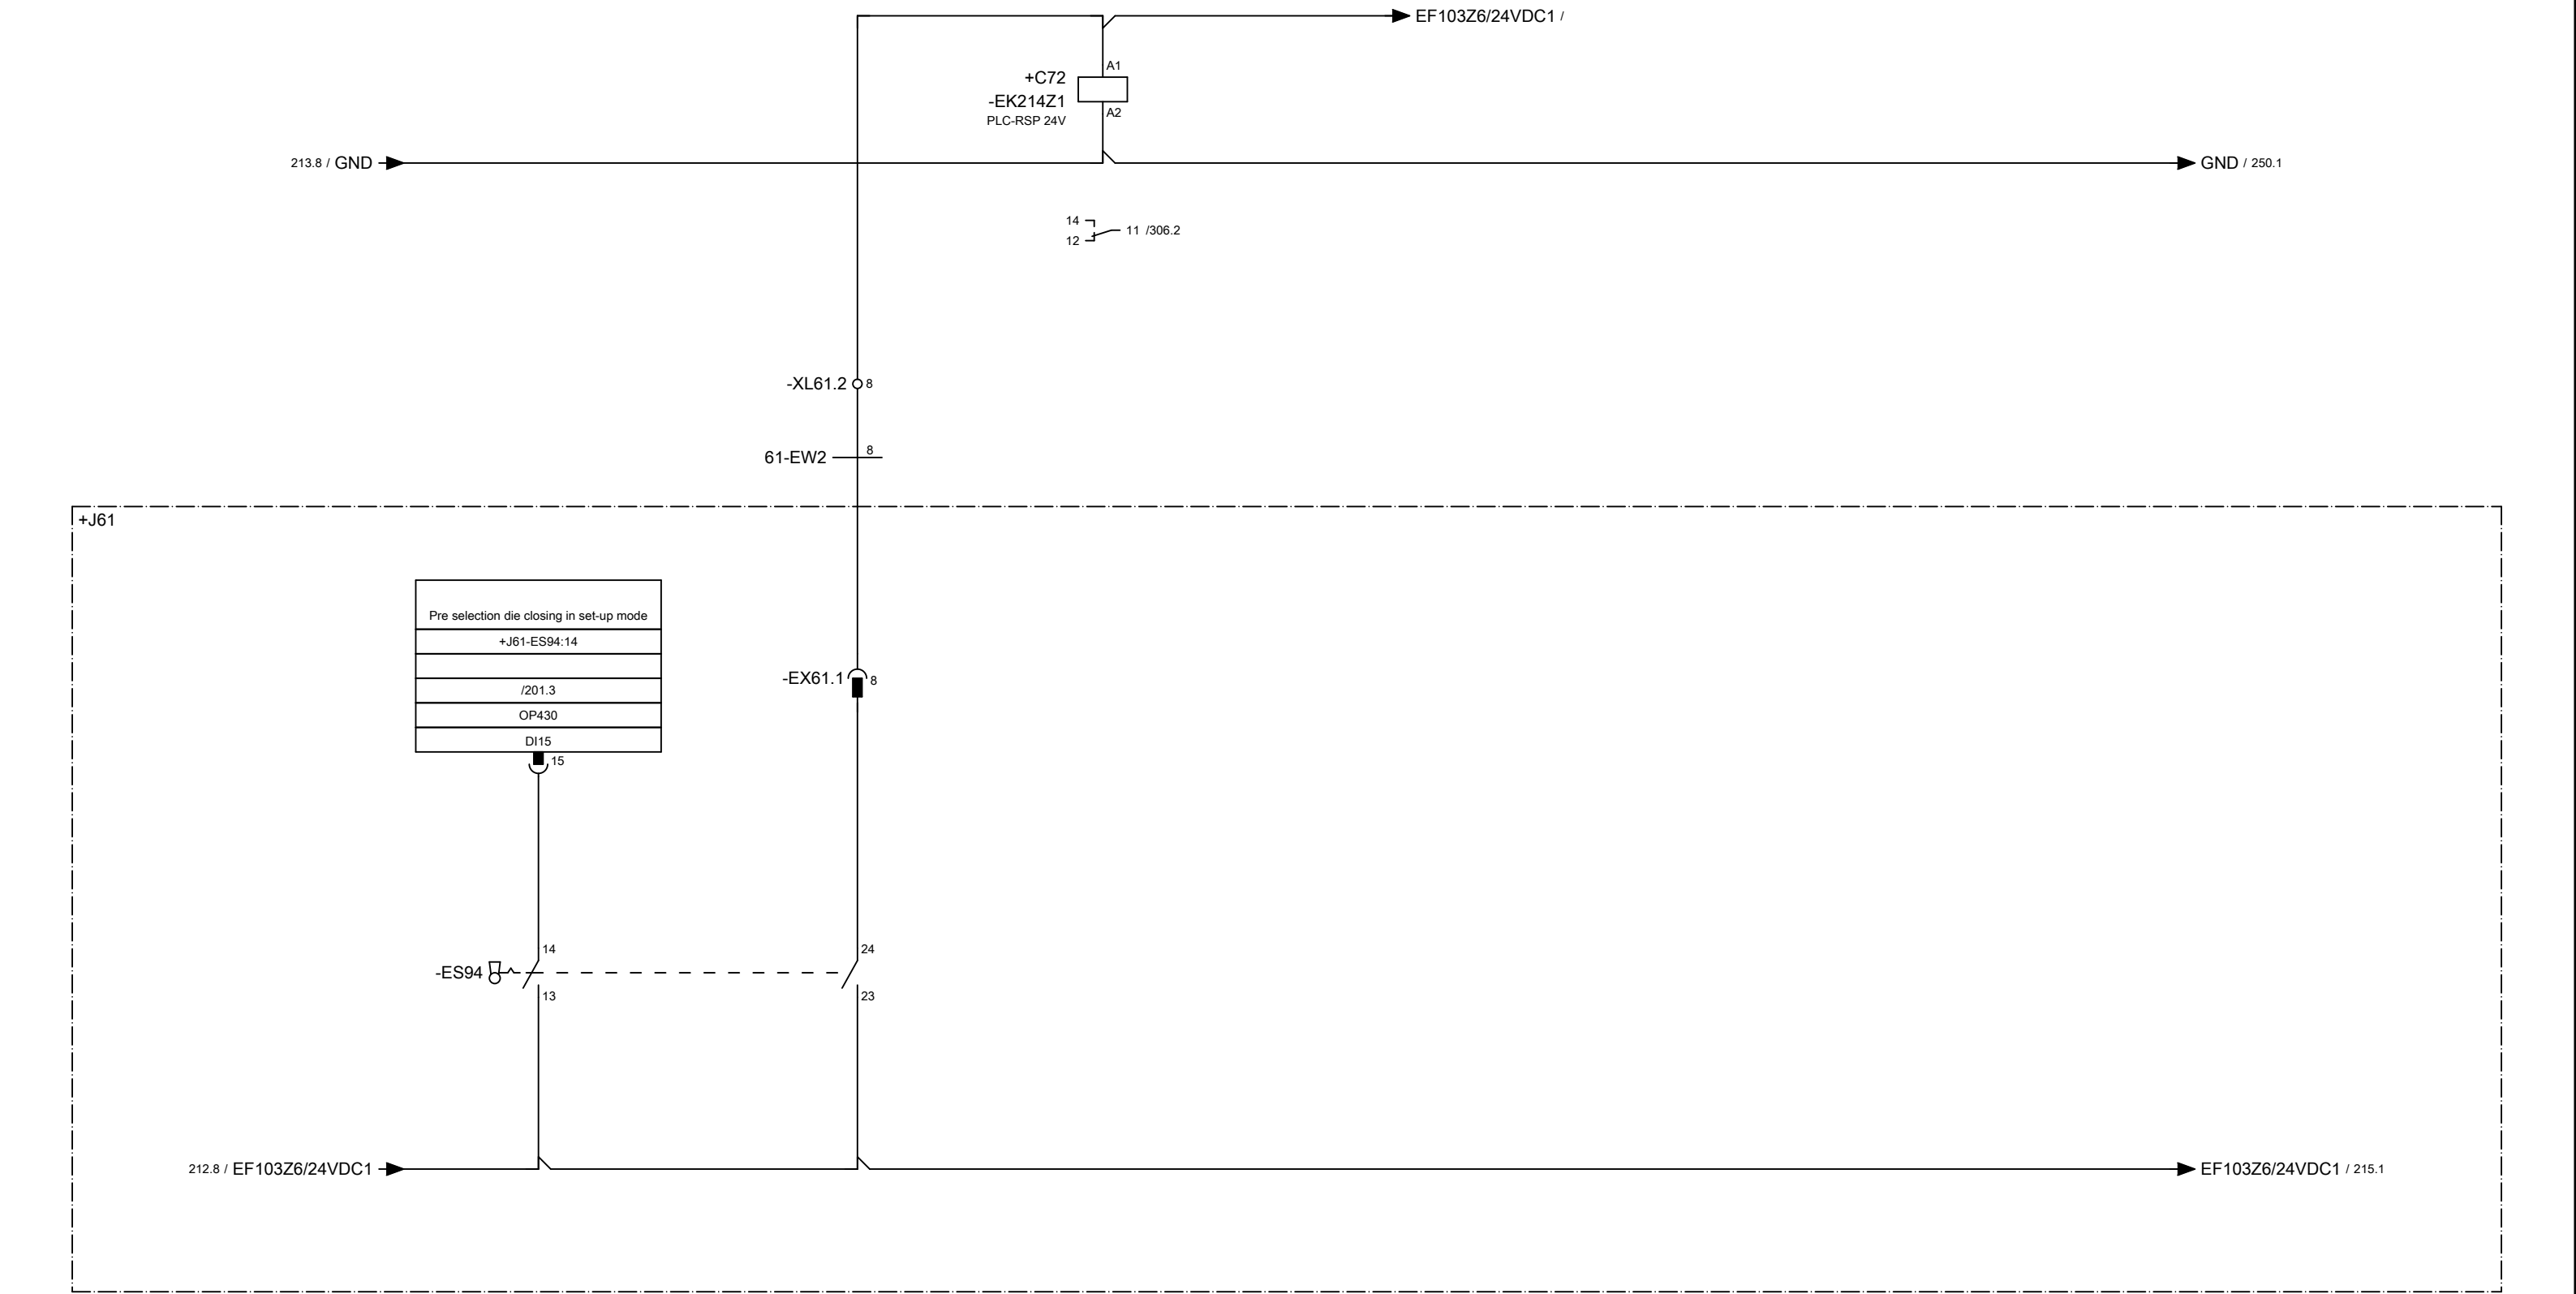


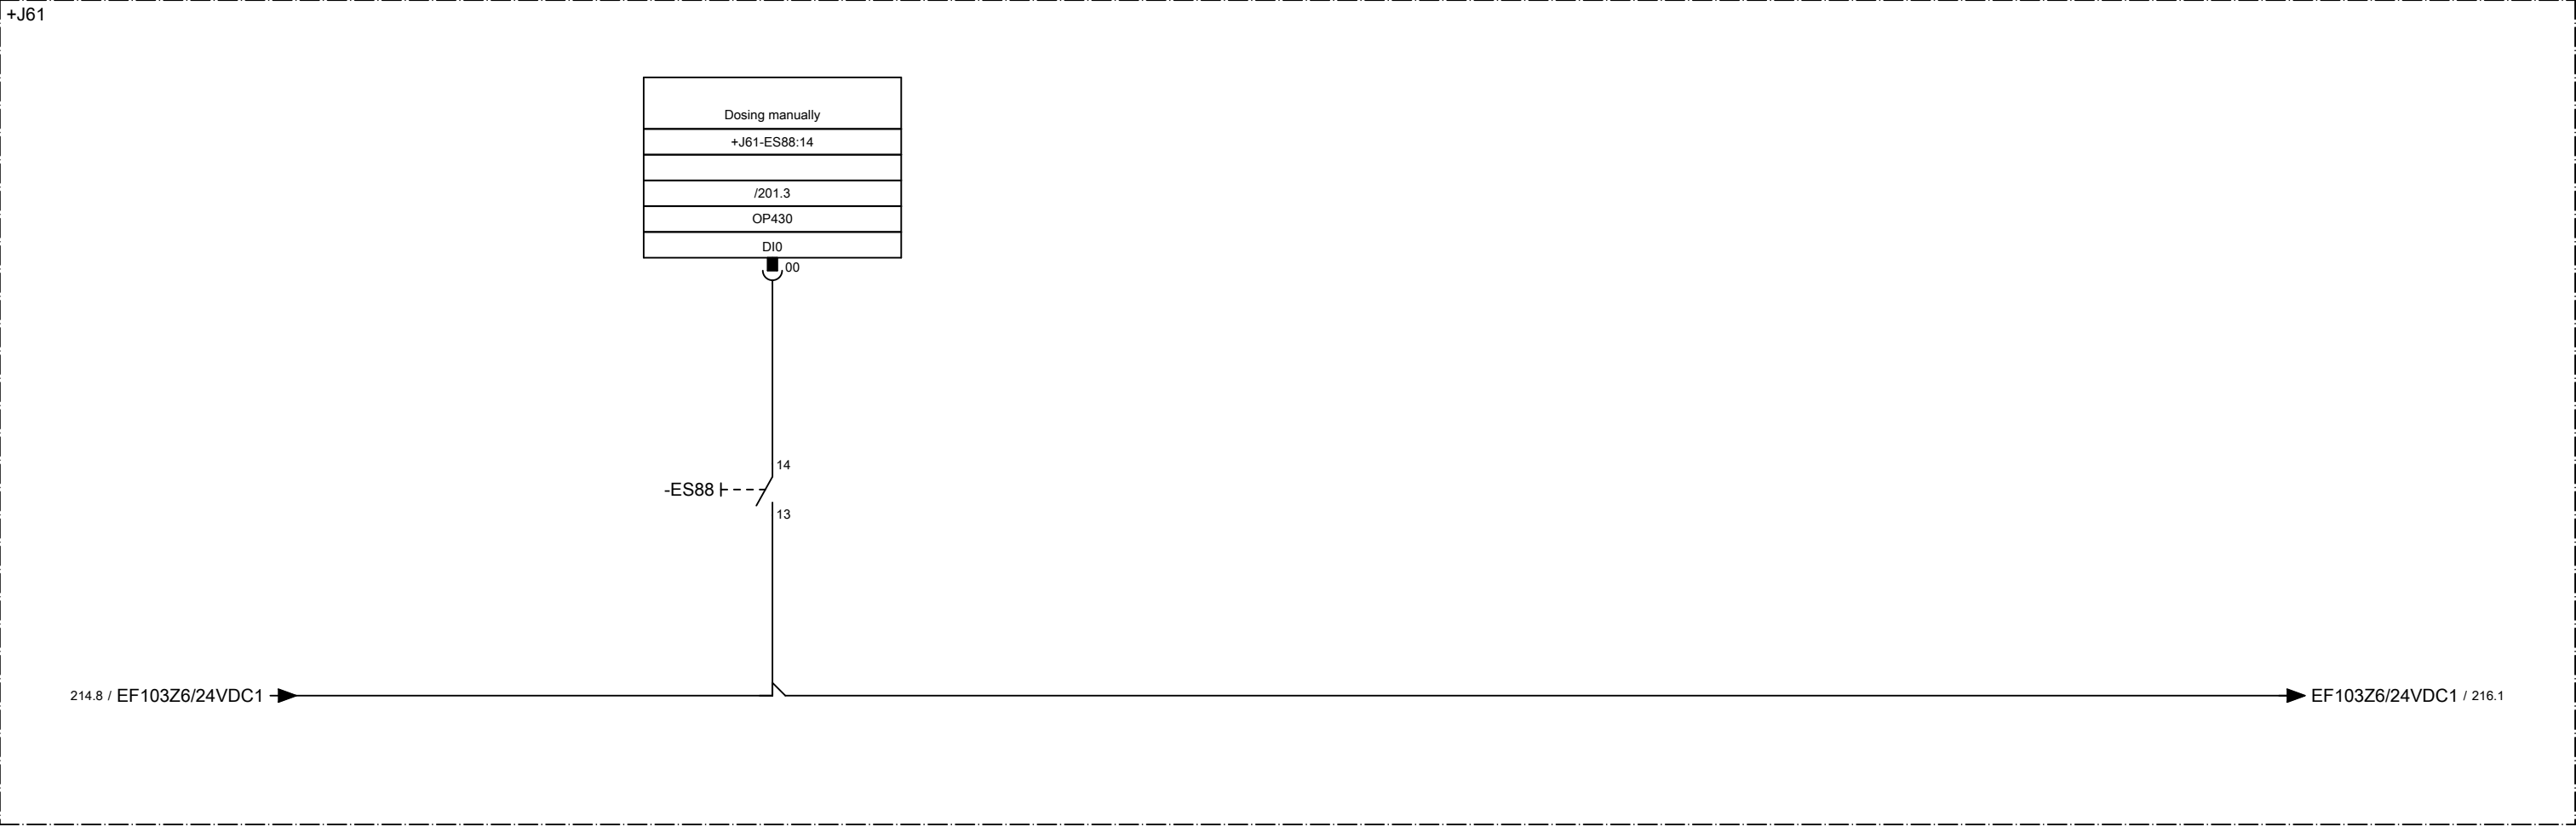


Dosing manually

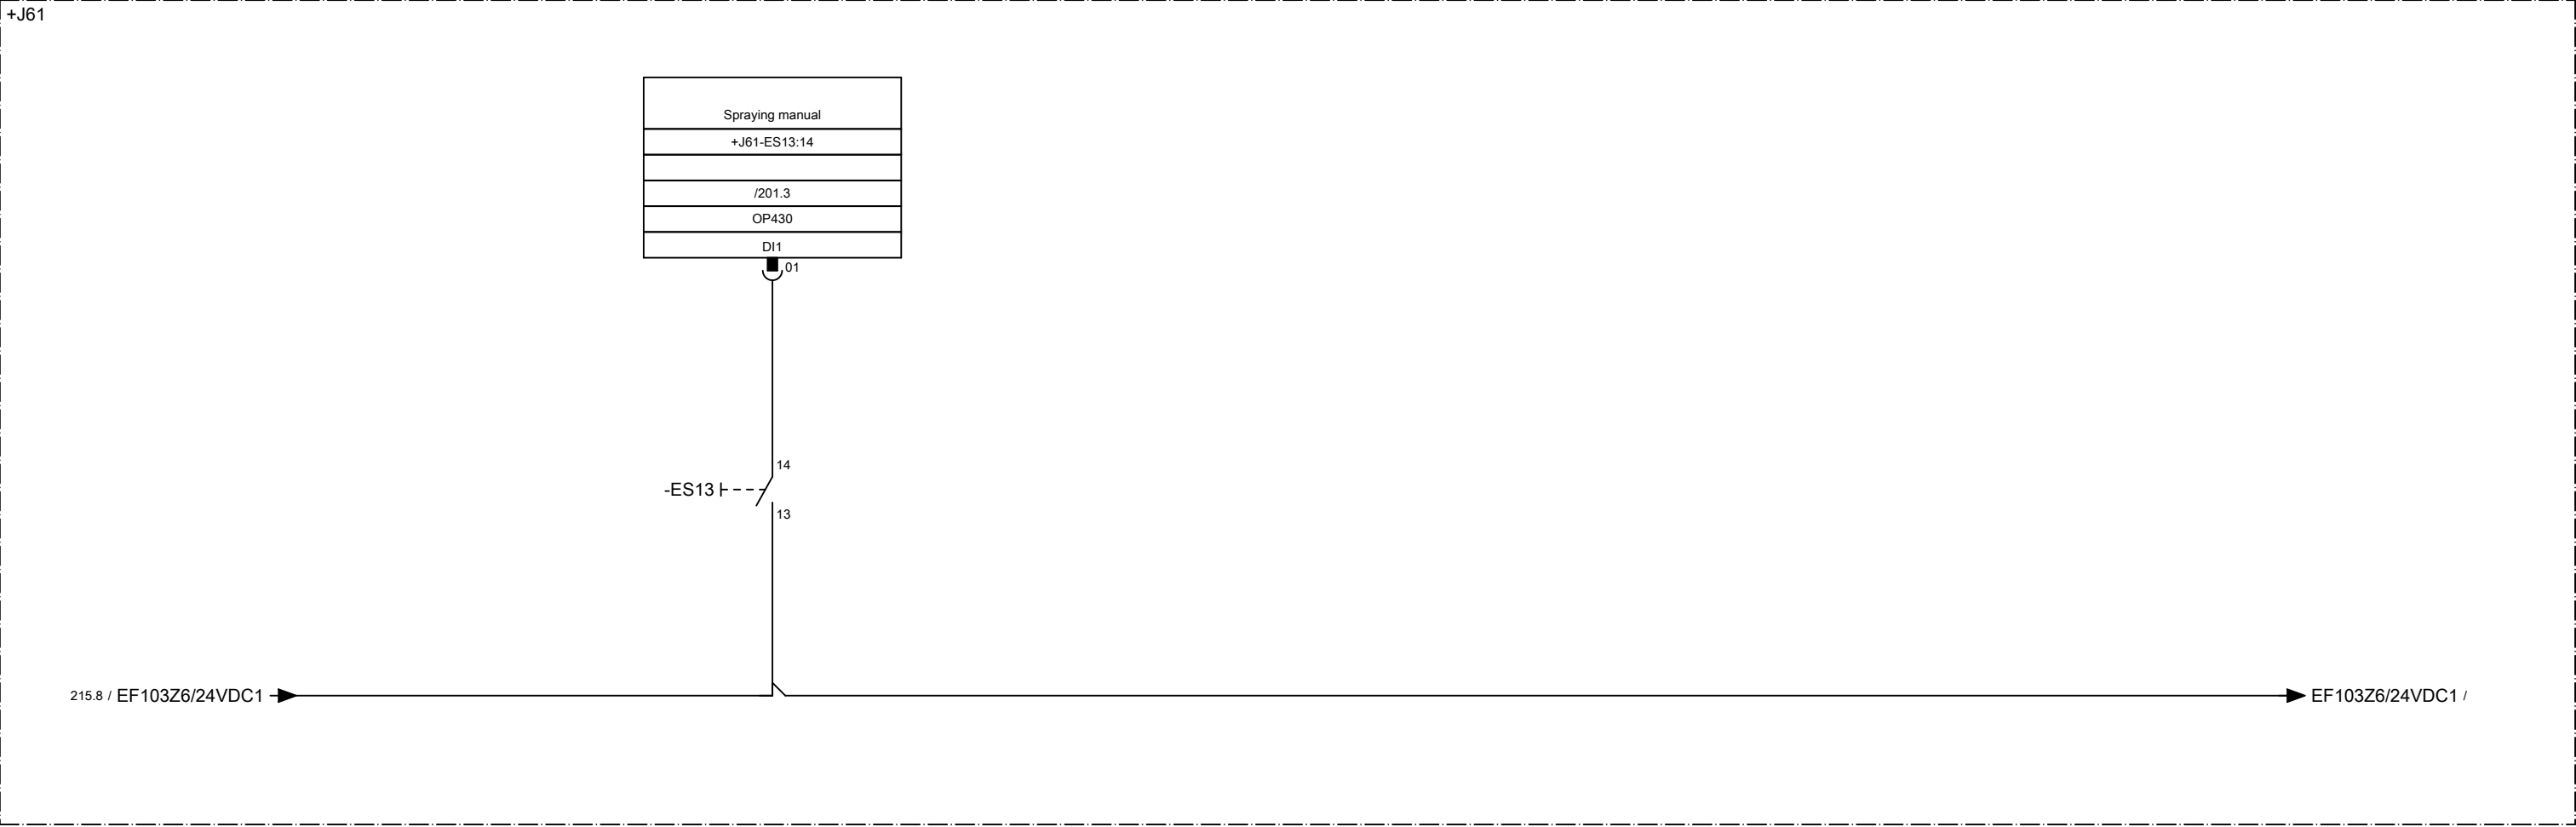


Spraying manual

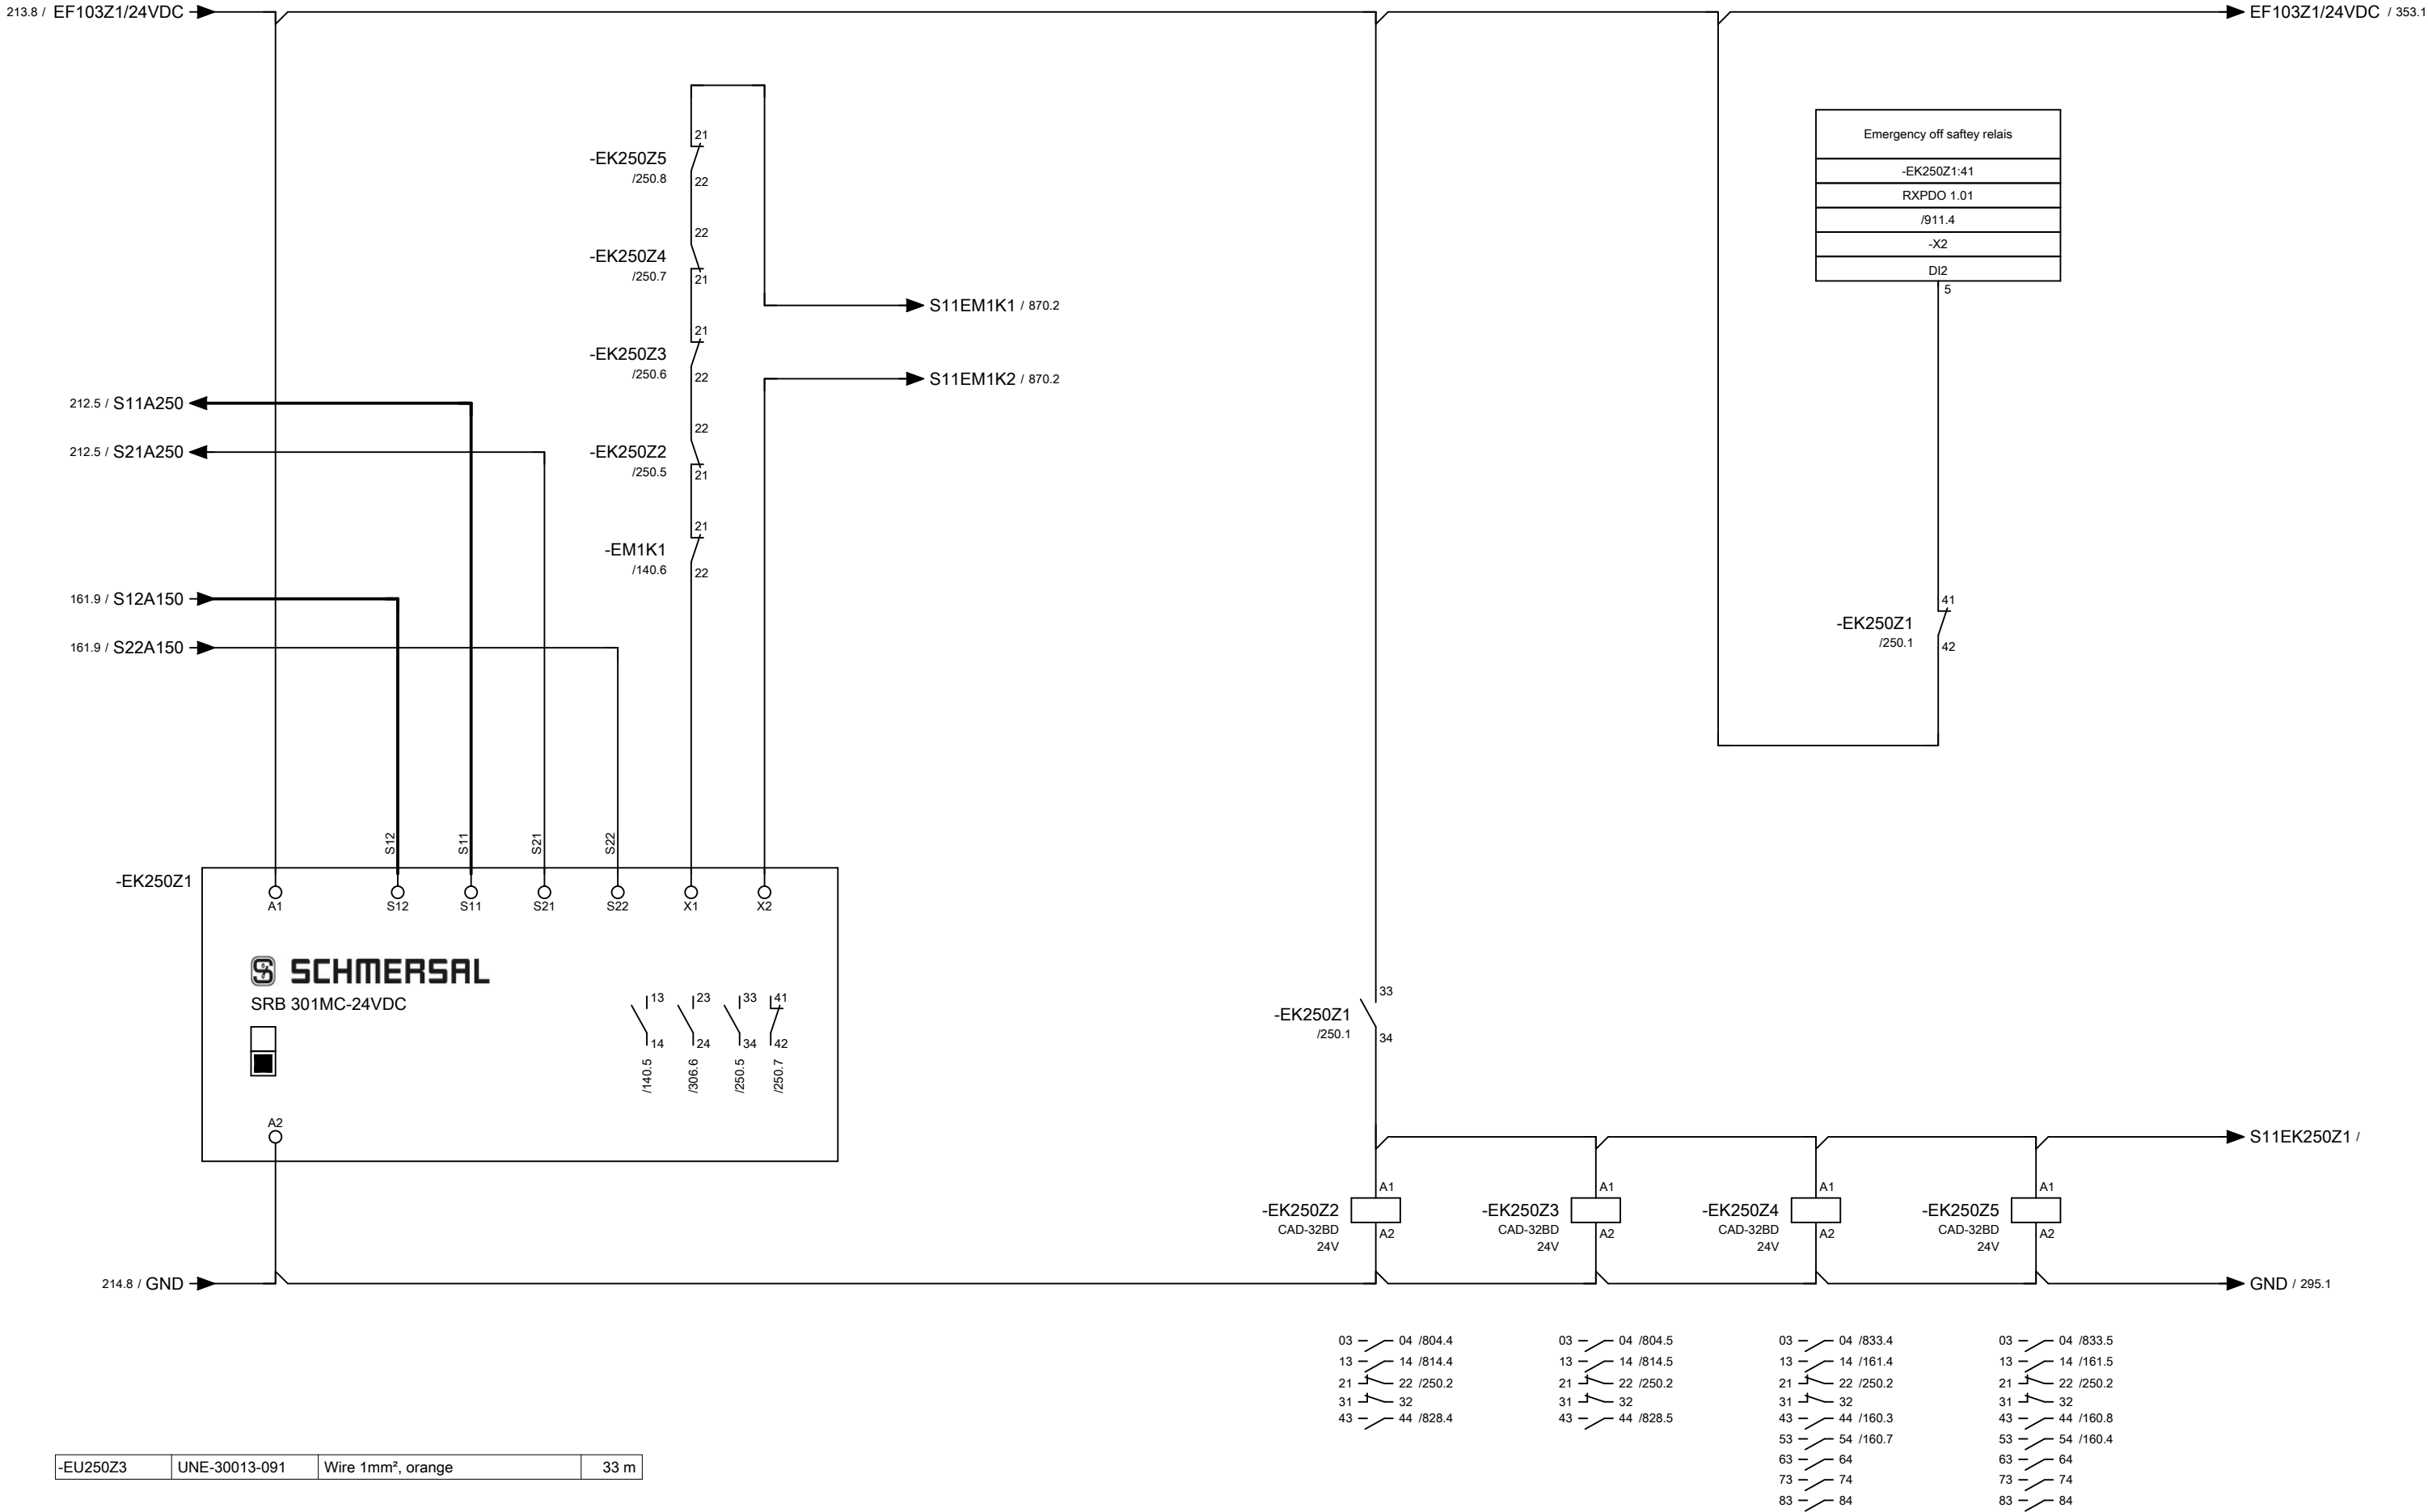

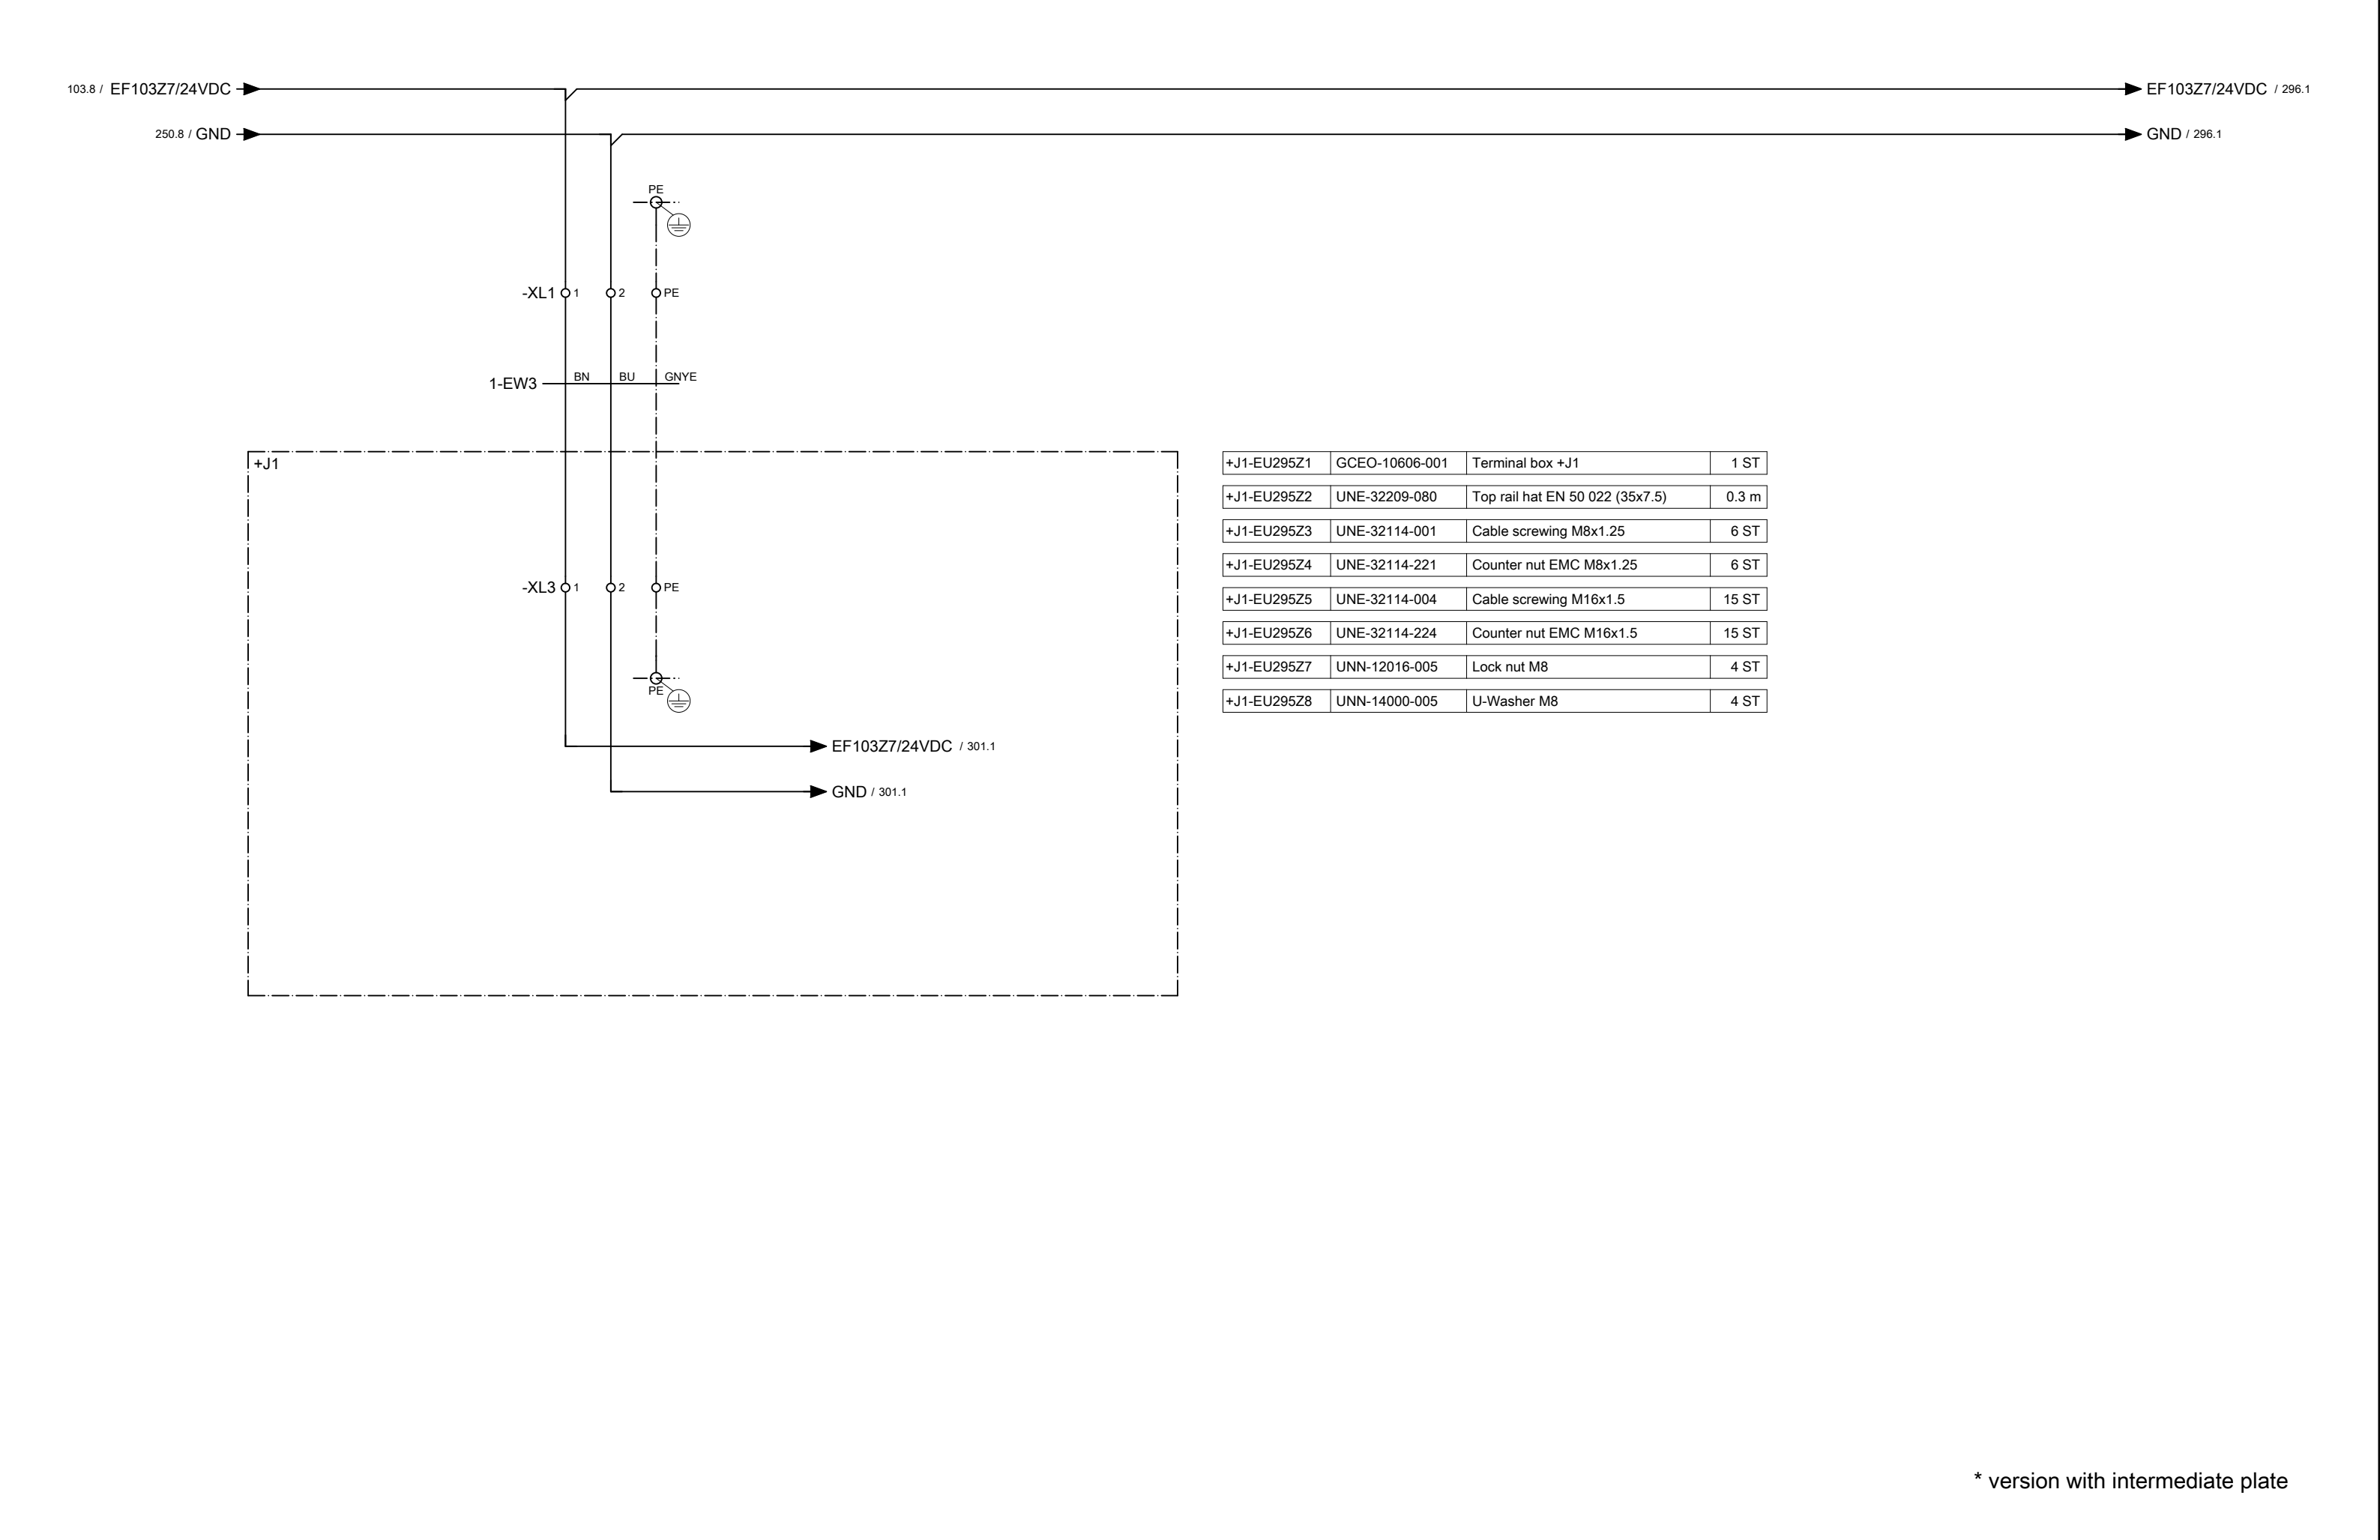


* version with intermediate plate

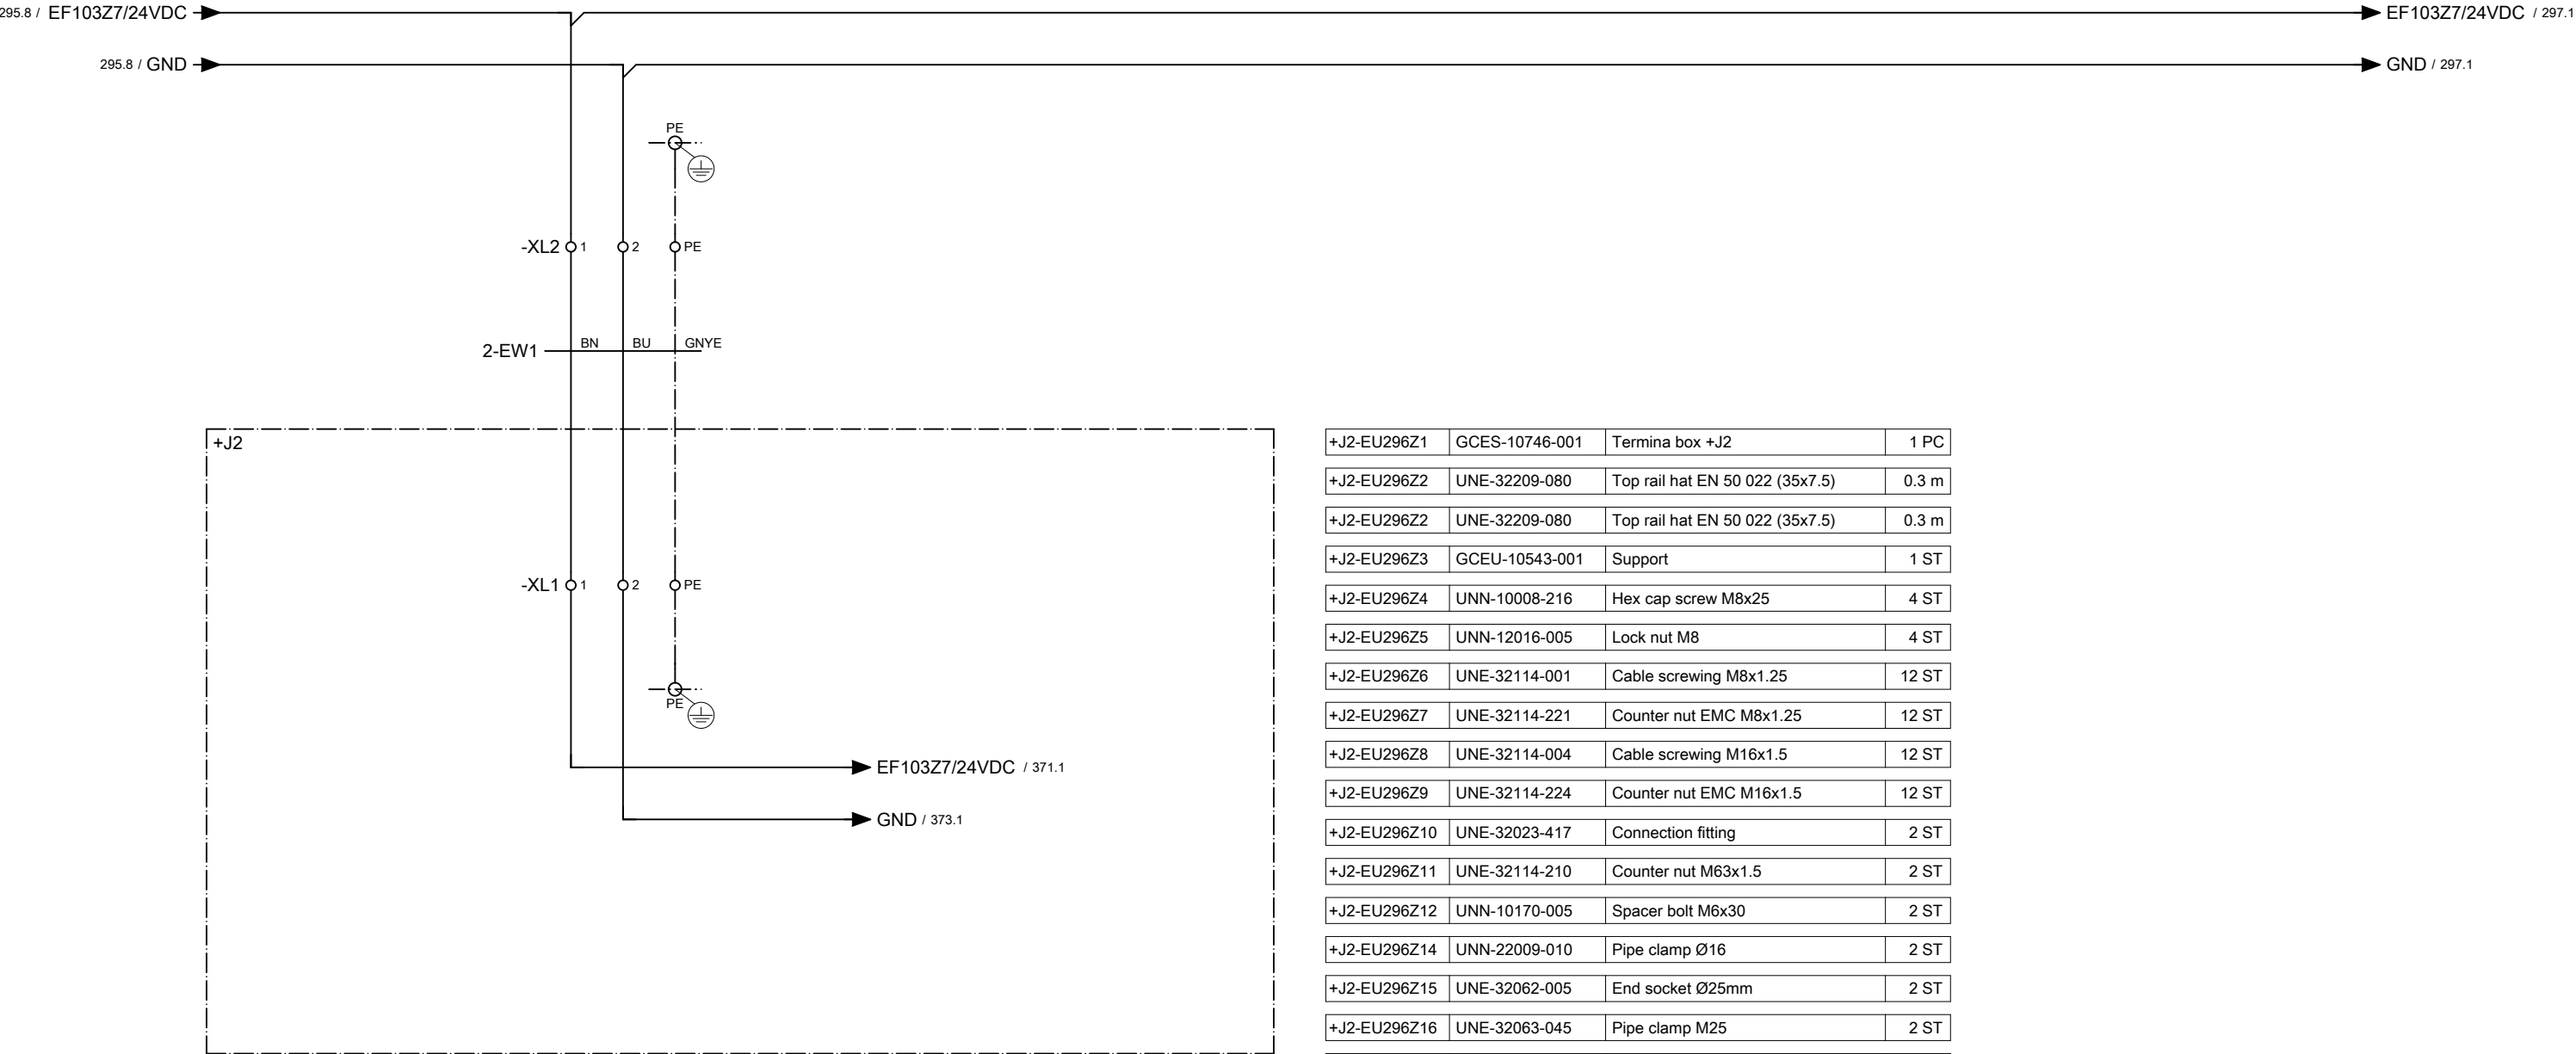


+J2-EU296Z1	GCES-10746-001	Termina box +J2	1 PC
+J2-EU296Z2	UNE-32209-080	Top rail hat EN 50 022 (35x7.5)	0.3 m
+J2-EU296Z2	UNE-32209-080	Top rail hat EN 50 022 (35x7.5)	0.3 m
+J2-EU296Z3	GCEU-10543-001	Support	1 ST
+J2-EU296Z4	UNN-10008-216	Hex cap screw M8x25	4 ST
+J2-EU296Z5	UNN-12016-005	Lock nut M8	4 ST
+J2-EU296Z6	UNE-32114-001	Cable screwing M8x1.25	12 ST
+J2-EU296Z7	UNE-32114-221	Counter nut EMC M8x1.25	12 ST
+J2-EU296Z8	UNE-32114-004	Cable screwing M16x1.5	12 ST
+J2-EU296Z9	UNE-32114-224	Counter nut EMC M16x1.5	12 ST
+J2-EU296Z10	UNE-32023-417	Connection fitting	2 ST
+J2-EU296Z11	UNE-32114-210	Counter nut M63x1.5	2 ST
+J2-EU296Z12	UNN-10170-005	Spacer bolt M6x30	2 ST
+J2-EU296Z14	UNN-22009-010	Pipe clamp Ø16	2 ST
+J2-EU296Z15	UNE-32062-005	End socket Ø25mm	2 ST
+J2-EU296Z16	UNE-32063-045	Pipe clamp M25	2 ST
+J2-EU296Z17	UXR-56207-020	Hydraulic hose DN10	2 m
+J2-EU296Z18	UNE-32060-045	Aluminium pipe Ø25mm	0.5 m
+J2-EU296Z20	UNE-32114-210	Counter nut M63x1.5	1 ST
+J2-EU296Z21	UNE-32023-448	Treat seal	2 ST

* version with intermediate plate

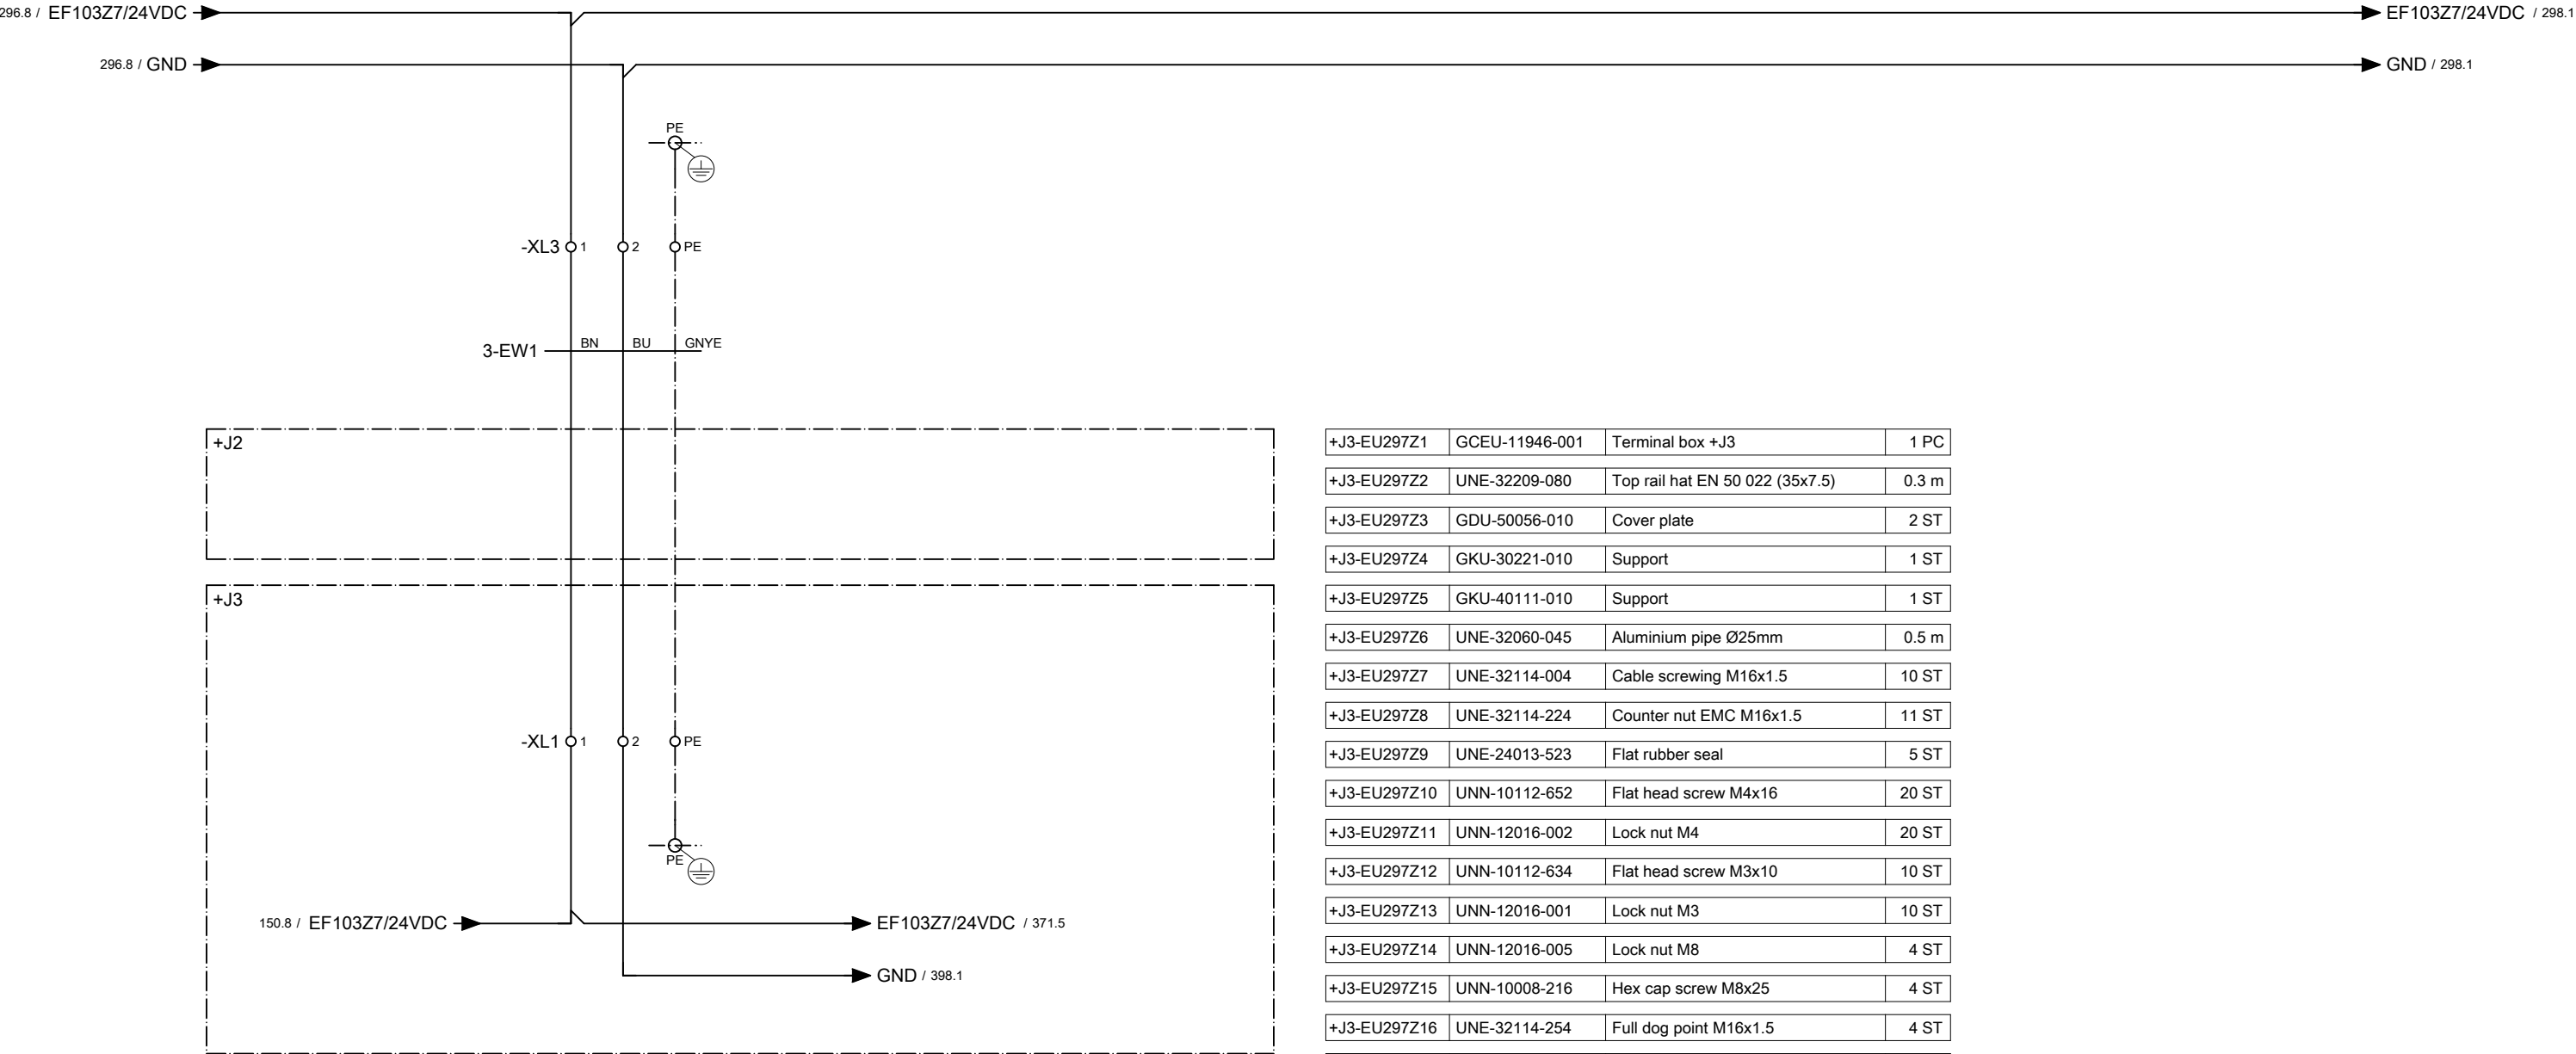



* version with intermediate plate

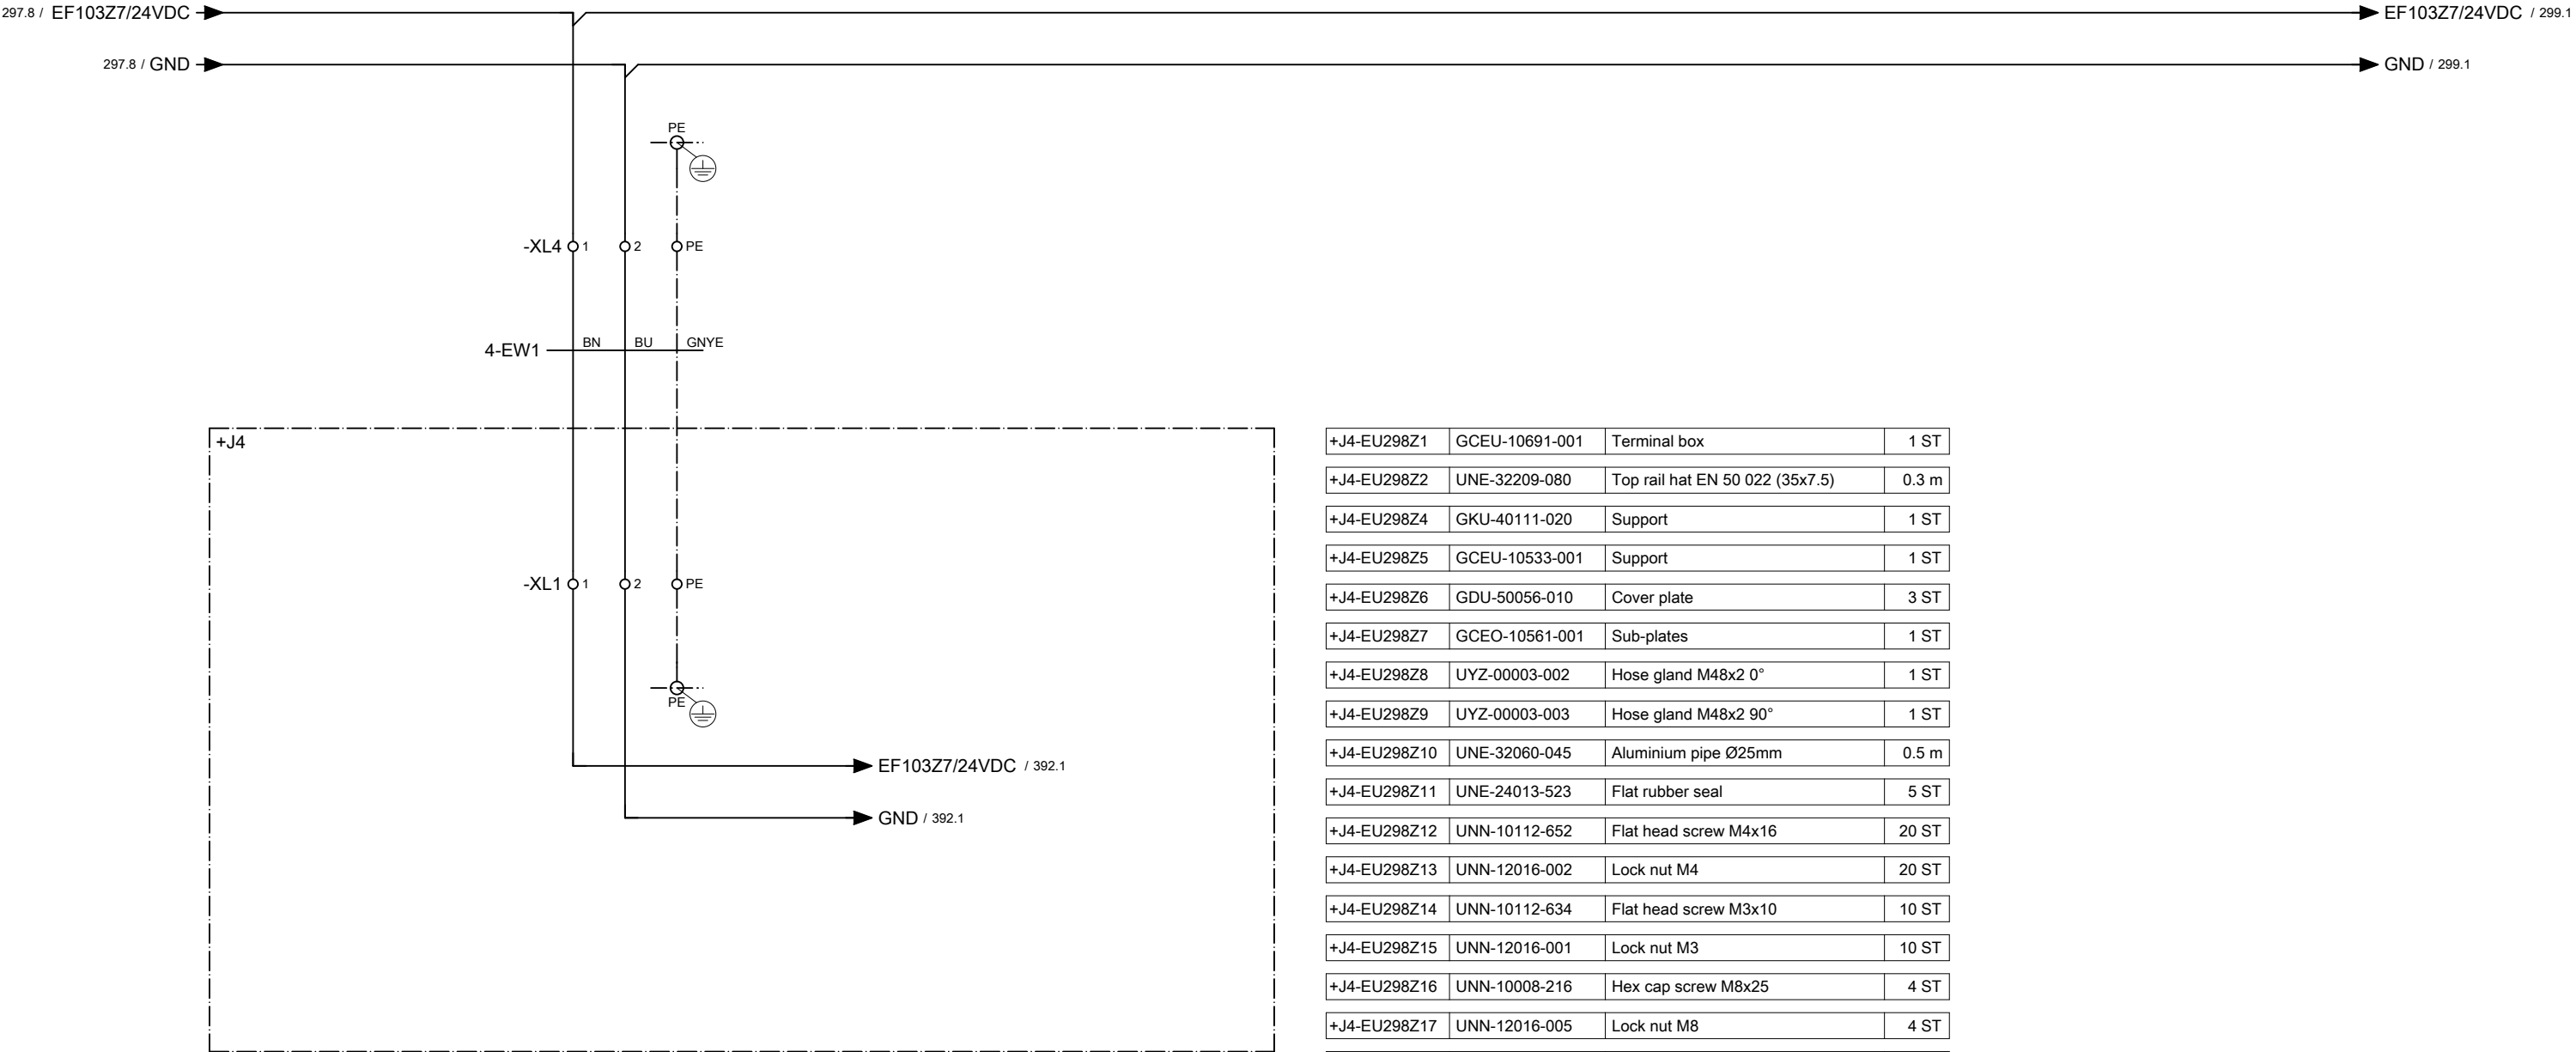



+J4-EU298Z1	GCEU-10691-001	Terminal box	1 ST
+J4-EU298Z2	UNE-32209-080	Top rail hat EN 50 022 (35x7.5)	0.3 m
+J4-EU298Z4	GKU-40111-020	Support	1 ST
+J4-EU298Z5	GCEU-10533-001	Support	1 ST
+J4-EU298Z6	GDU-50056-010	Cover plate	3 ST
+J4-EU298Z7	GCEO-10561-001	Sub-plates	1 ST
+J4-EU298Z8	UYZ-00003-002	Hose gland M48x2 0°	1 ST
+J4-EU298Z9	UYZ-00003-003	Hose gland M48x2 90°	1 ST
+J4-EU298Z10	UNE-32060-045	Aluminium pipe Ø25mm	0.5 m
+J4-EU298Z11	UNE-24013-523	Flat rubber seal	5 ST
+J4-EU298Z12	UNN-10112-652	Flat head screw M4x16	20 ST
+J4-EU298Z13	UNN-12016-002	Lock nut M4	20 ST
+J4-EU298Z14	UNN-10112-634	Flat head screw M3x10	10 ST
+J4-EU298Z15	UNN-12016-001	Lock nut M3	10 ST
+J4-EU298Z16	UNN-10008-216	Hex cap screw M8x25	4 ST
+J4-EU298Z17	UNN-12016-005	Lock nut M8	4 ST
+J4-EU298Z18	UNN-22013-148	Pipe clamp Ø48	1 ST
+J4-EU298Z19	UNN-10170-005	Spacer bolt M6x30	2 ST
+J4-EU298Z20	UNN-14000-005	U-Washer M8	4 ST
+J4-EU298Z21	UNE-32114-224	Counter nut EMC M16x1.5	11 ST
+J4-EU298Z22	UNE-32114-254	Full dog point M16x1.5	4 ST
+J4-EU298Z23	UNE-32062-005	End socket Ø25mm	2 ST
+J4-EU298Z24	UNE-32063-045	Pipe clamp M25	2 ST
+J4-EU298Z25	UNE-32114-004	Cable screwing M16x1.5	11 ST
+J4-EU298Z26	UNE-32023-417	Connection fitting	2 ST
+J4-EU298Z30	GCEO-10562-001	Sub-plates	1 ST

* version with intermediate plate

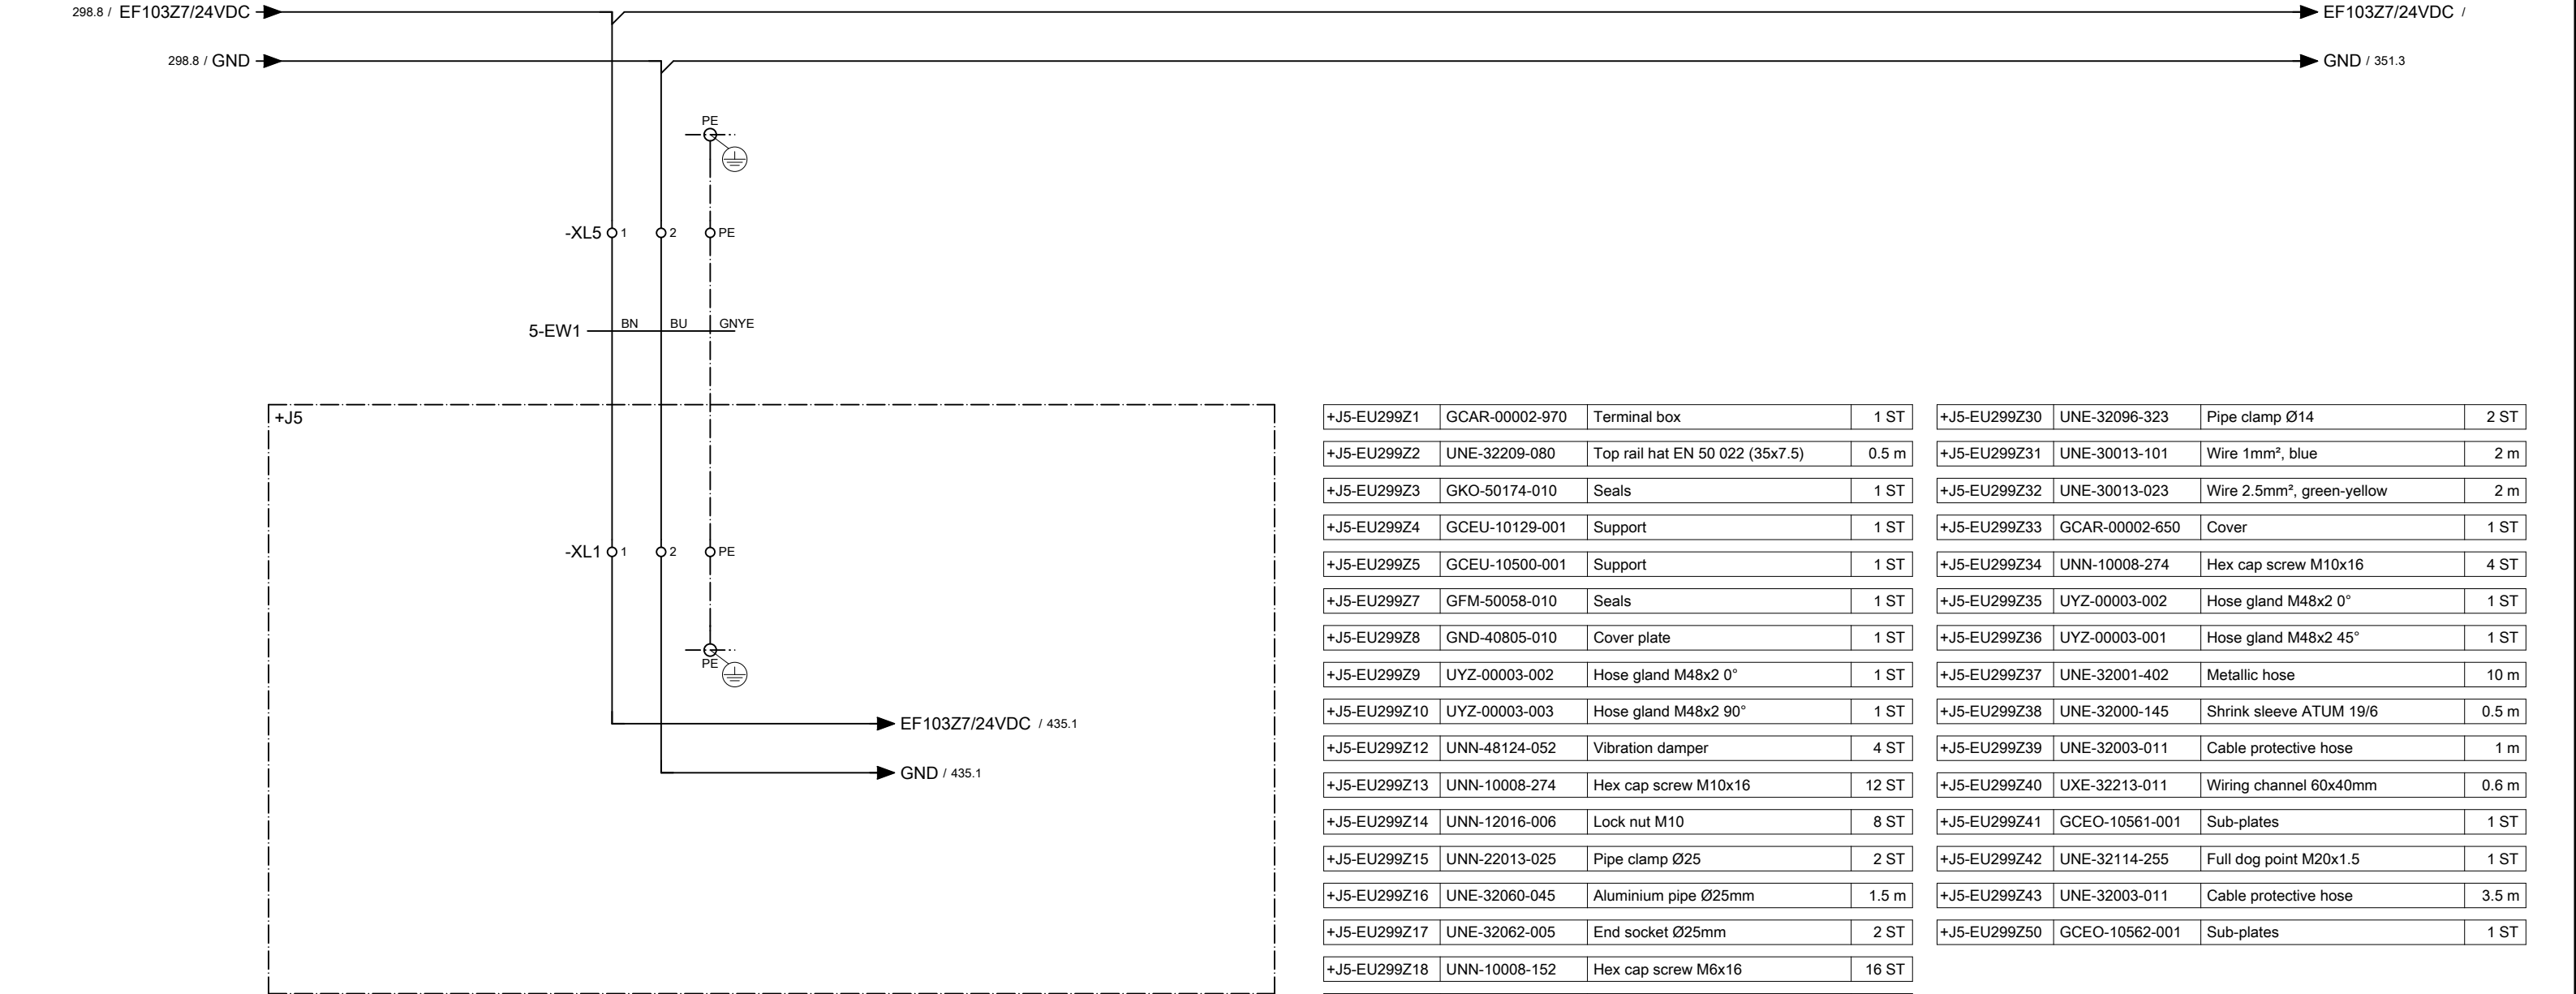


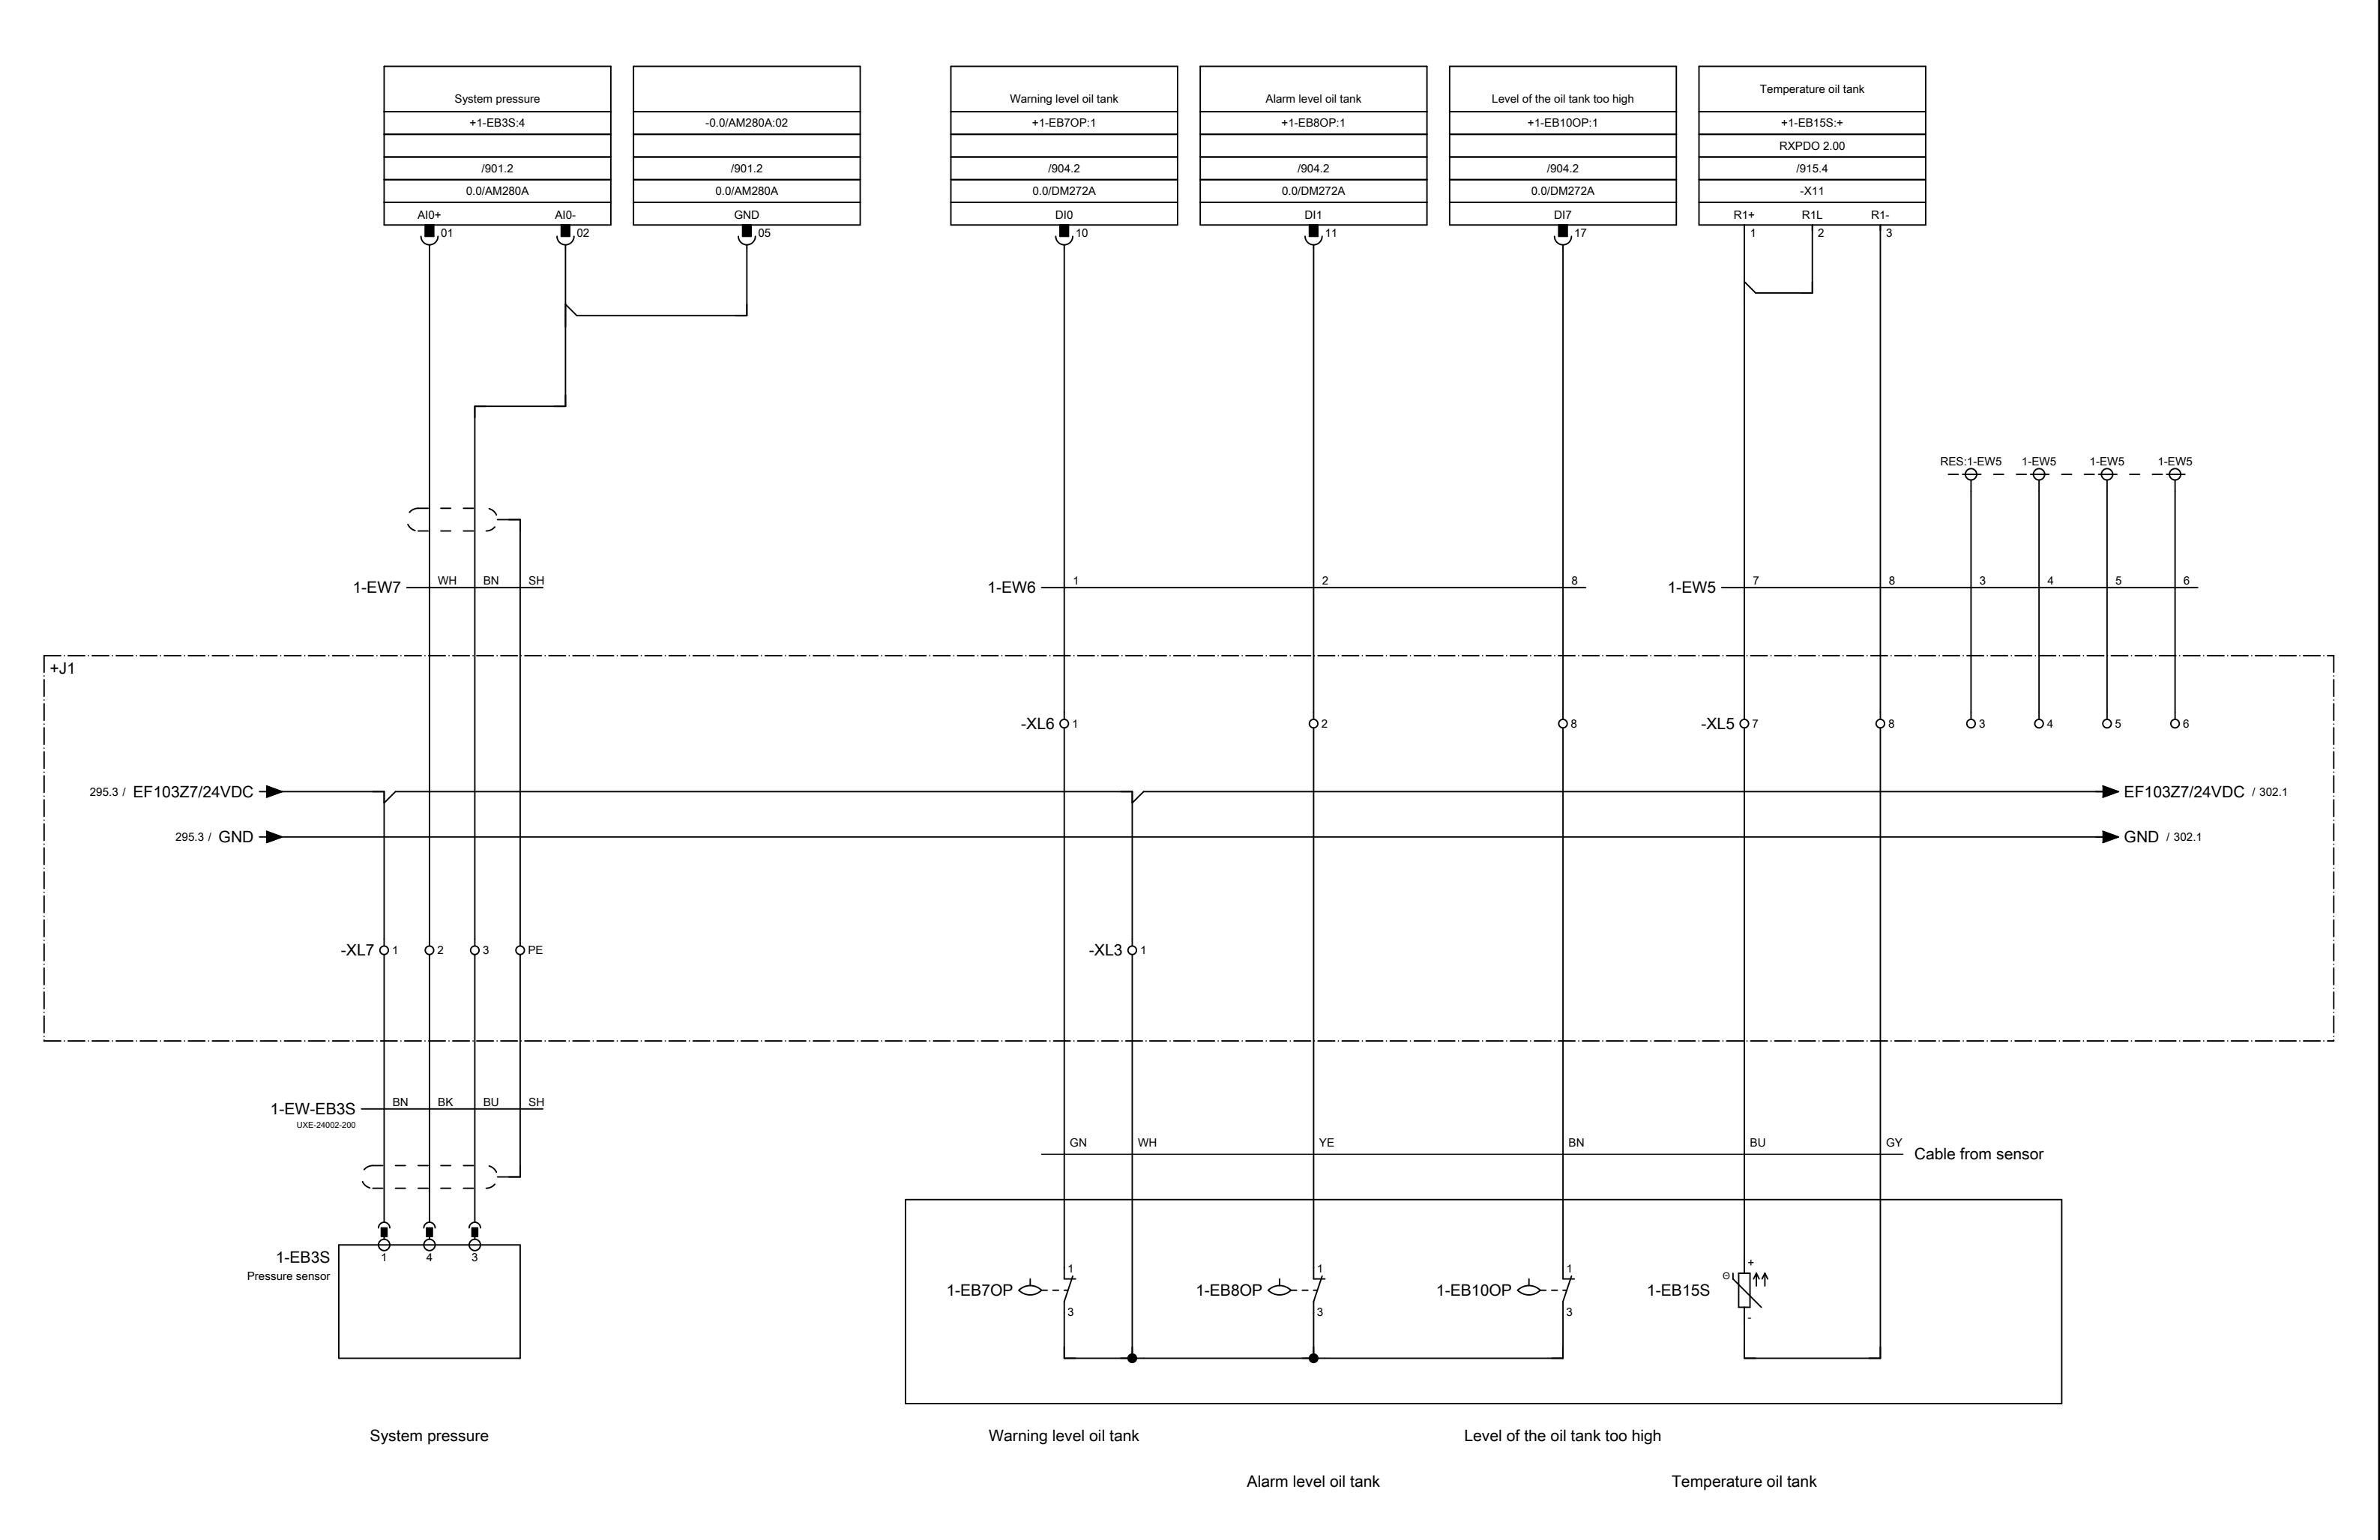

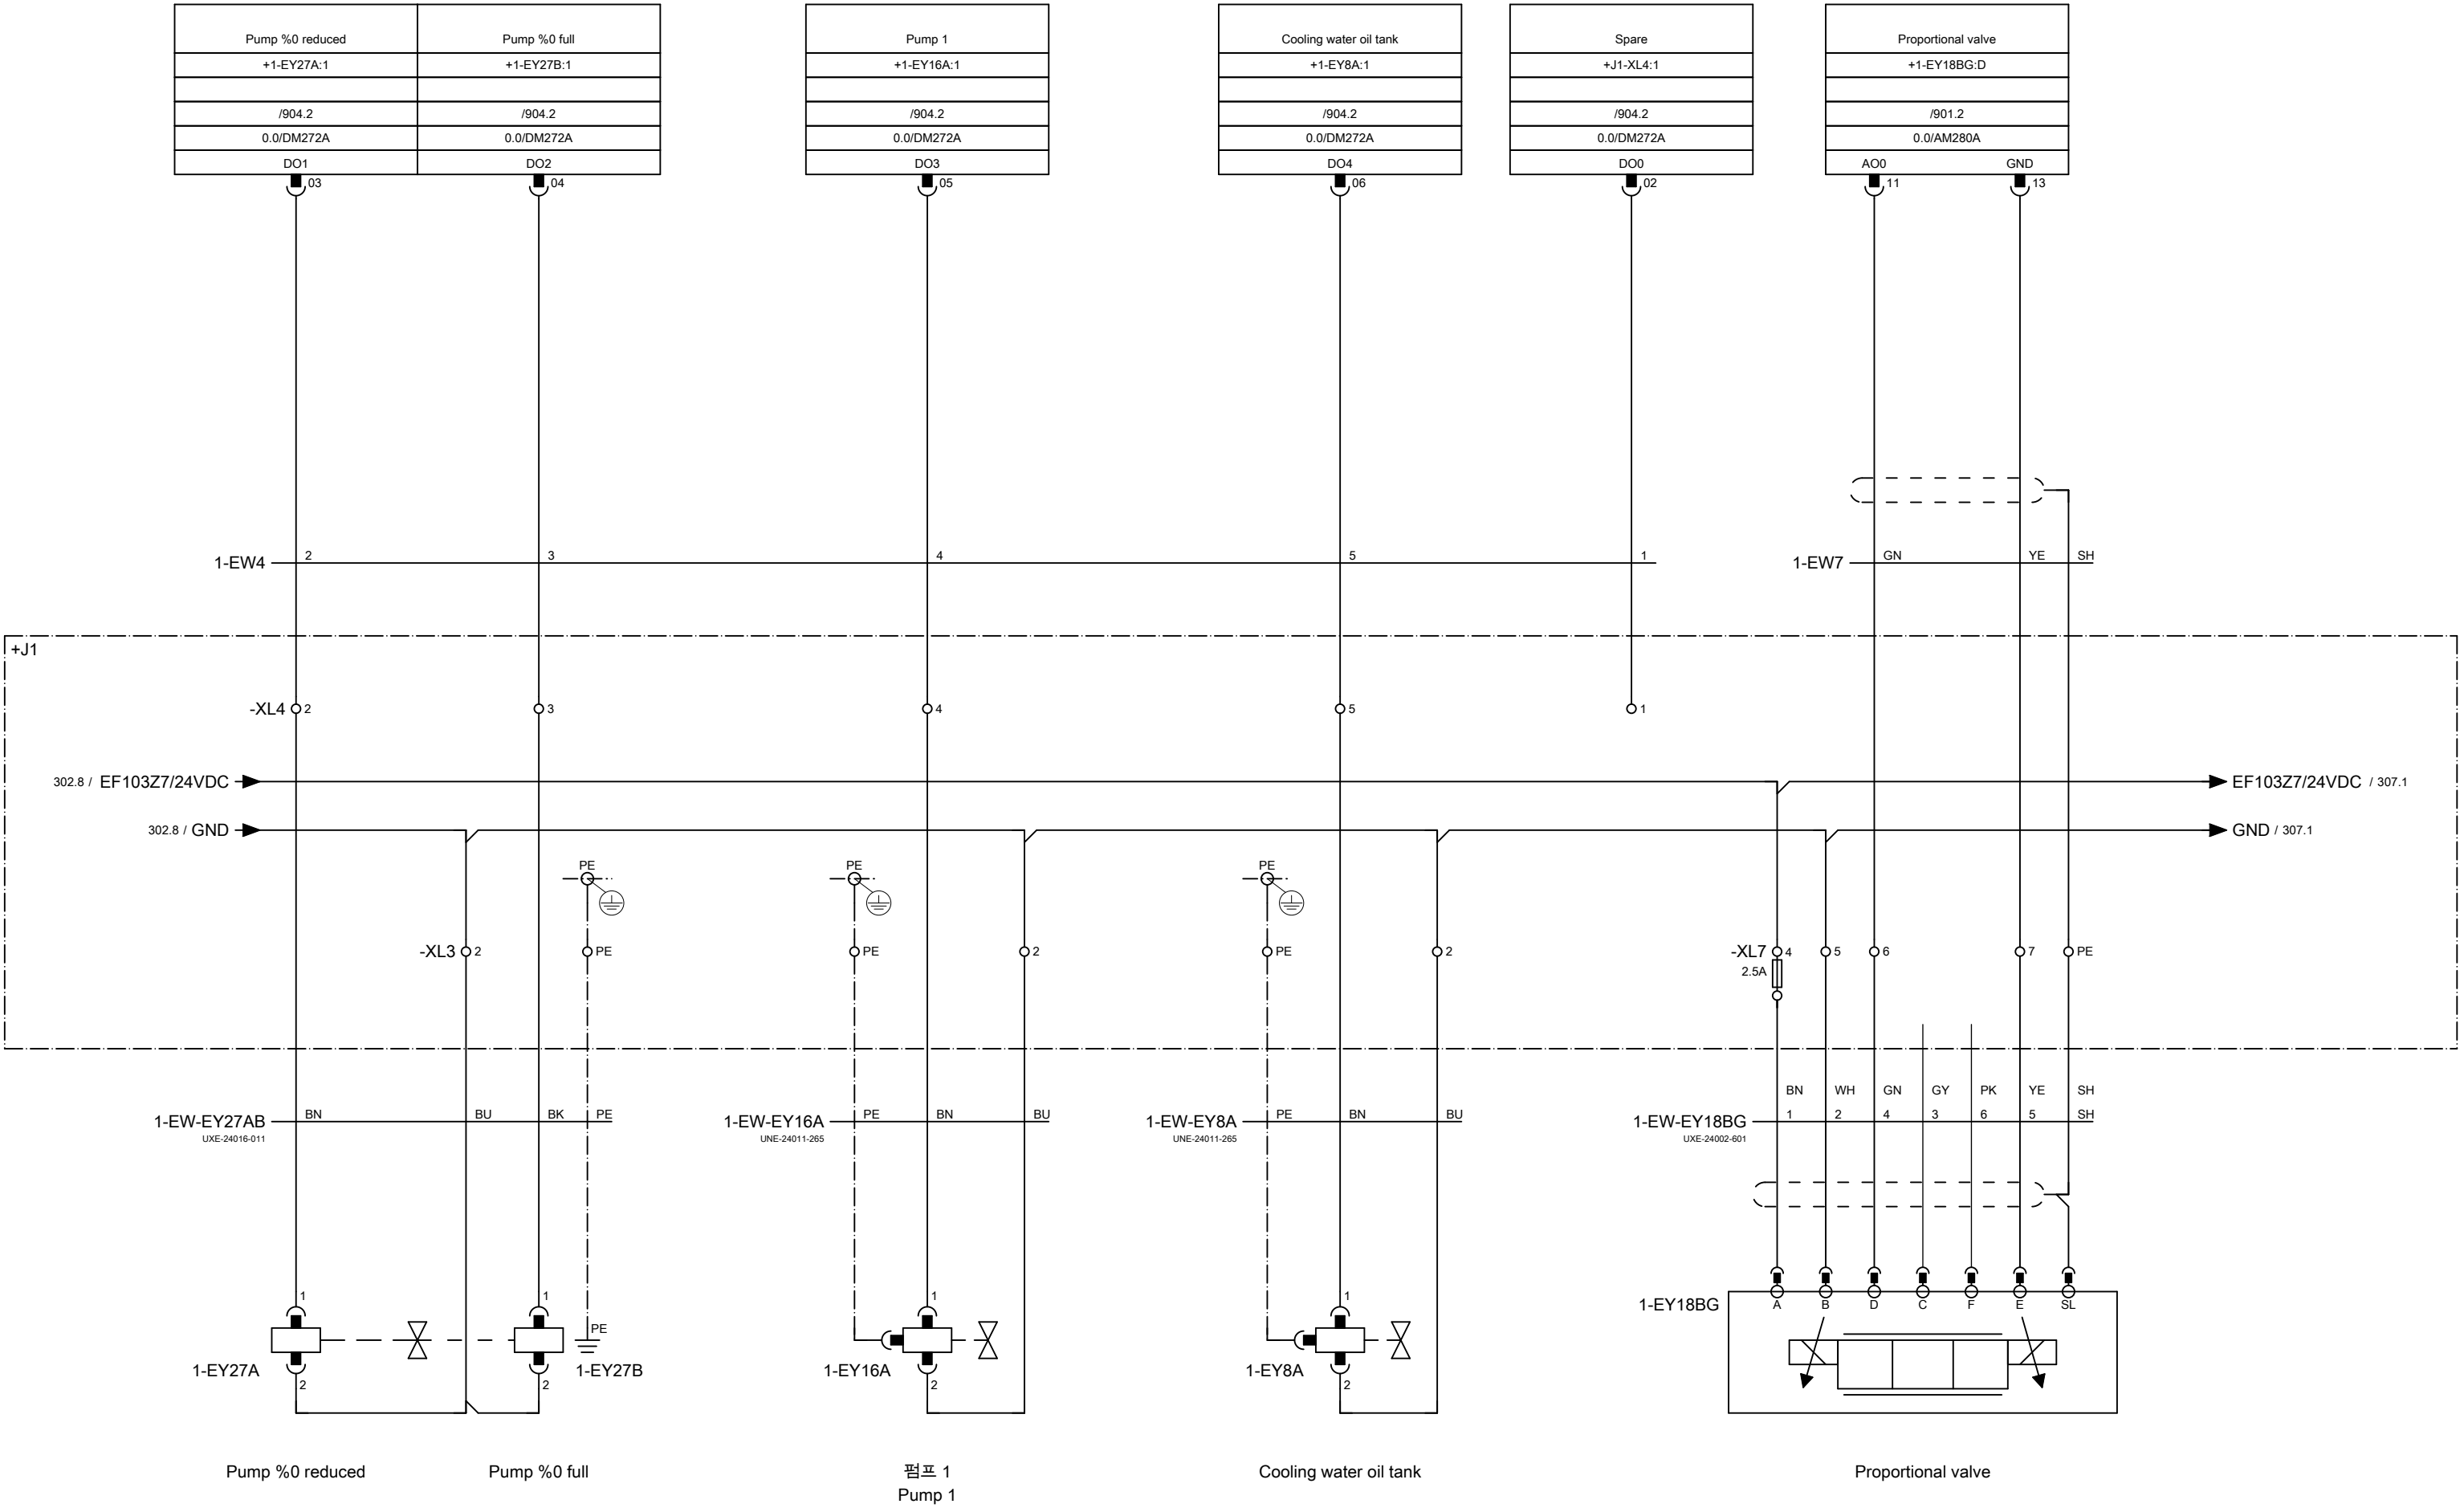

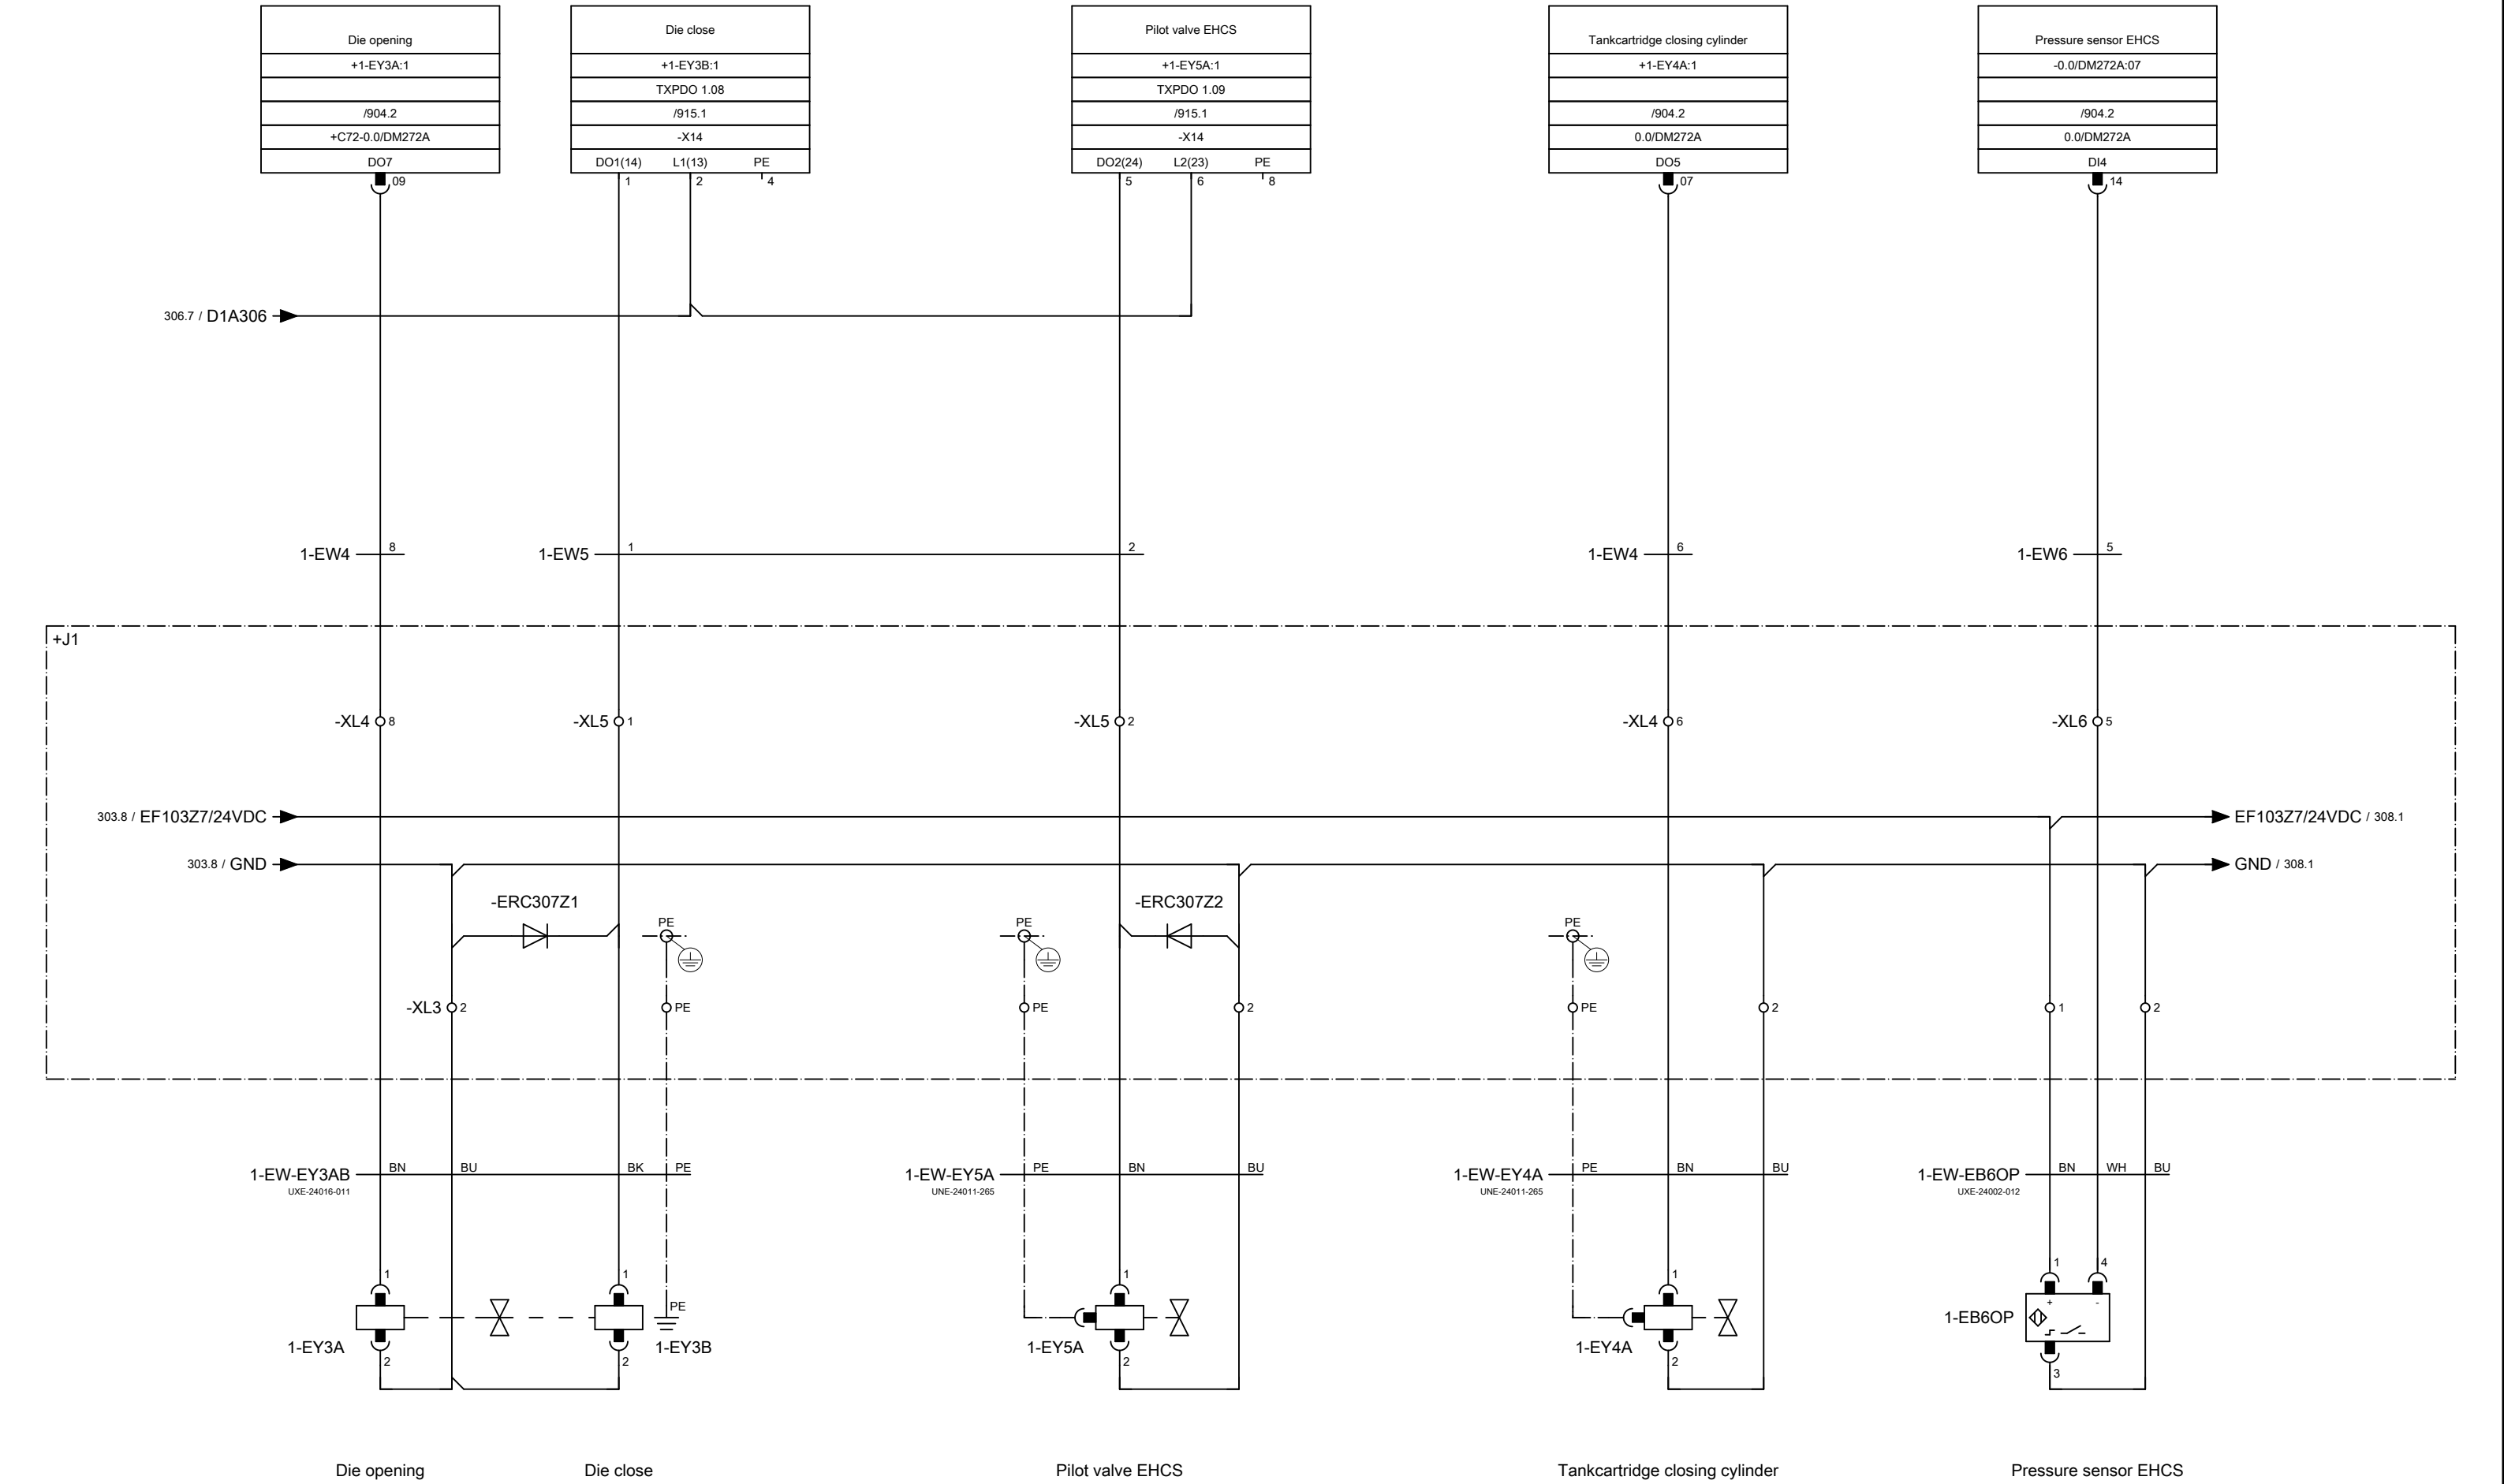

=A+C80-EU351Z1
UNE-24004-114
1 ST

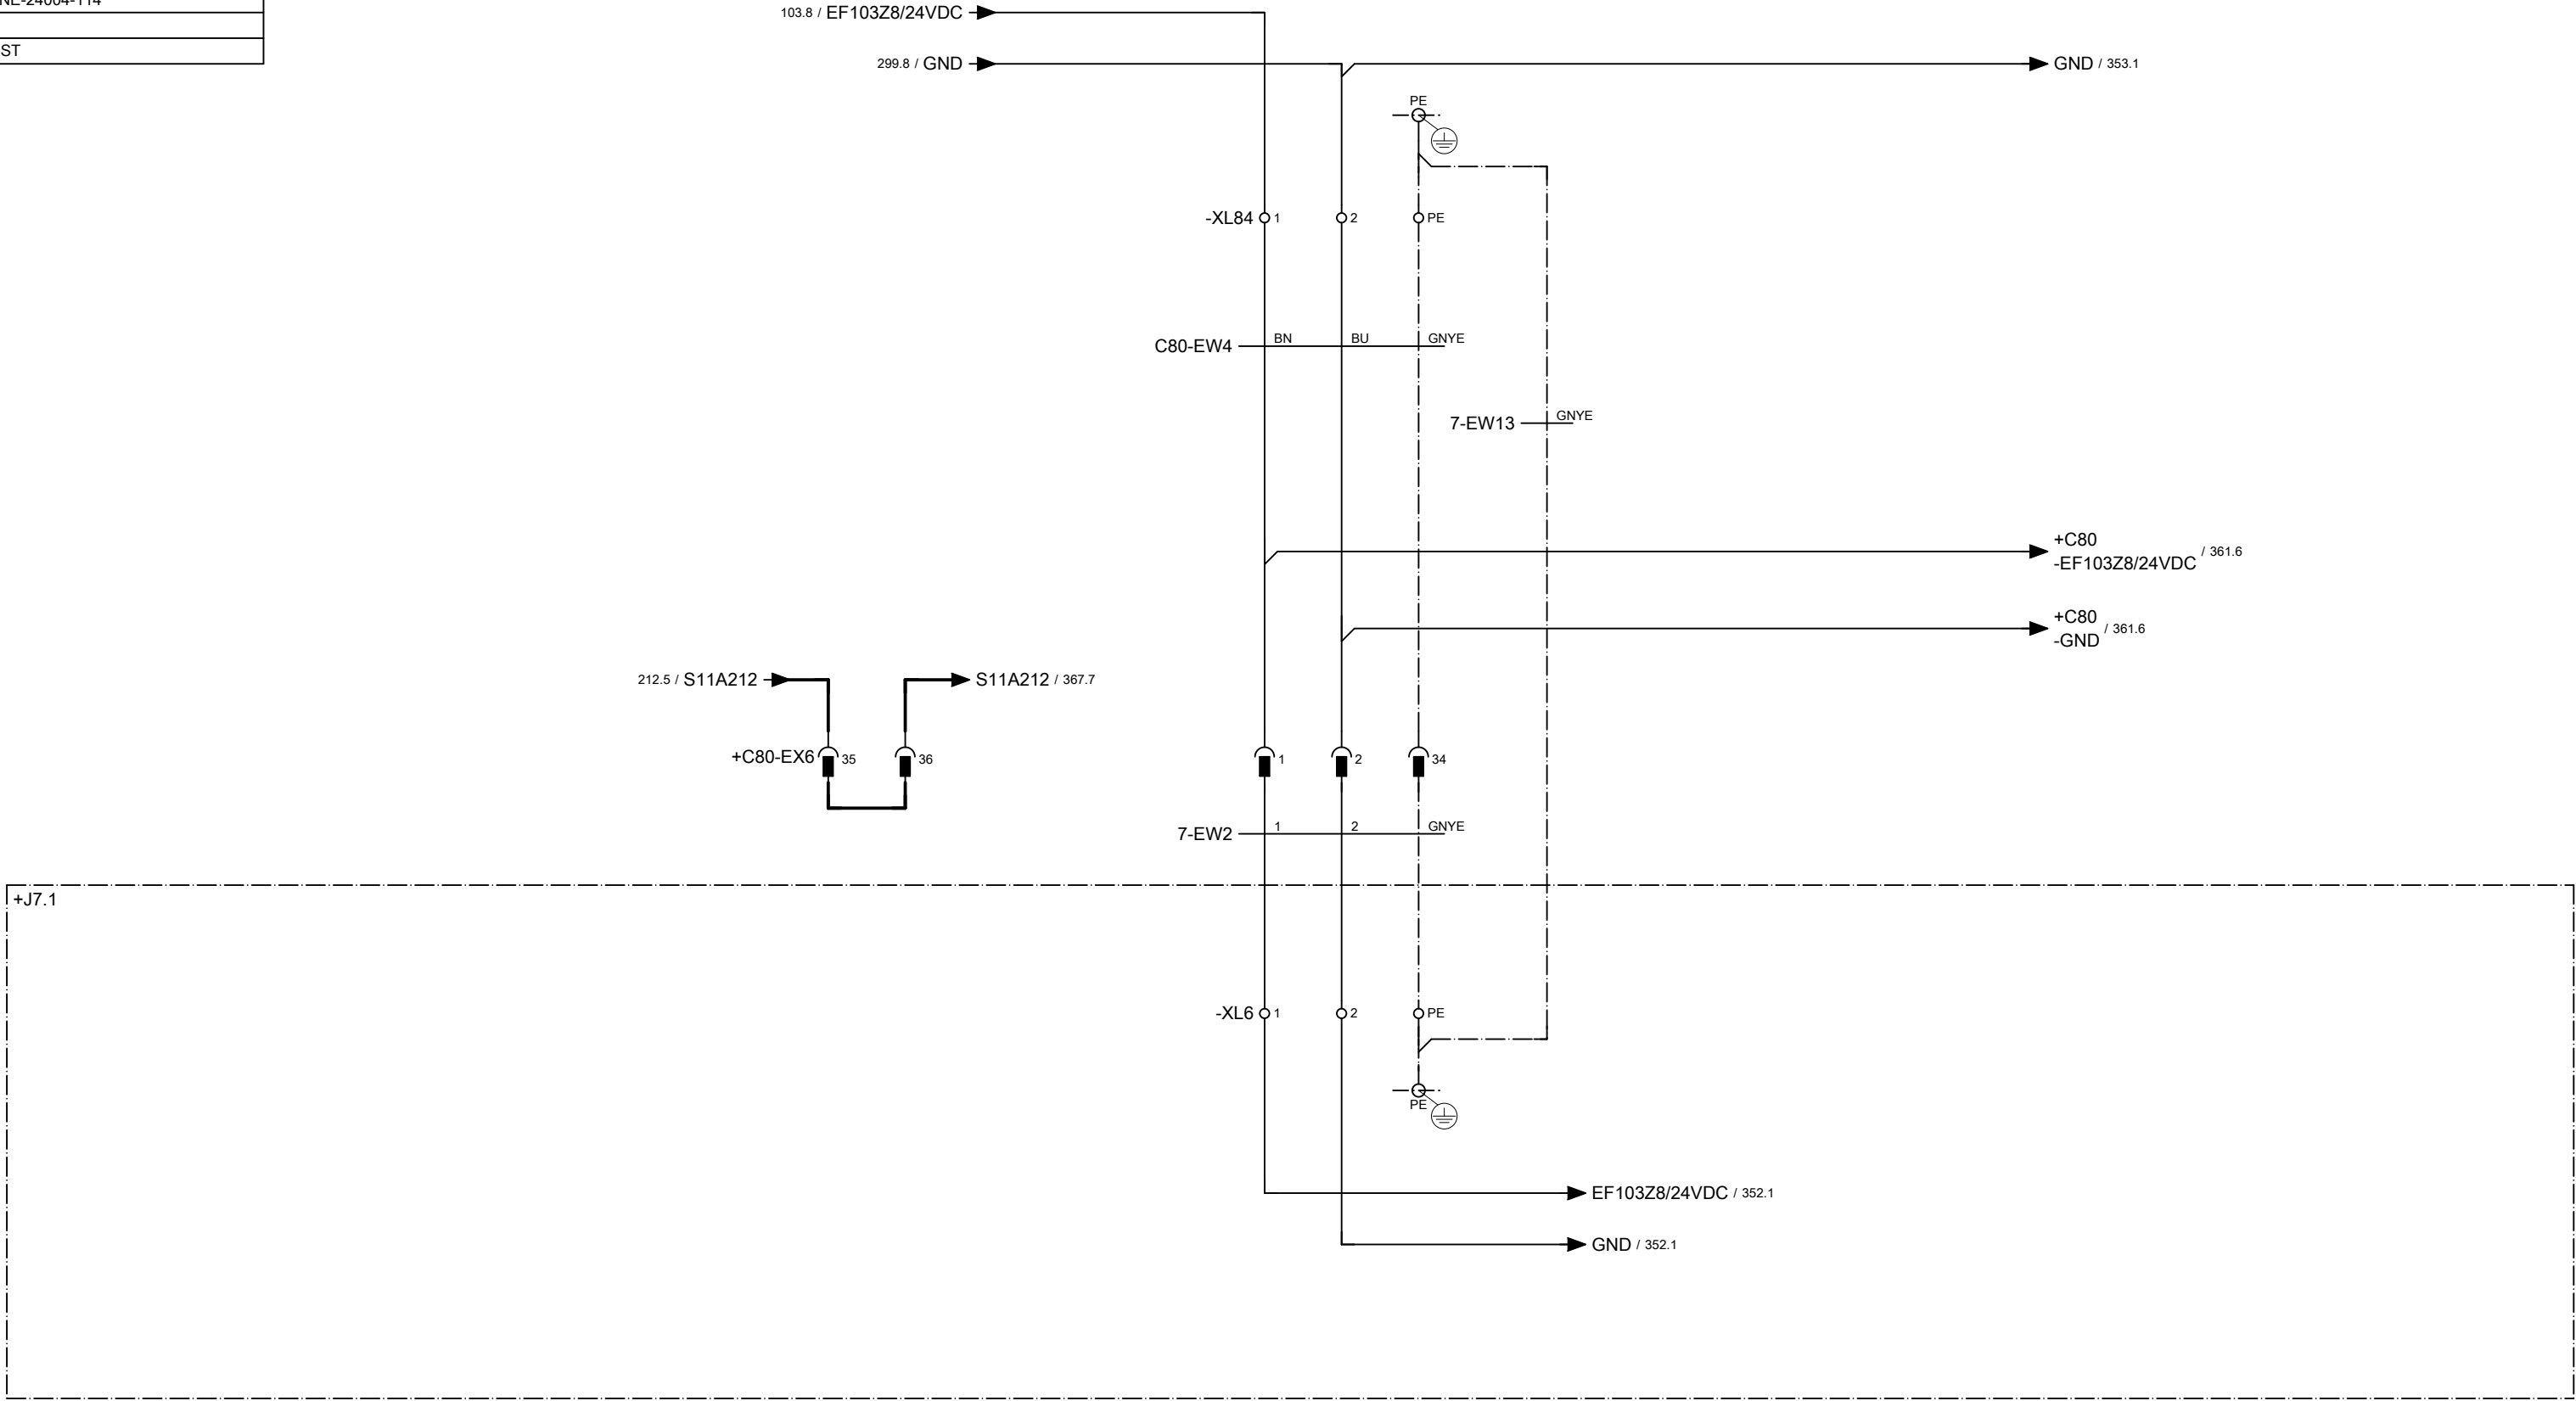

			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 351.01	Replacement of	Replaced by



Bühler AG - Die Casting

Safety gate left manual

ESM-85061

Ecoline


EN


Page

351

= A

+ C72

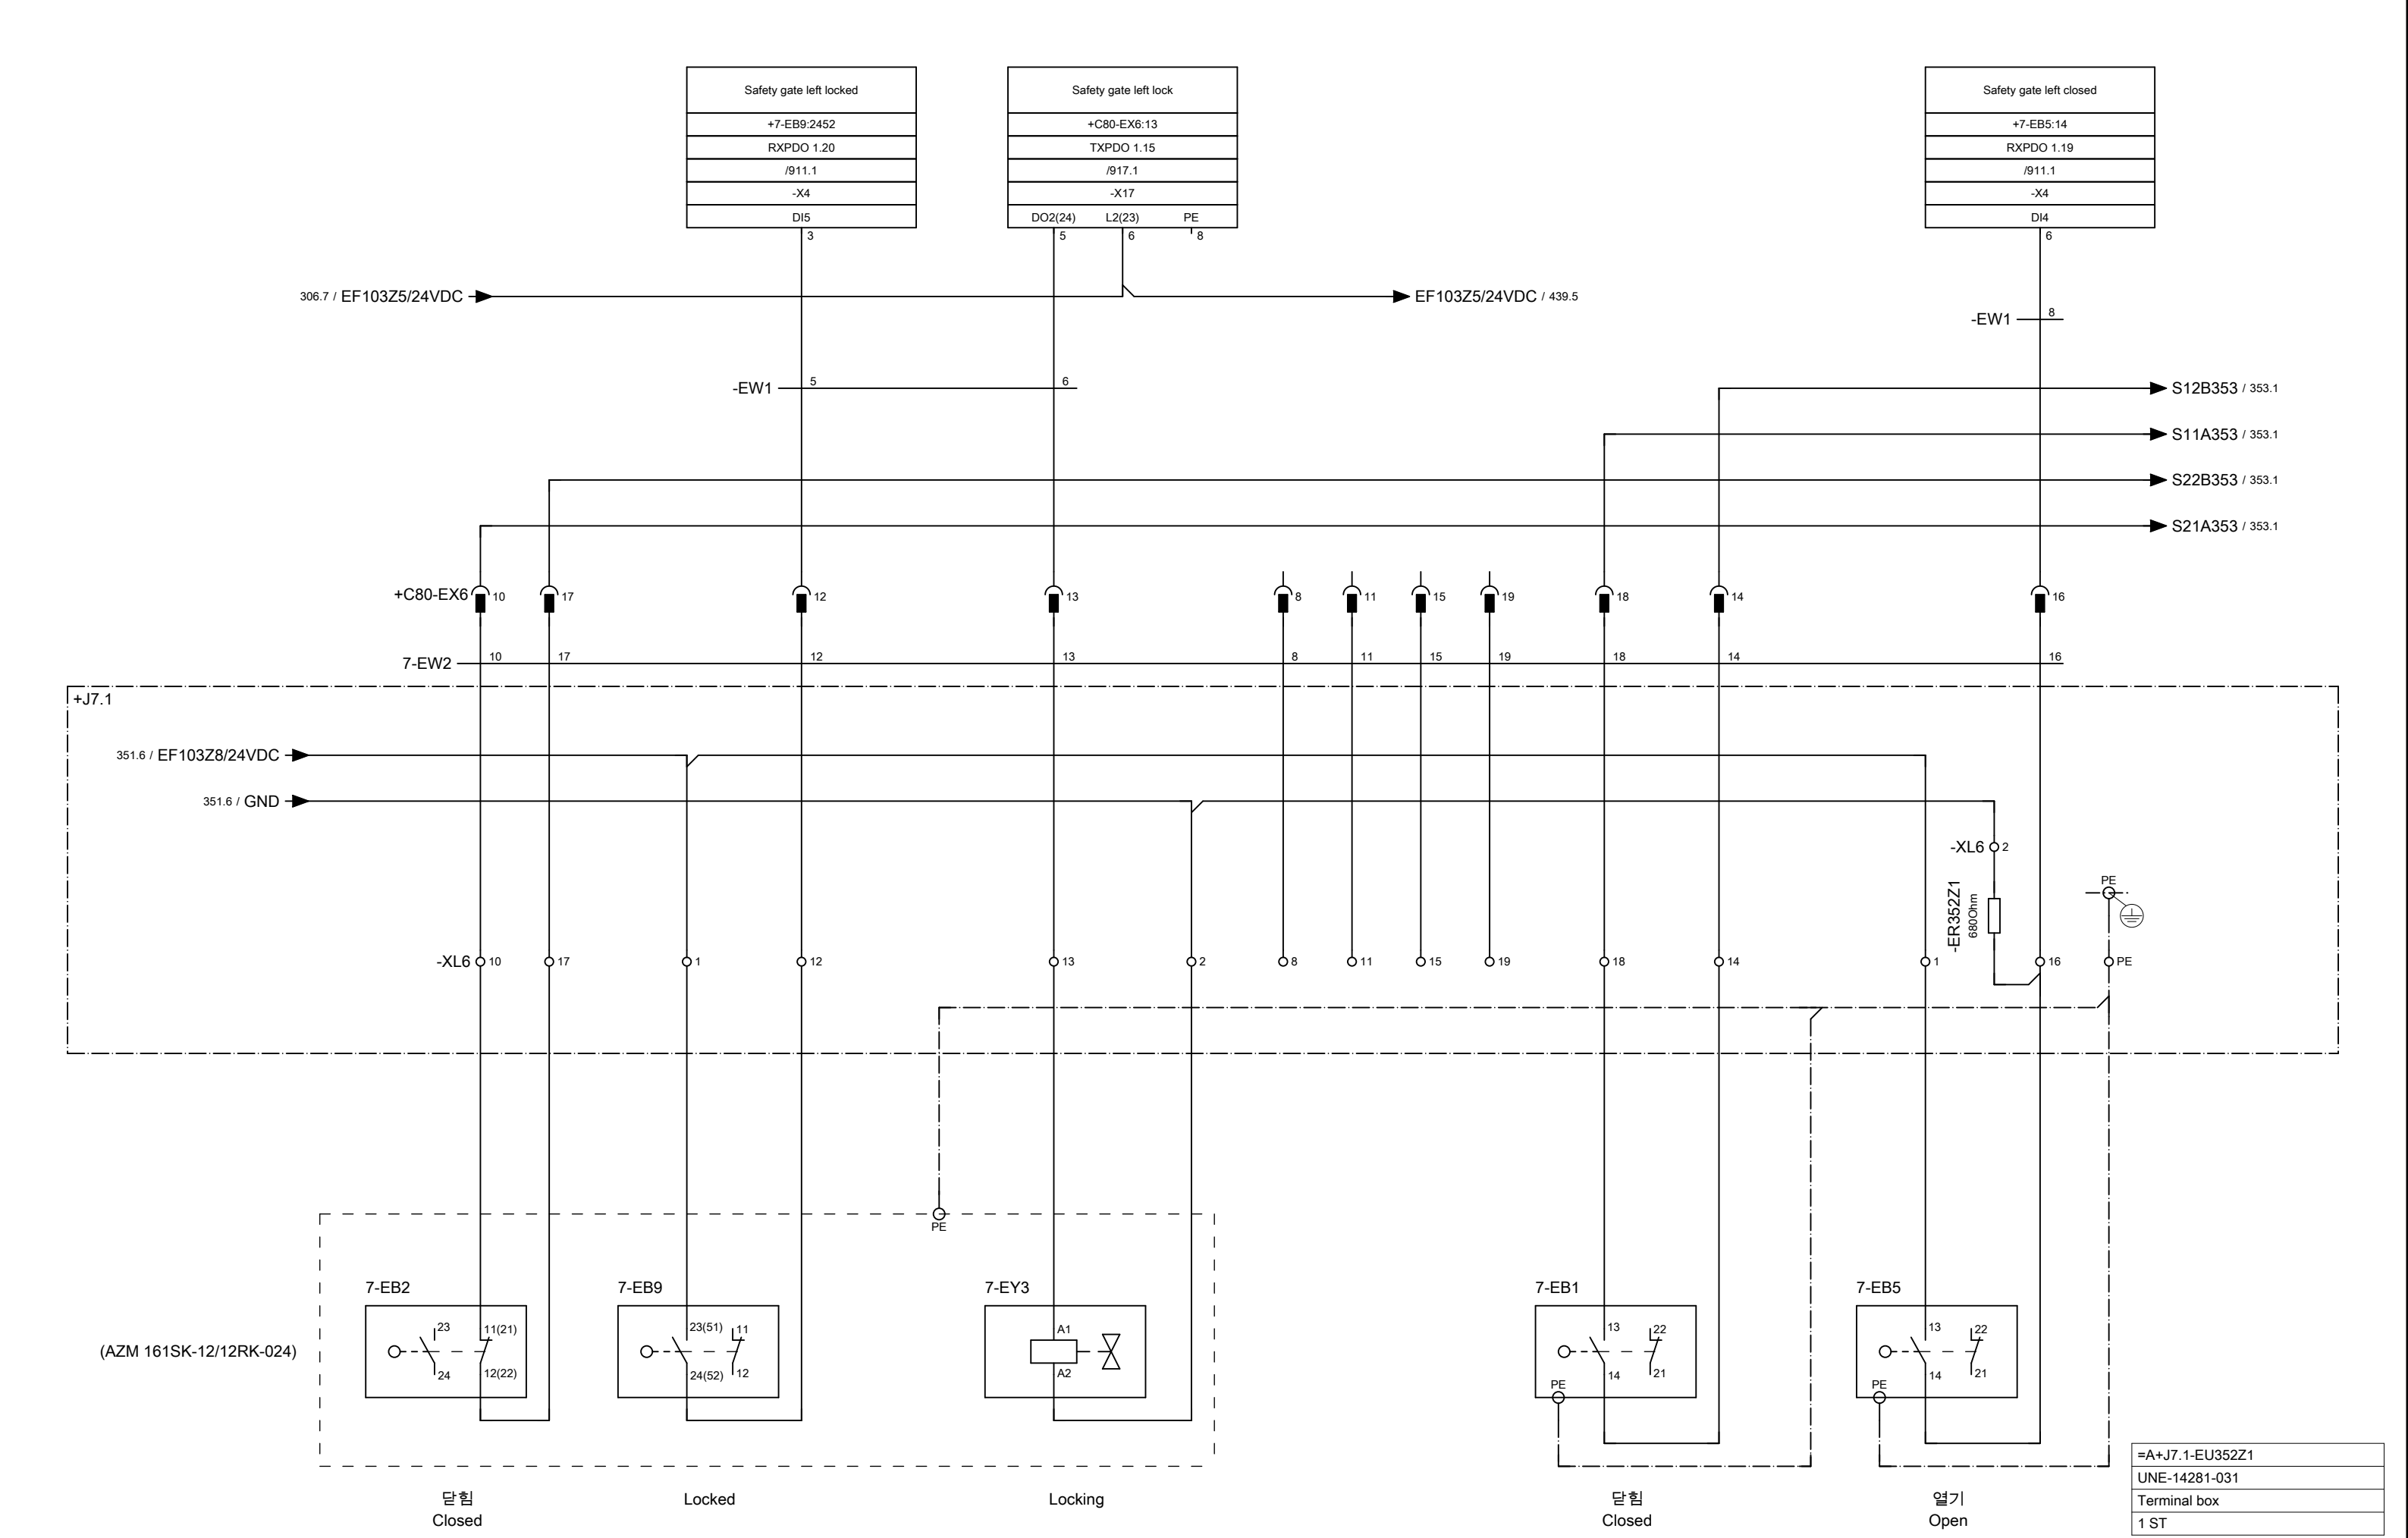

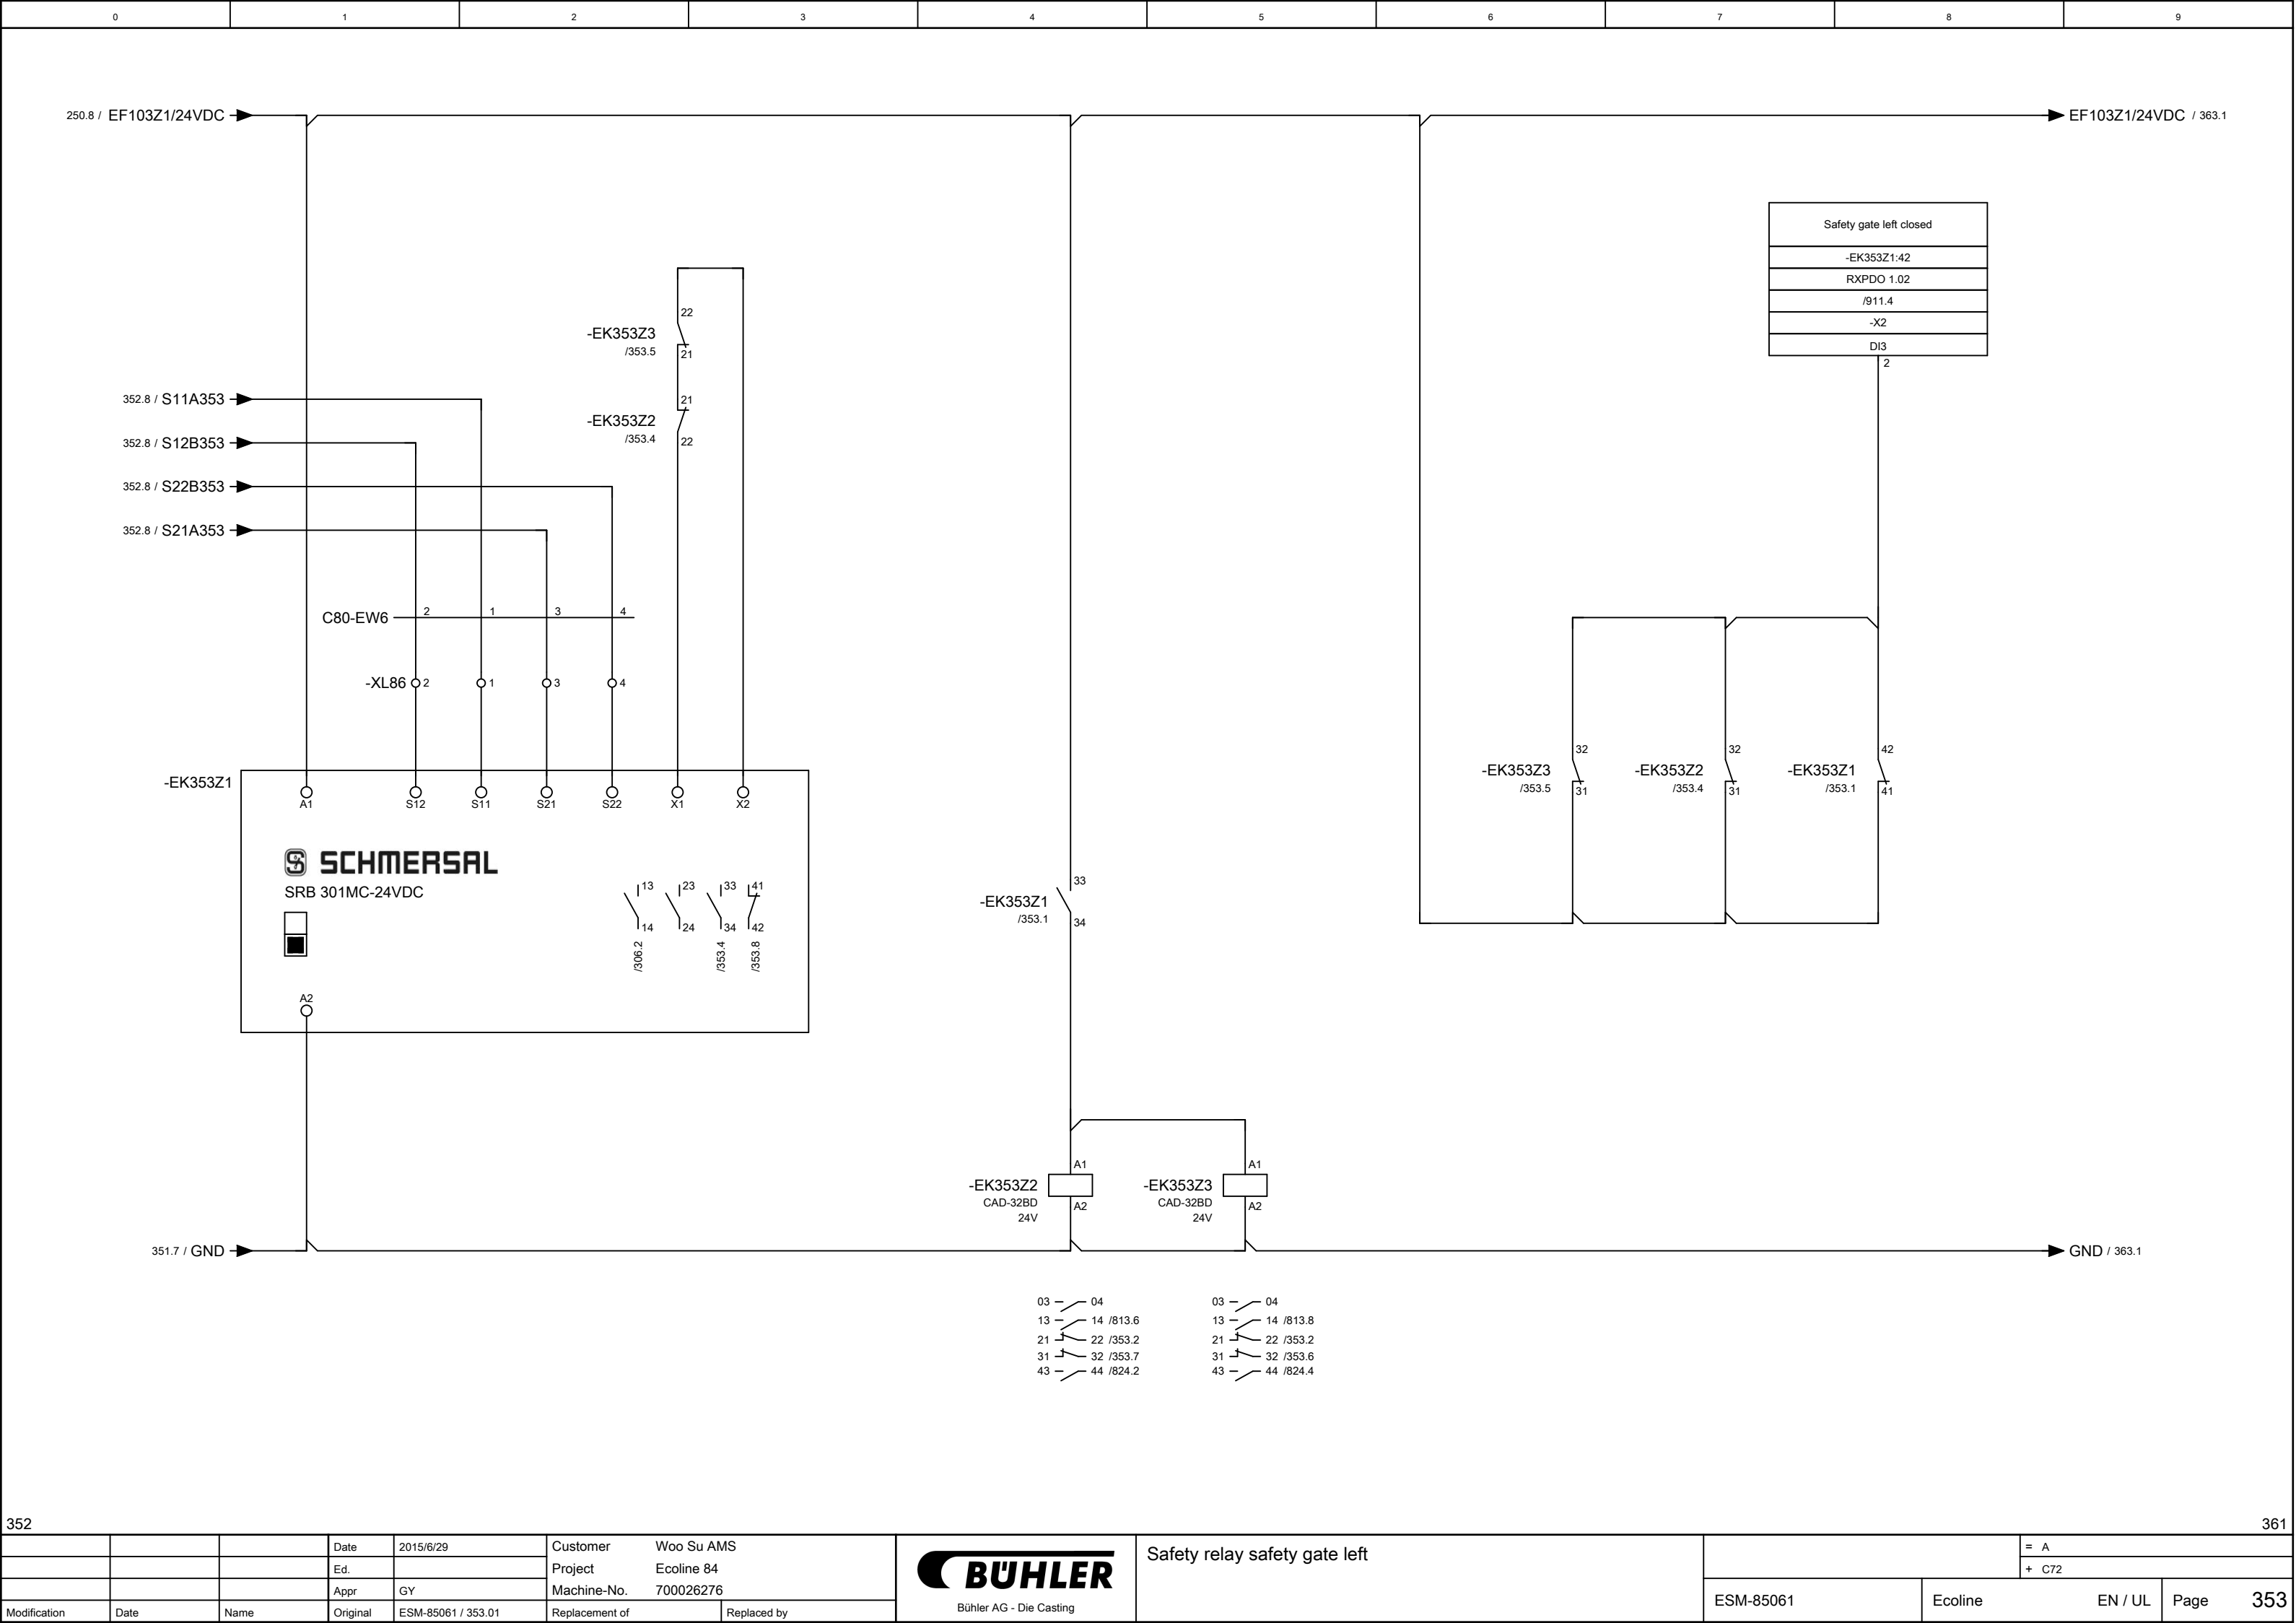


352

361

			Date	2015/6/29	Customer	Woo Su AMS	BUHLER Bühler AG - Die Casting	Safety relay safety gate left			= A	
			Ed.		Project	Ecoline 84				+ C72		
			Appr	GY	Machine-No.	700026276						
Modification	Date	Name	Original	ESM-85061 / 353.01	Replacement of	Replaced by						




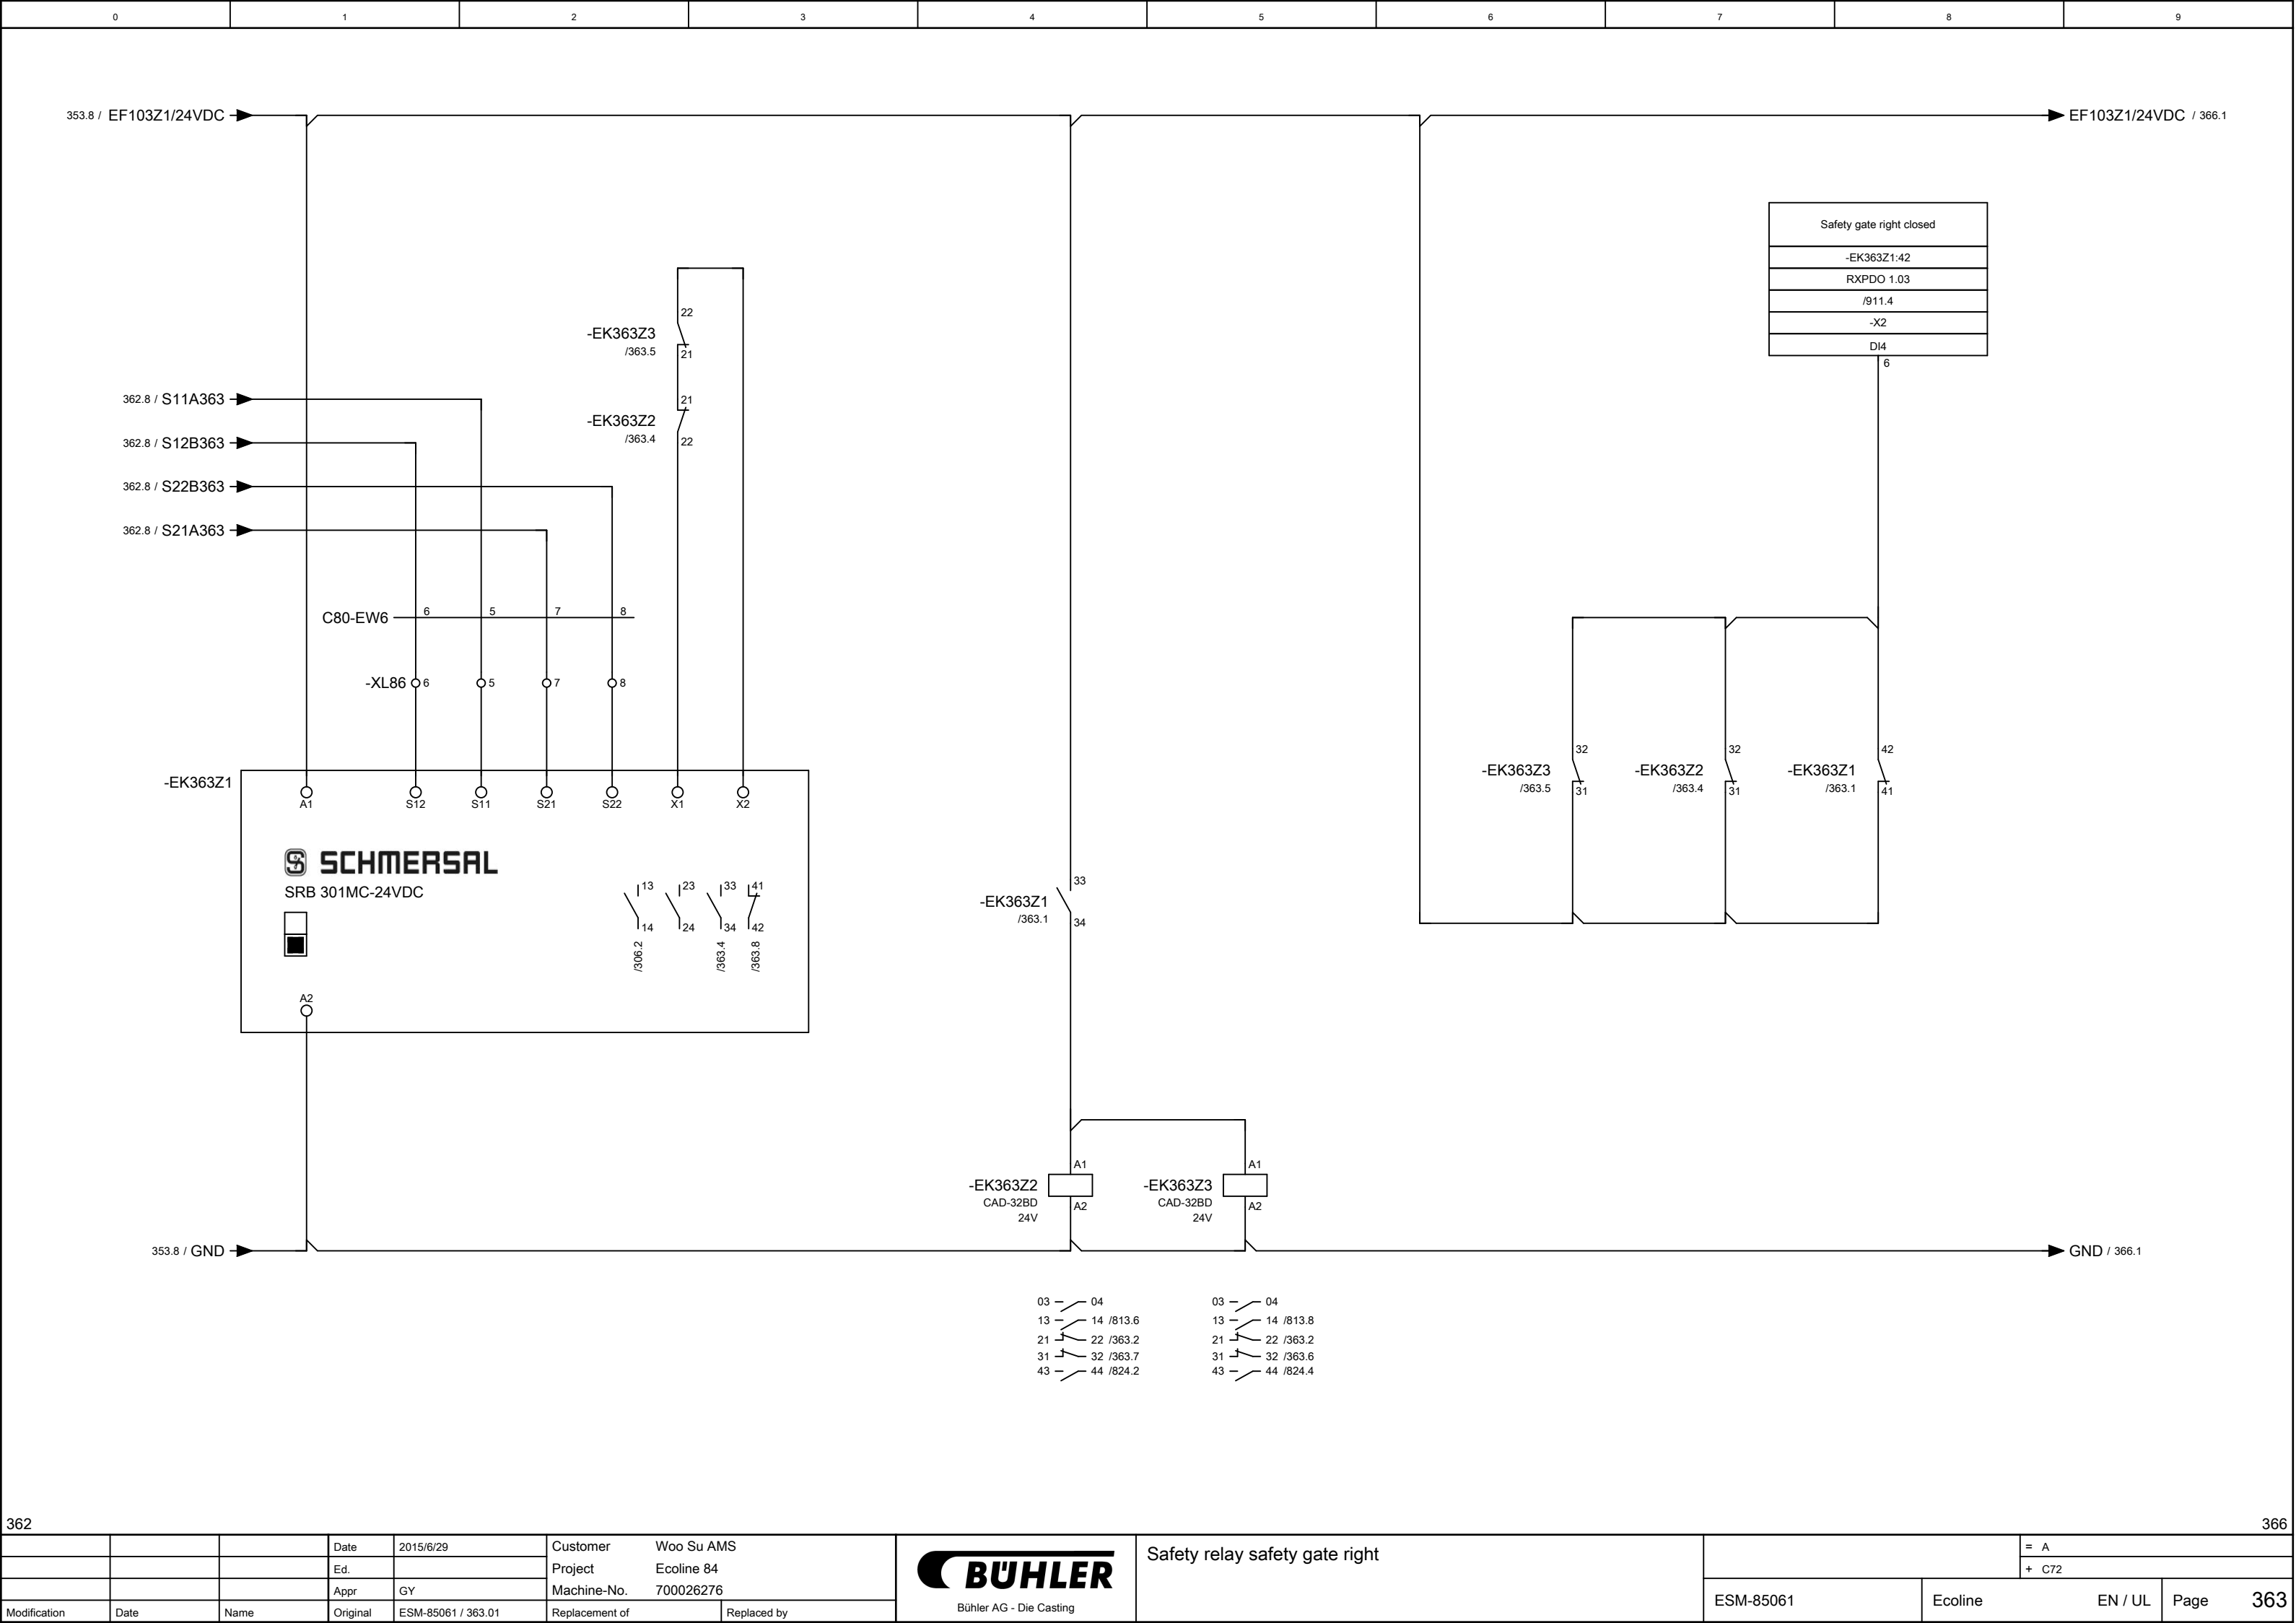



362


366


			Date	2015/6/29	Customer	Woo Su AMS	BUHLER Bühler AG - Die Casting	Safety relay safety gate right			= A	
			Ed.	Project	Ecoline 84	+ C72						
			Appr	GY	Machine-No.	700026276						
Modification	Date	Name	Original	ESM-85061 / 363.01	Replacement of	Replaced by						

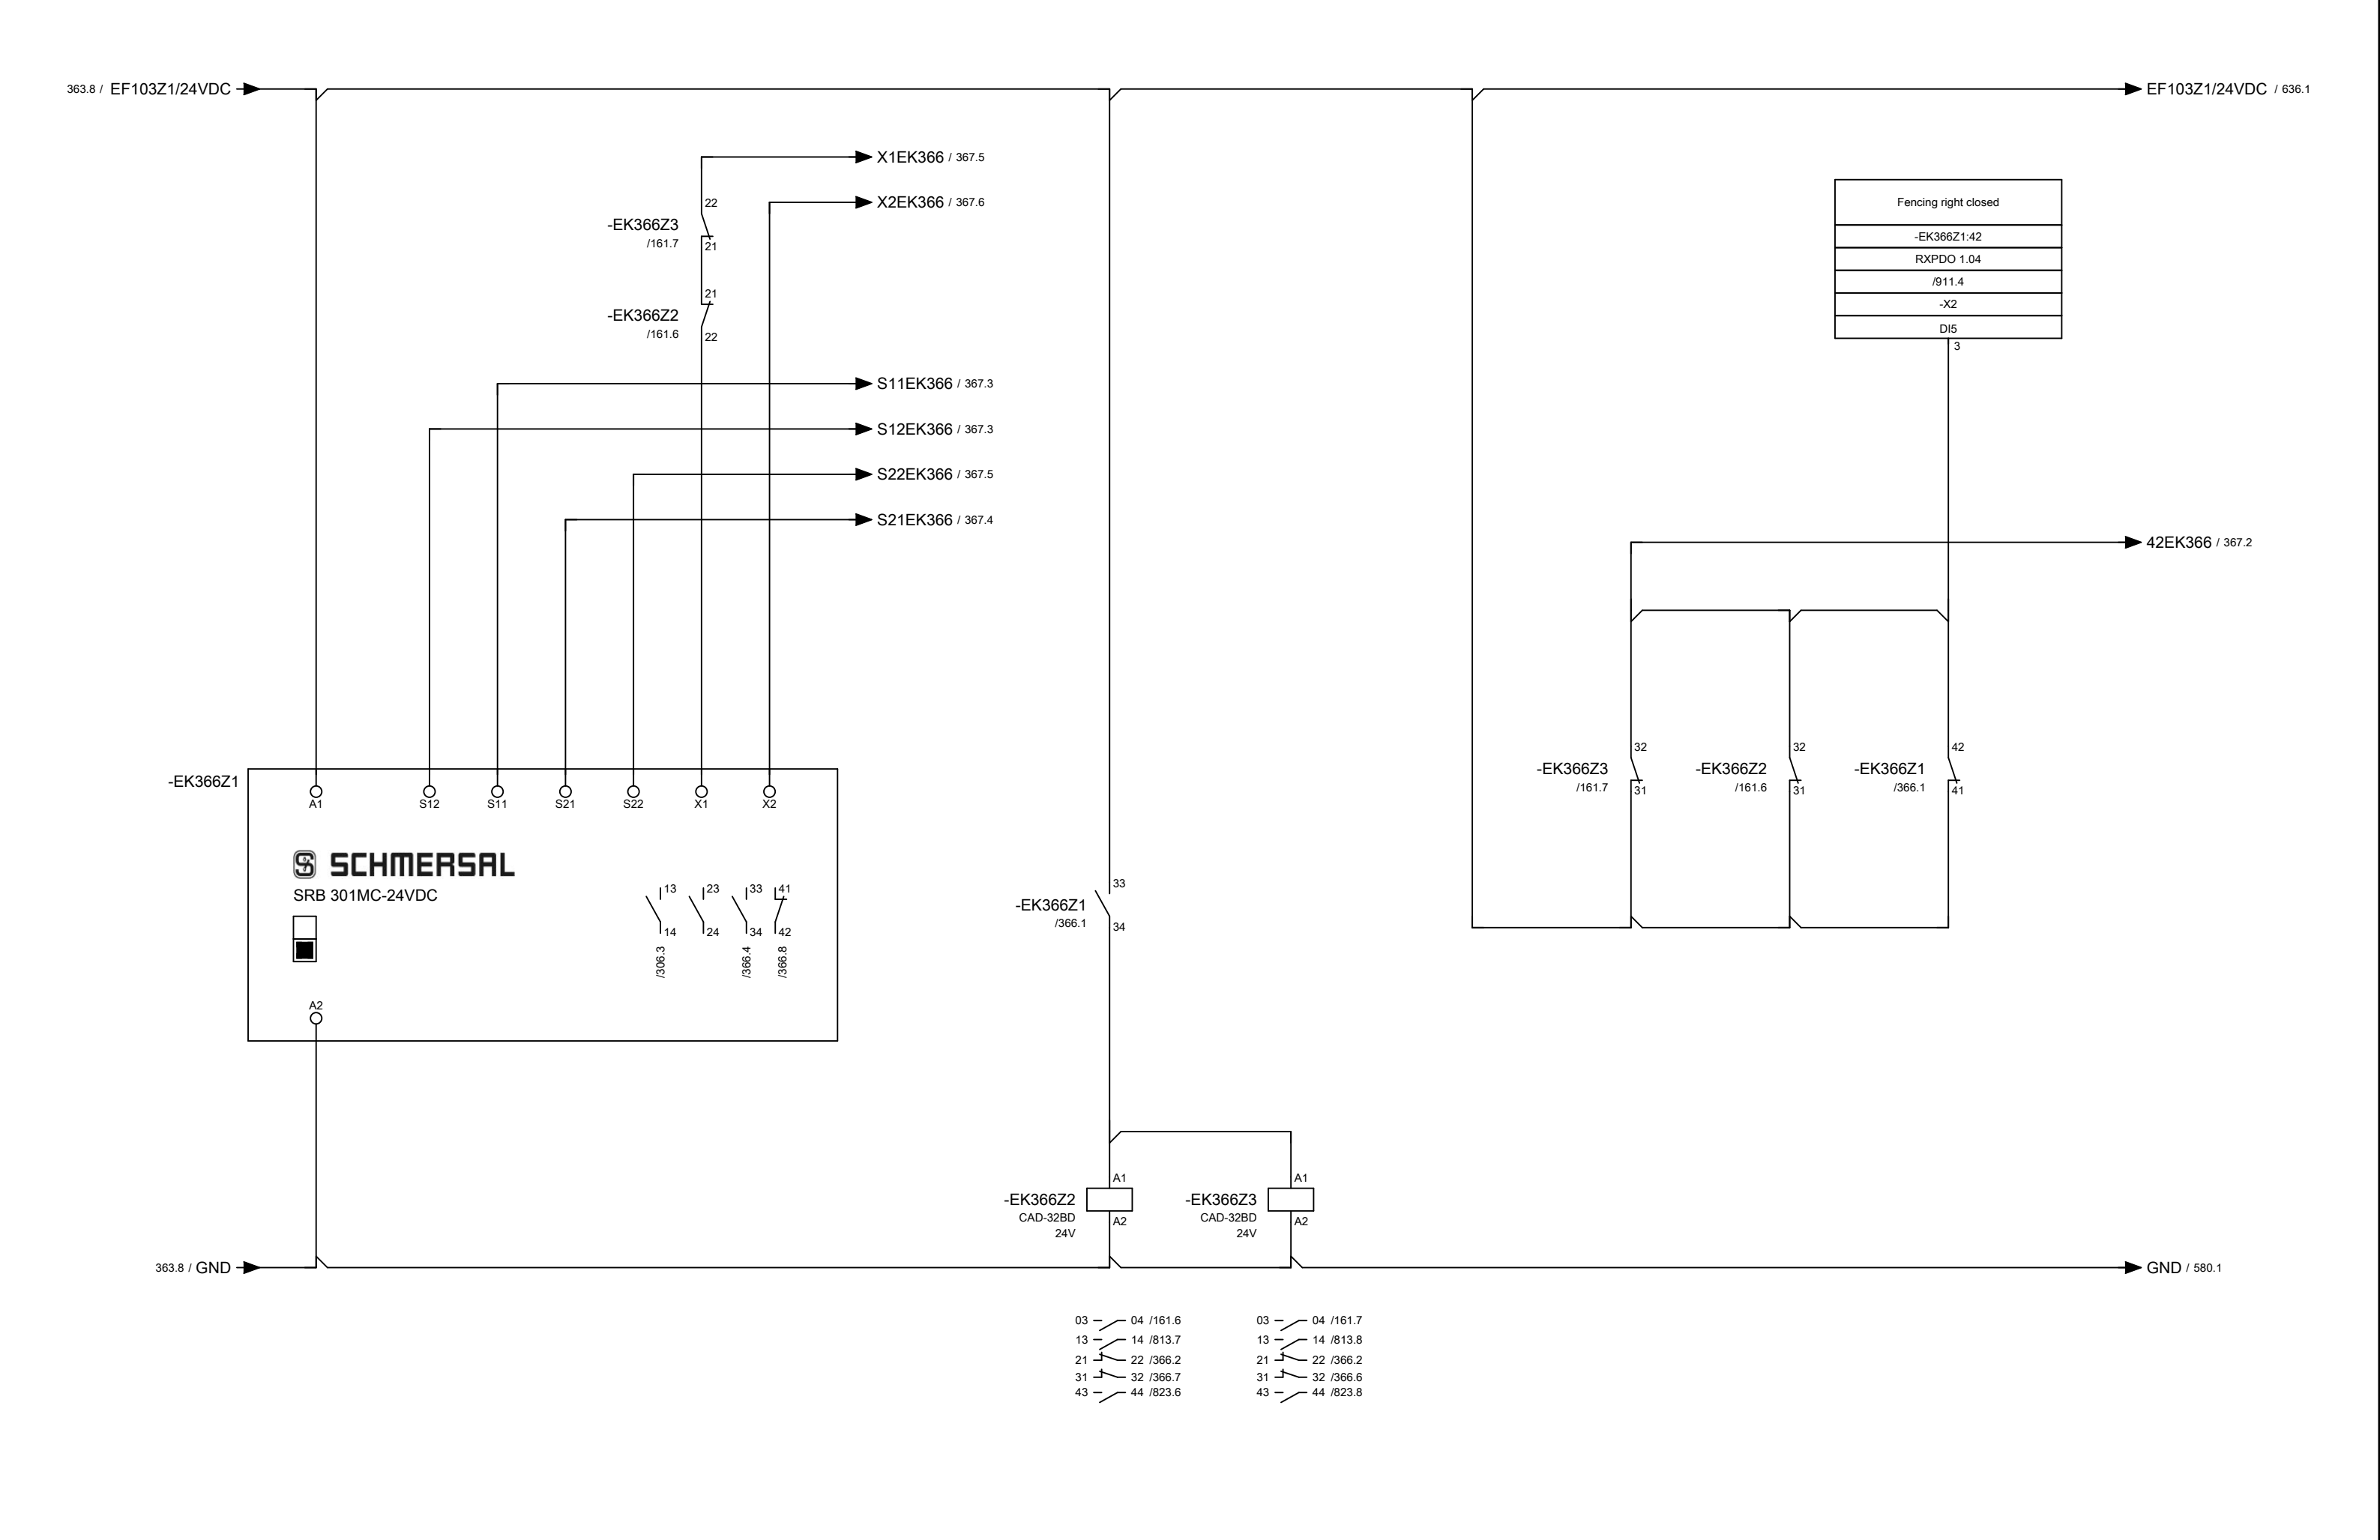

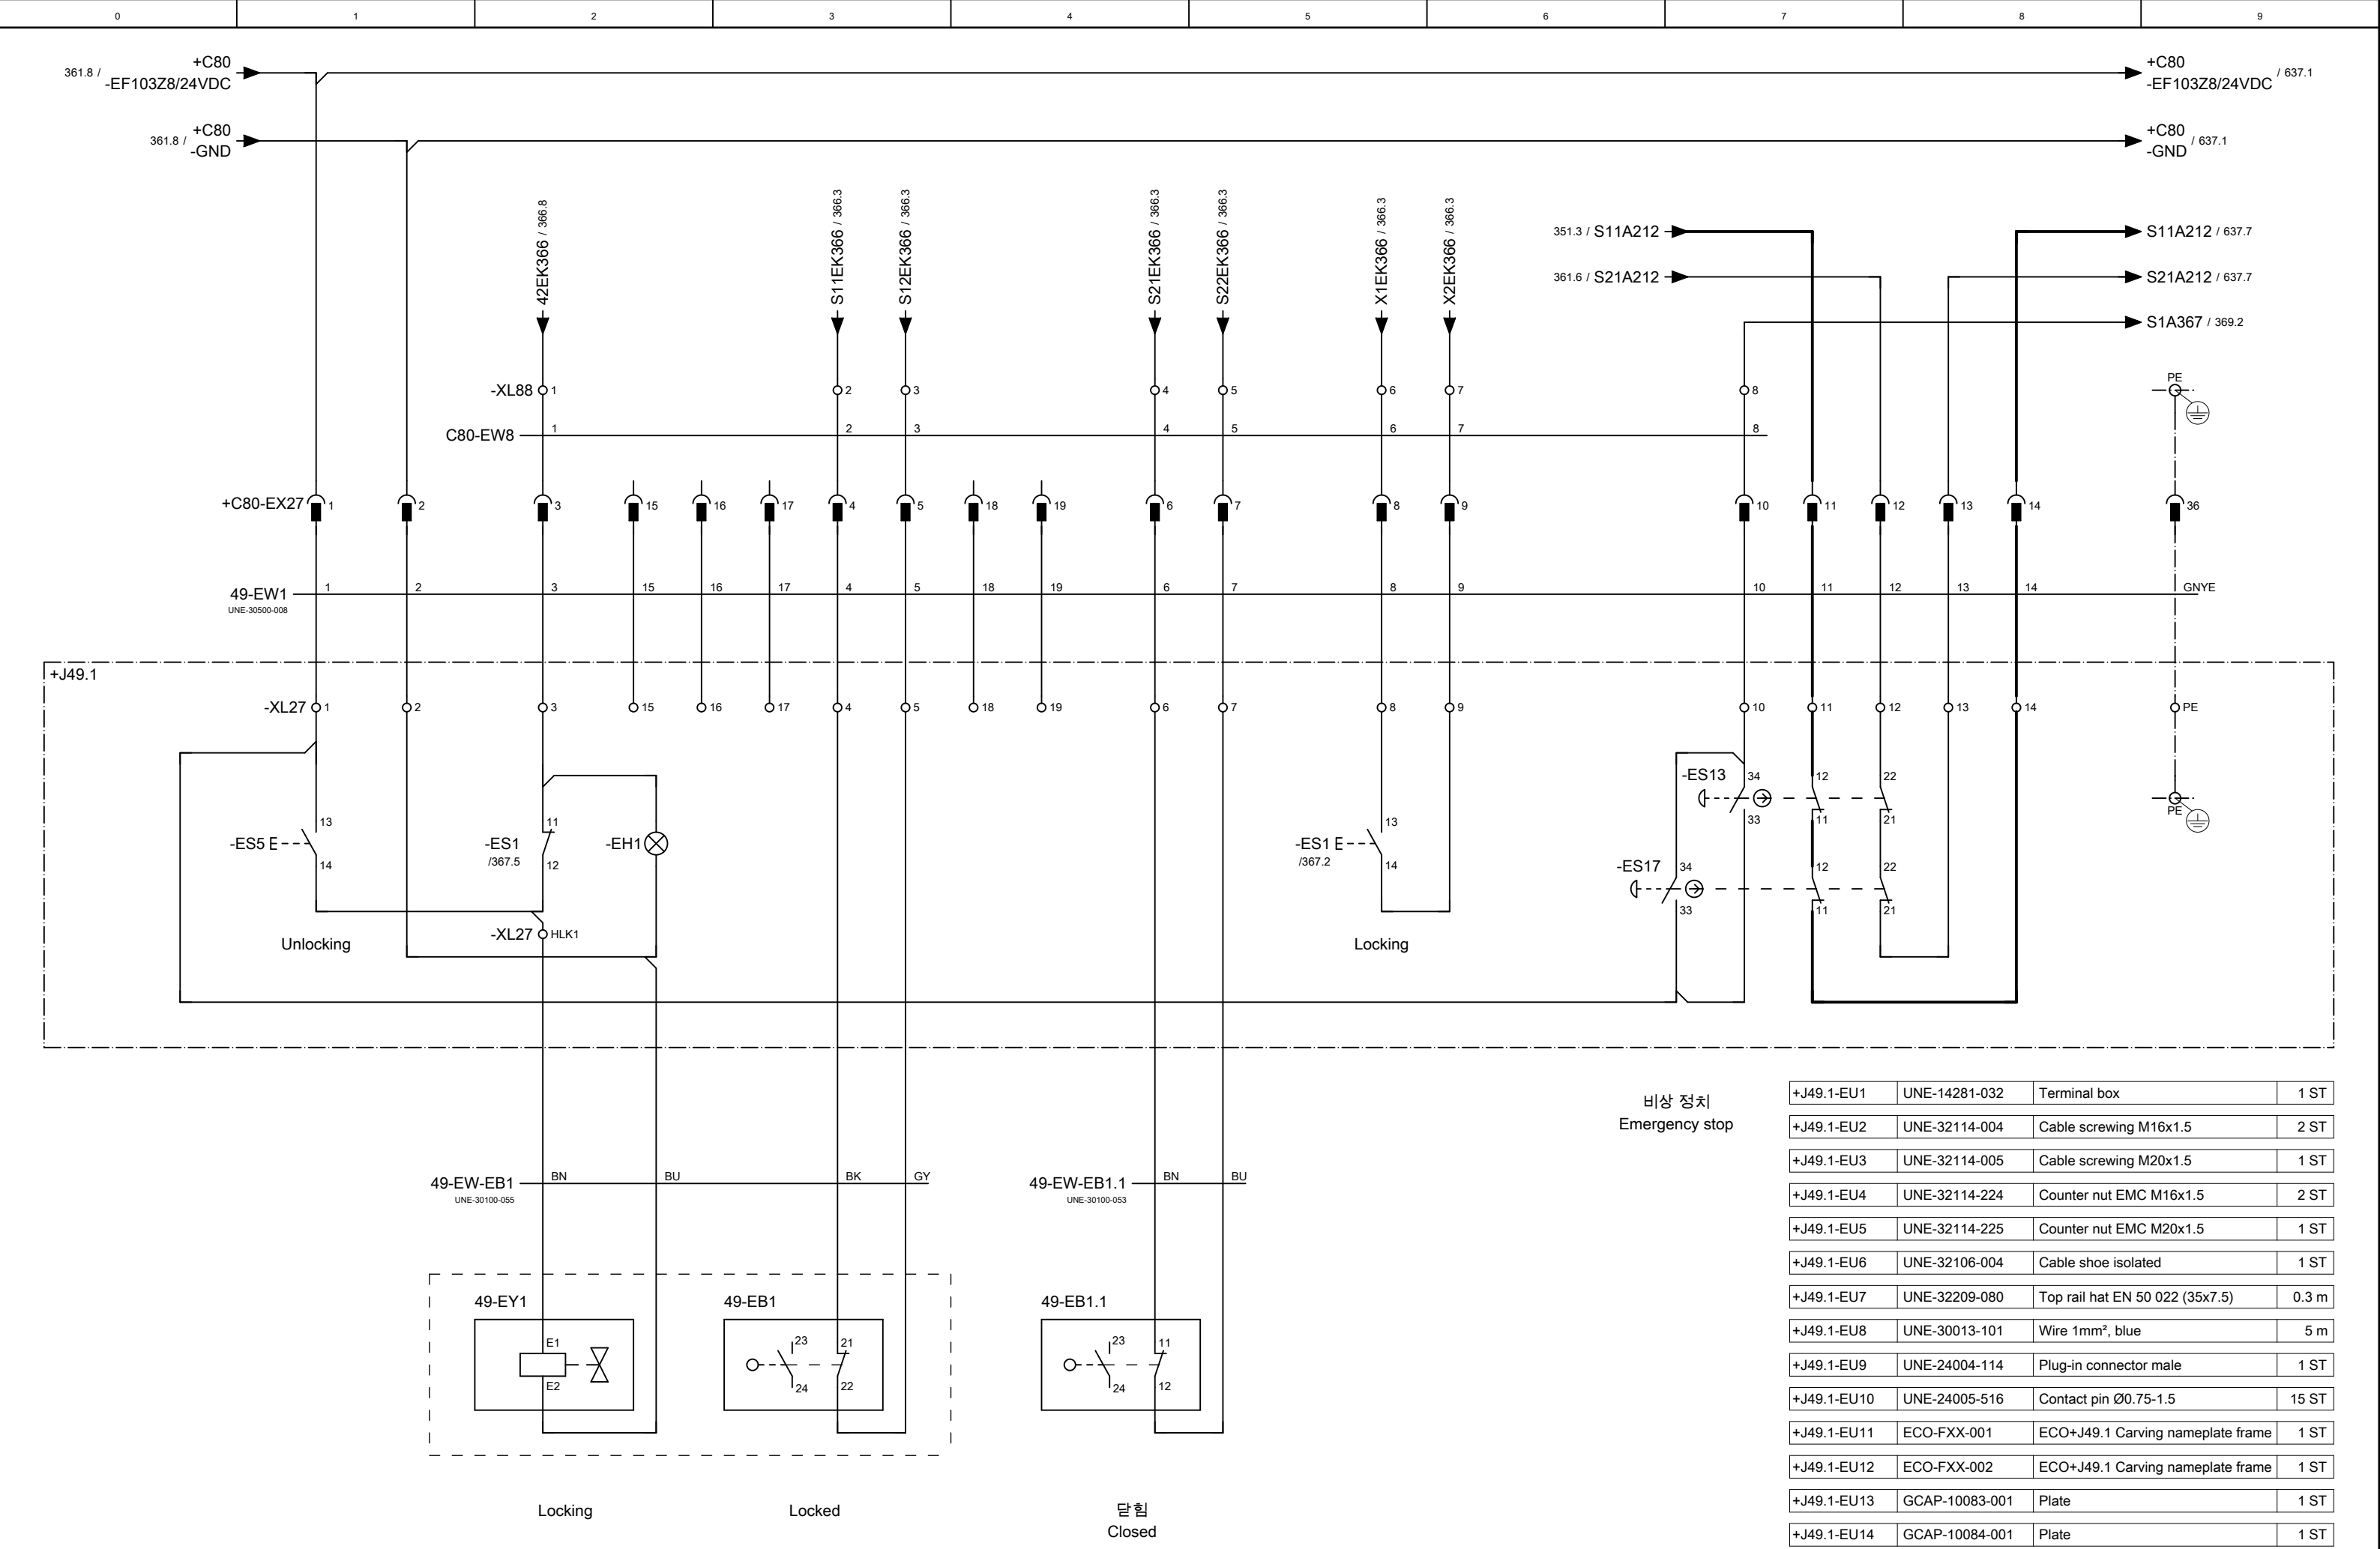

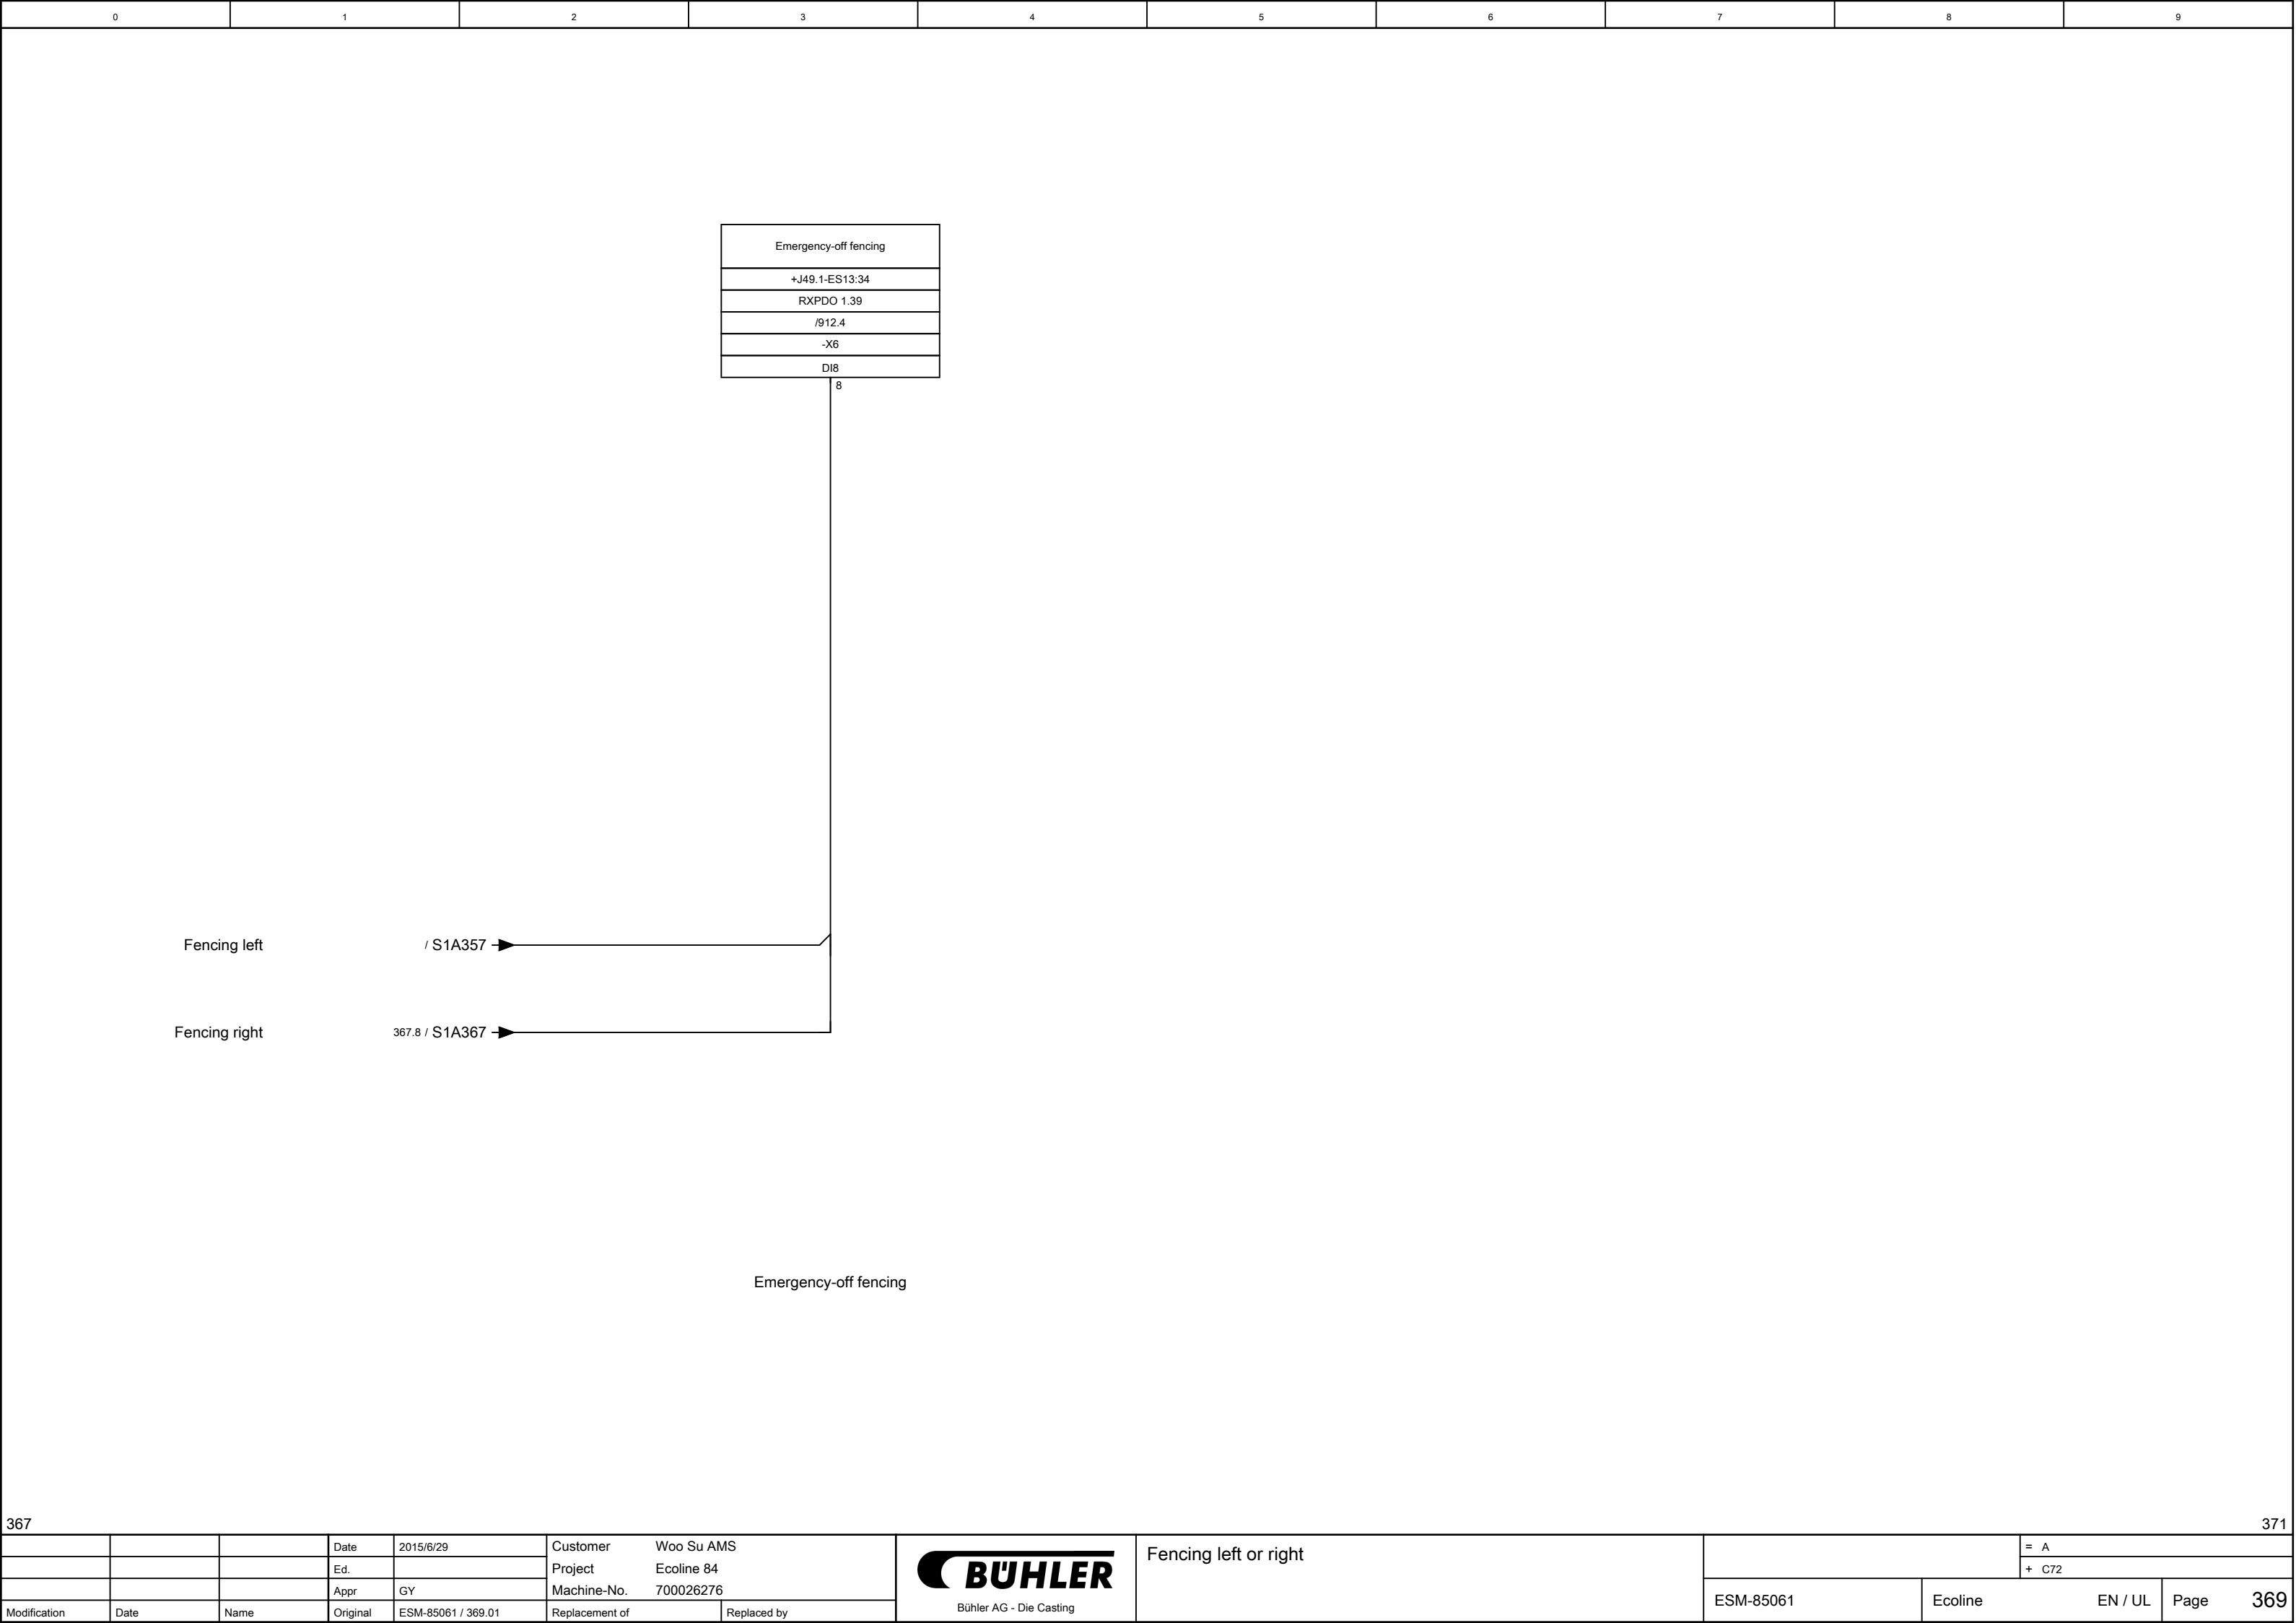

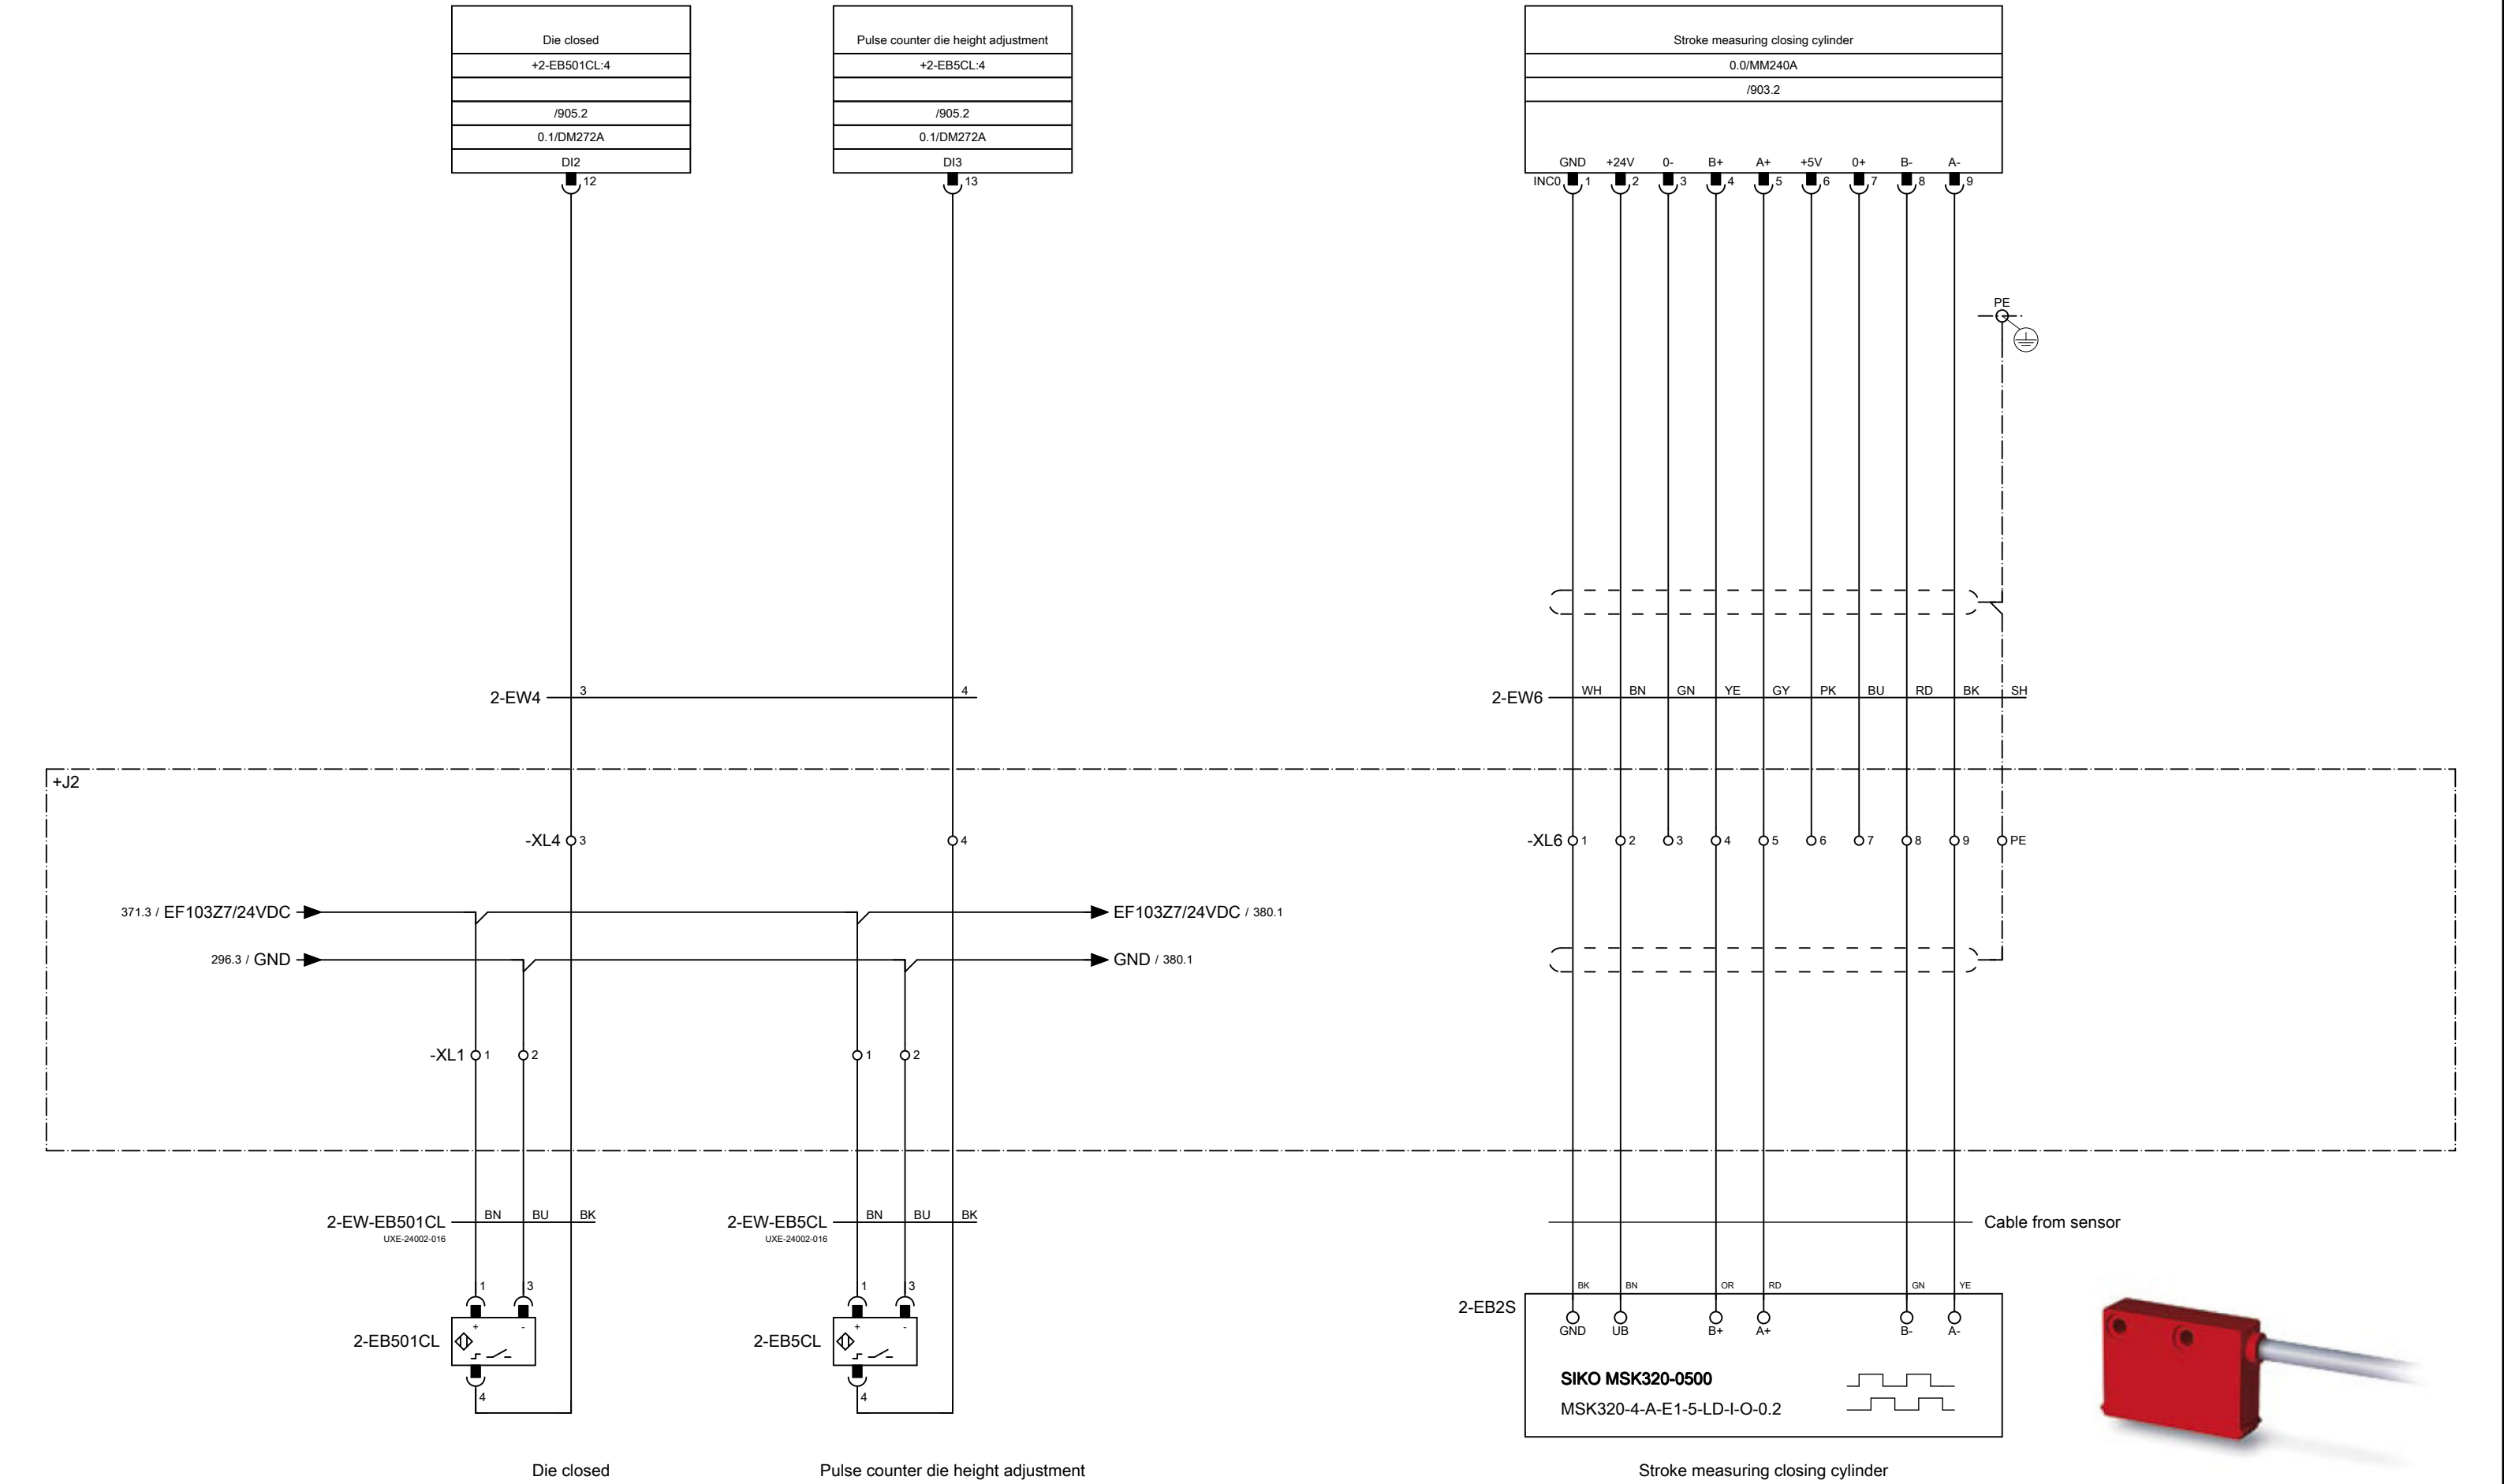

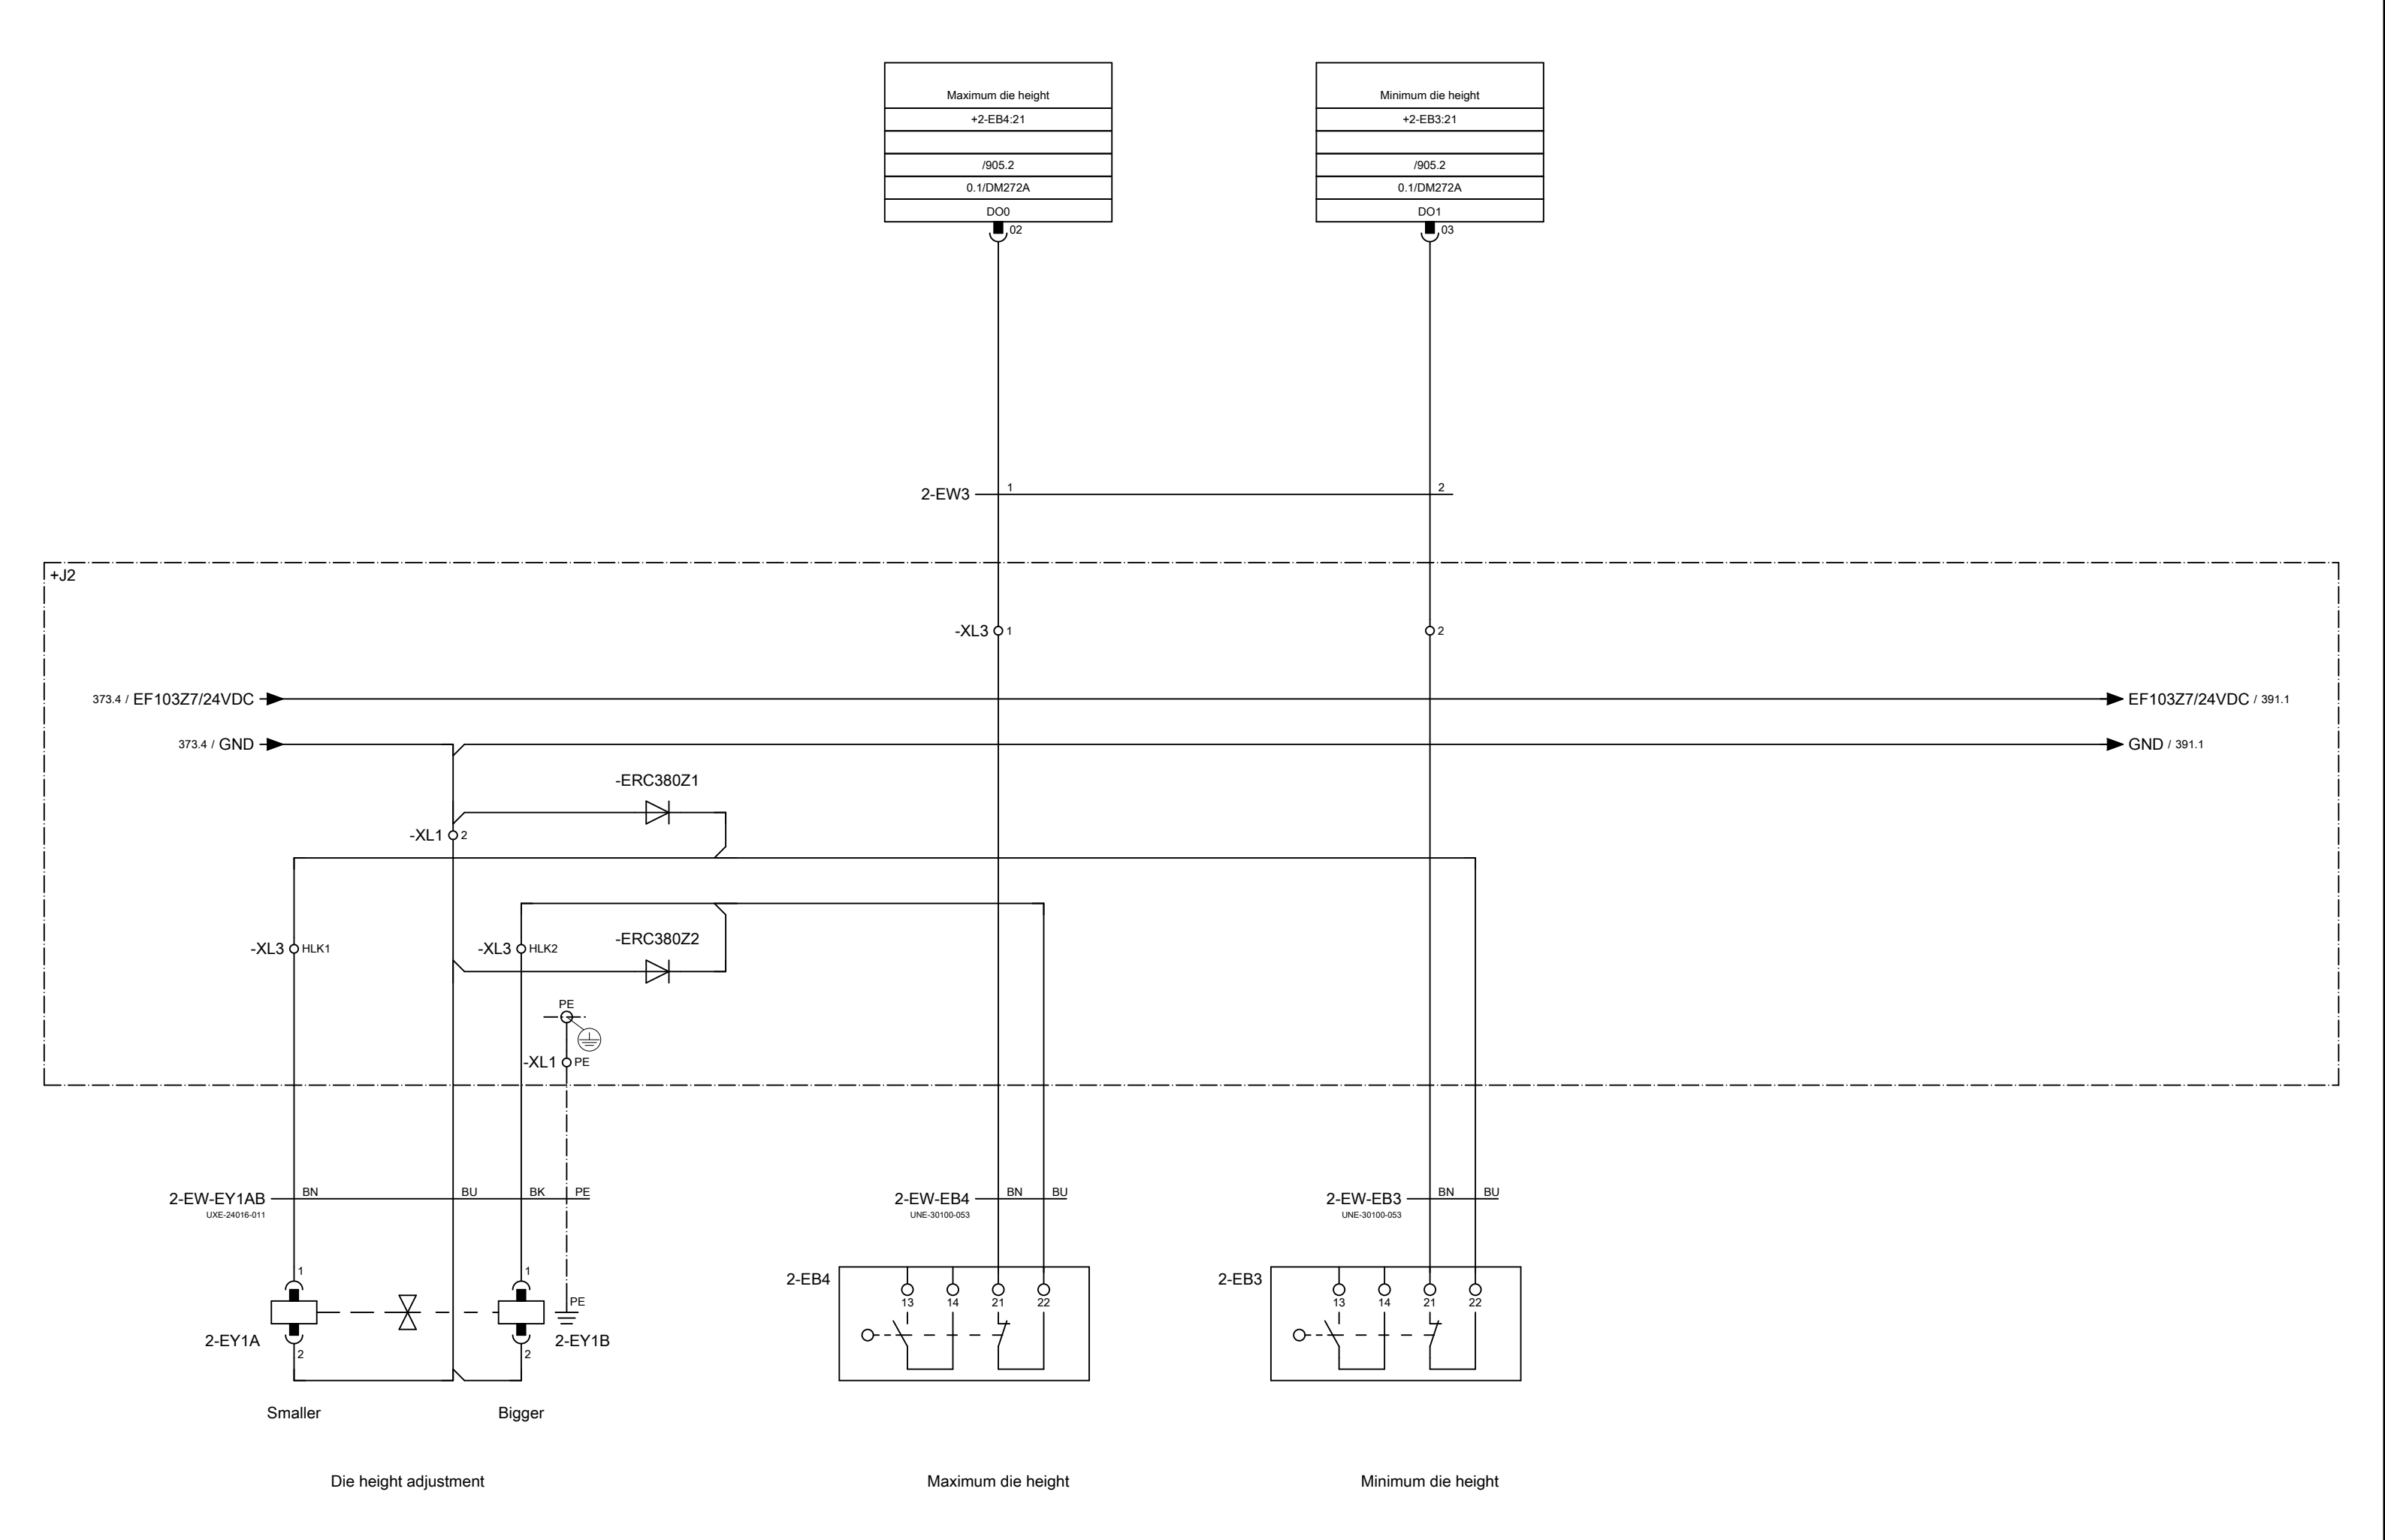

Closing security solve
+J2-XL3:8
/905.2
0.1/DM272A
DO7

09

2-EW3 8

-XL3 8

Closing security solved
+J2-XL5:1
RXPDO 1.48
/914.1
-X8
DI1

1

2-EW5 1

-XL5 1

Closing security clamped
+J2-XL5:2
RXPDO 1.49
/914.1
-X8
DI2

5

RES:2-EW5

2-EW5

2 3 8

-XL5 2

3

4

+J2

Closing security solve

Closing security solved

Closing security clamped


			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 382.05	Replacement of	Replaced by



Bühler AG - Die Casting

Without mechanical locking security

		= A	
		+ C72	
ESM-85061	Ecoline	EN	Page 382

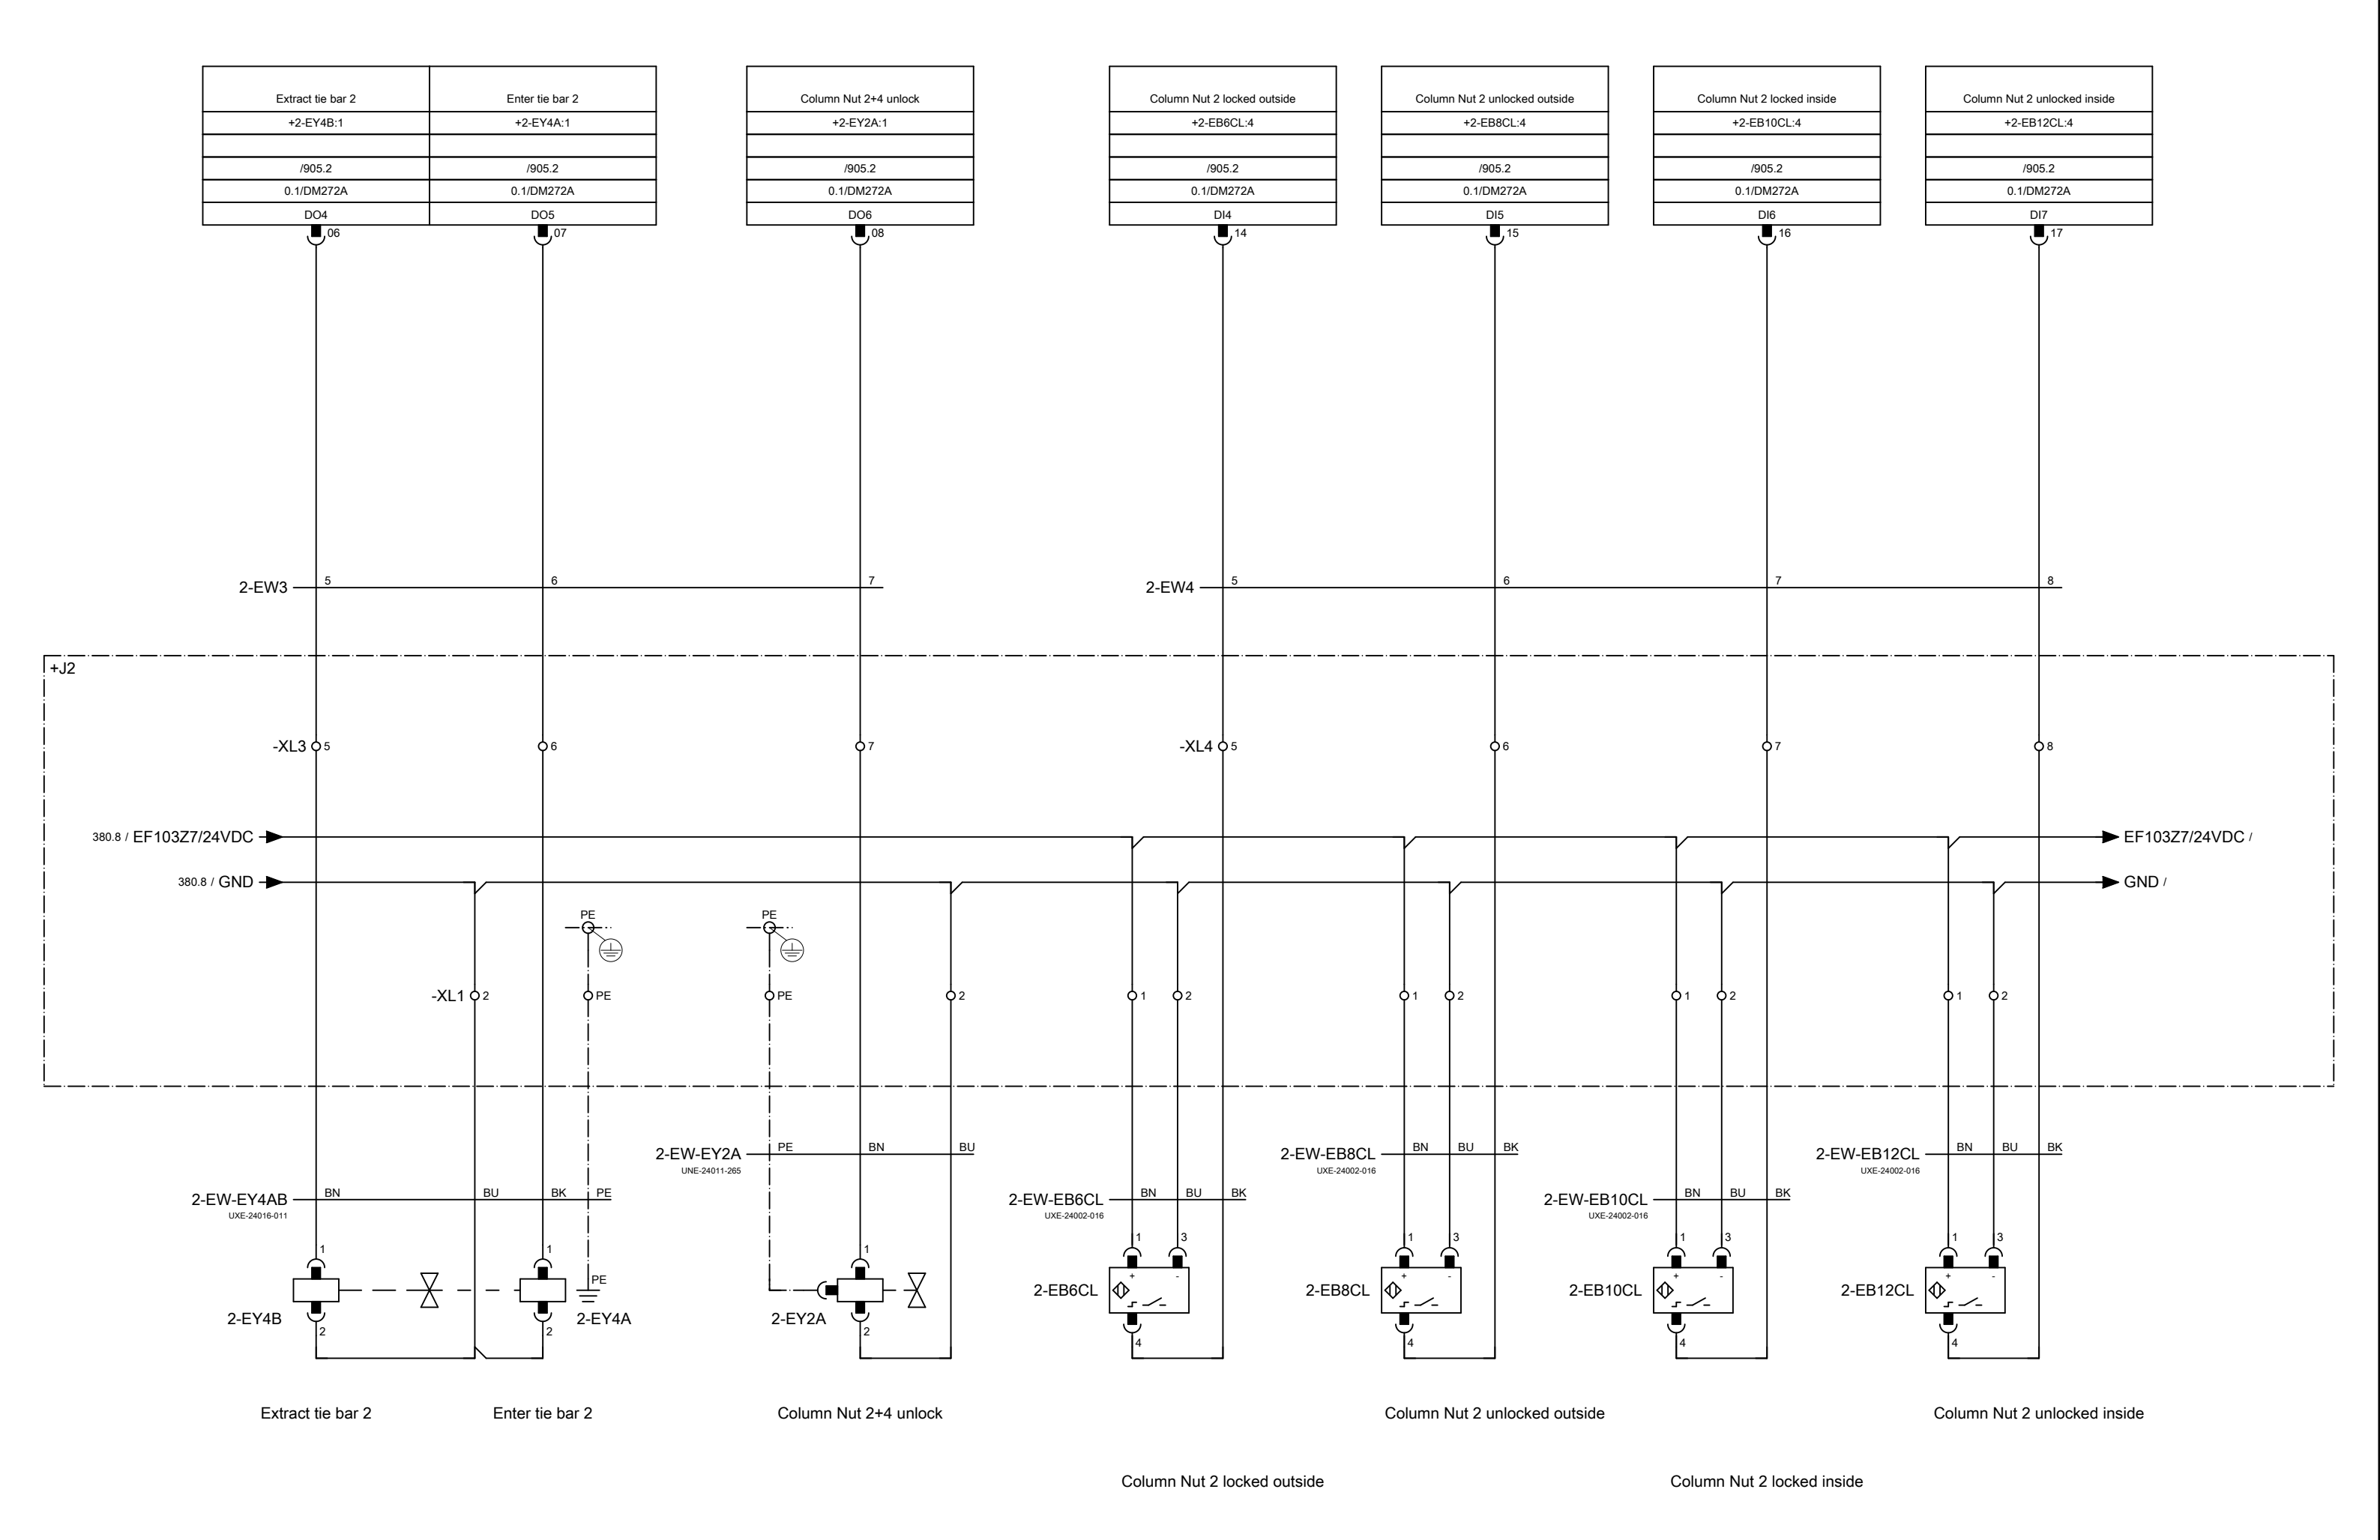

Extract tie bar 4	Enter tie bar 4
+J2-XL3:3	+J2-XL3:4
DO2	DO3

04

05

2-EW3

3

4

+J2

-XL3 O 3

O 4

Extract tie bar 4

Enter tie bar 4


			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 394.03	Replacement of	Replaced by



Without withdrawal tie bar No. 4

= A

+ C72

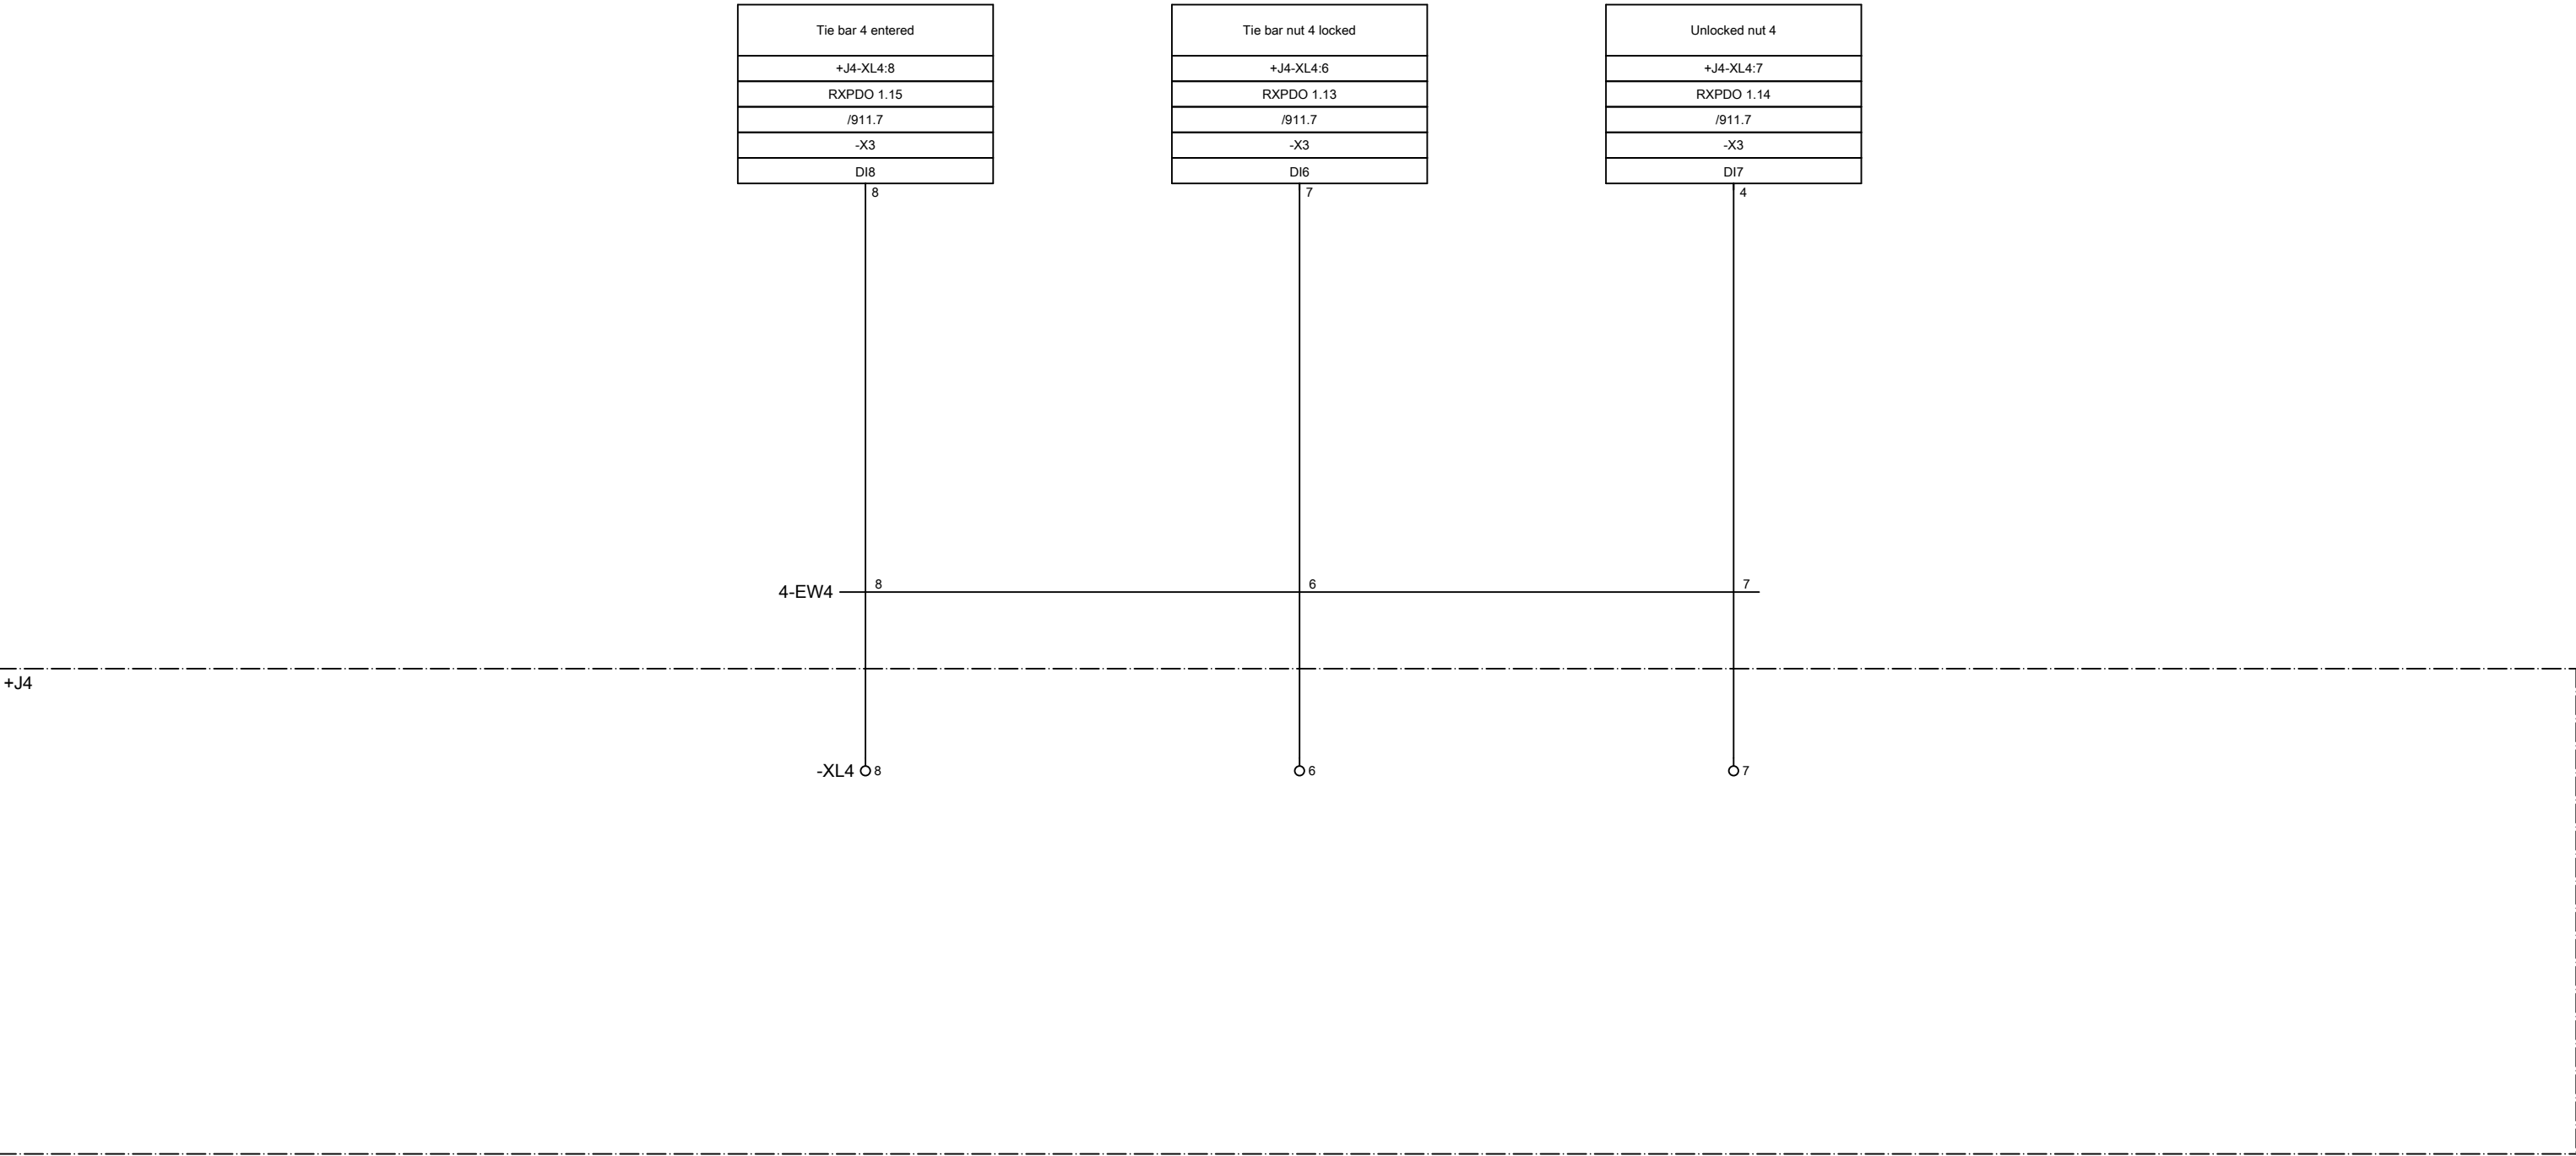

Tie bar 4 entered


Tie bar nut 4 locked


Unlocked nut 4








+J3-EU398Z4	UNE-24013-535	Attachment housing	1 ST
+J3-EU398Z5	UNE-32114-004	Cable screwing M16x1.5	4 ST
+J3-EU398Z6	GKU-30177-059	E jector	1 ST

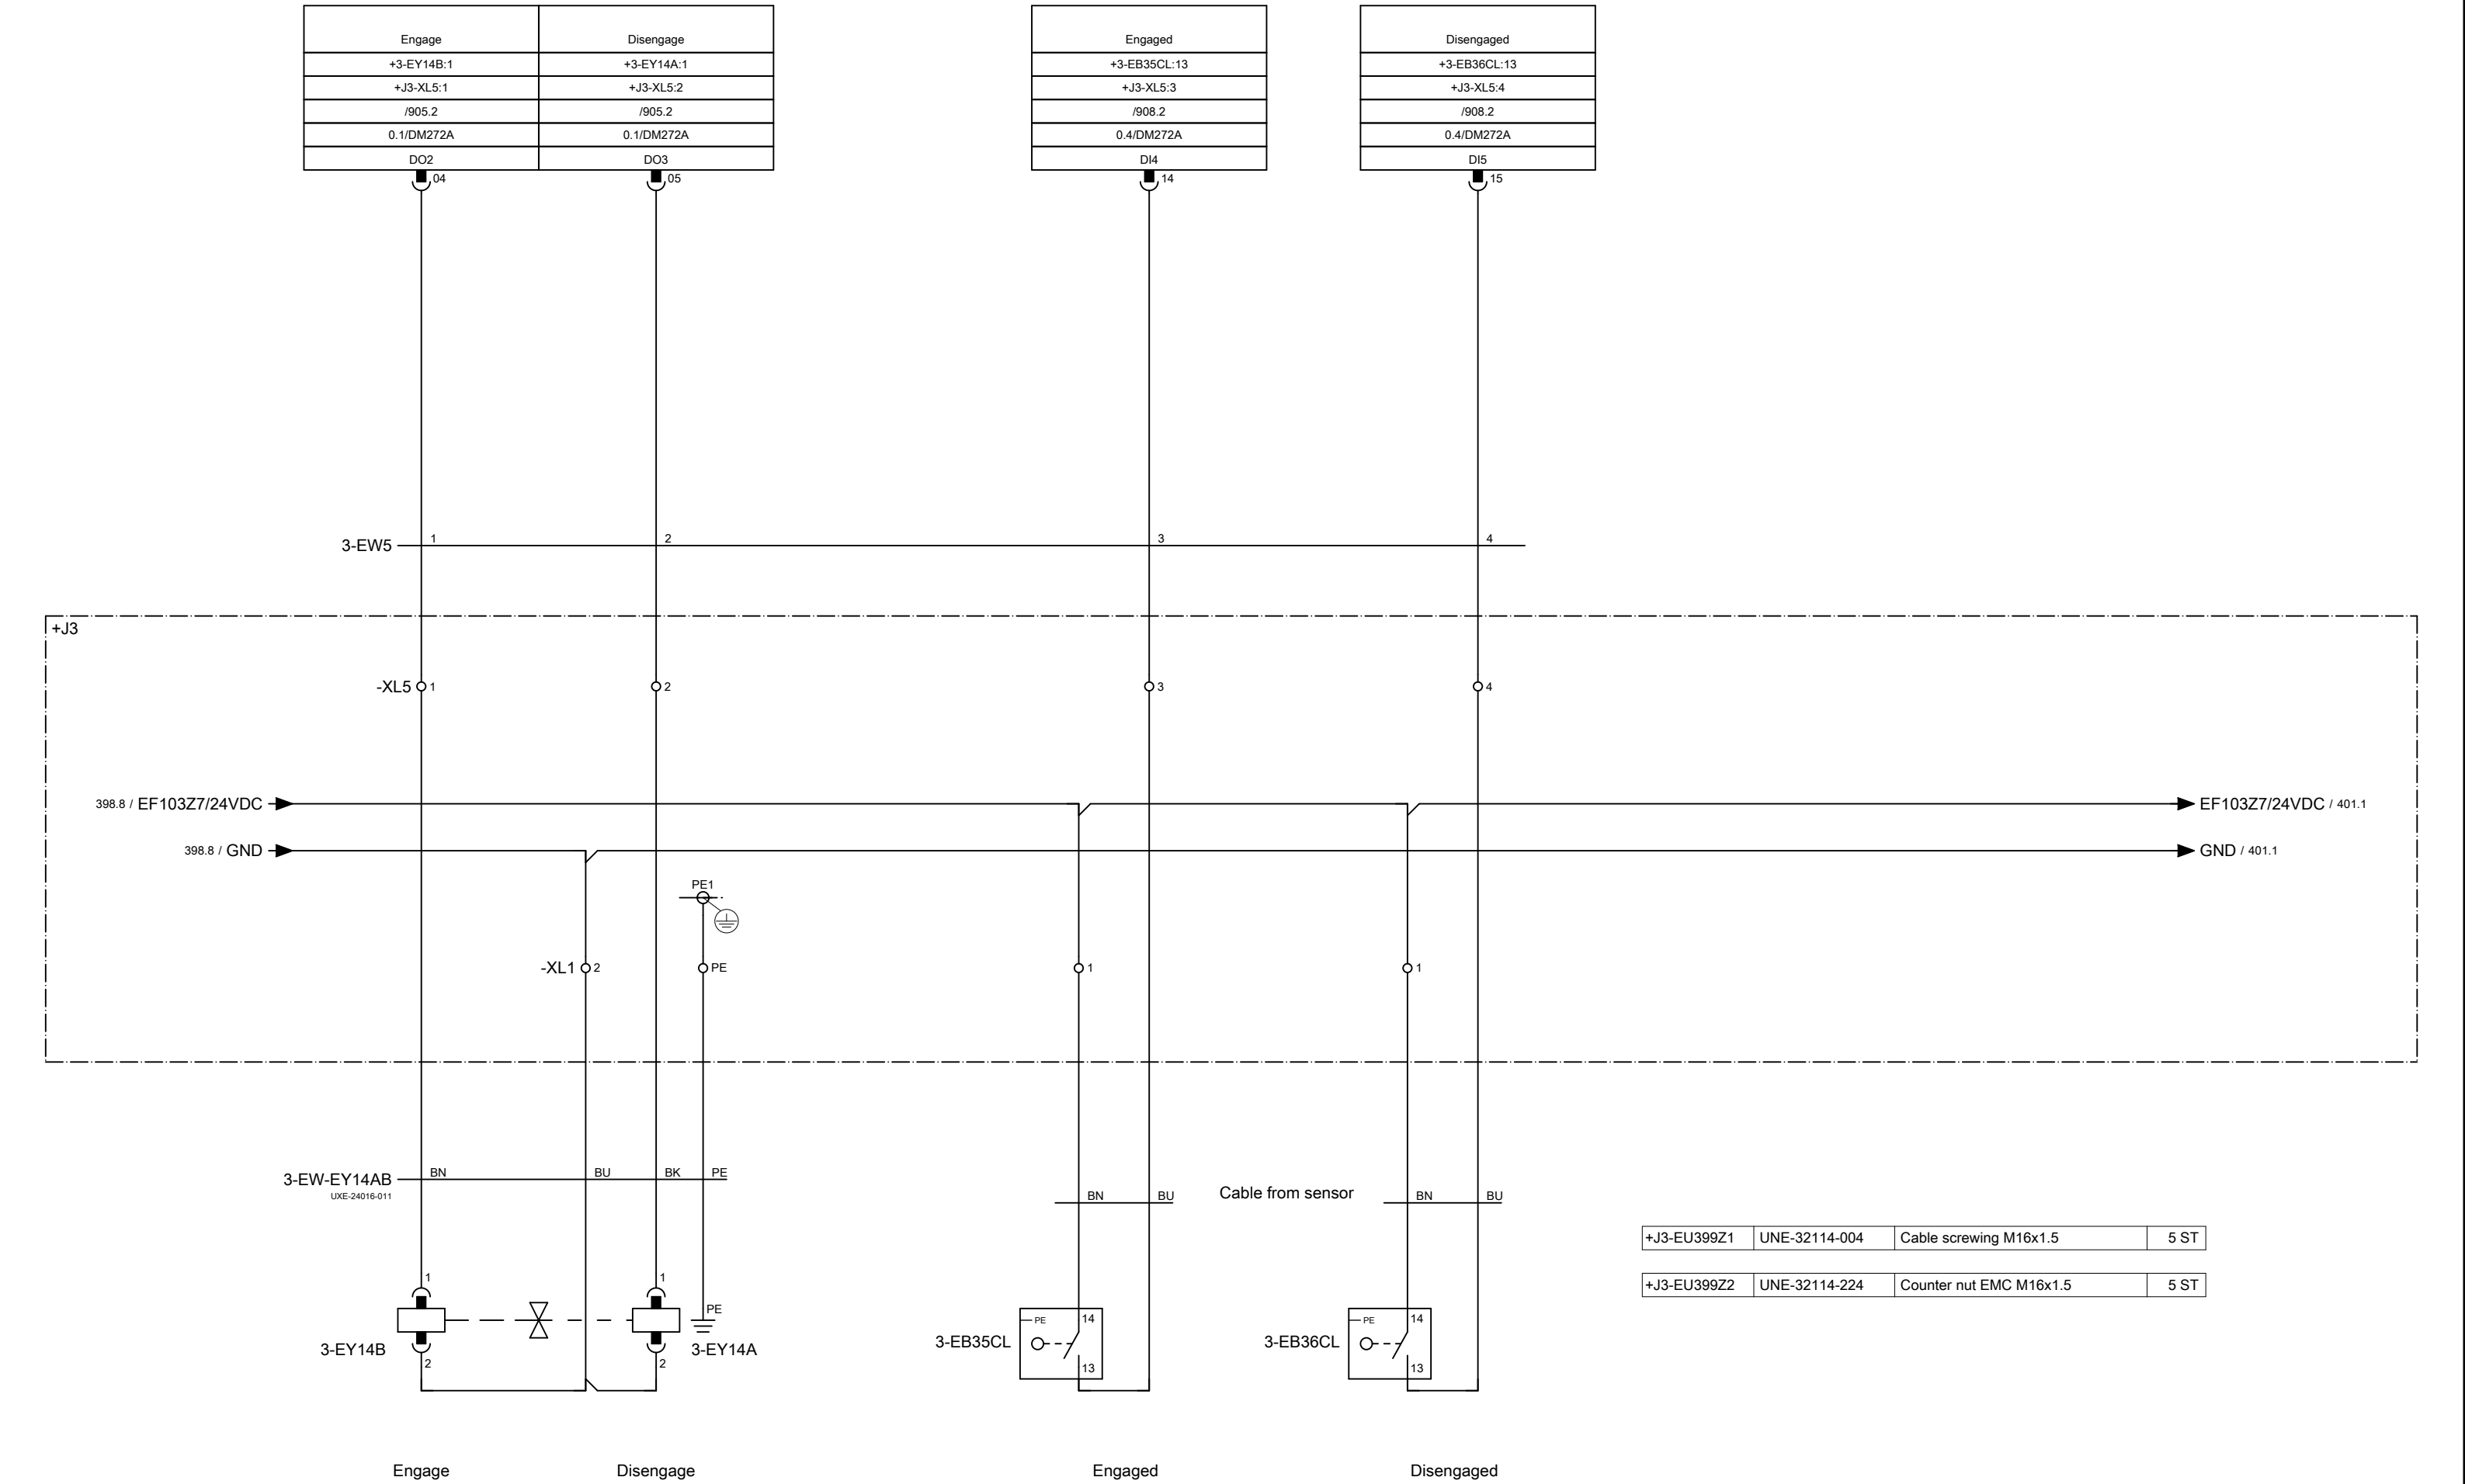


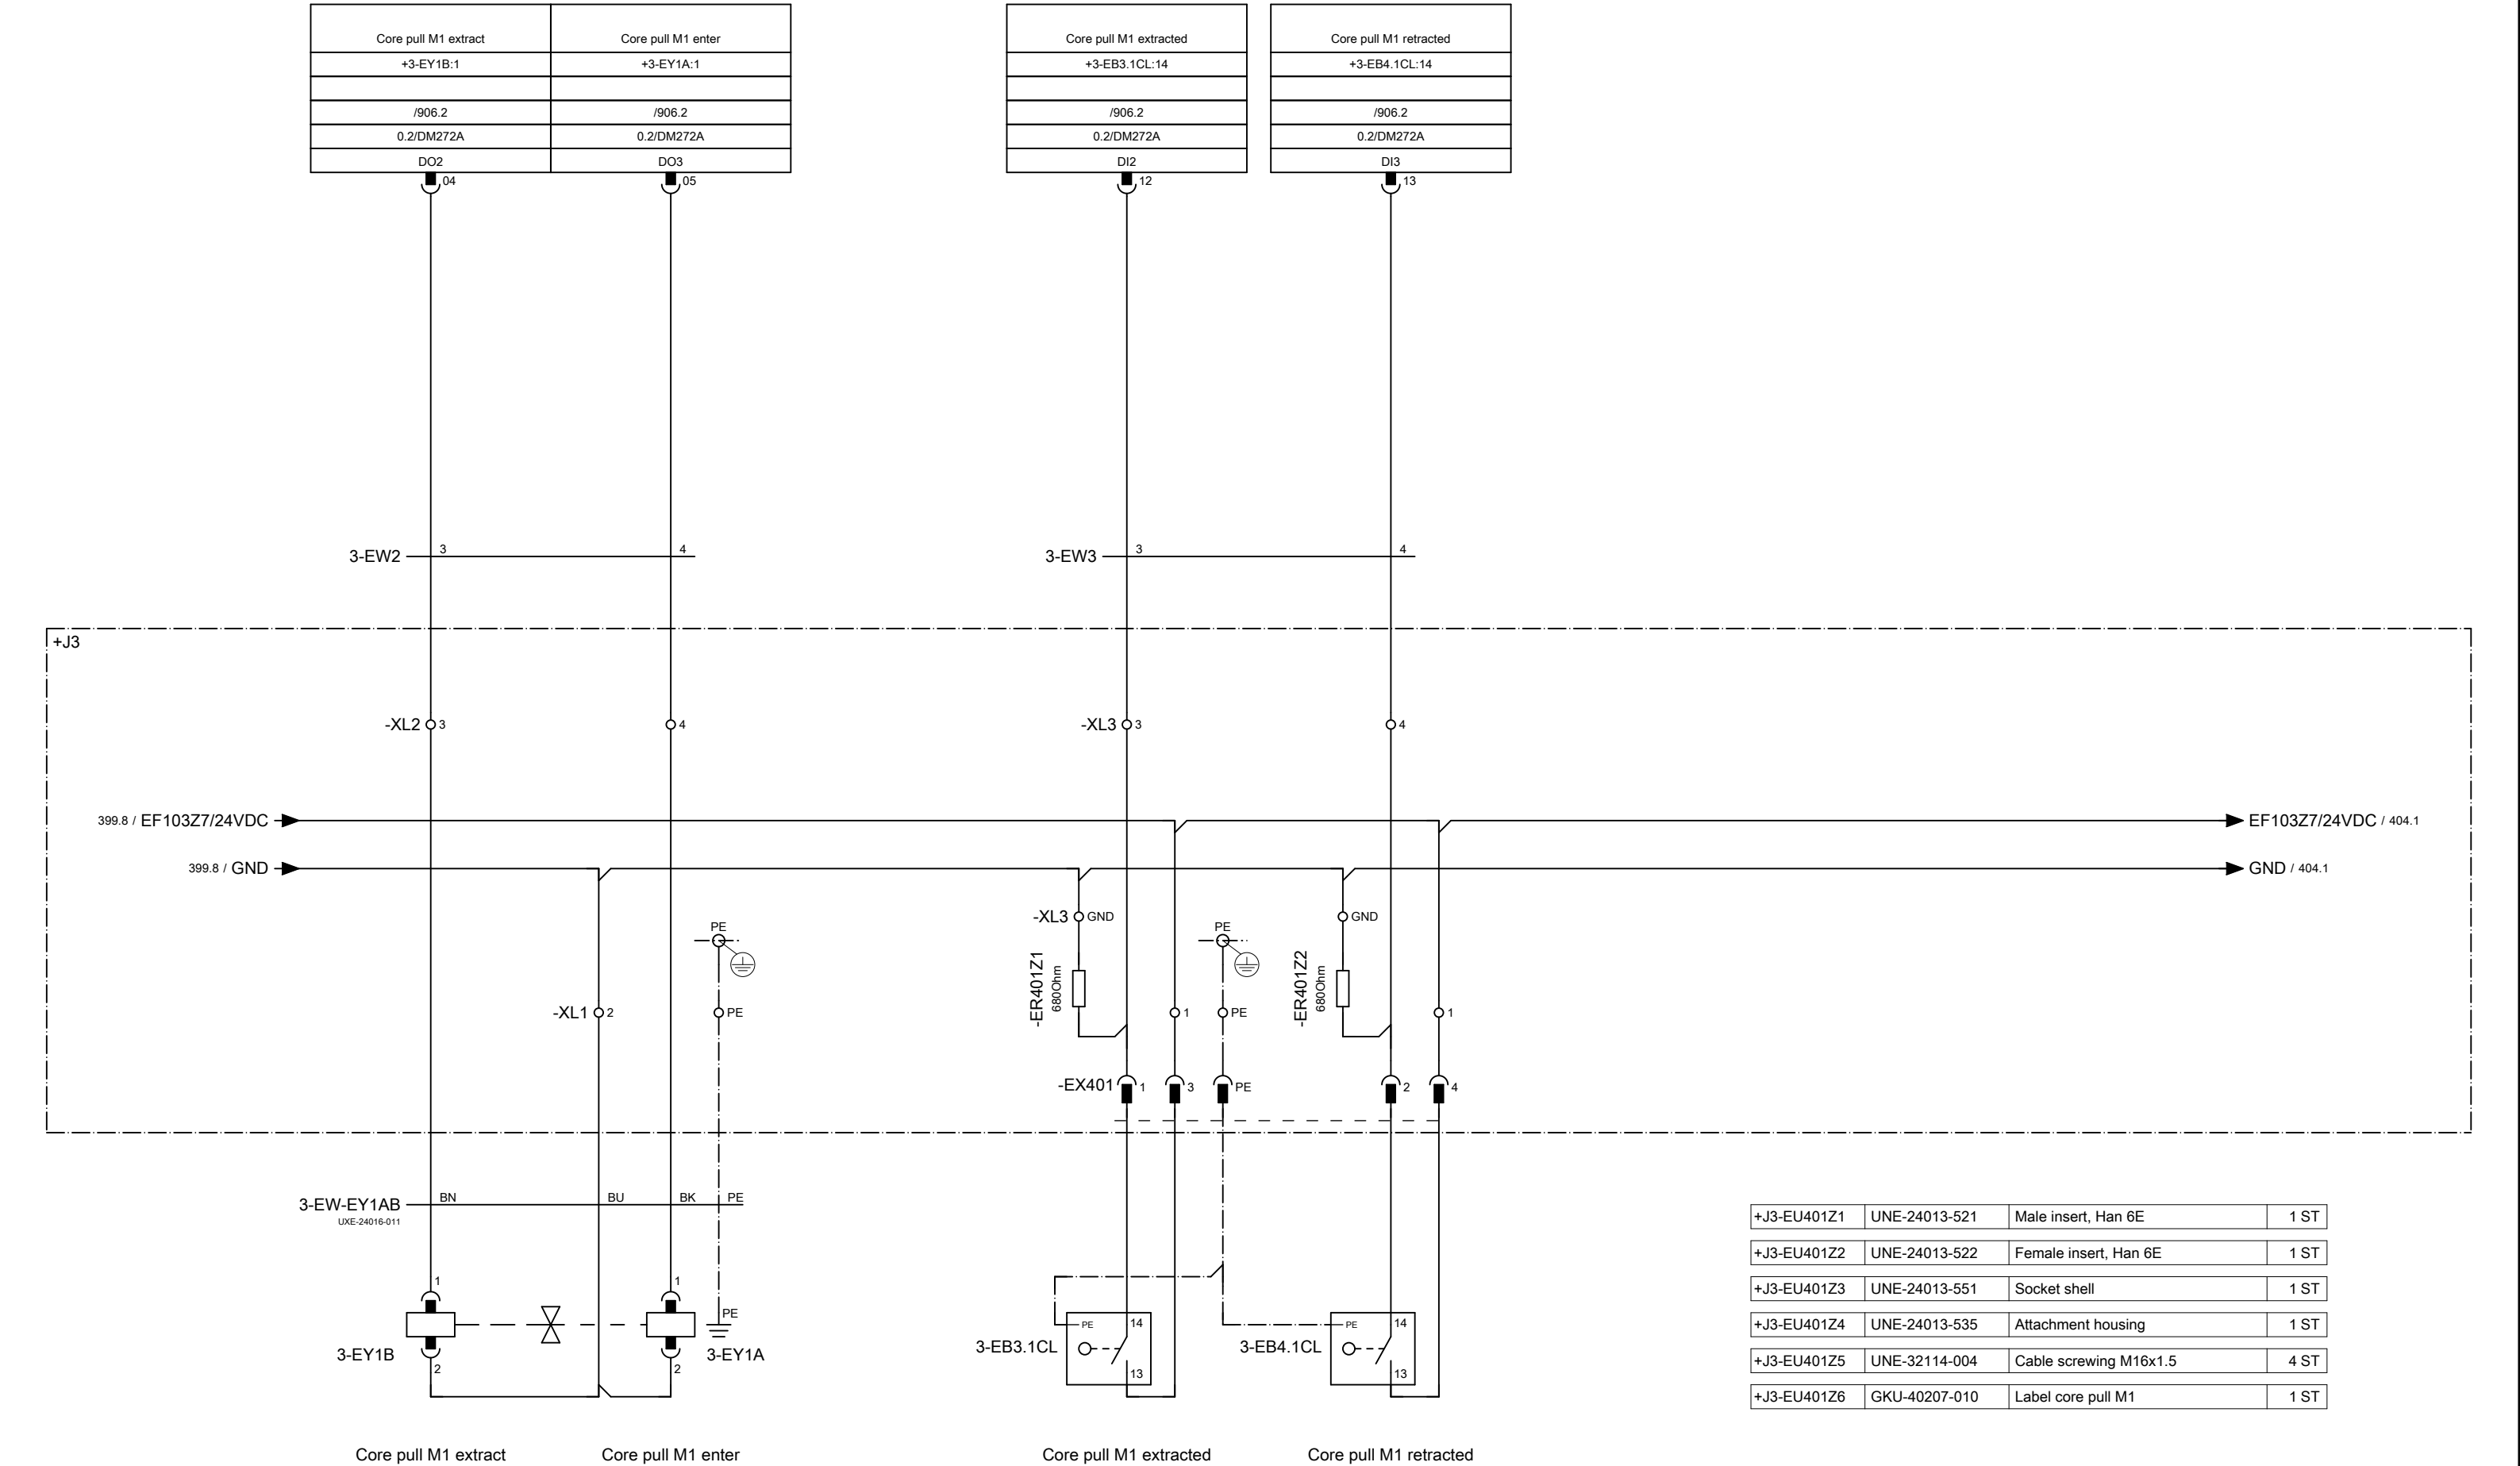


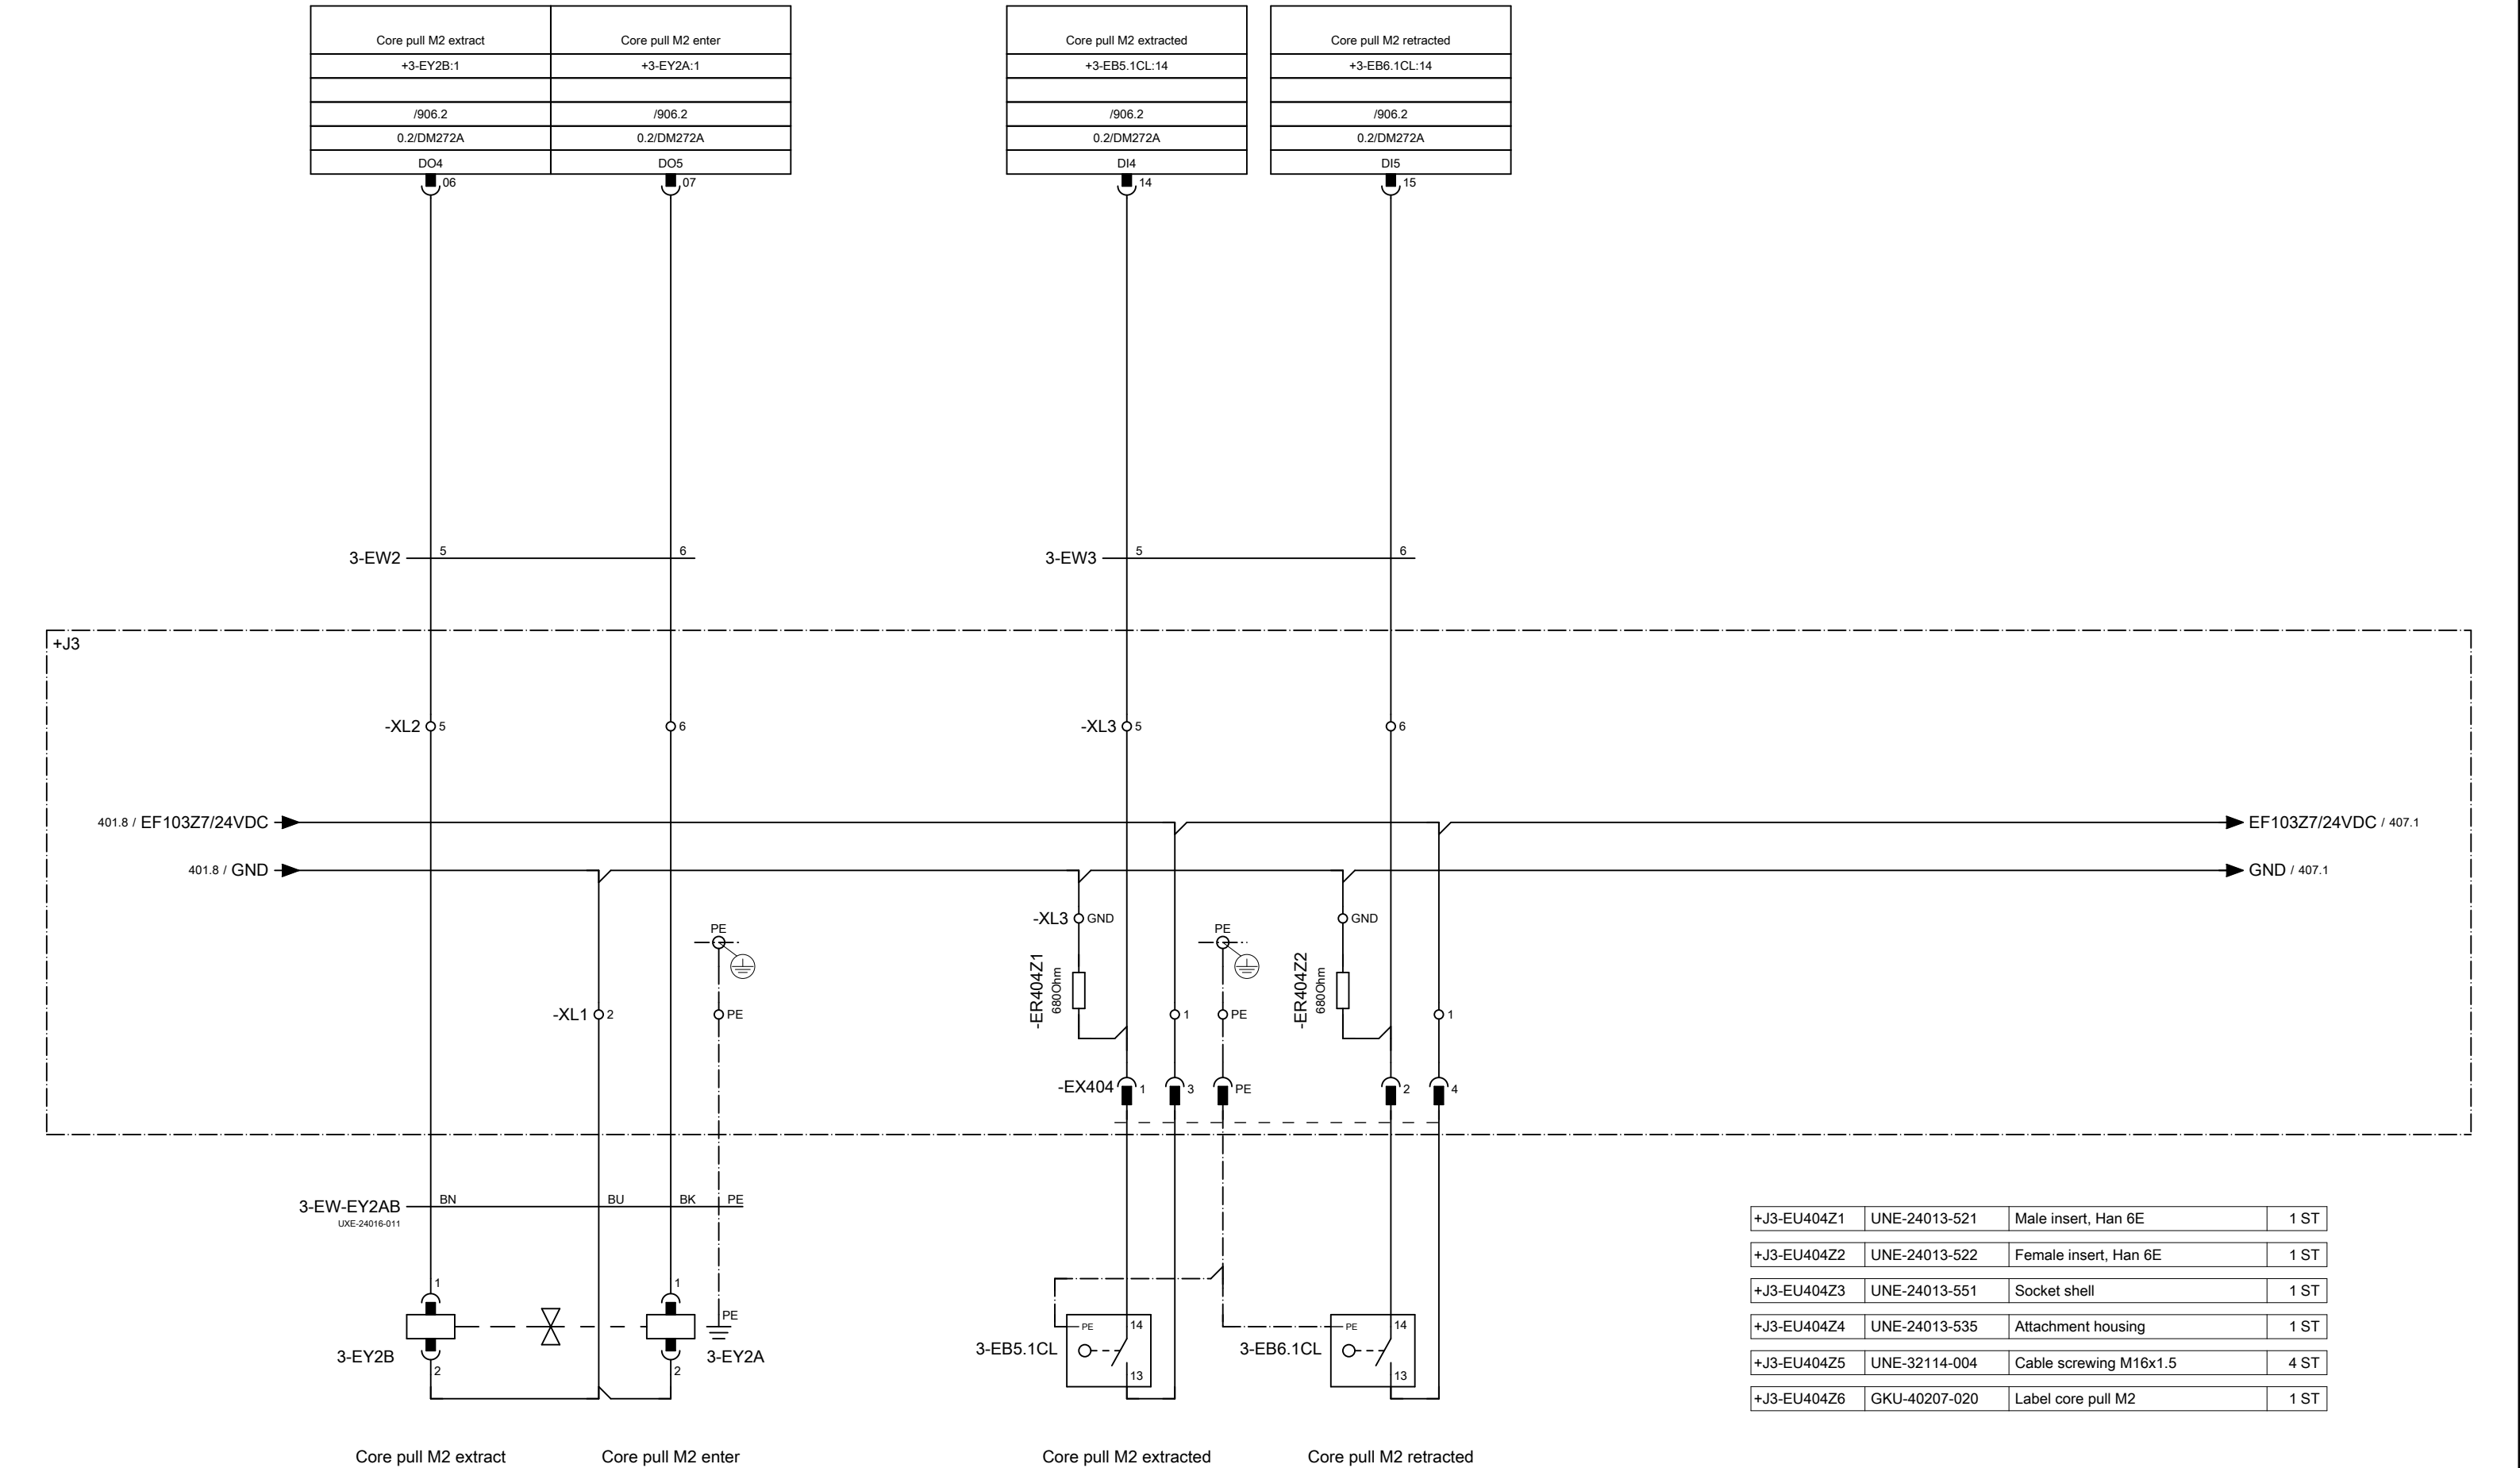

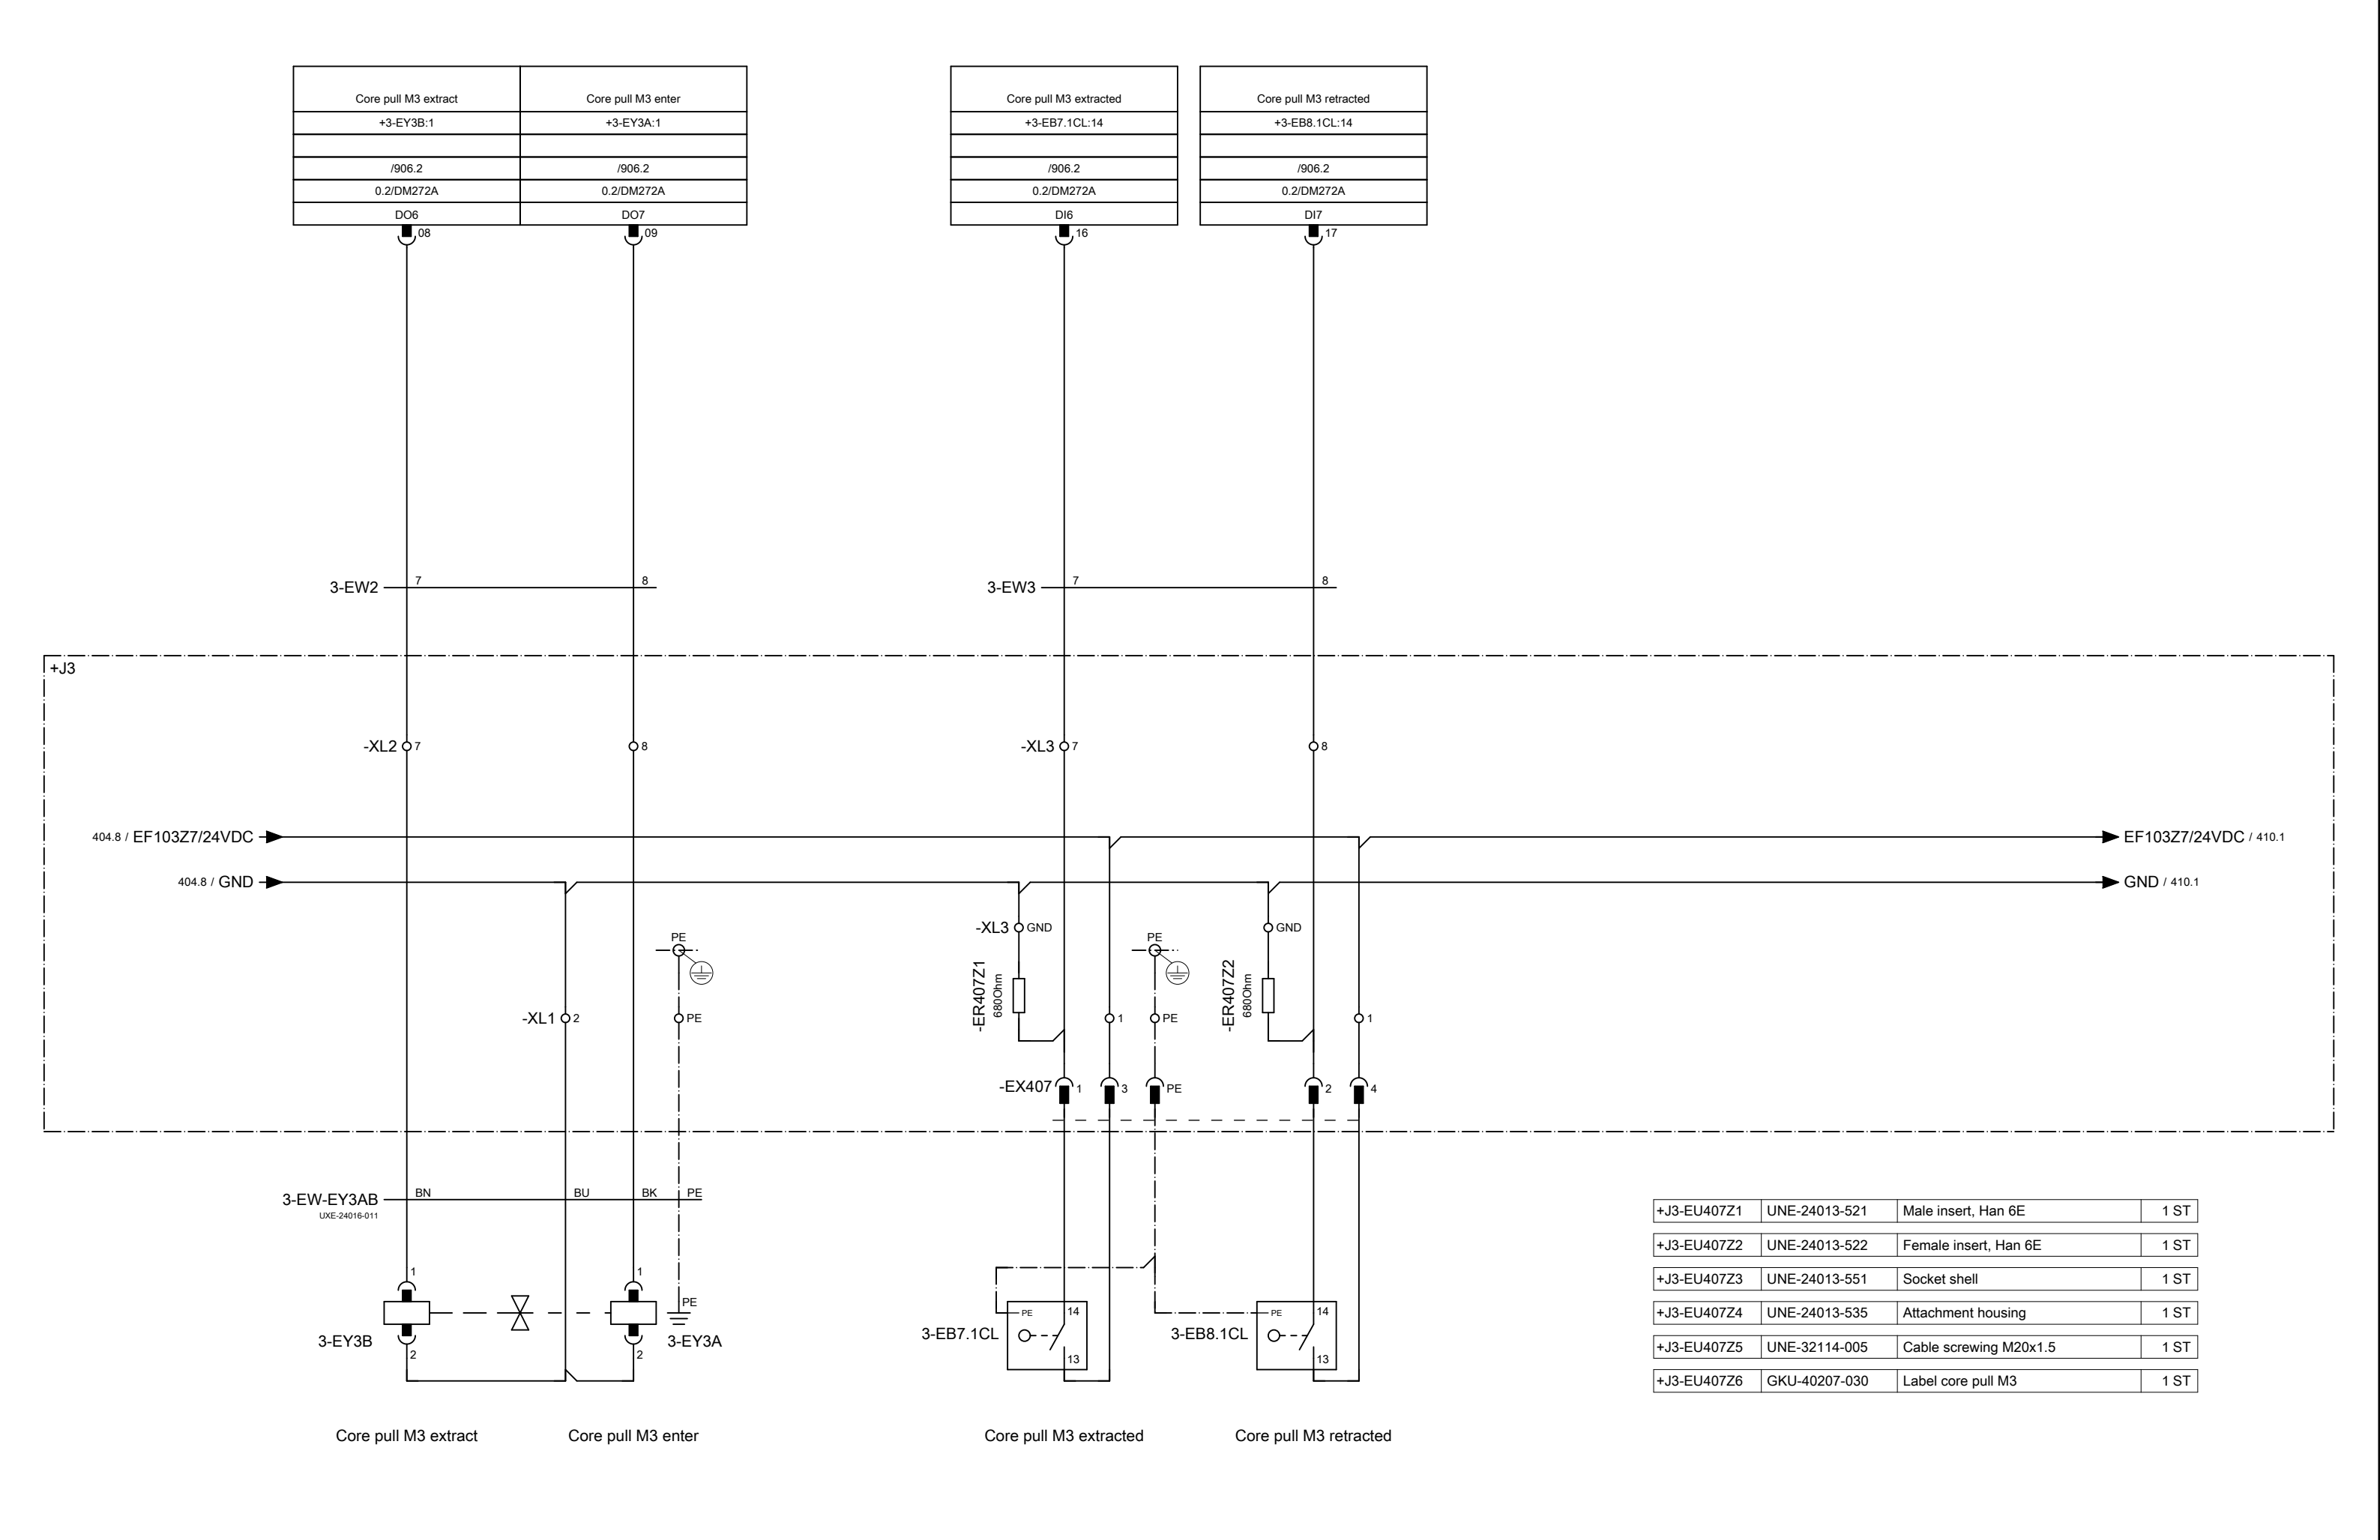


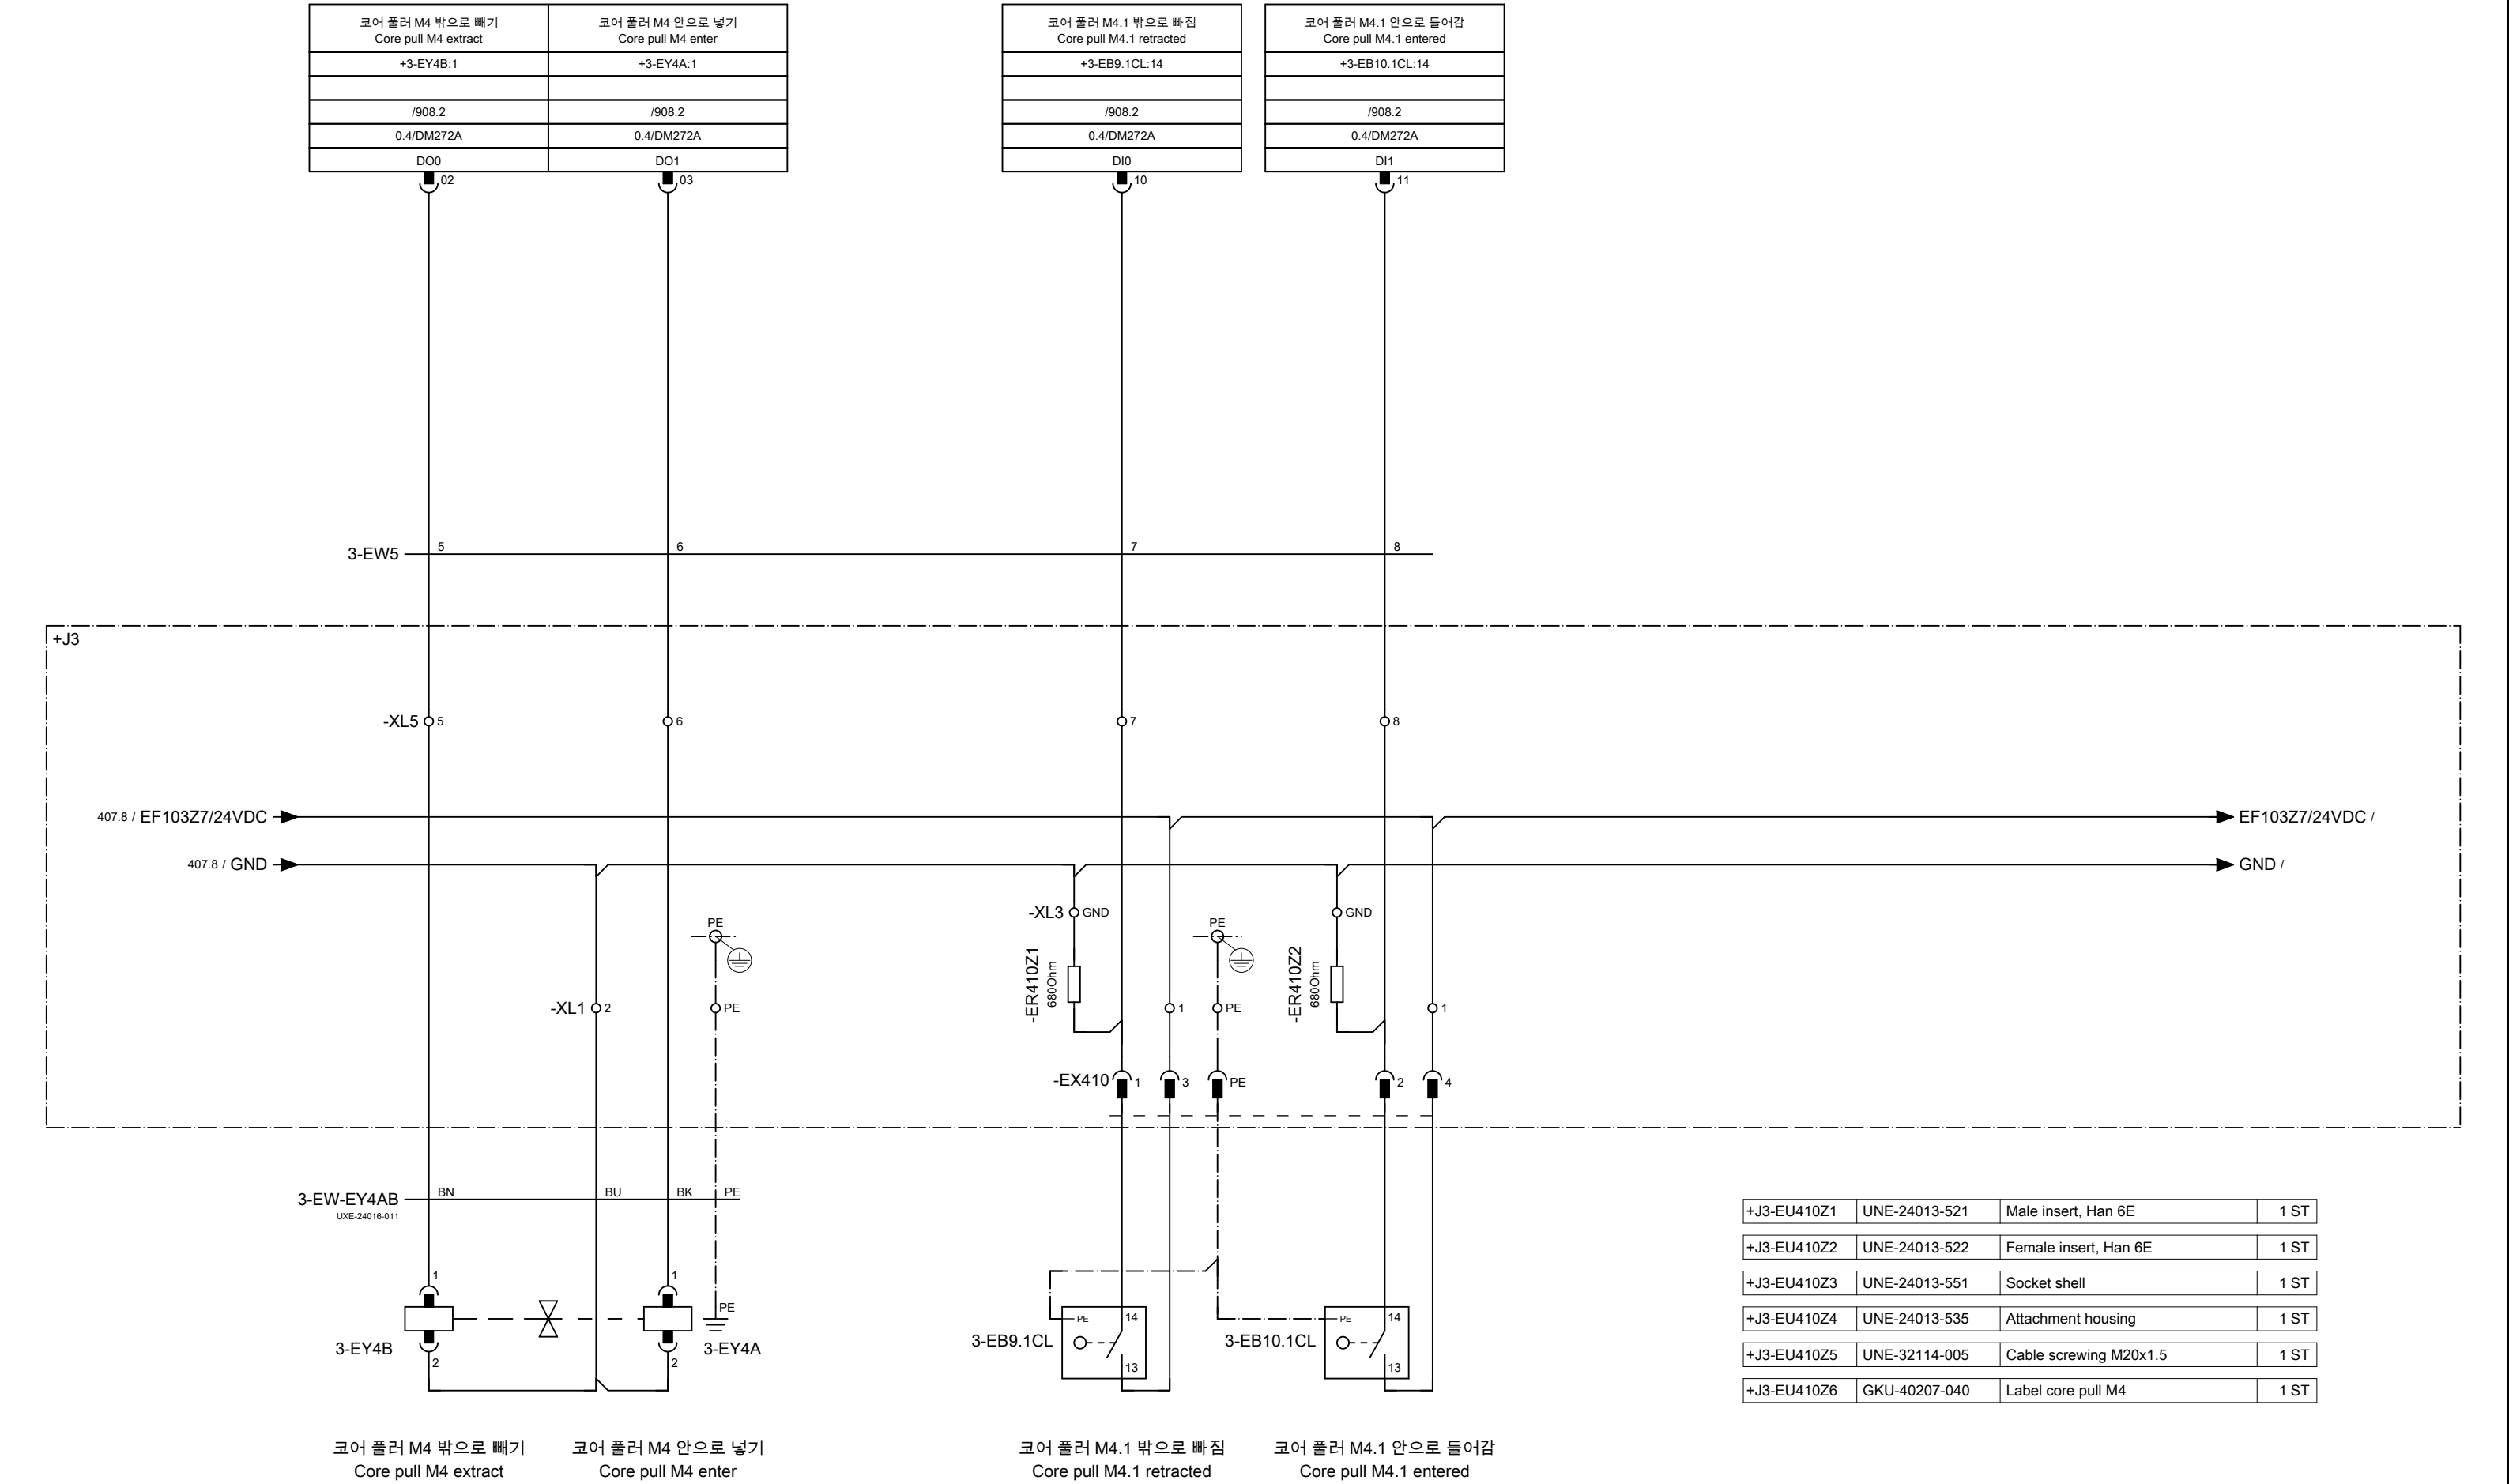

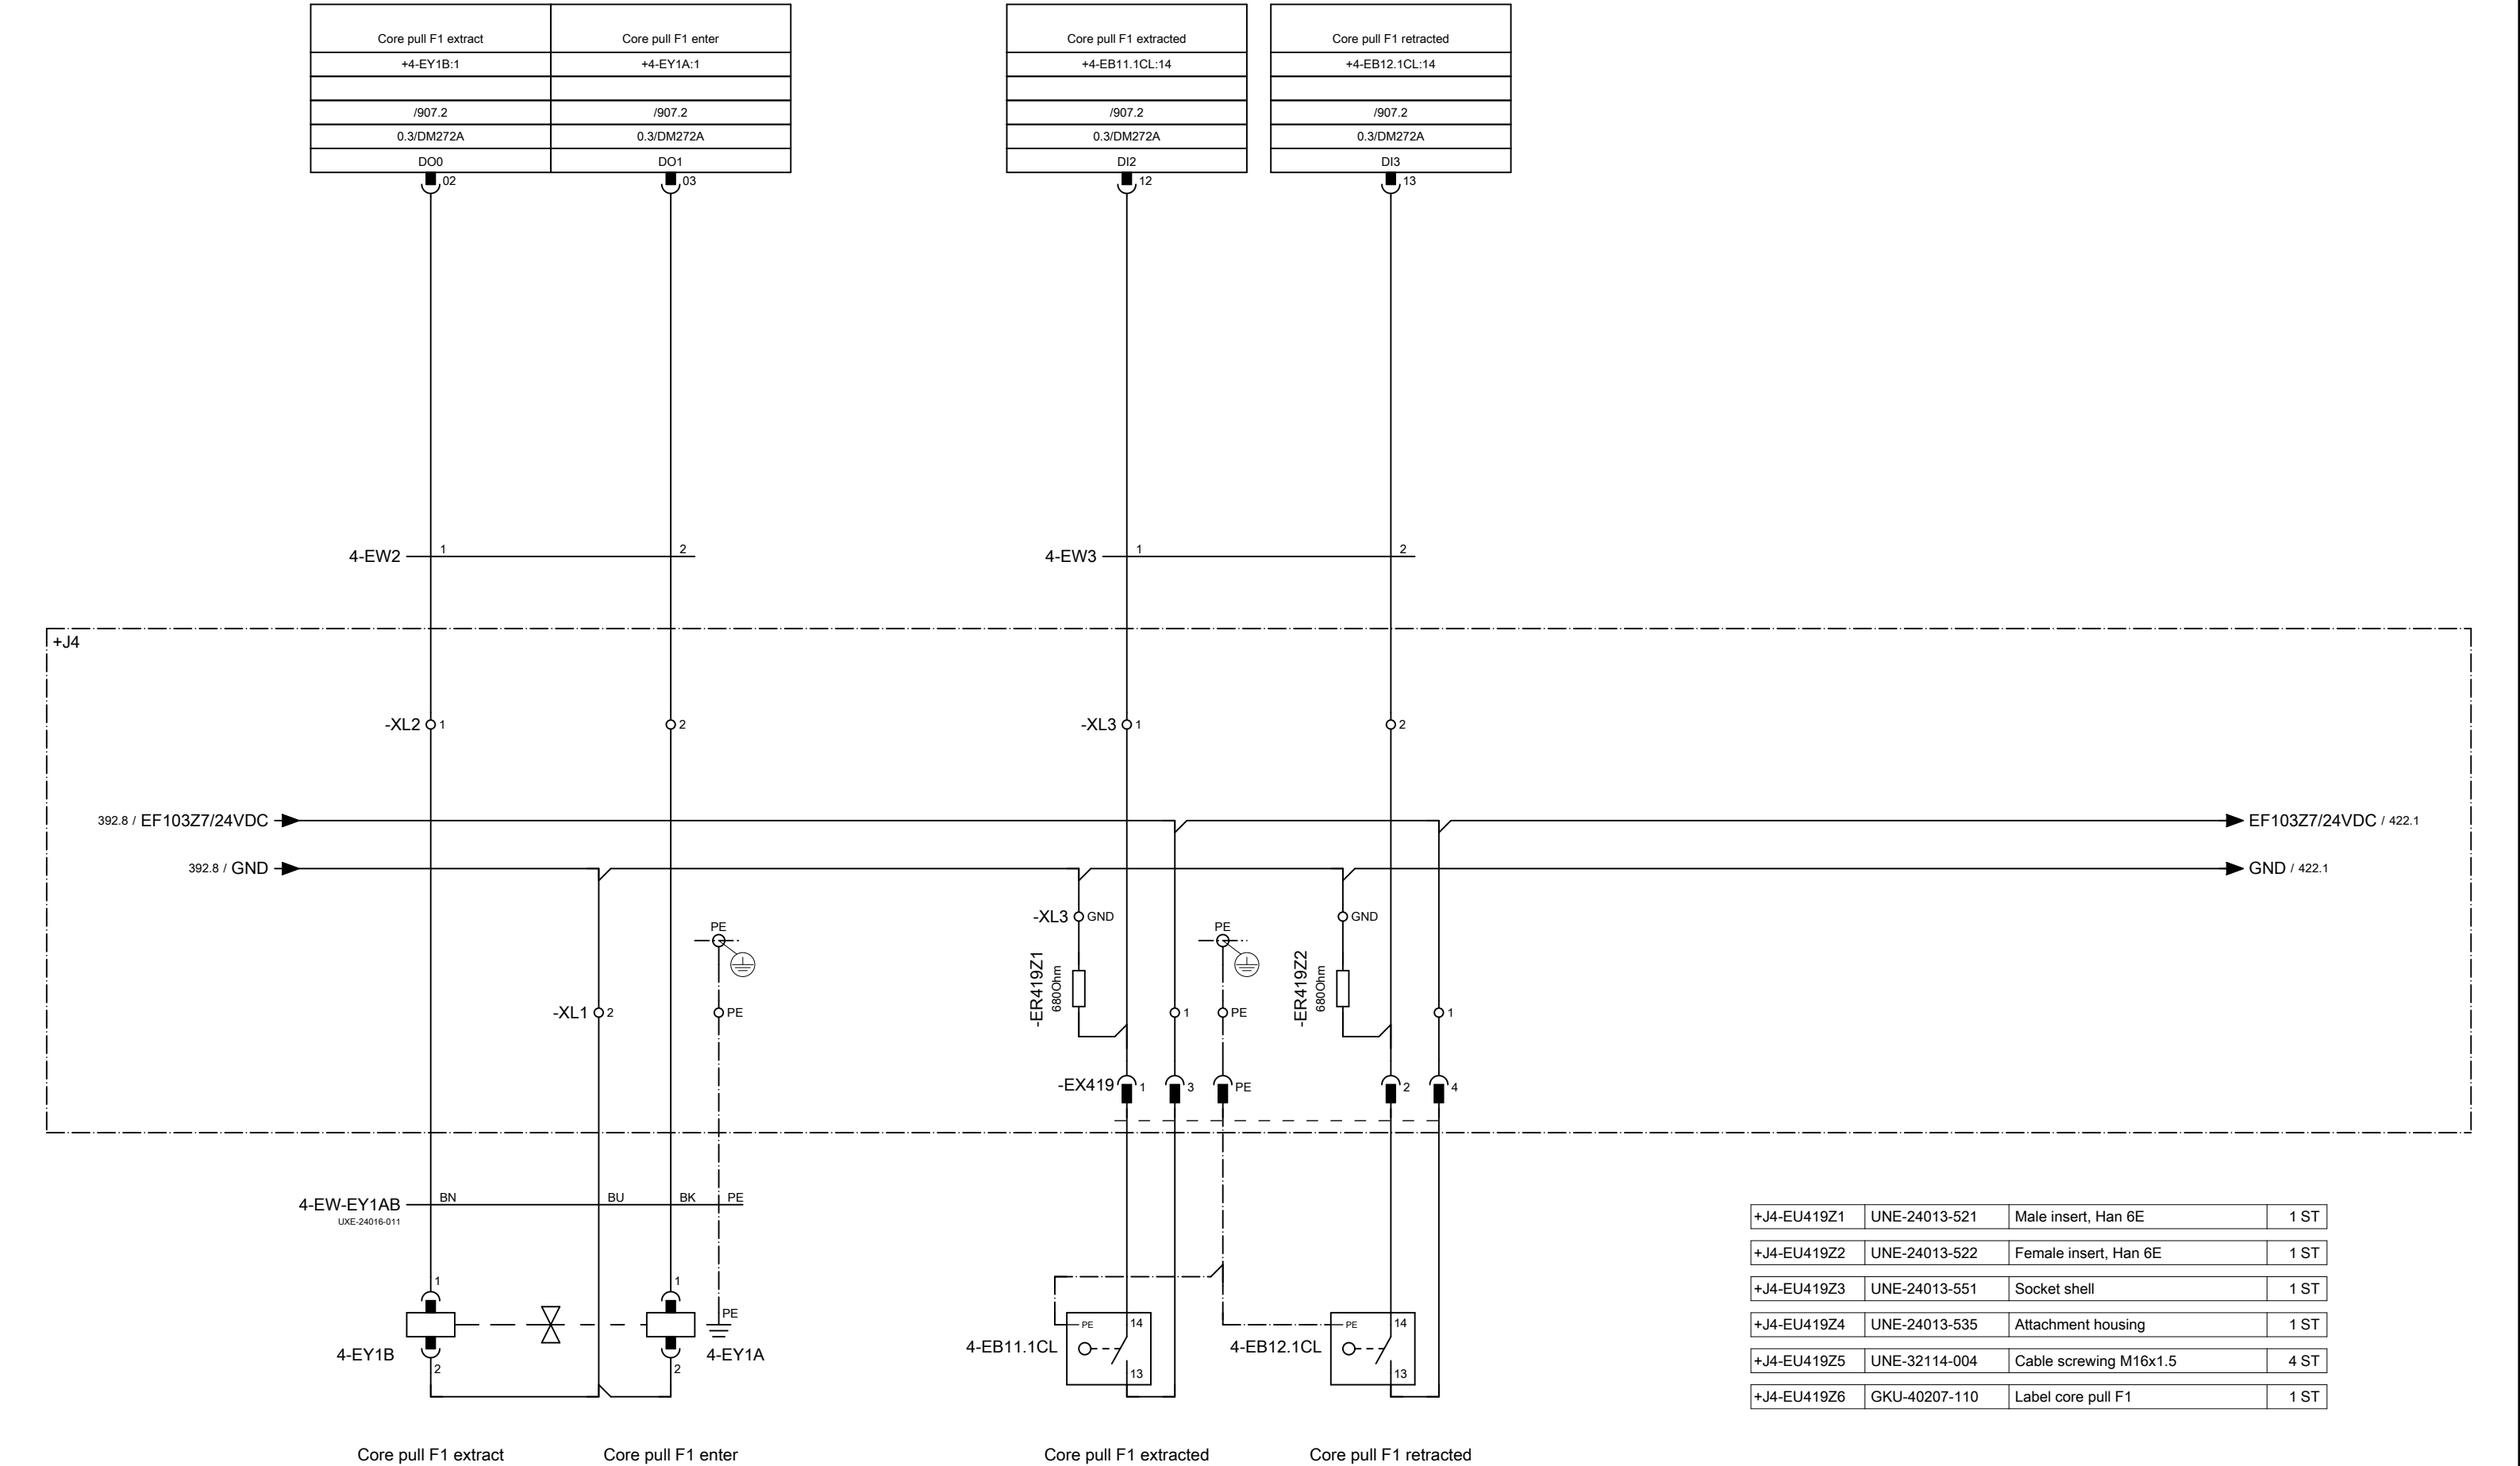

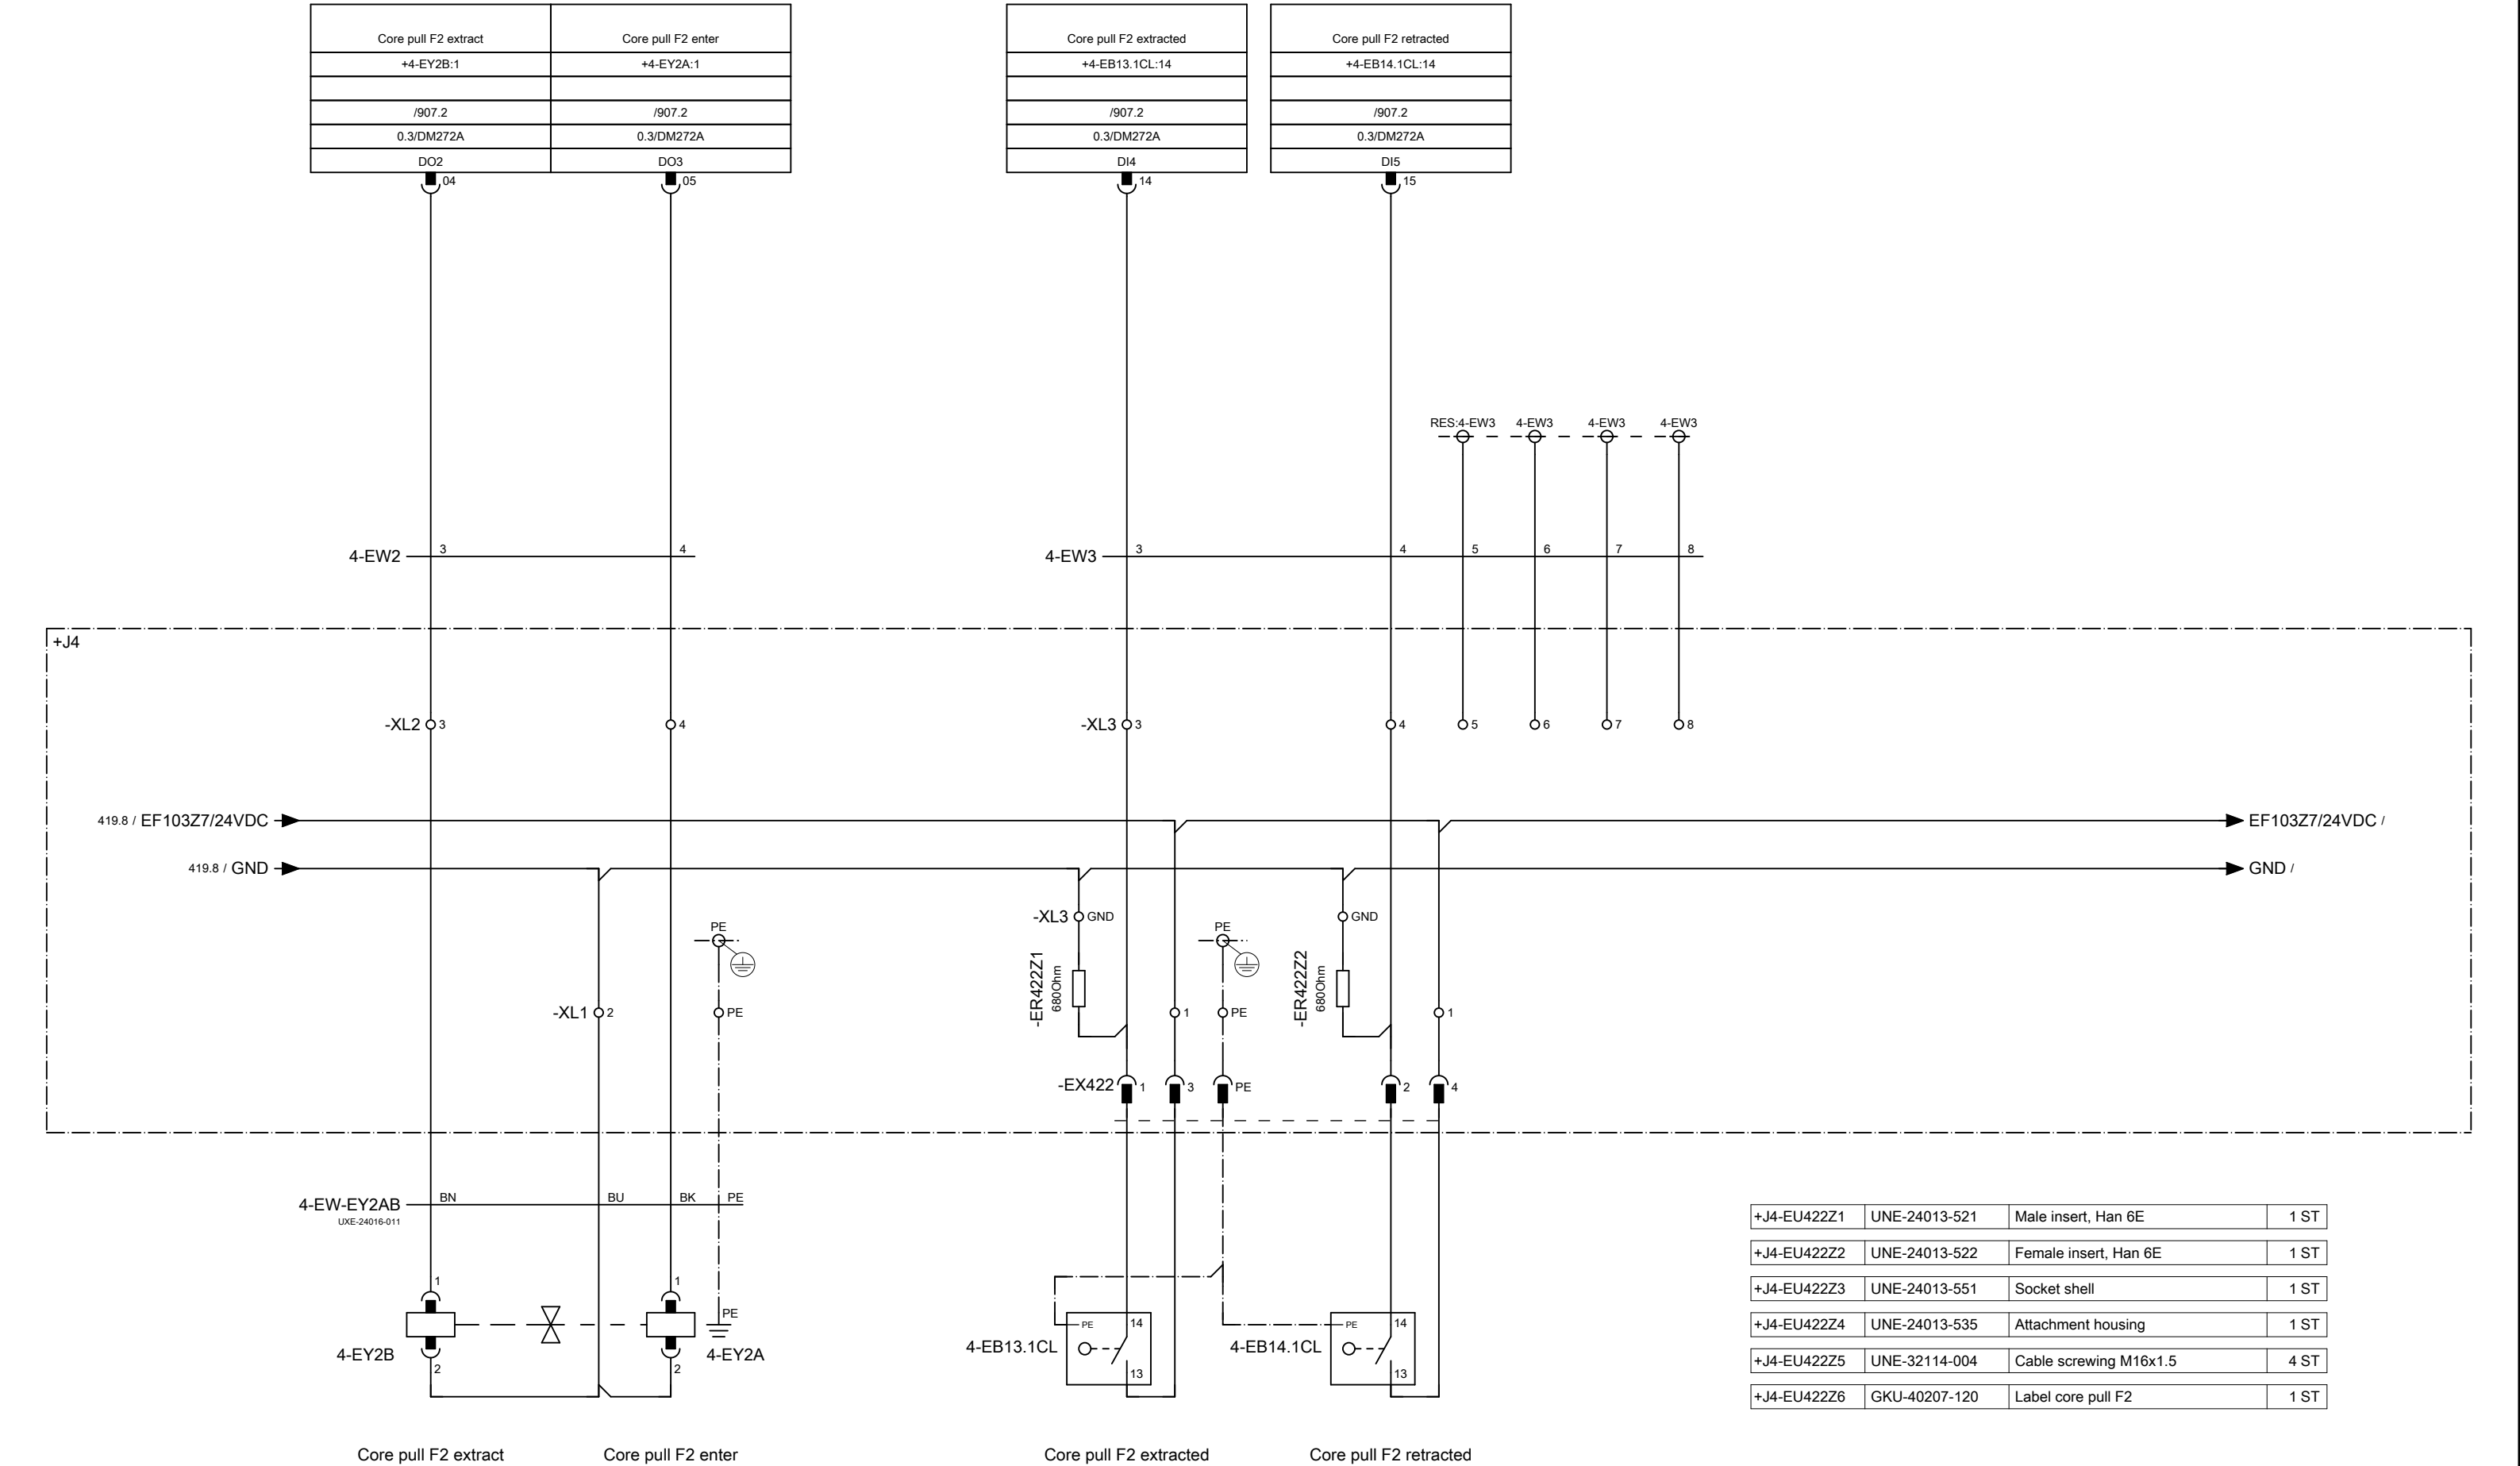



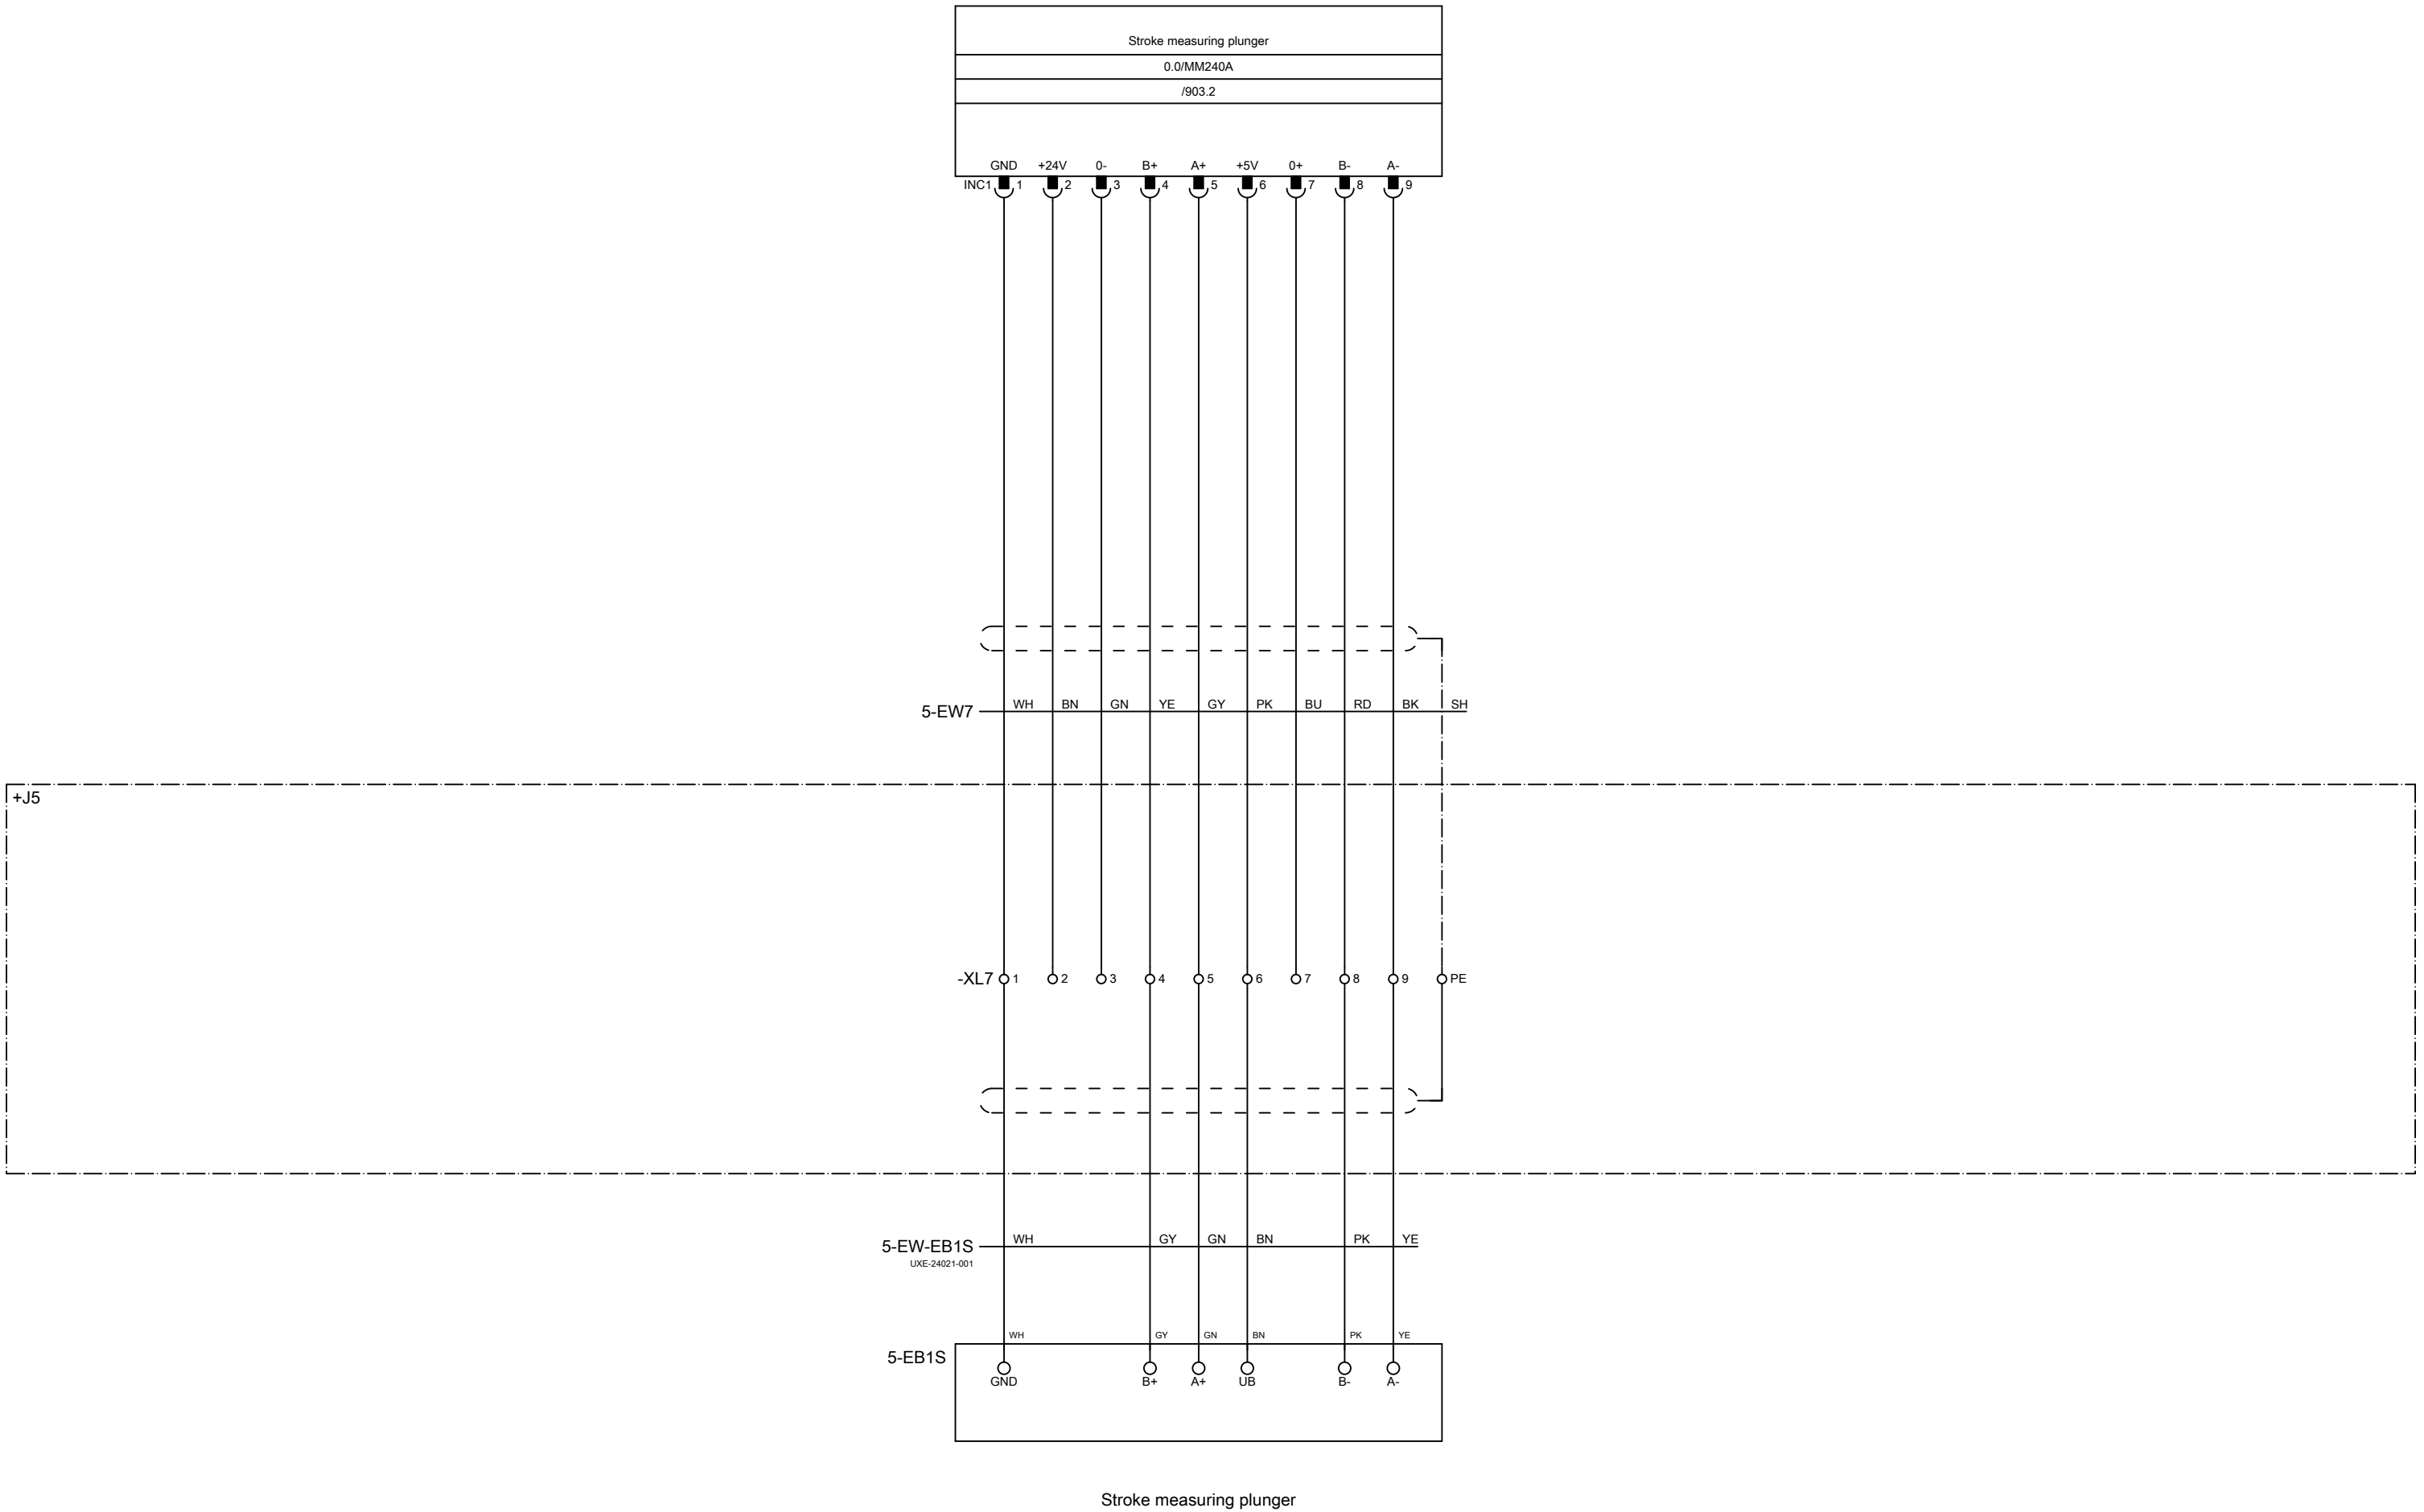

			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 437.01	Replacement of	Replaced by



Bühler AG - Die Casting

Injection unit

ESM-85061


Ecoline

EN/UL

Page

= A

+ C72

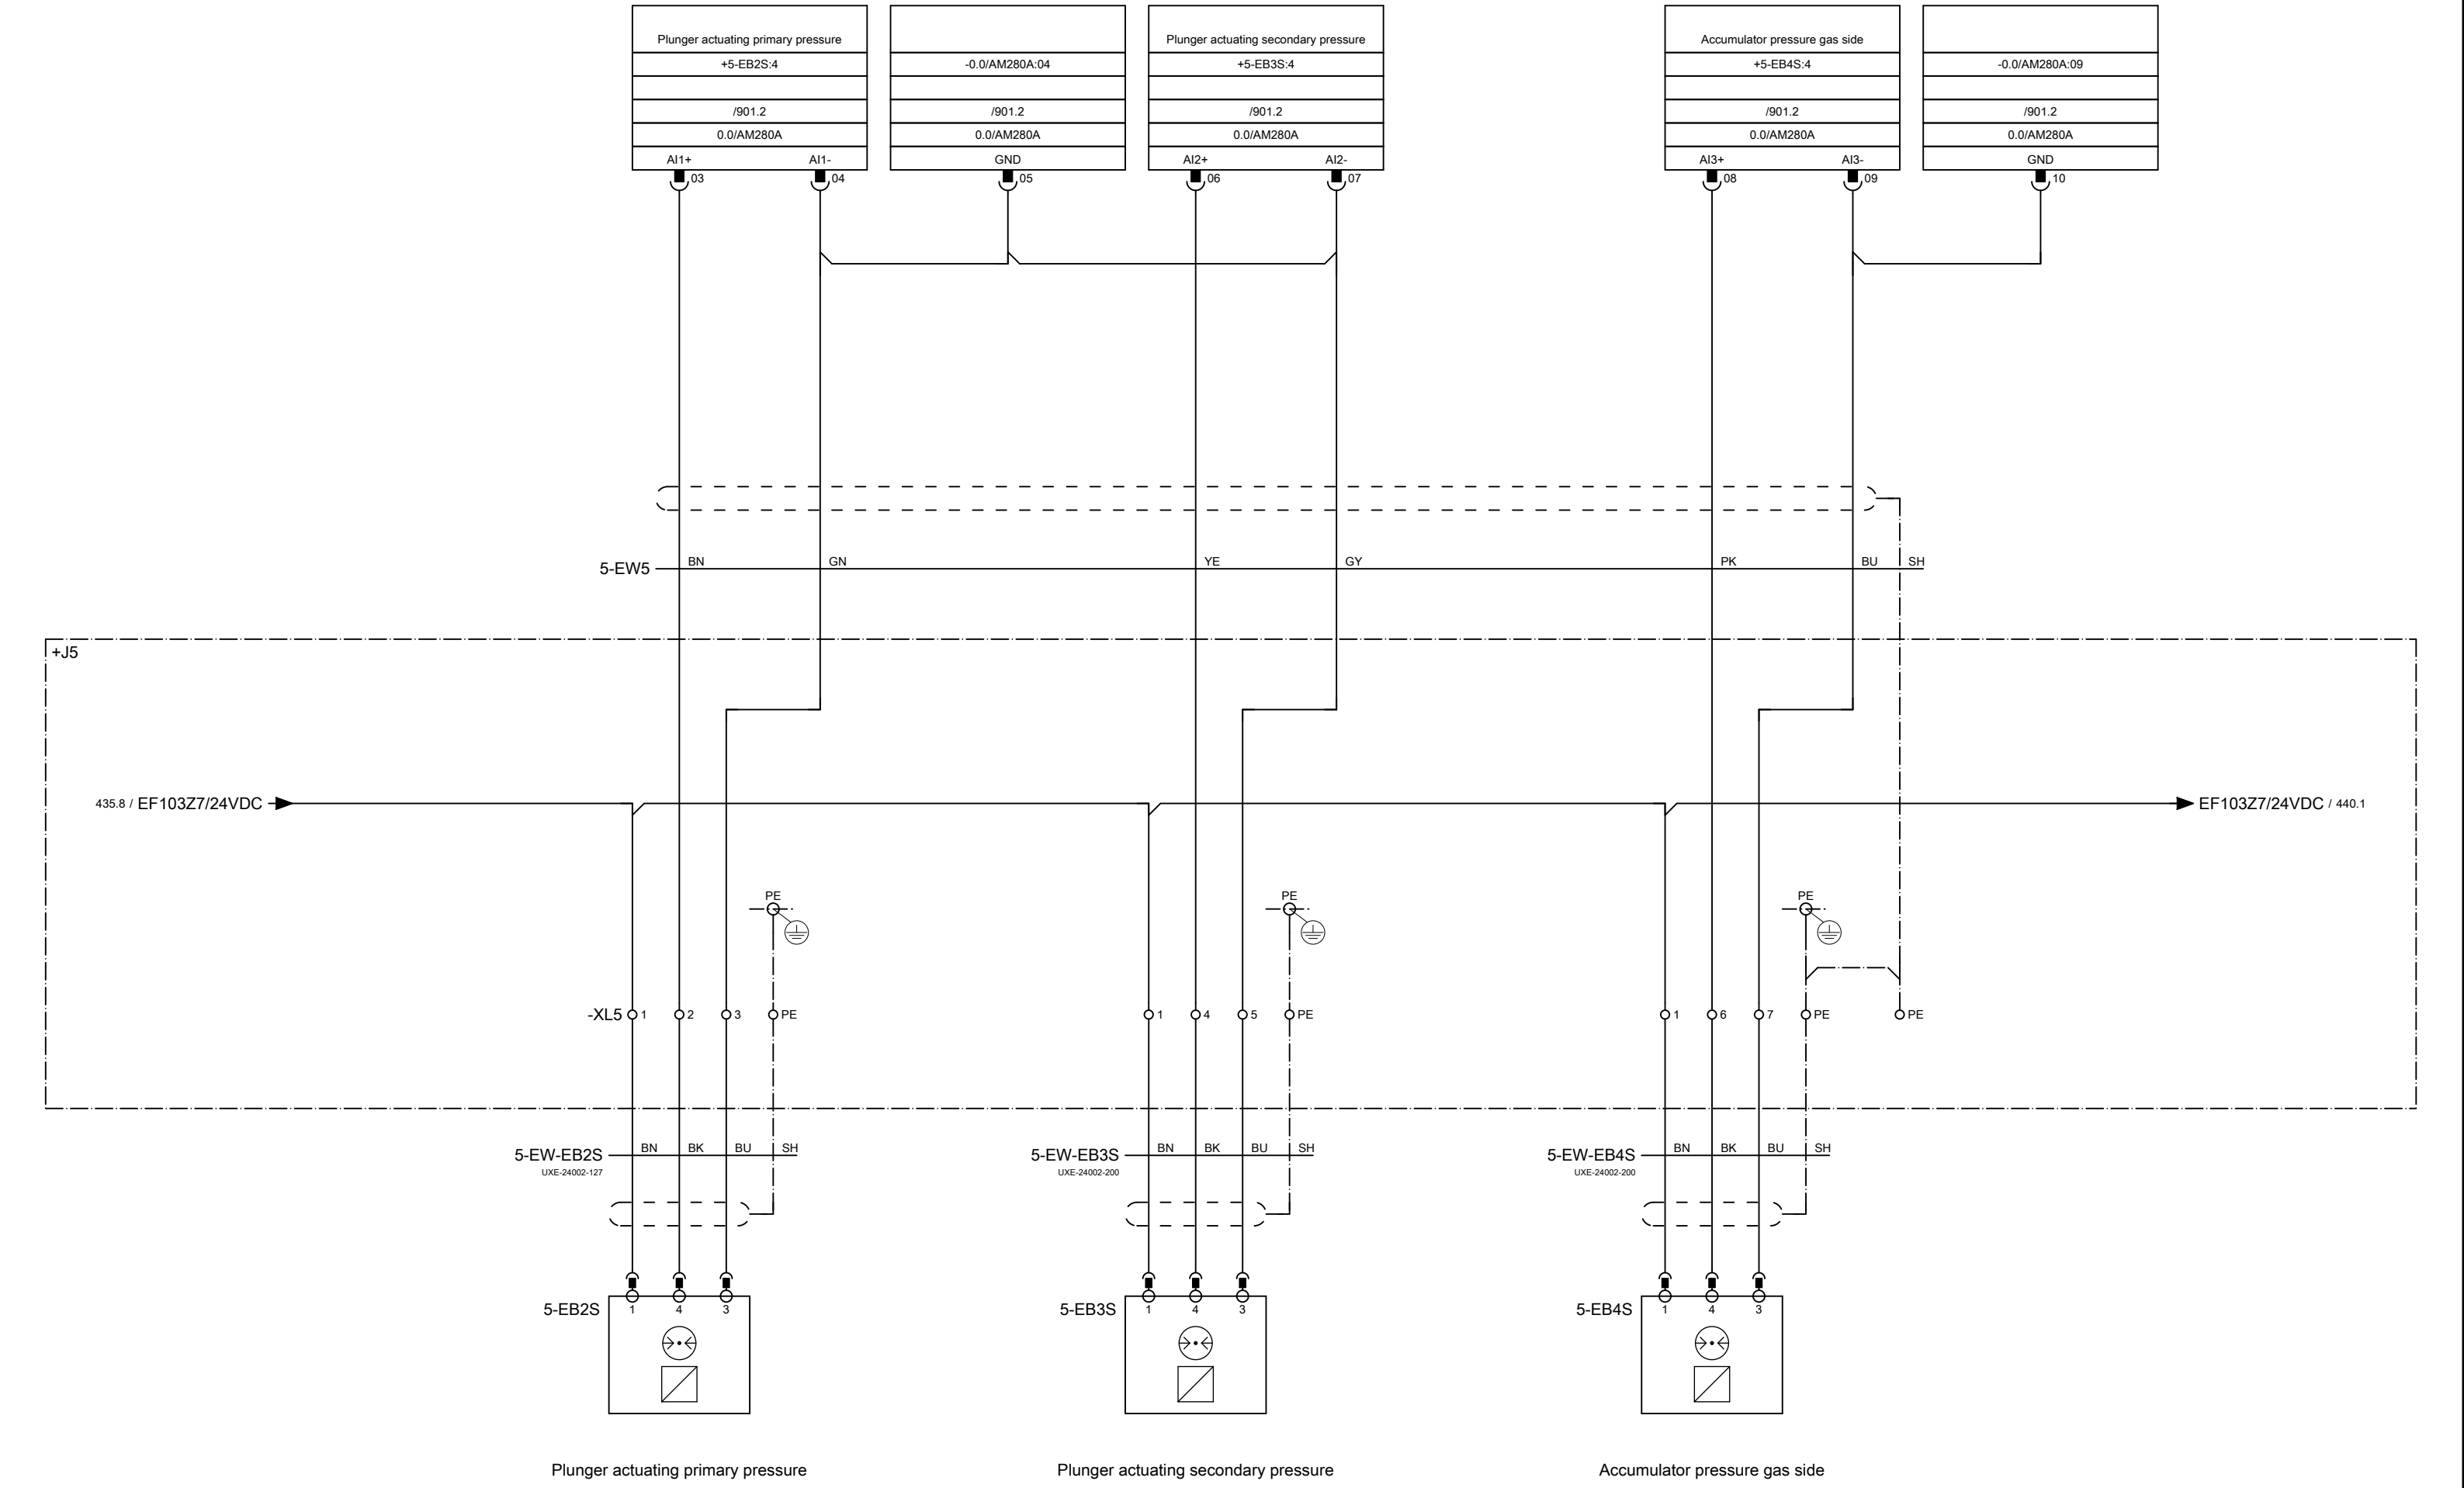


			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 438.01	Replacement of	Replaced by



Bühler AG - Die Casting


Injection unit


			= A
			+ C72
ESM-85061	Ecoline	EN/UL	Page 438

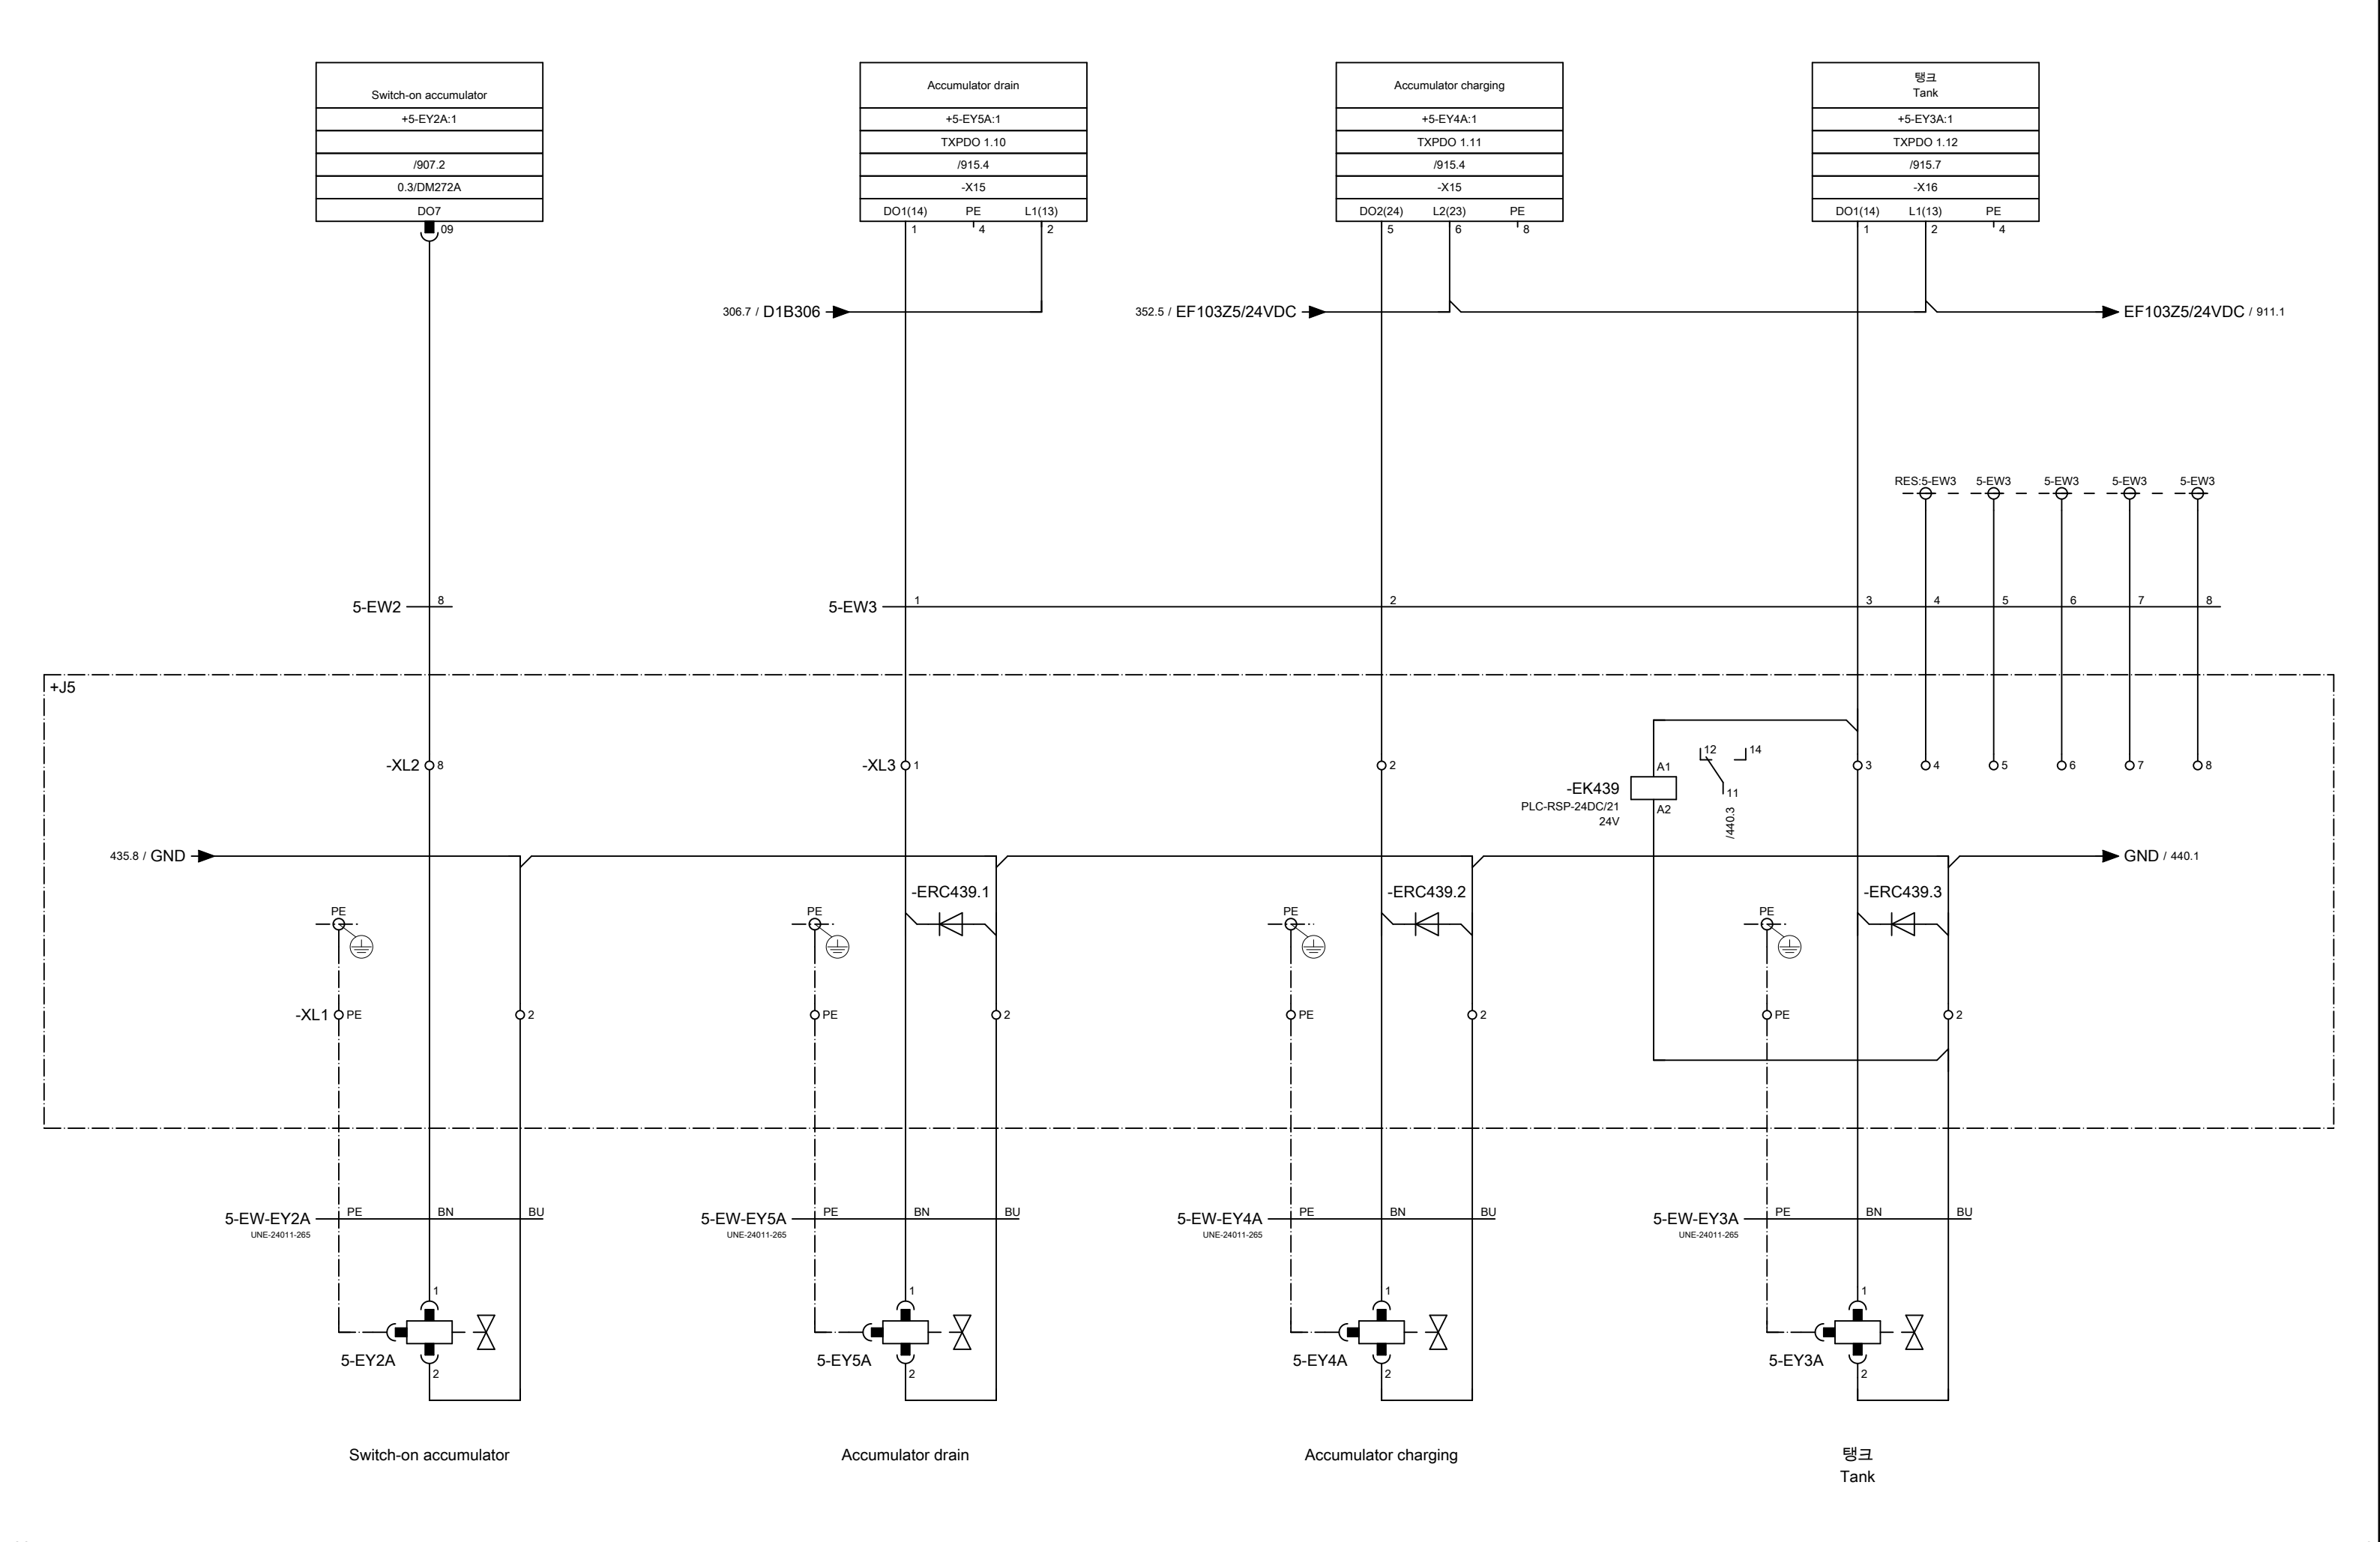





BÜHLER
Bühler AG - Die Casting

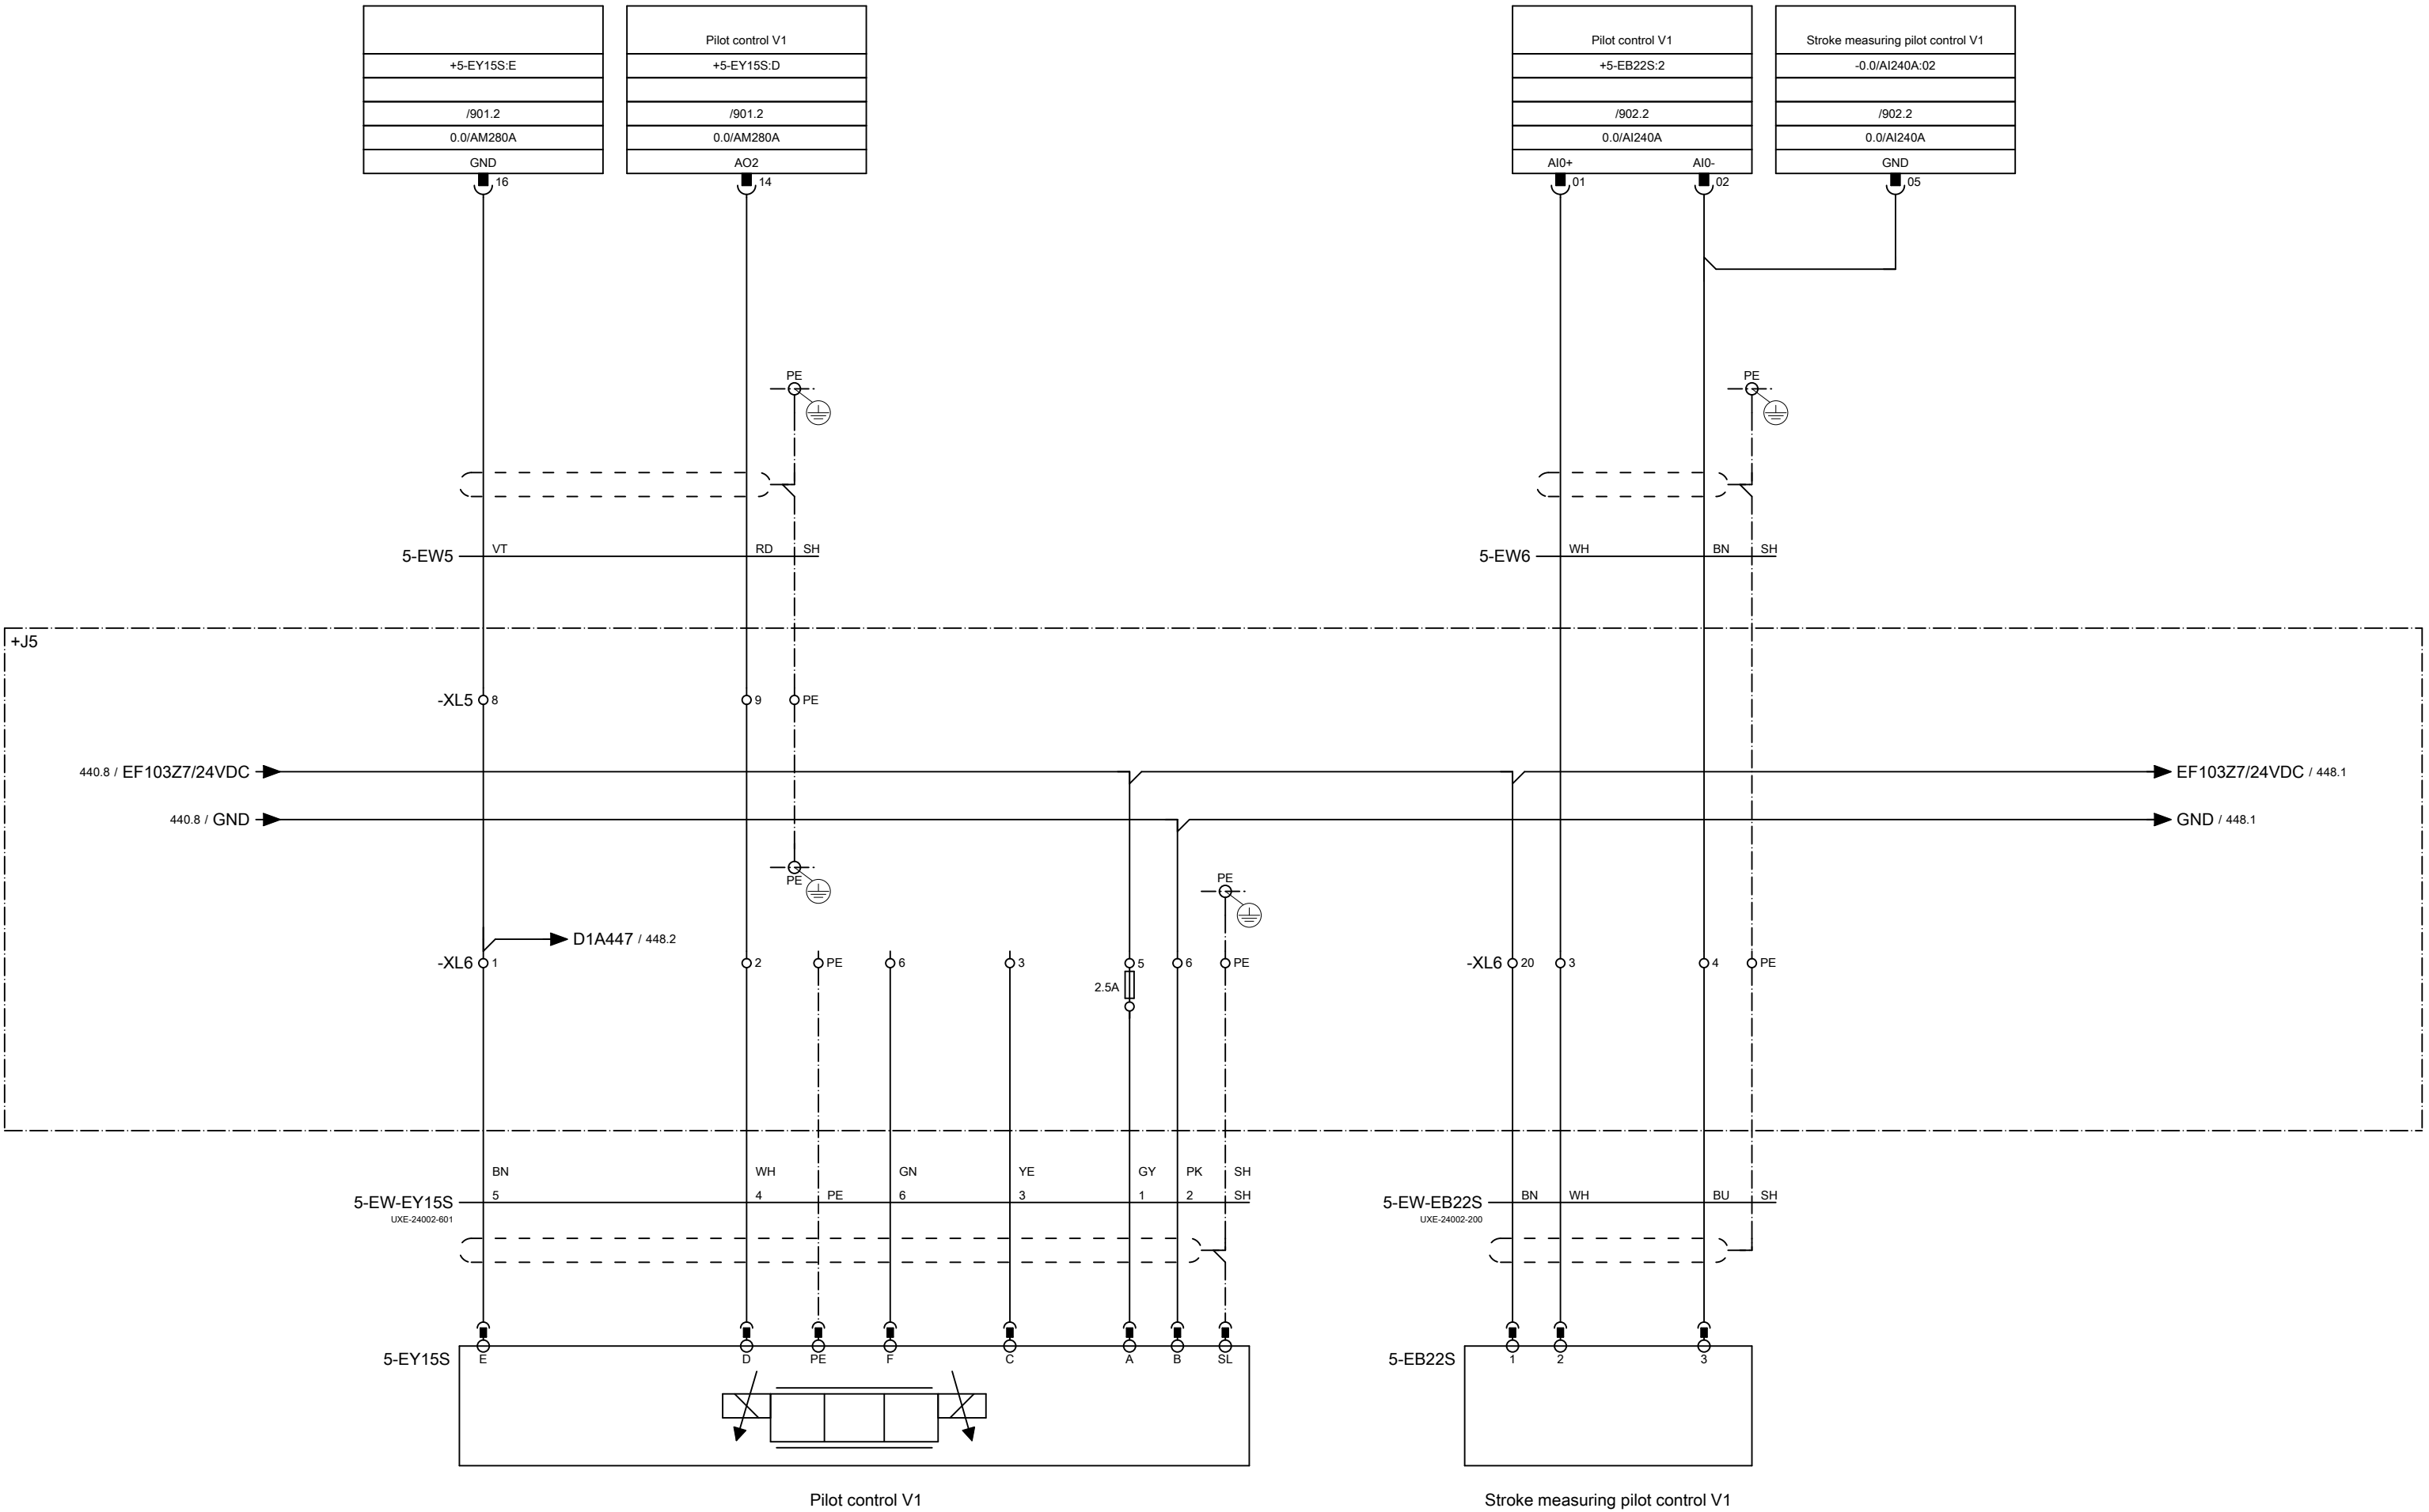

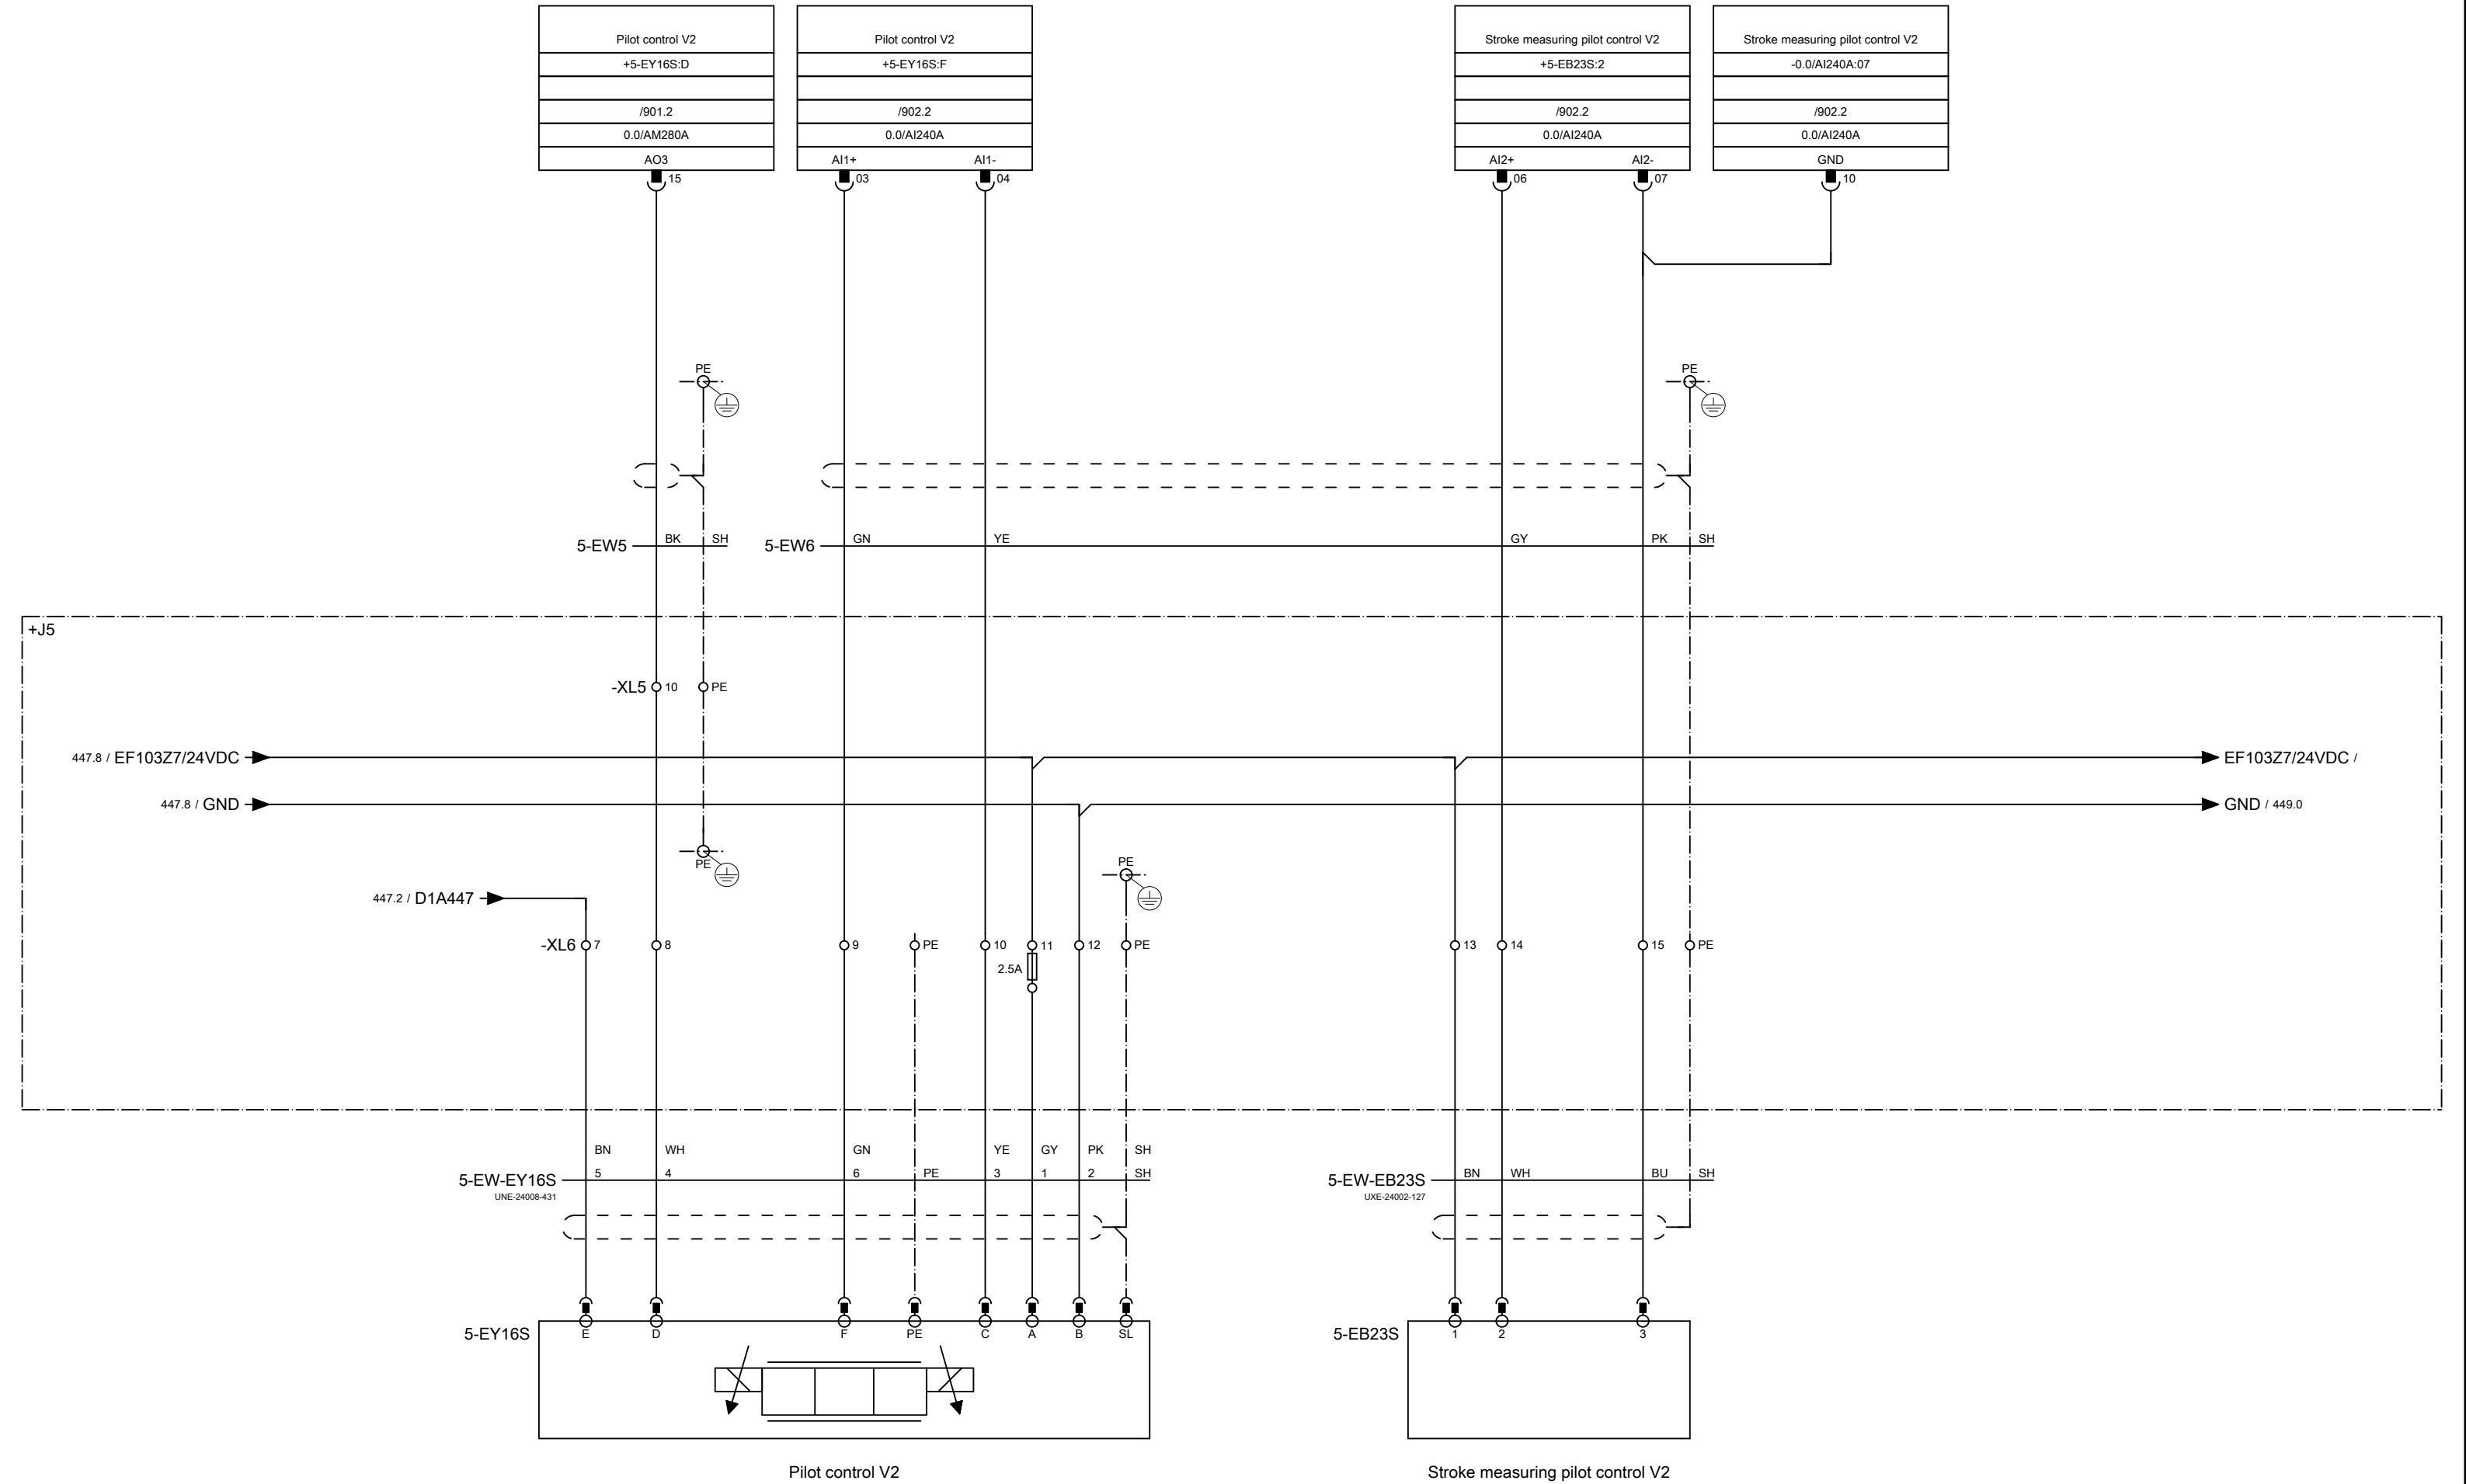

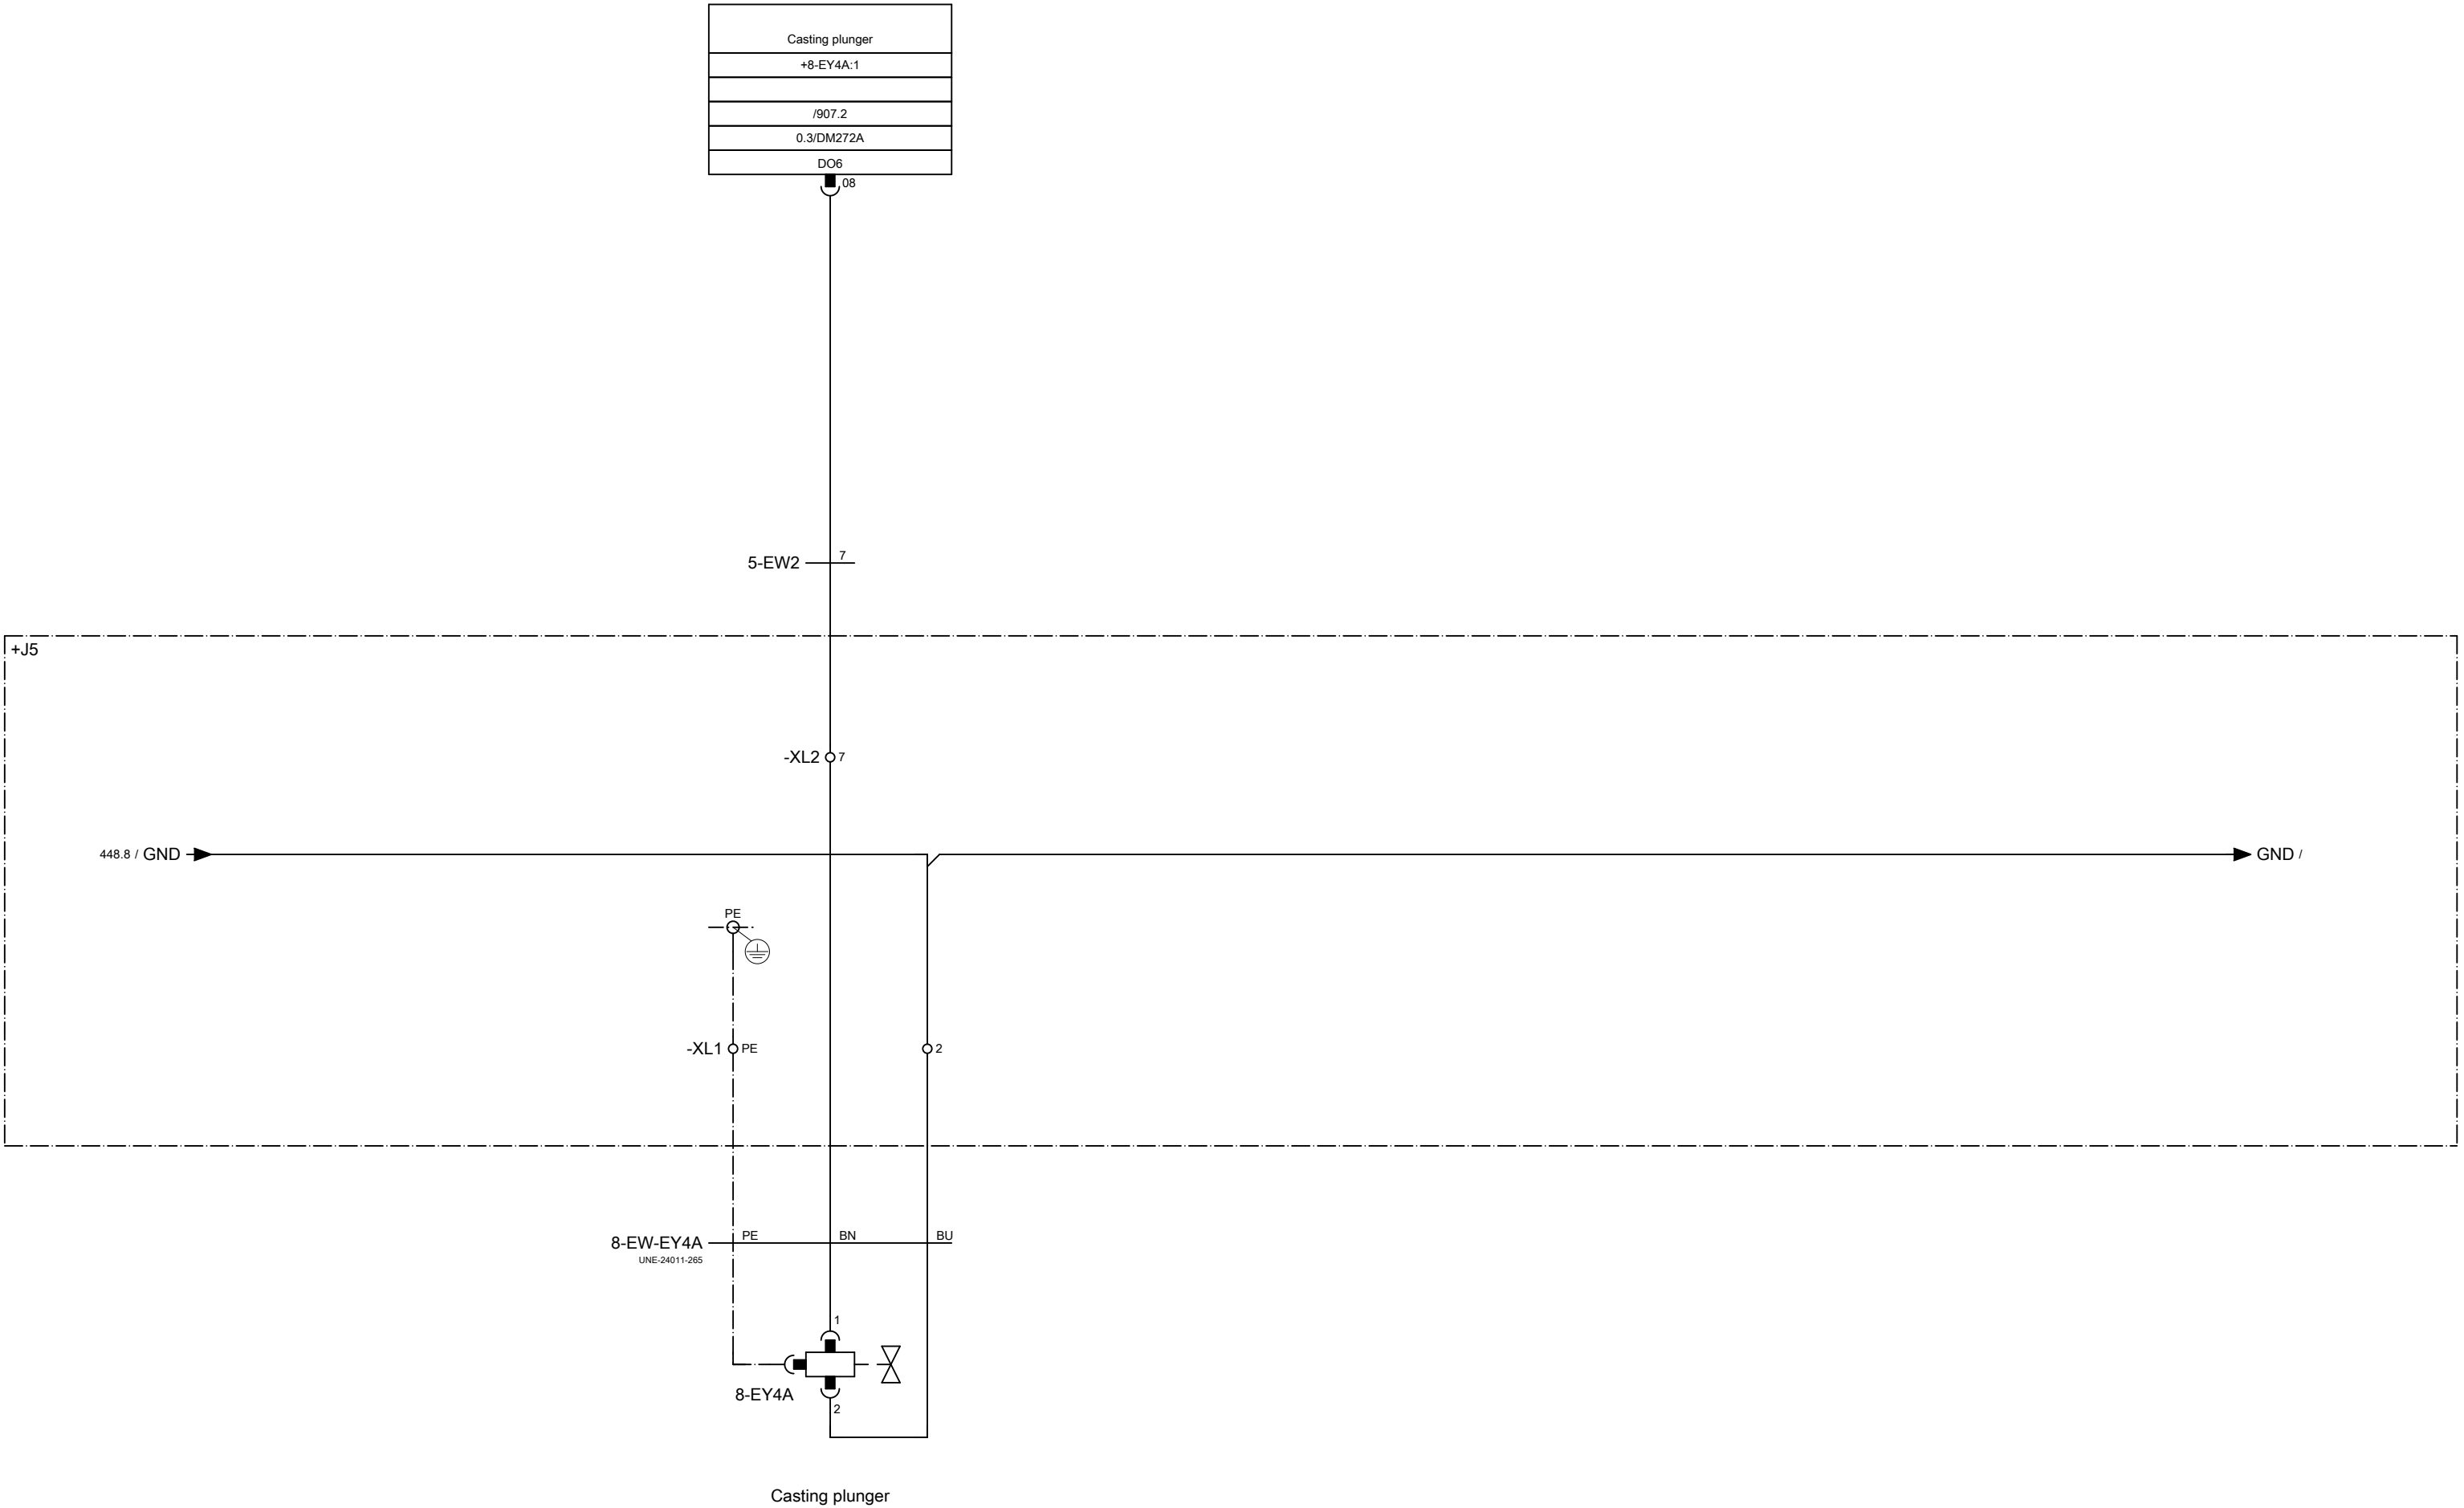

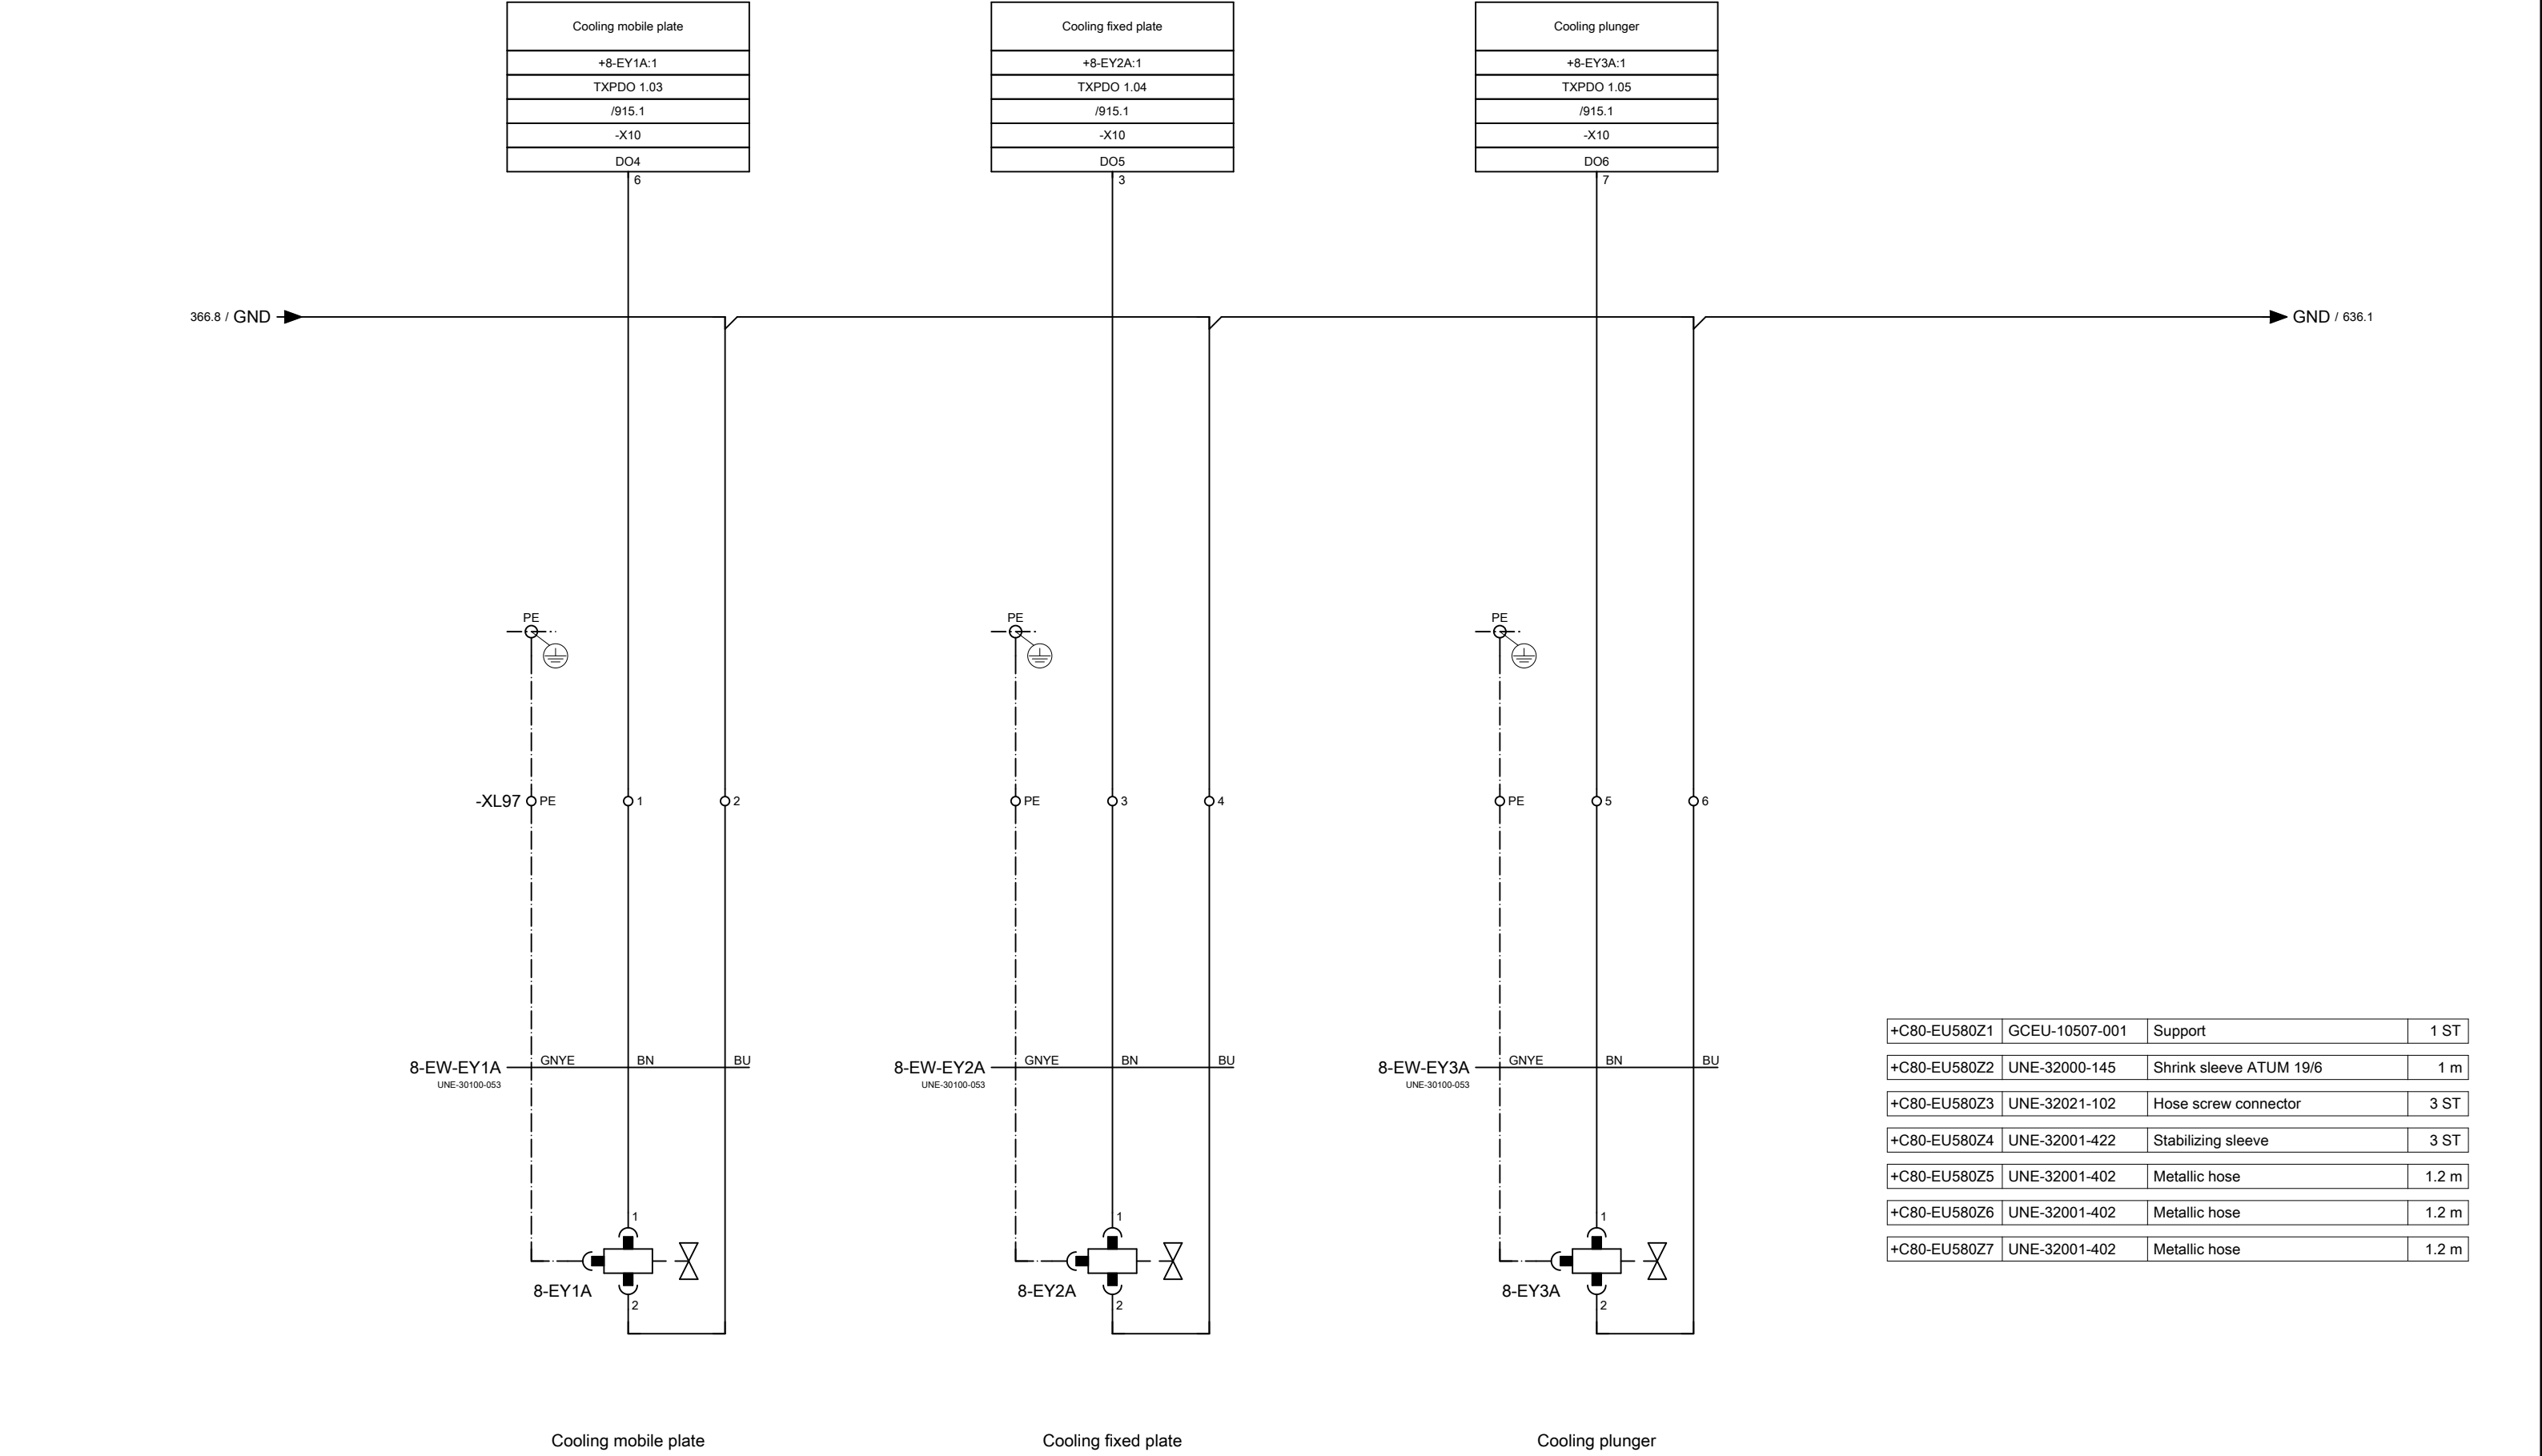


Emergency off fencing metal feeding
+J49.3-ES57:34
RXPDO 1.09
/911.7
-X3
DI2

5

637.8 / S1A637



Emergency off fencing metal feeding

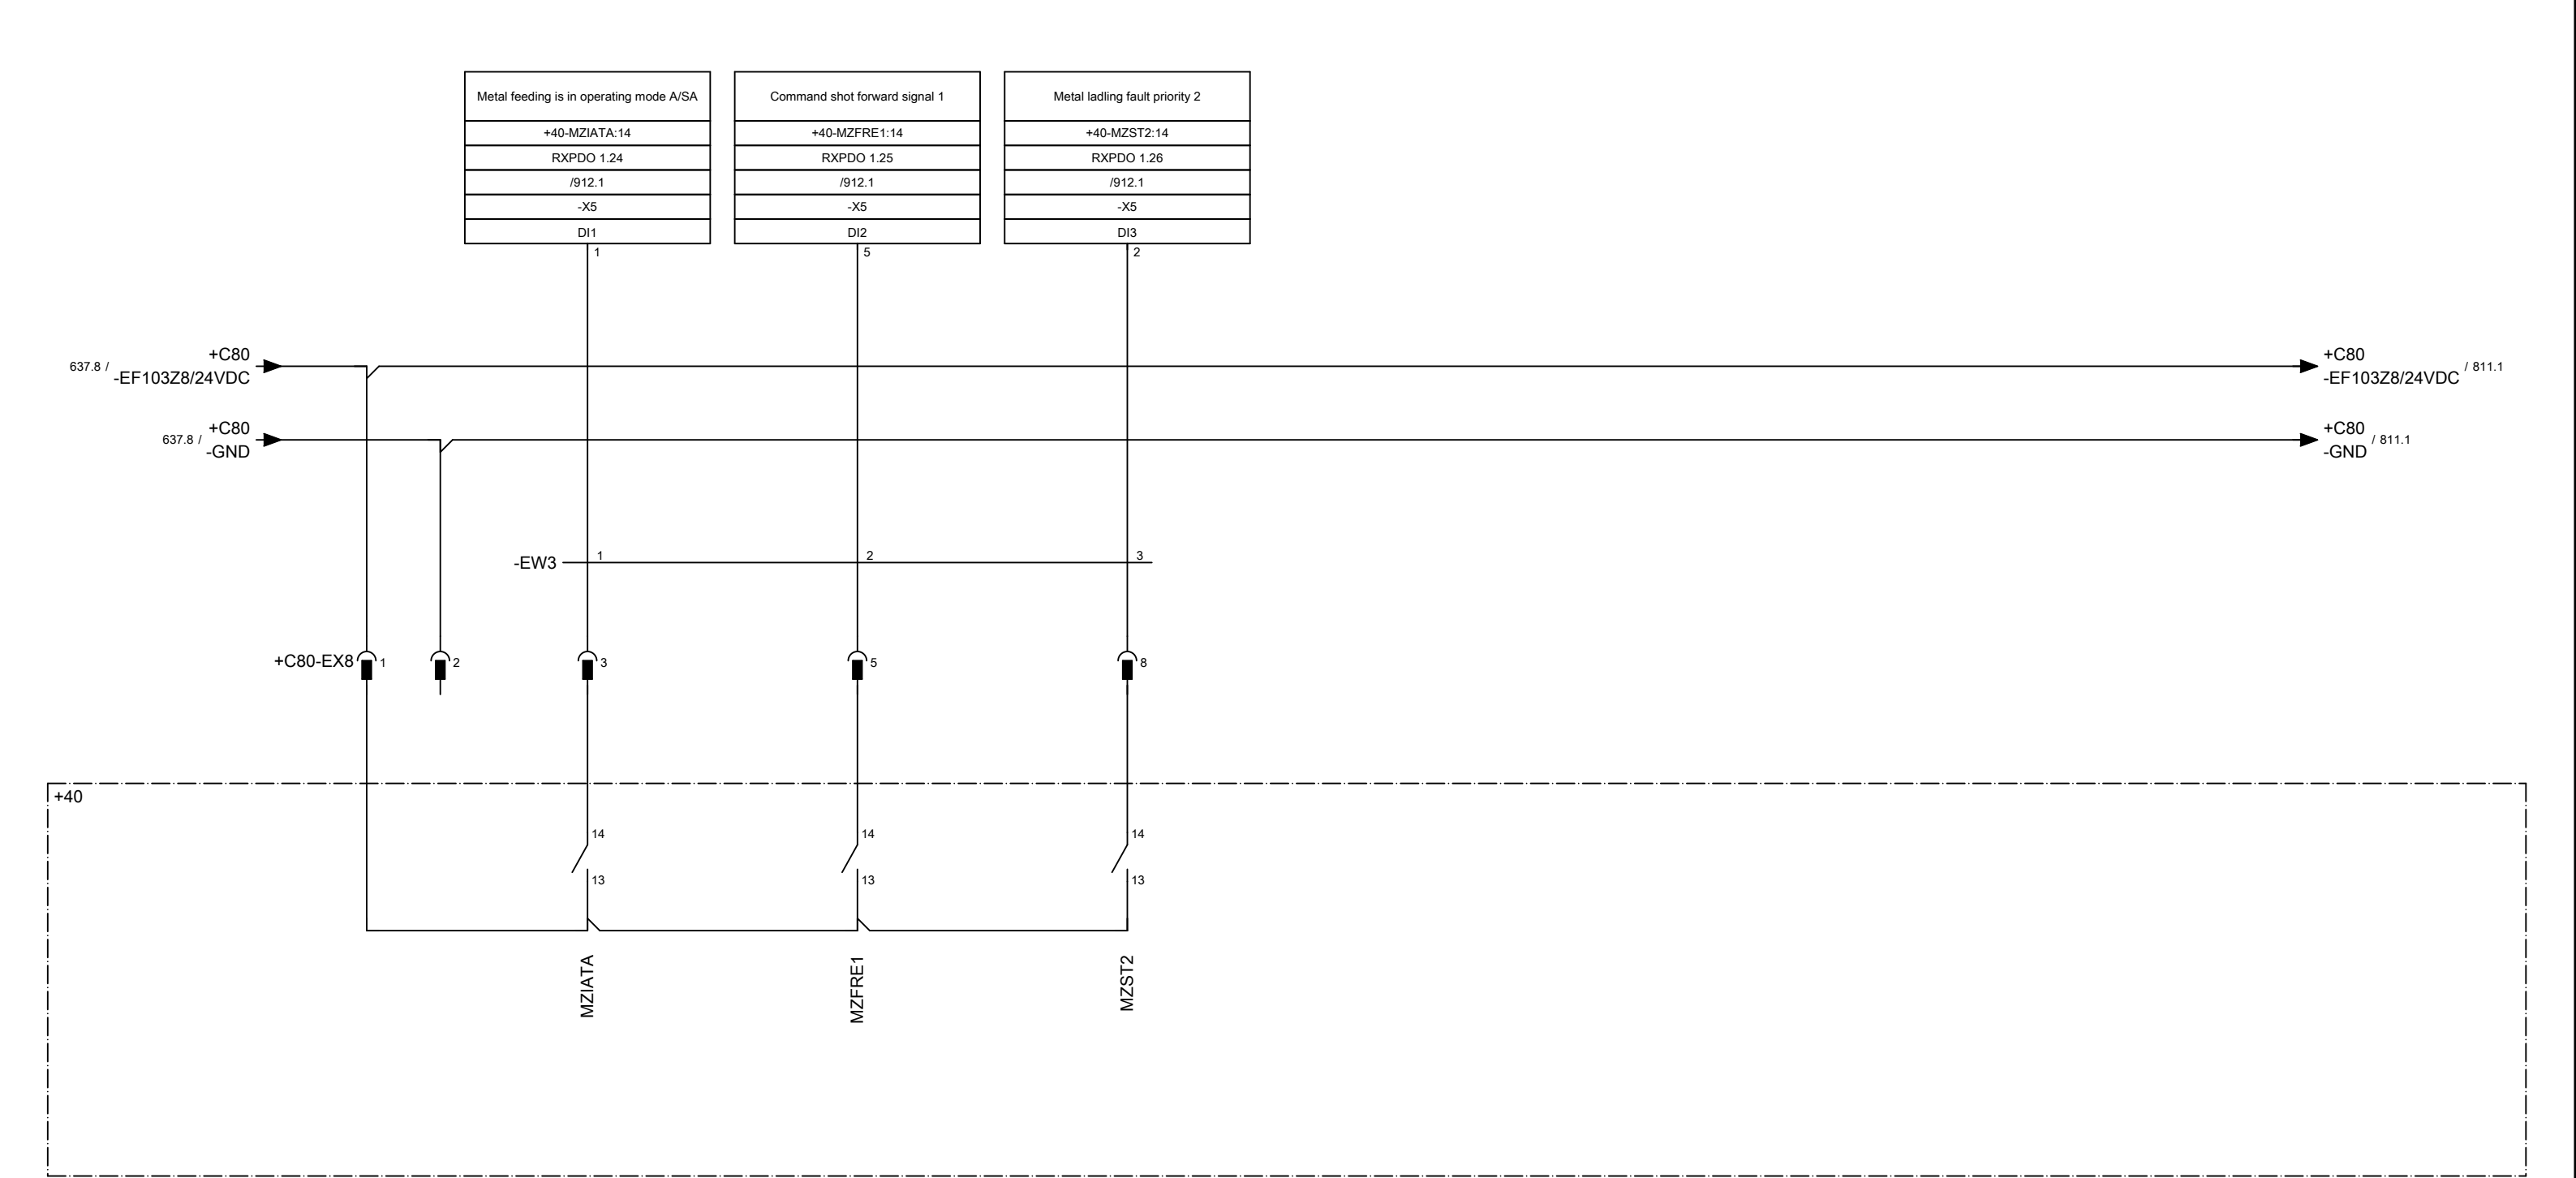

Metal feeding is in operating mode A/SA

Command shot forward signal 1

Impulse min. 200ms

Metal ladling fault priority 2

=A+C80-EU801Z1
UNE-24004-114
1 ST

			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 801.01	Replacement of	Replaced by



Bühler AG - Die Casting

Peripheral interface metal feeding


ESM-85061

Ecoline

EN / UL

Page

801

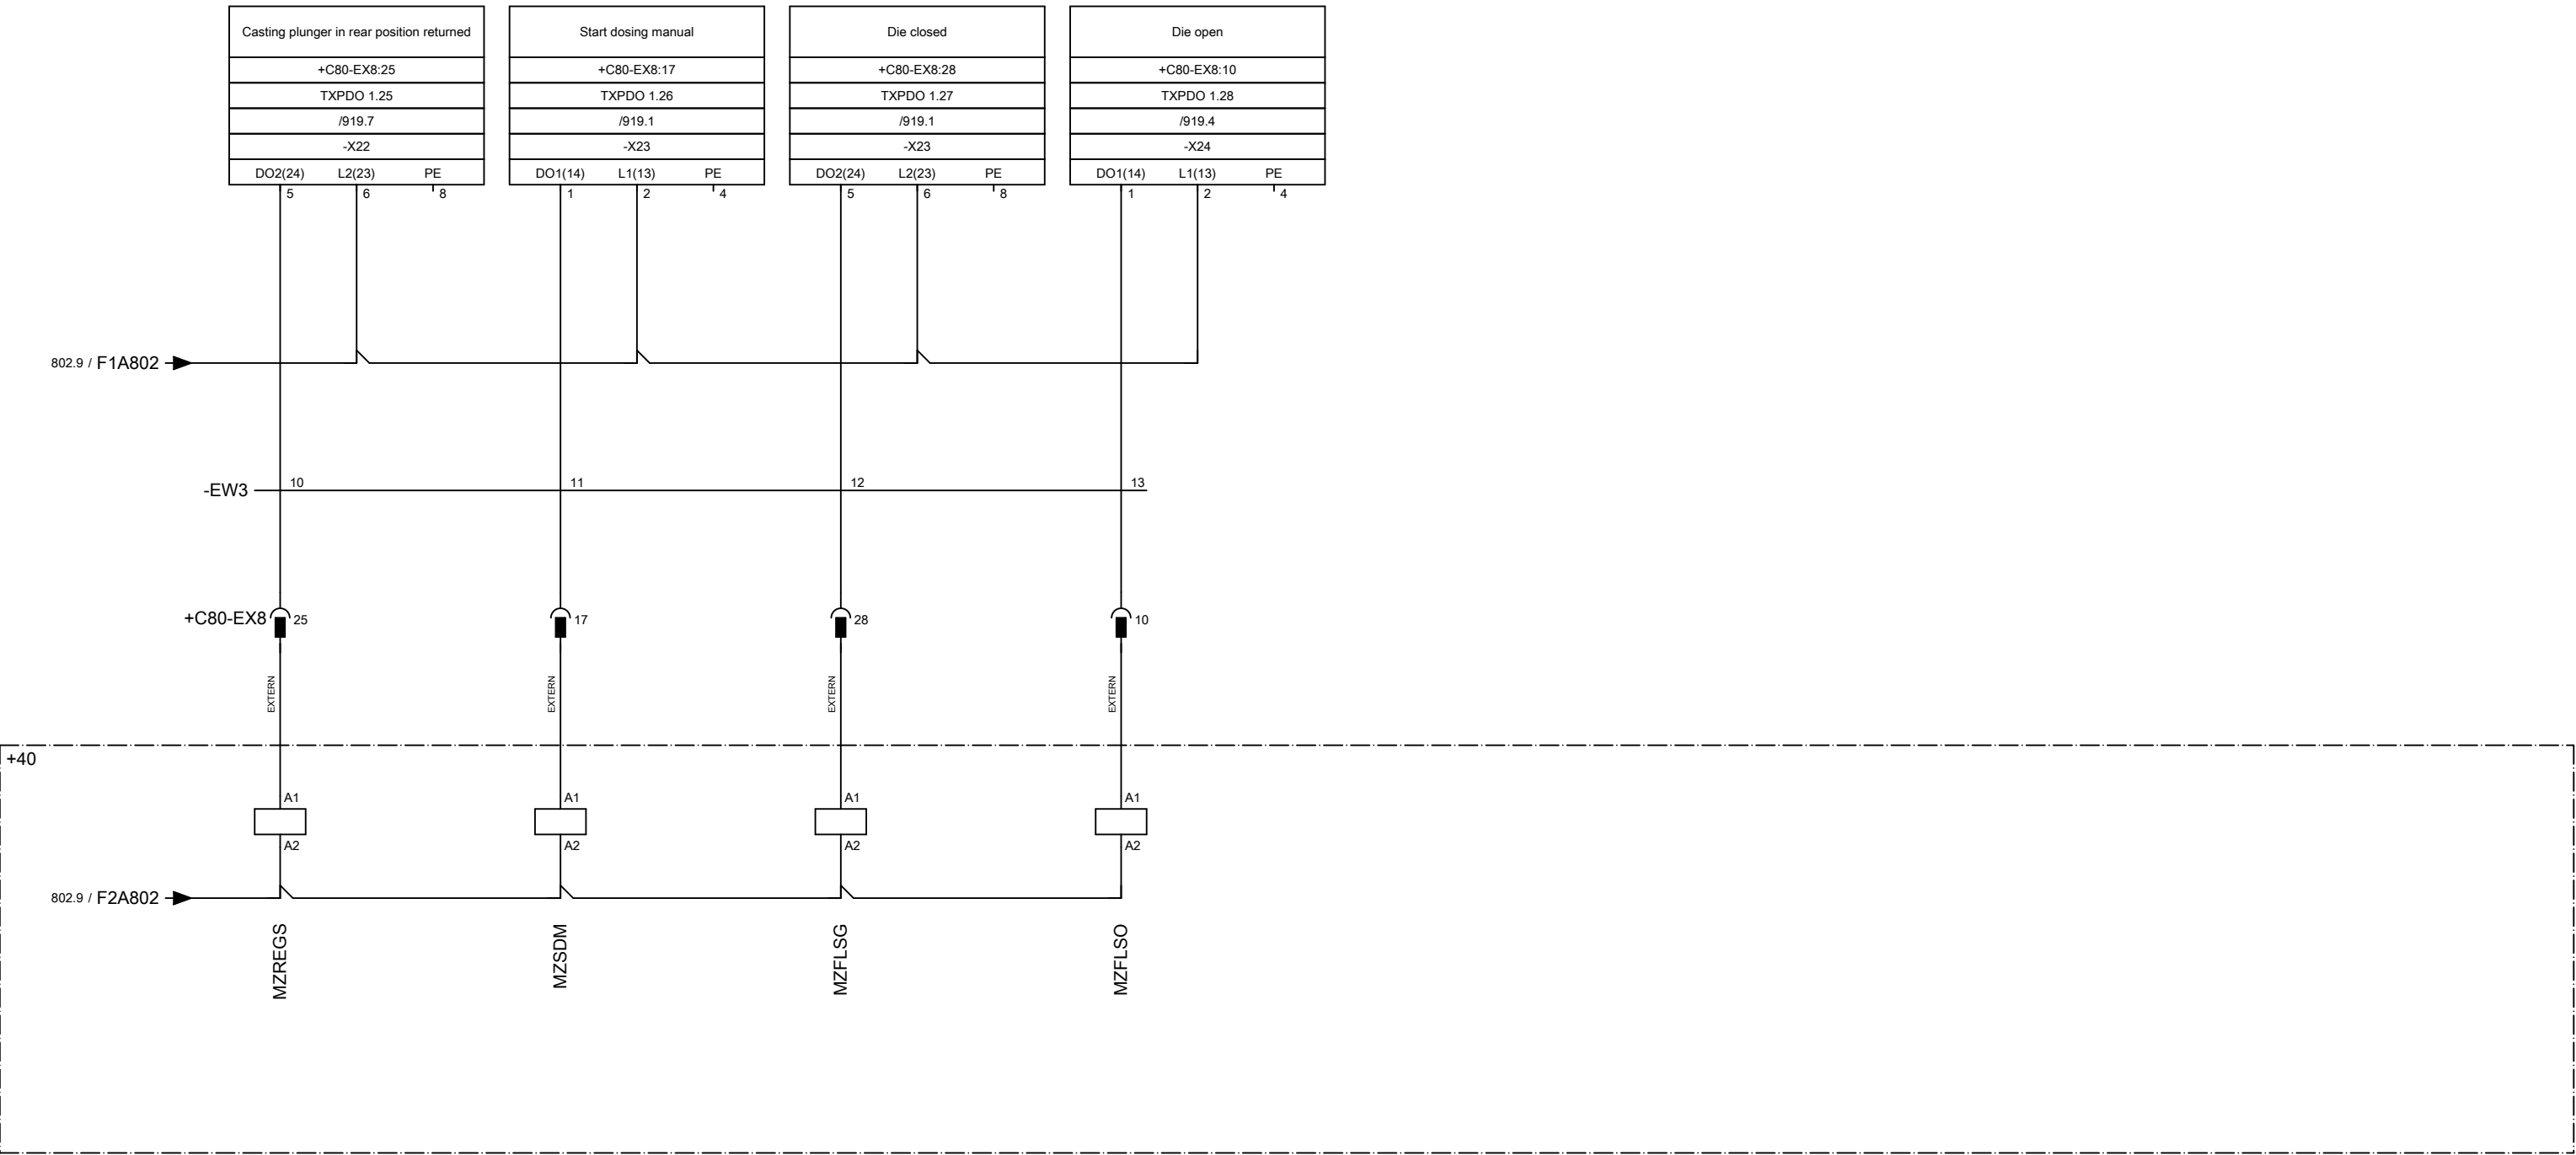



Casting plunger in rear position returned

Start dosing manual

Die closed

Die open

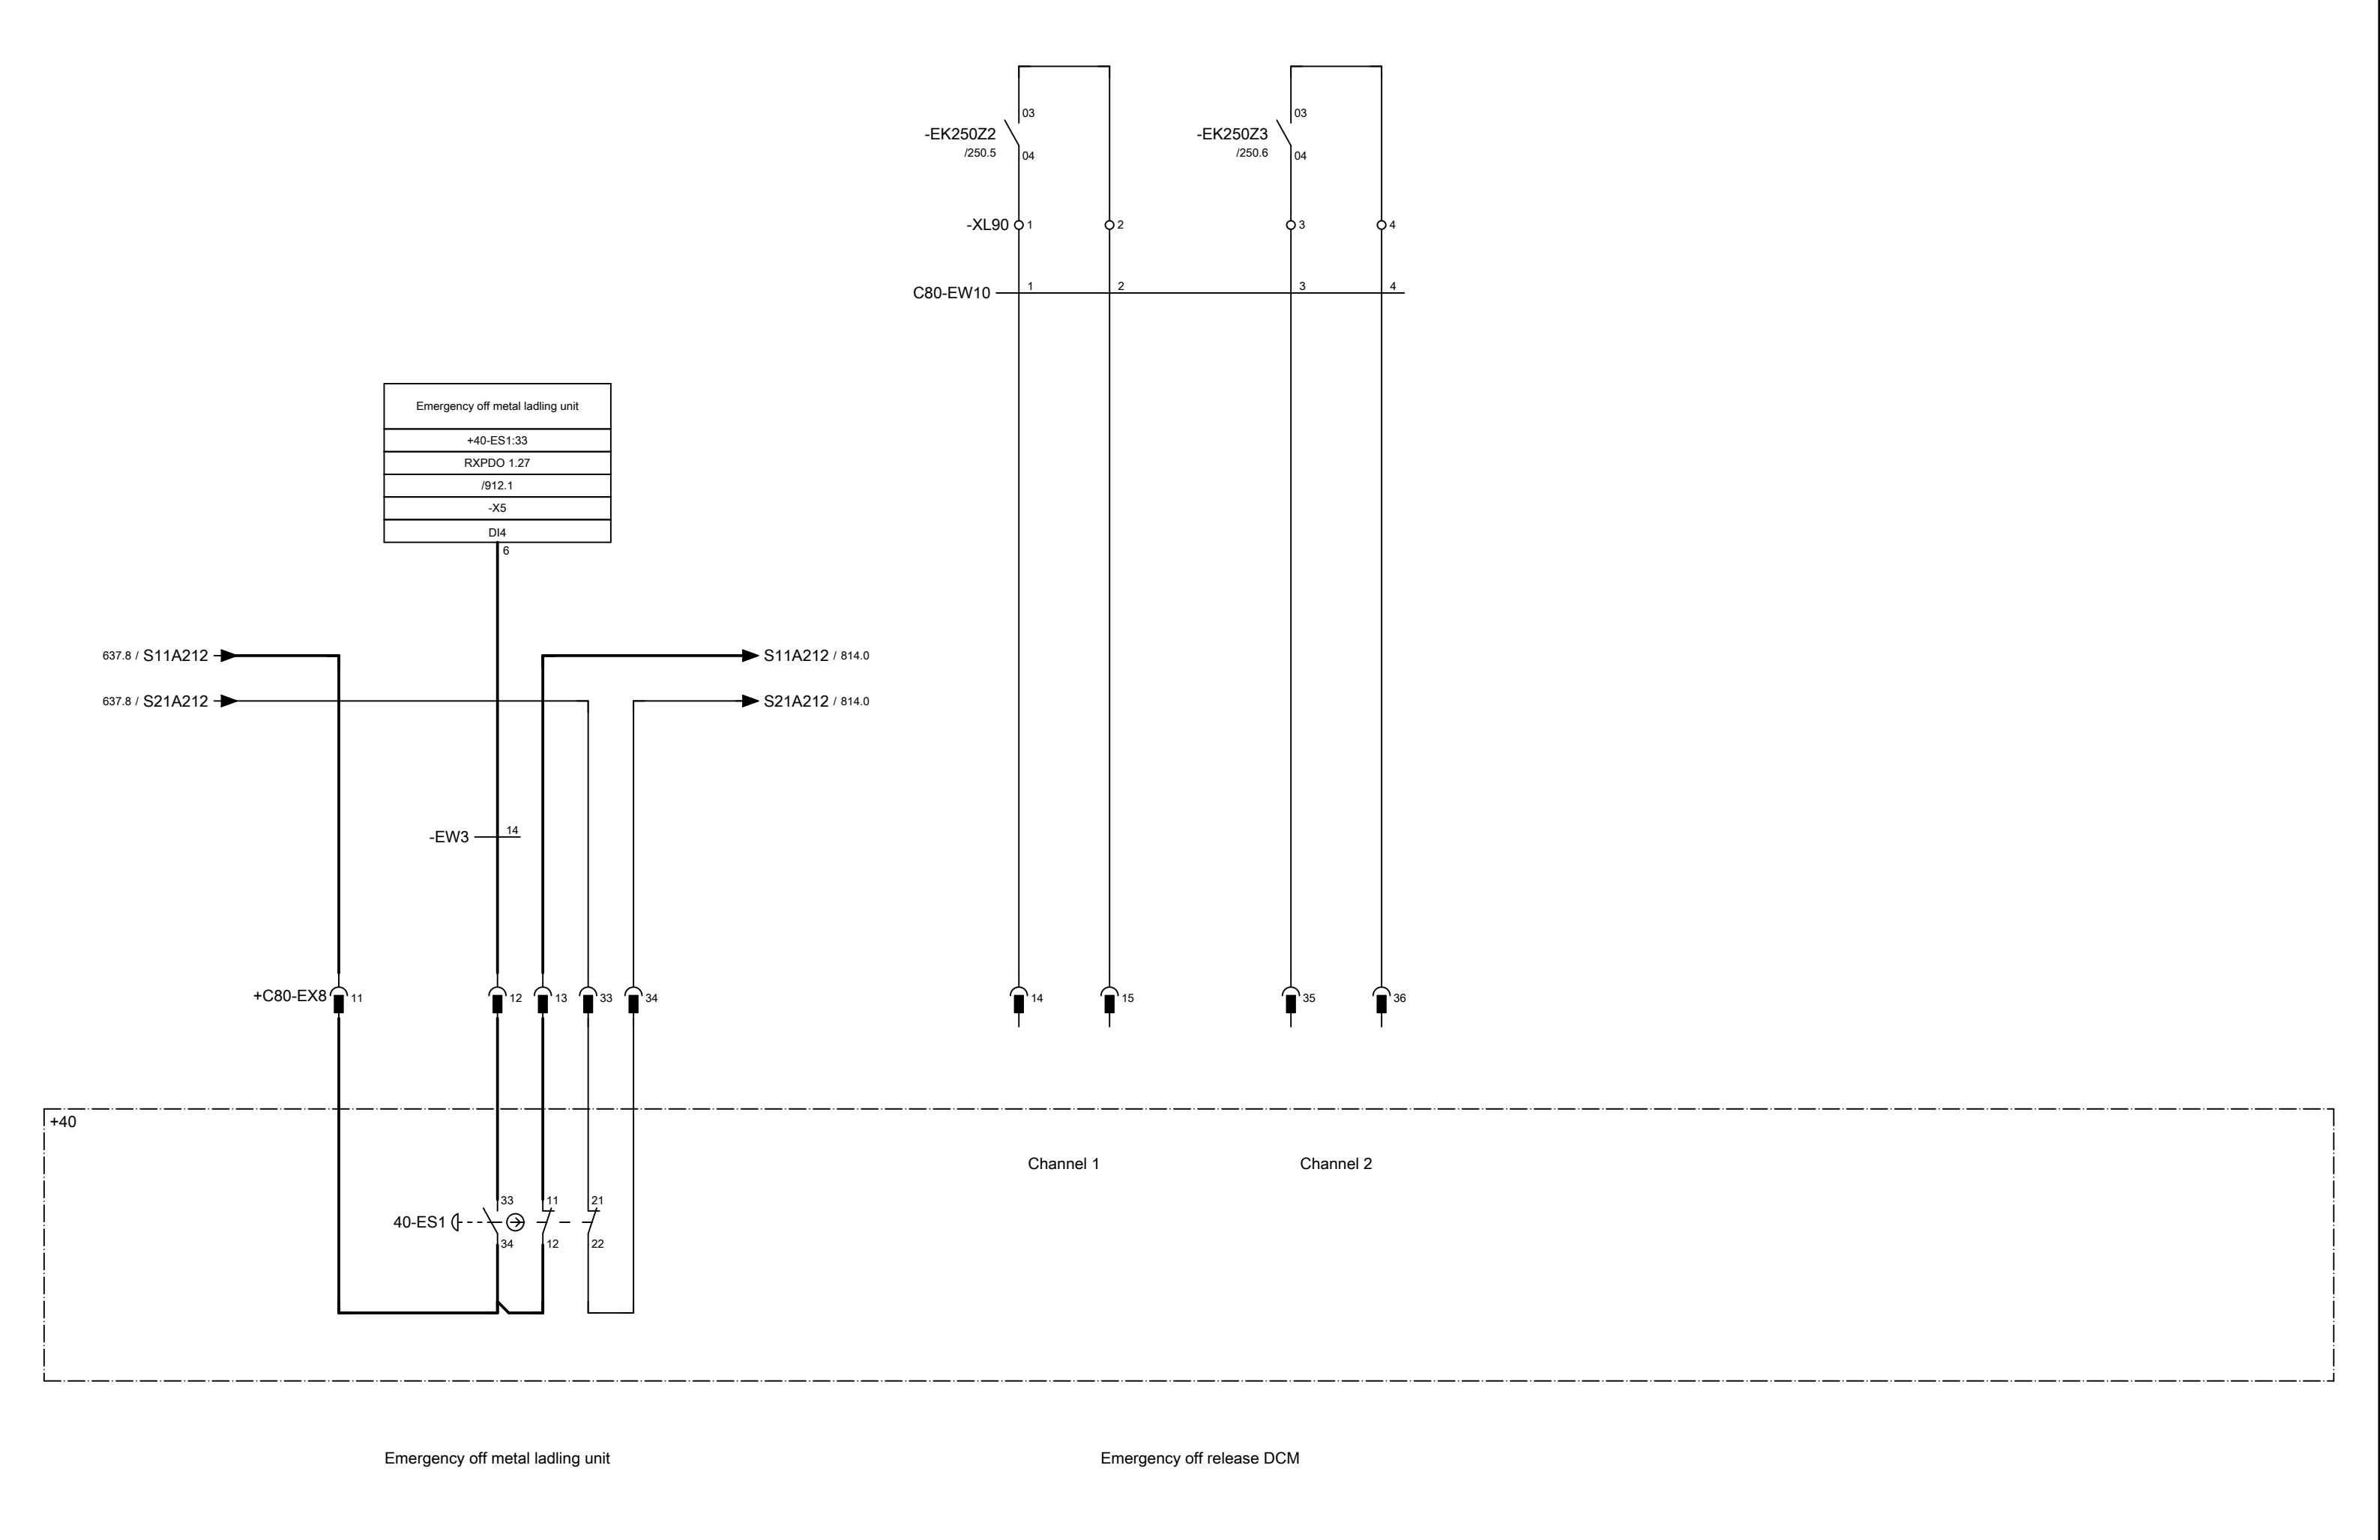

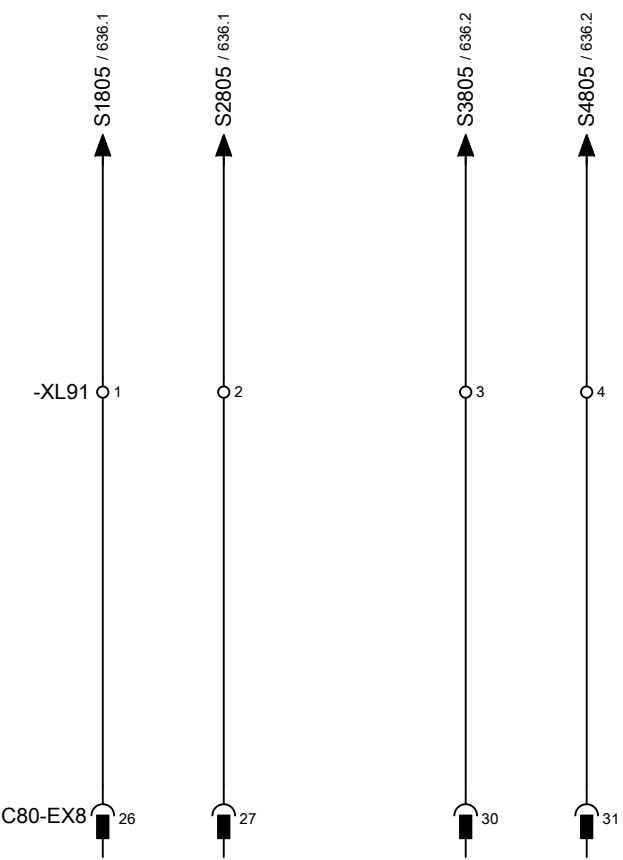



+42/+55

채널 1
Channel 1

채널 2
Channel 2

Fencing metal feeding

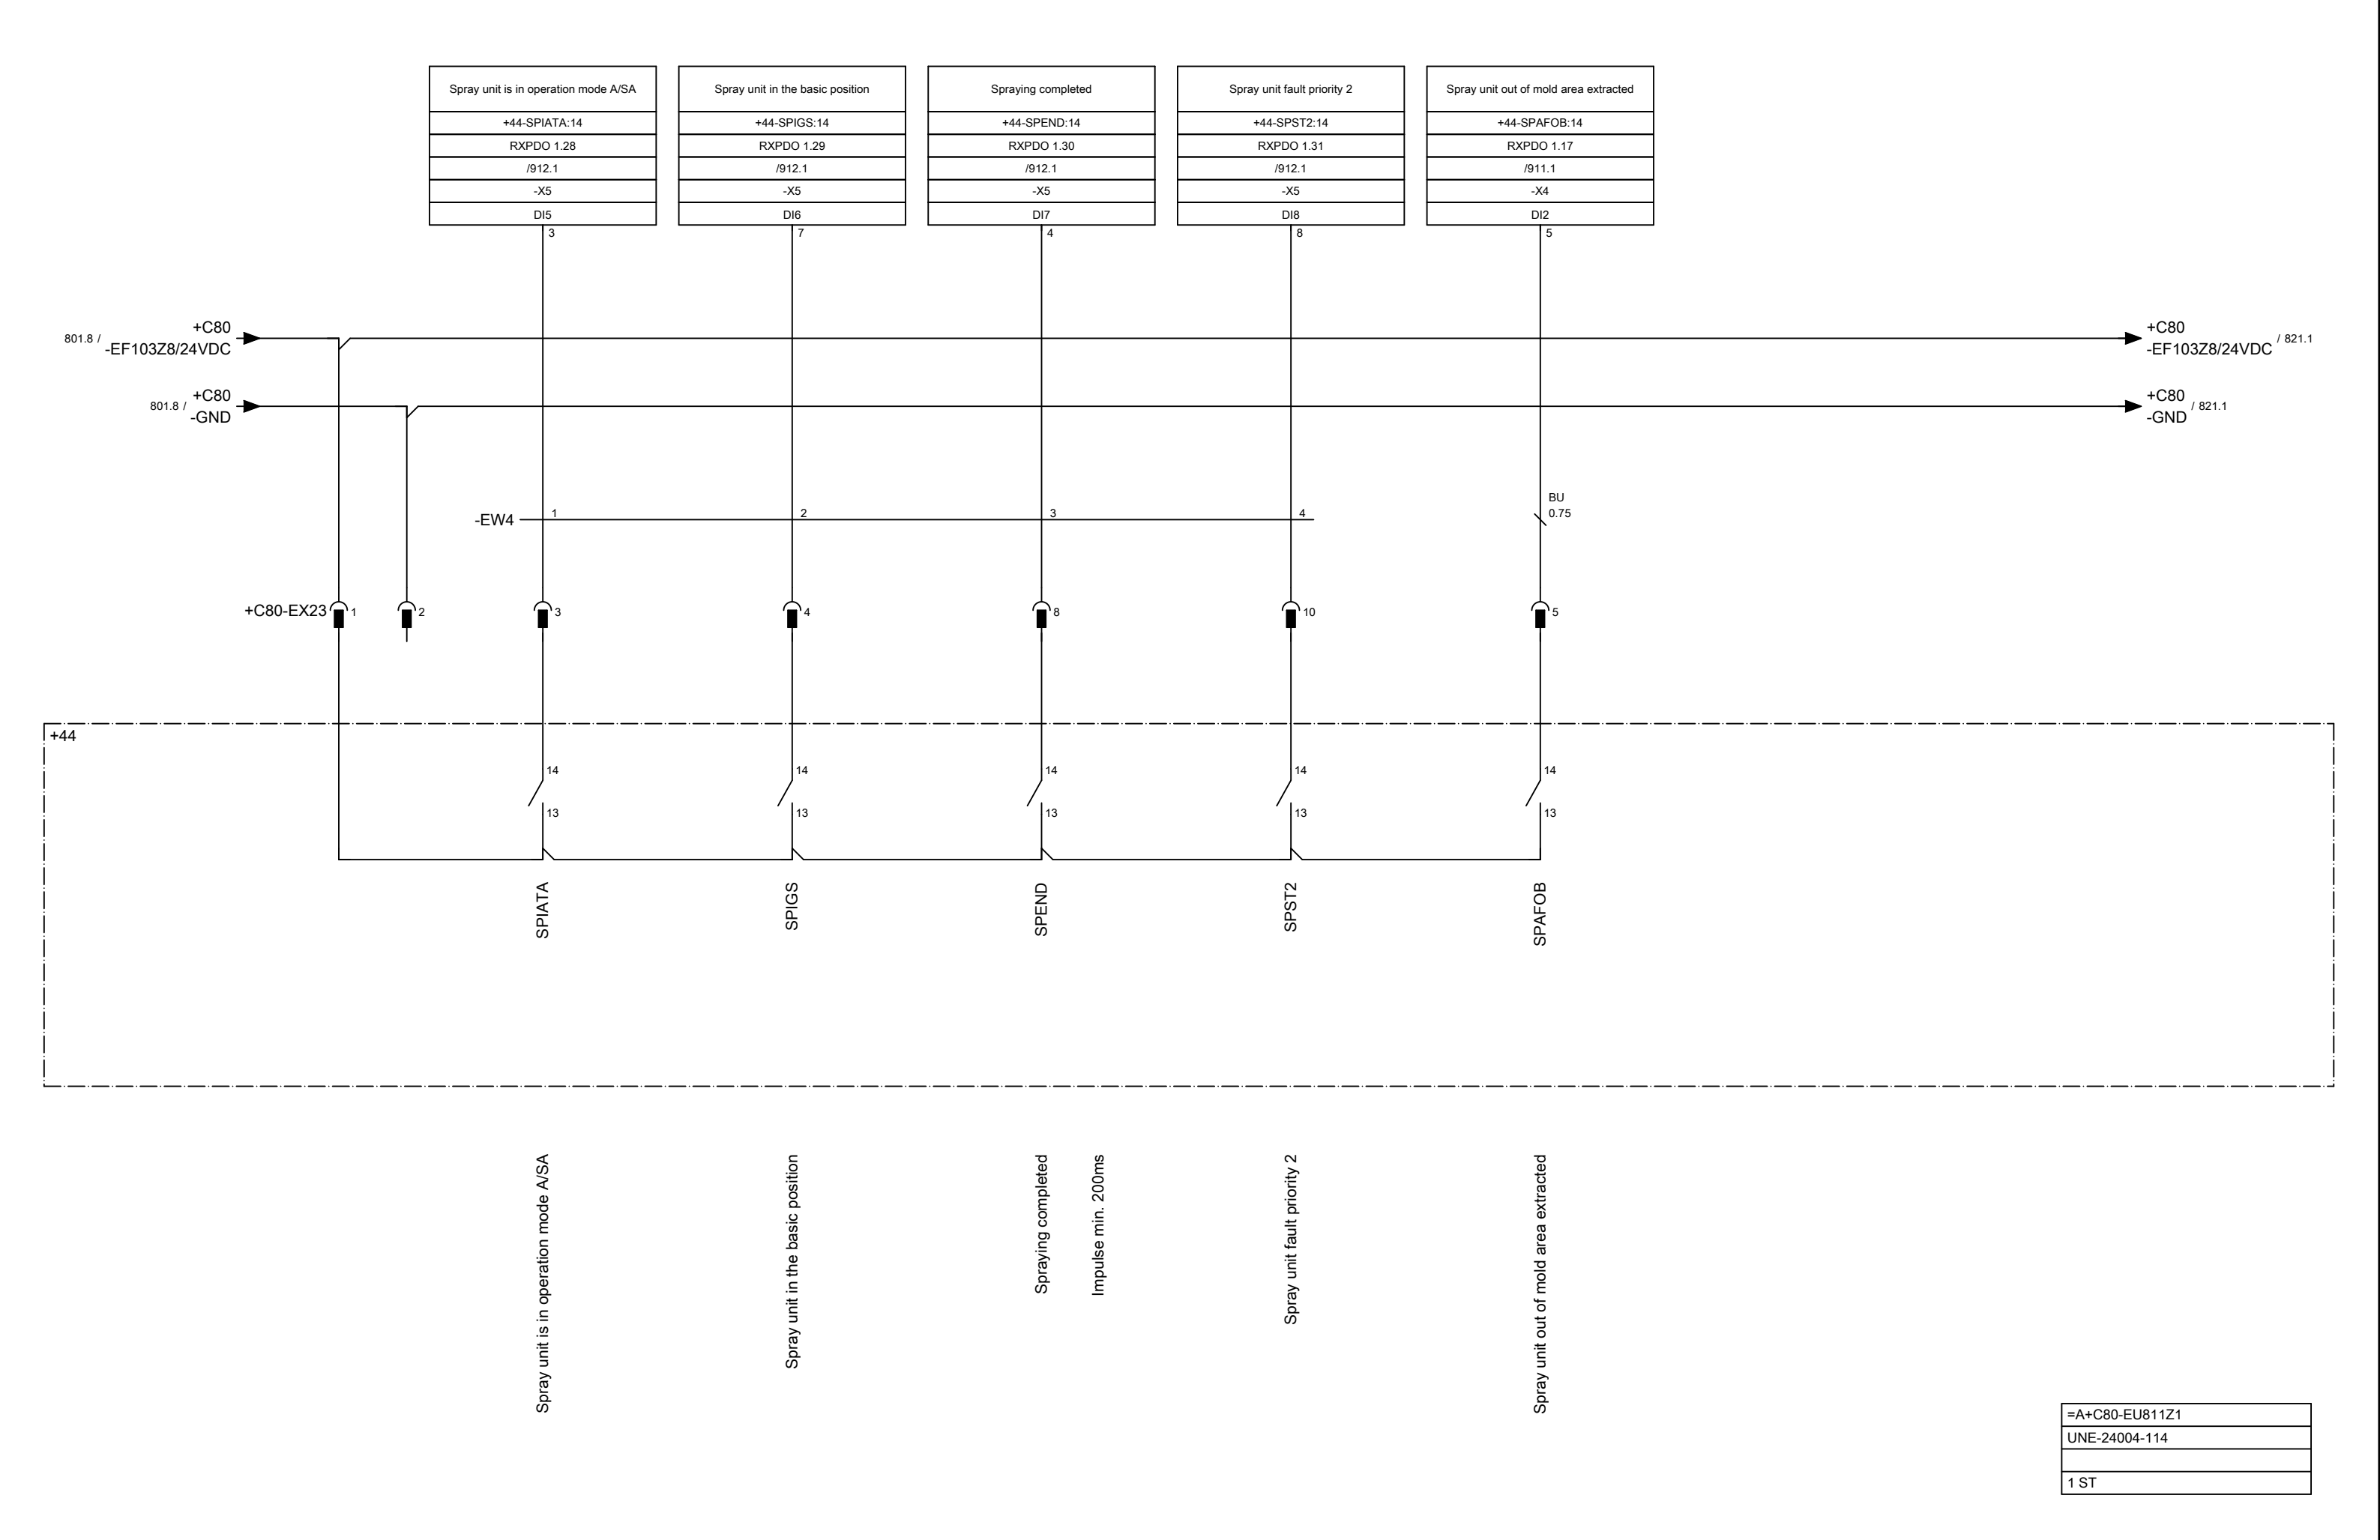

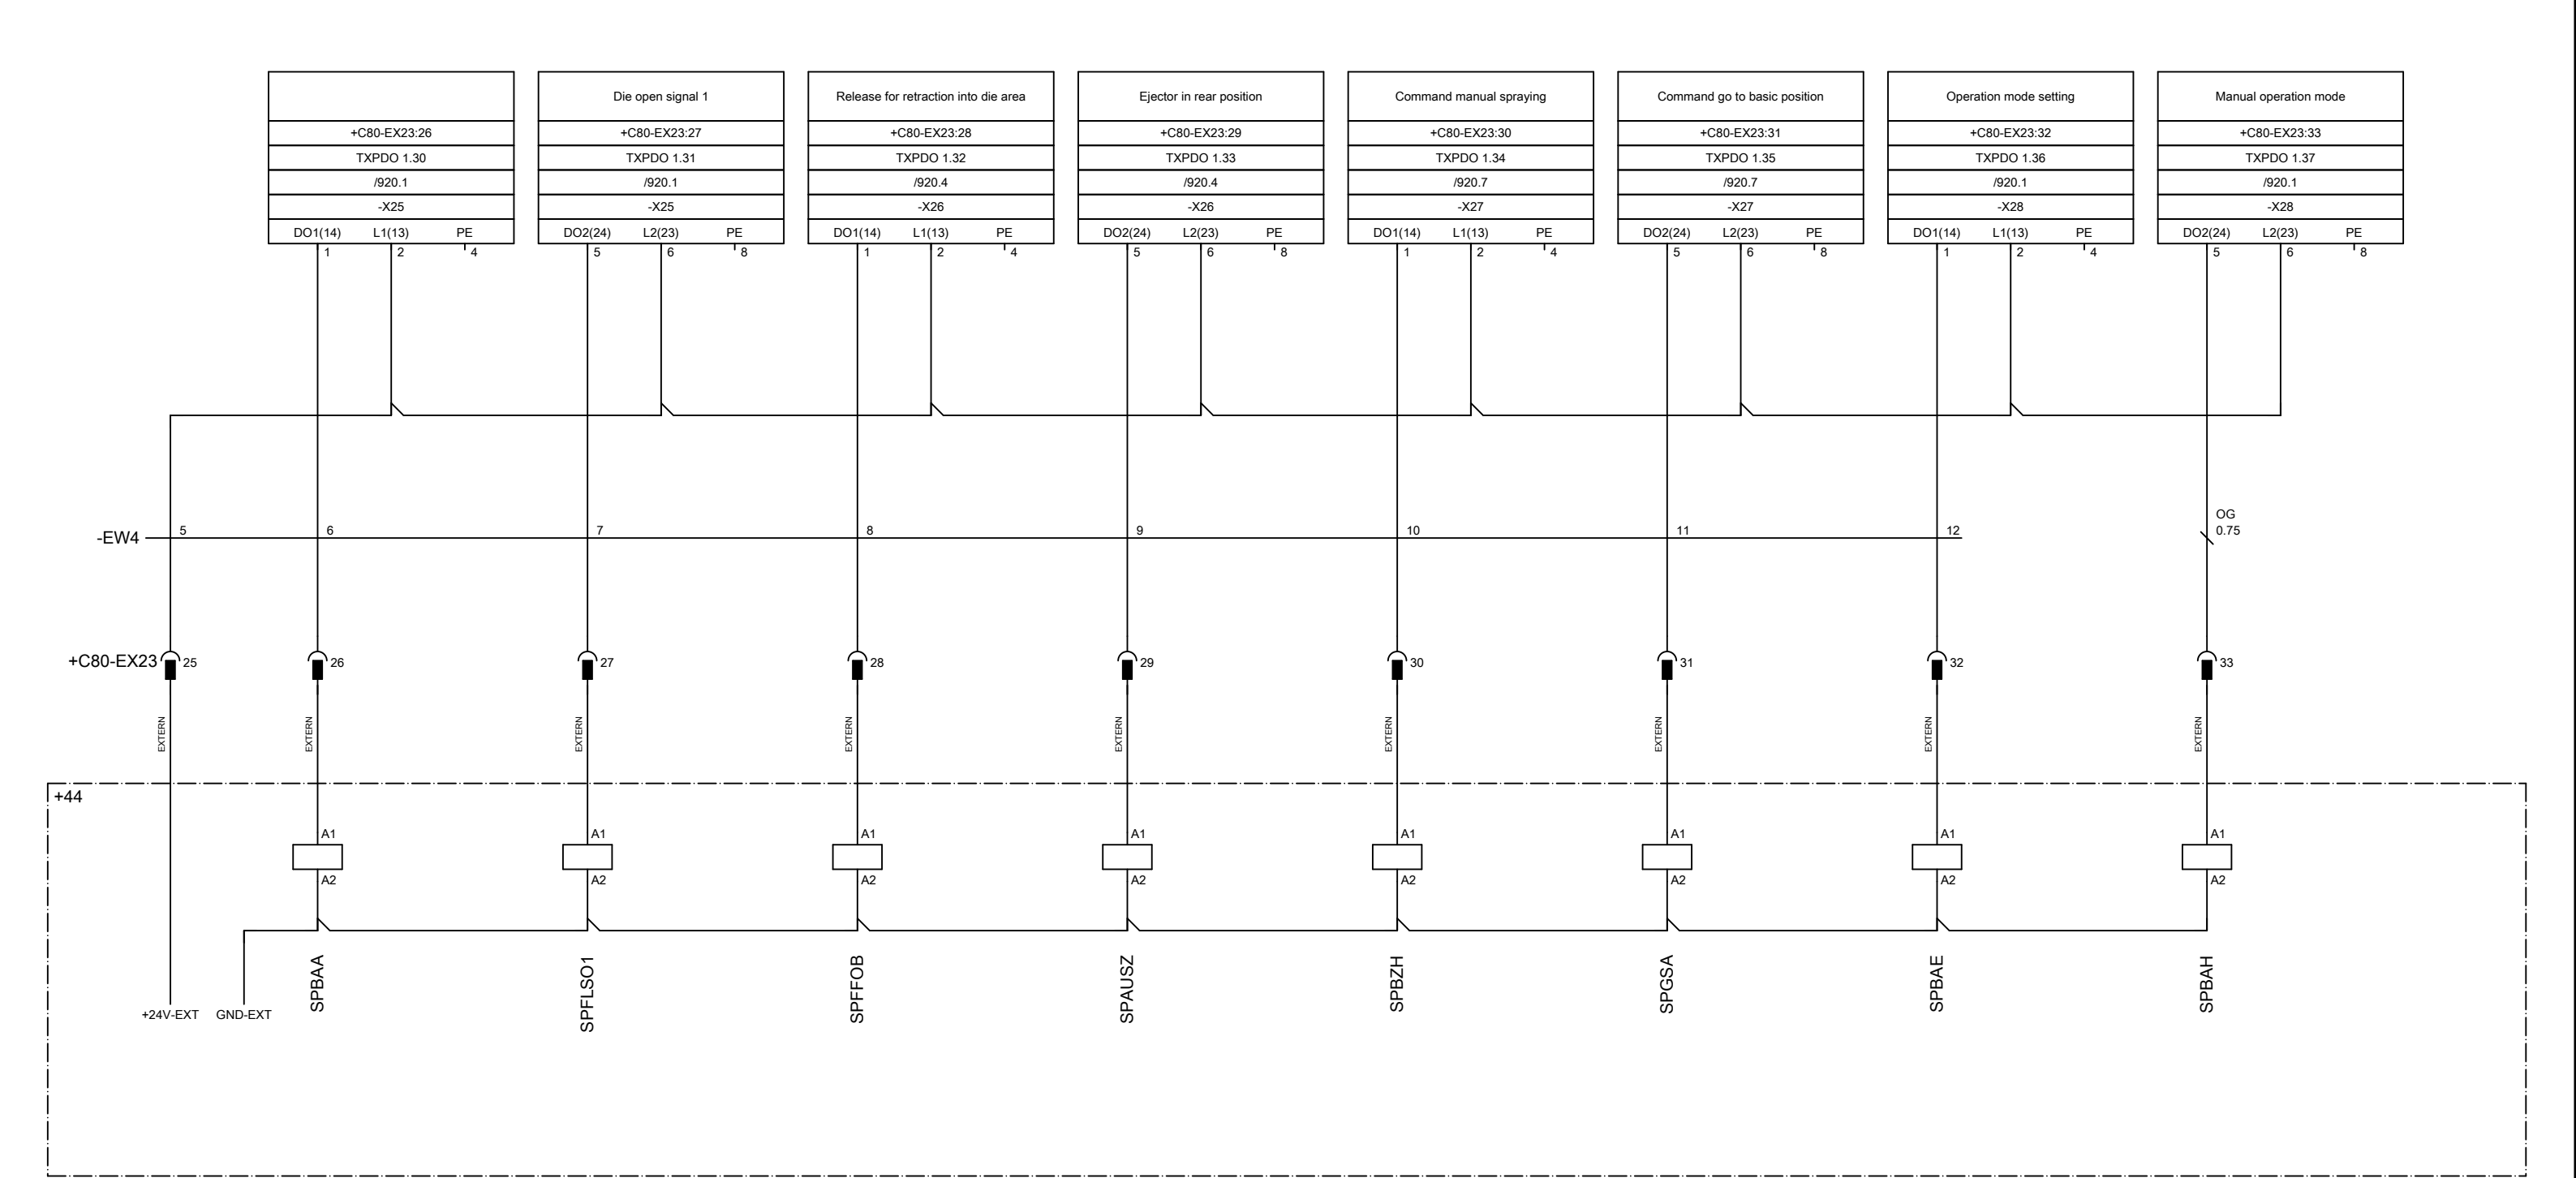

Die open signal 1

Release for retraction into die area


Ejector in rear position


Command manual spraying


Command go to basic position


Operation mode setting

Manual operation mode

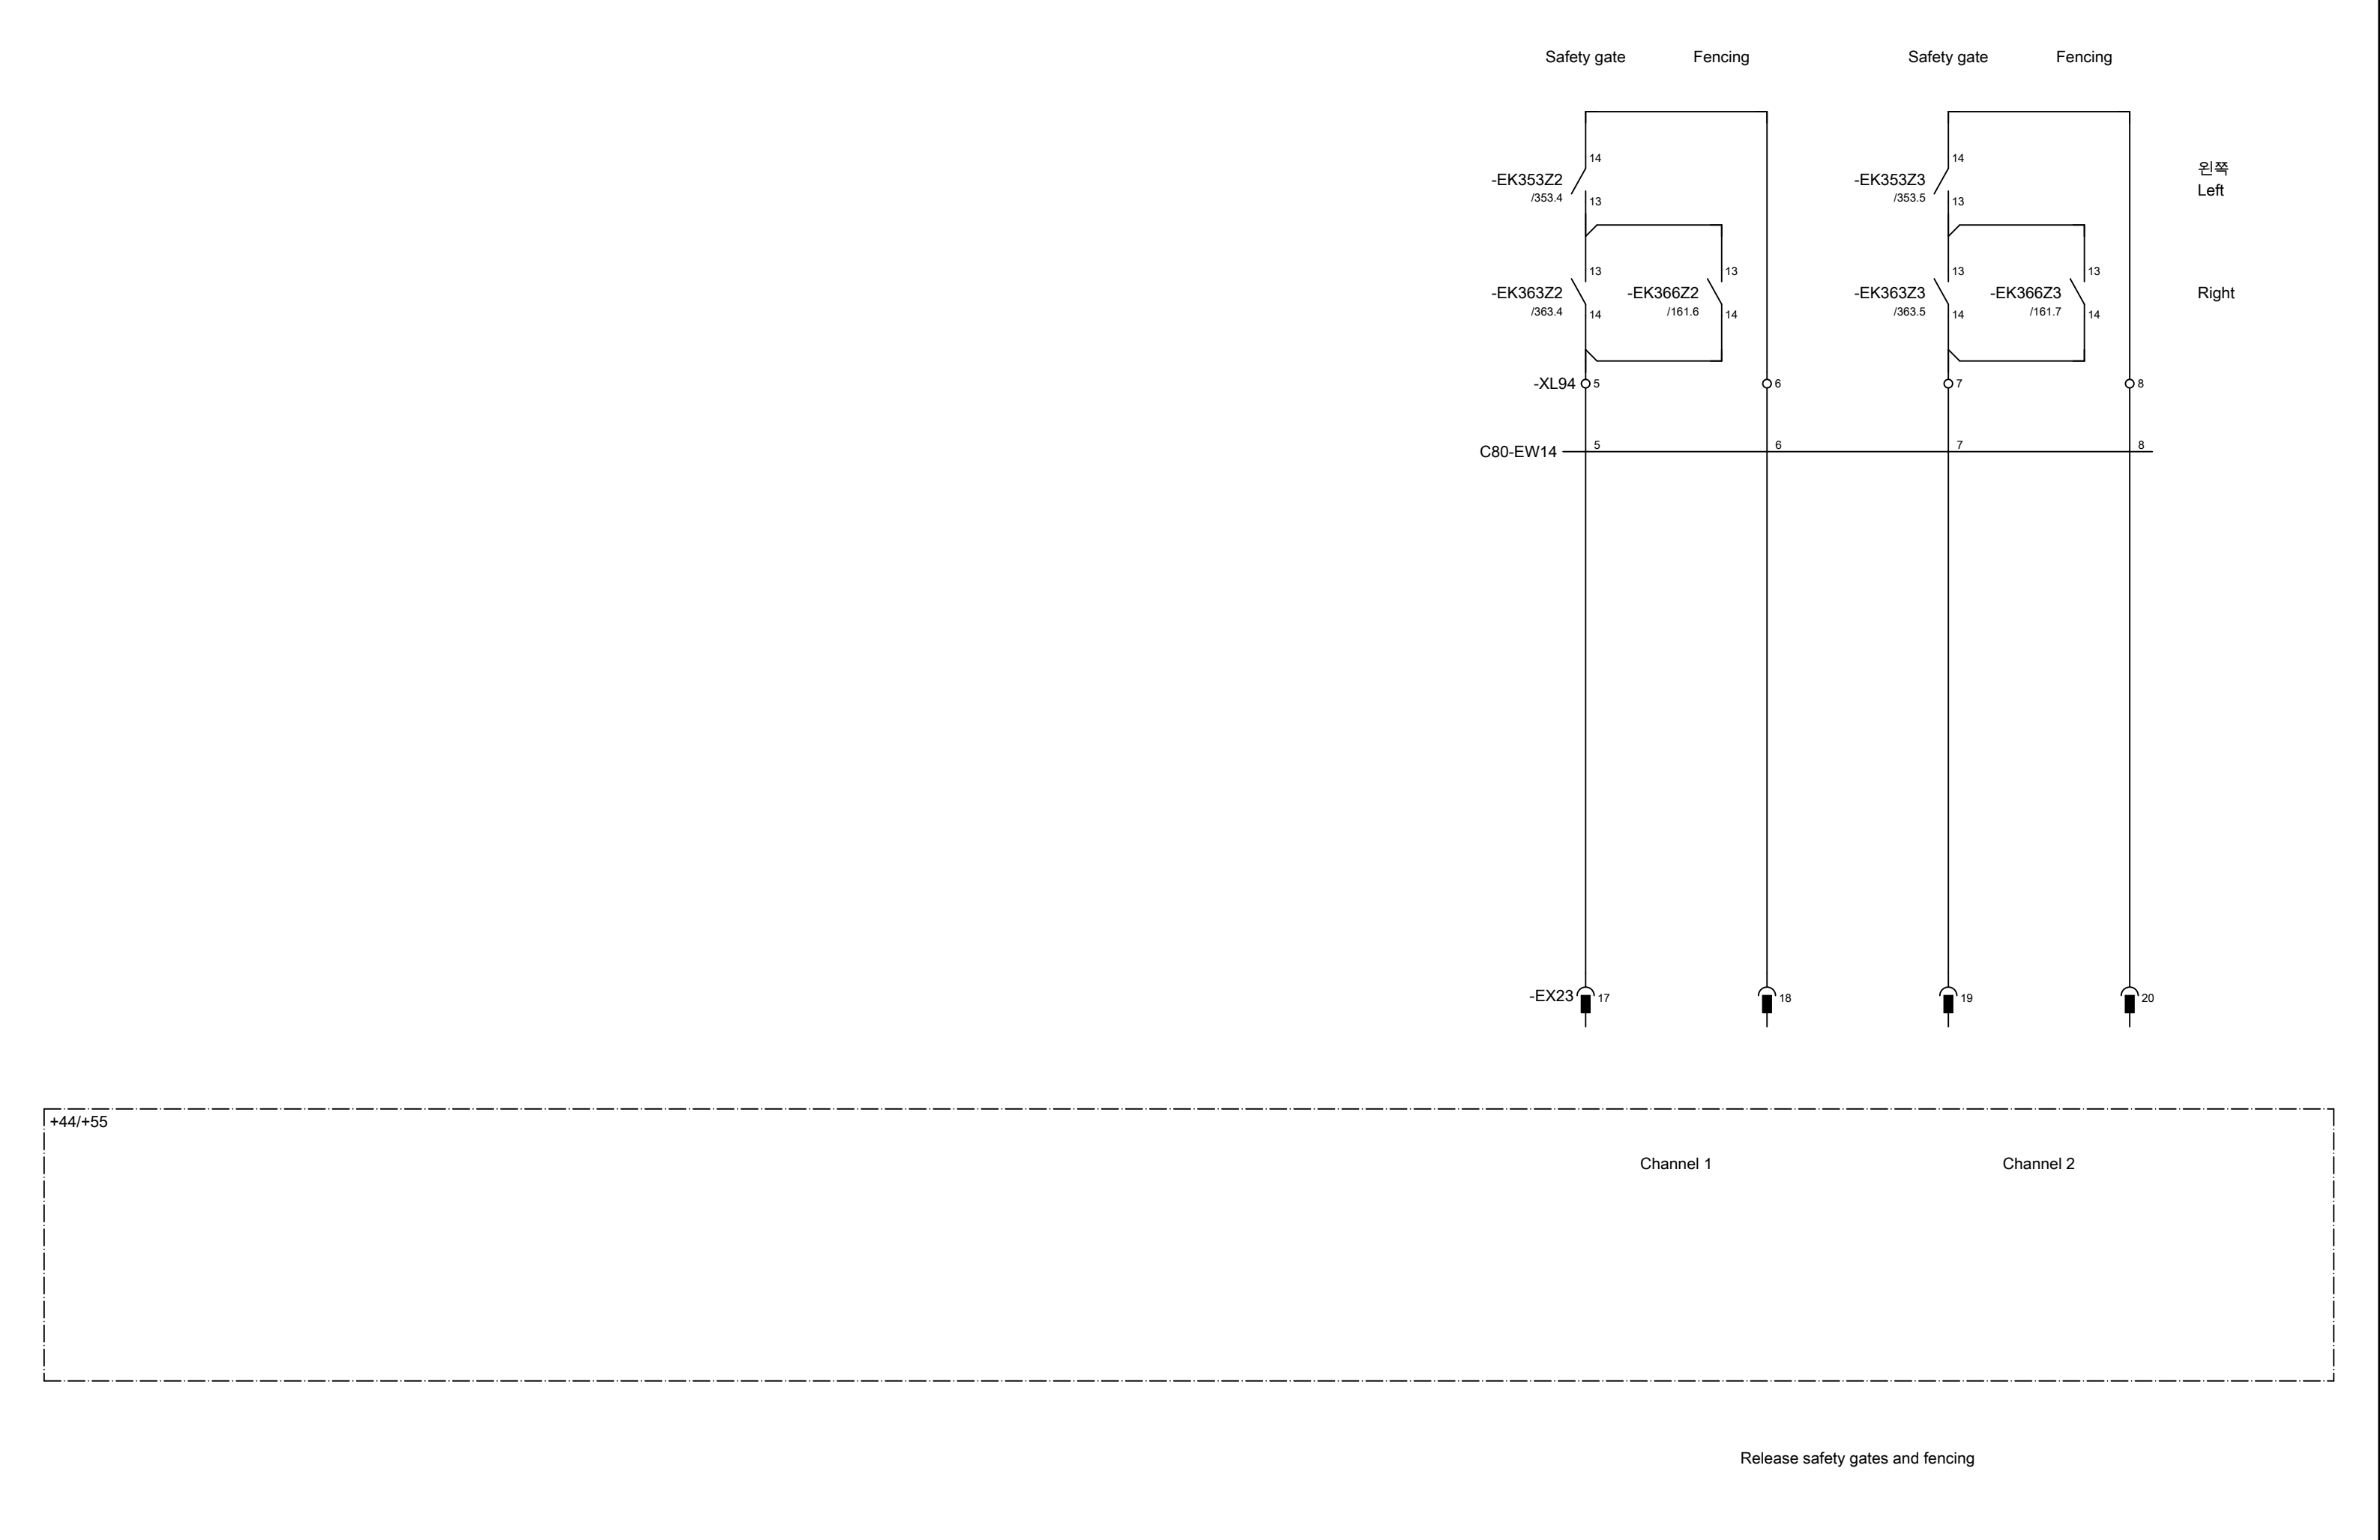

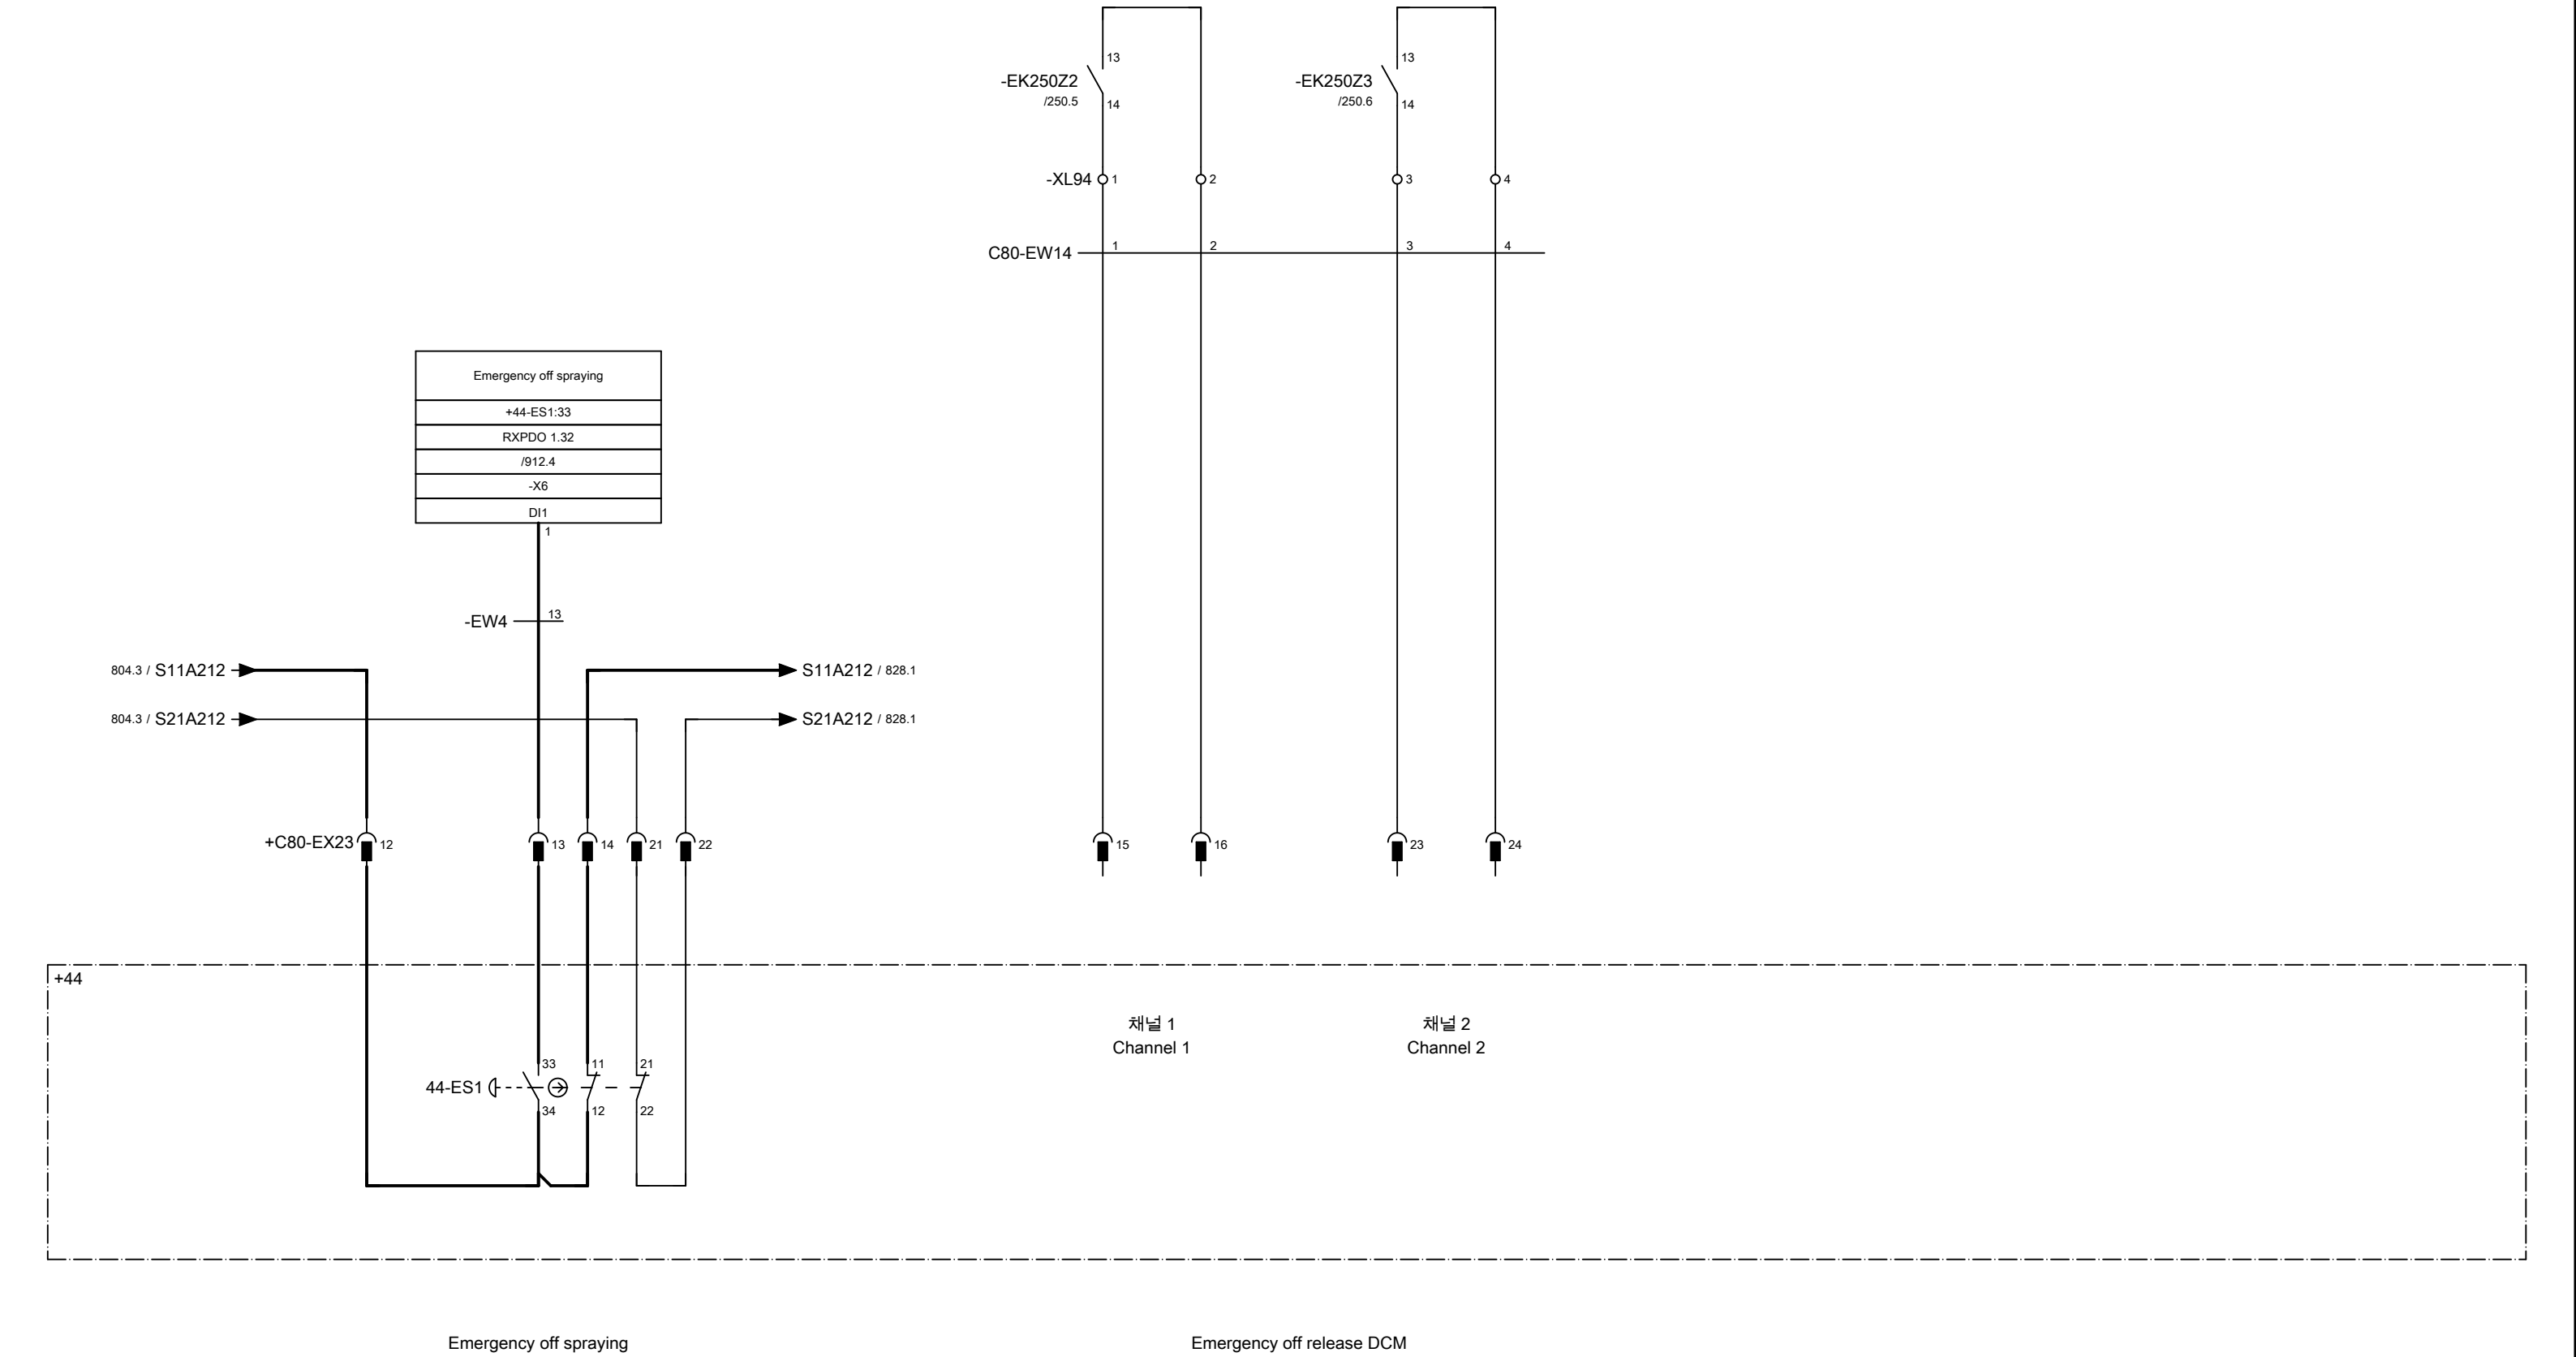

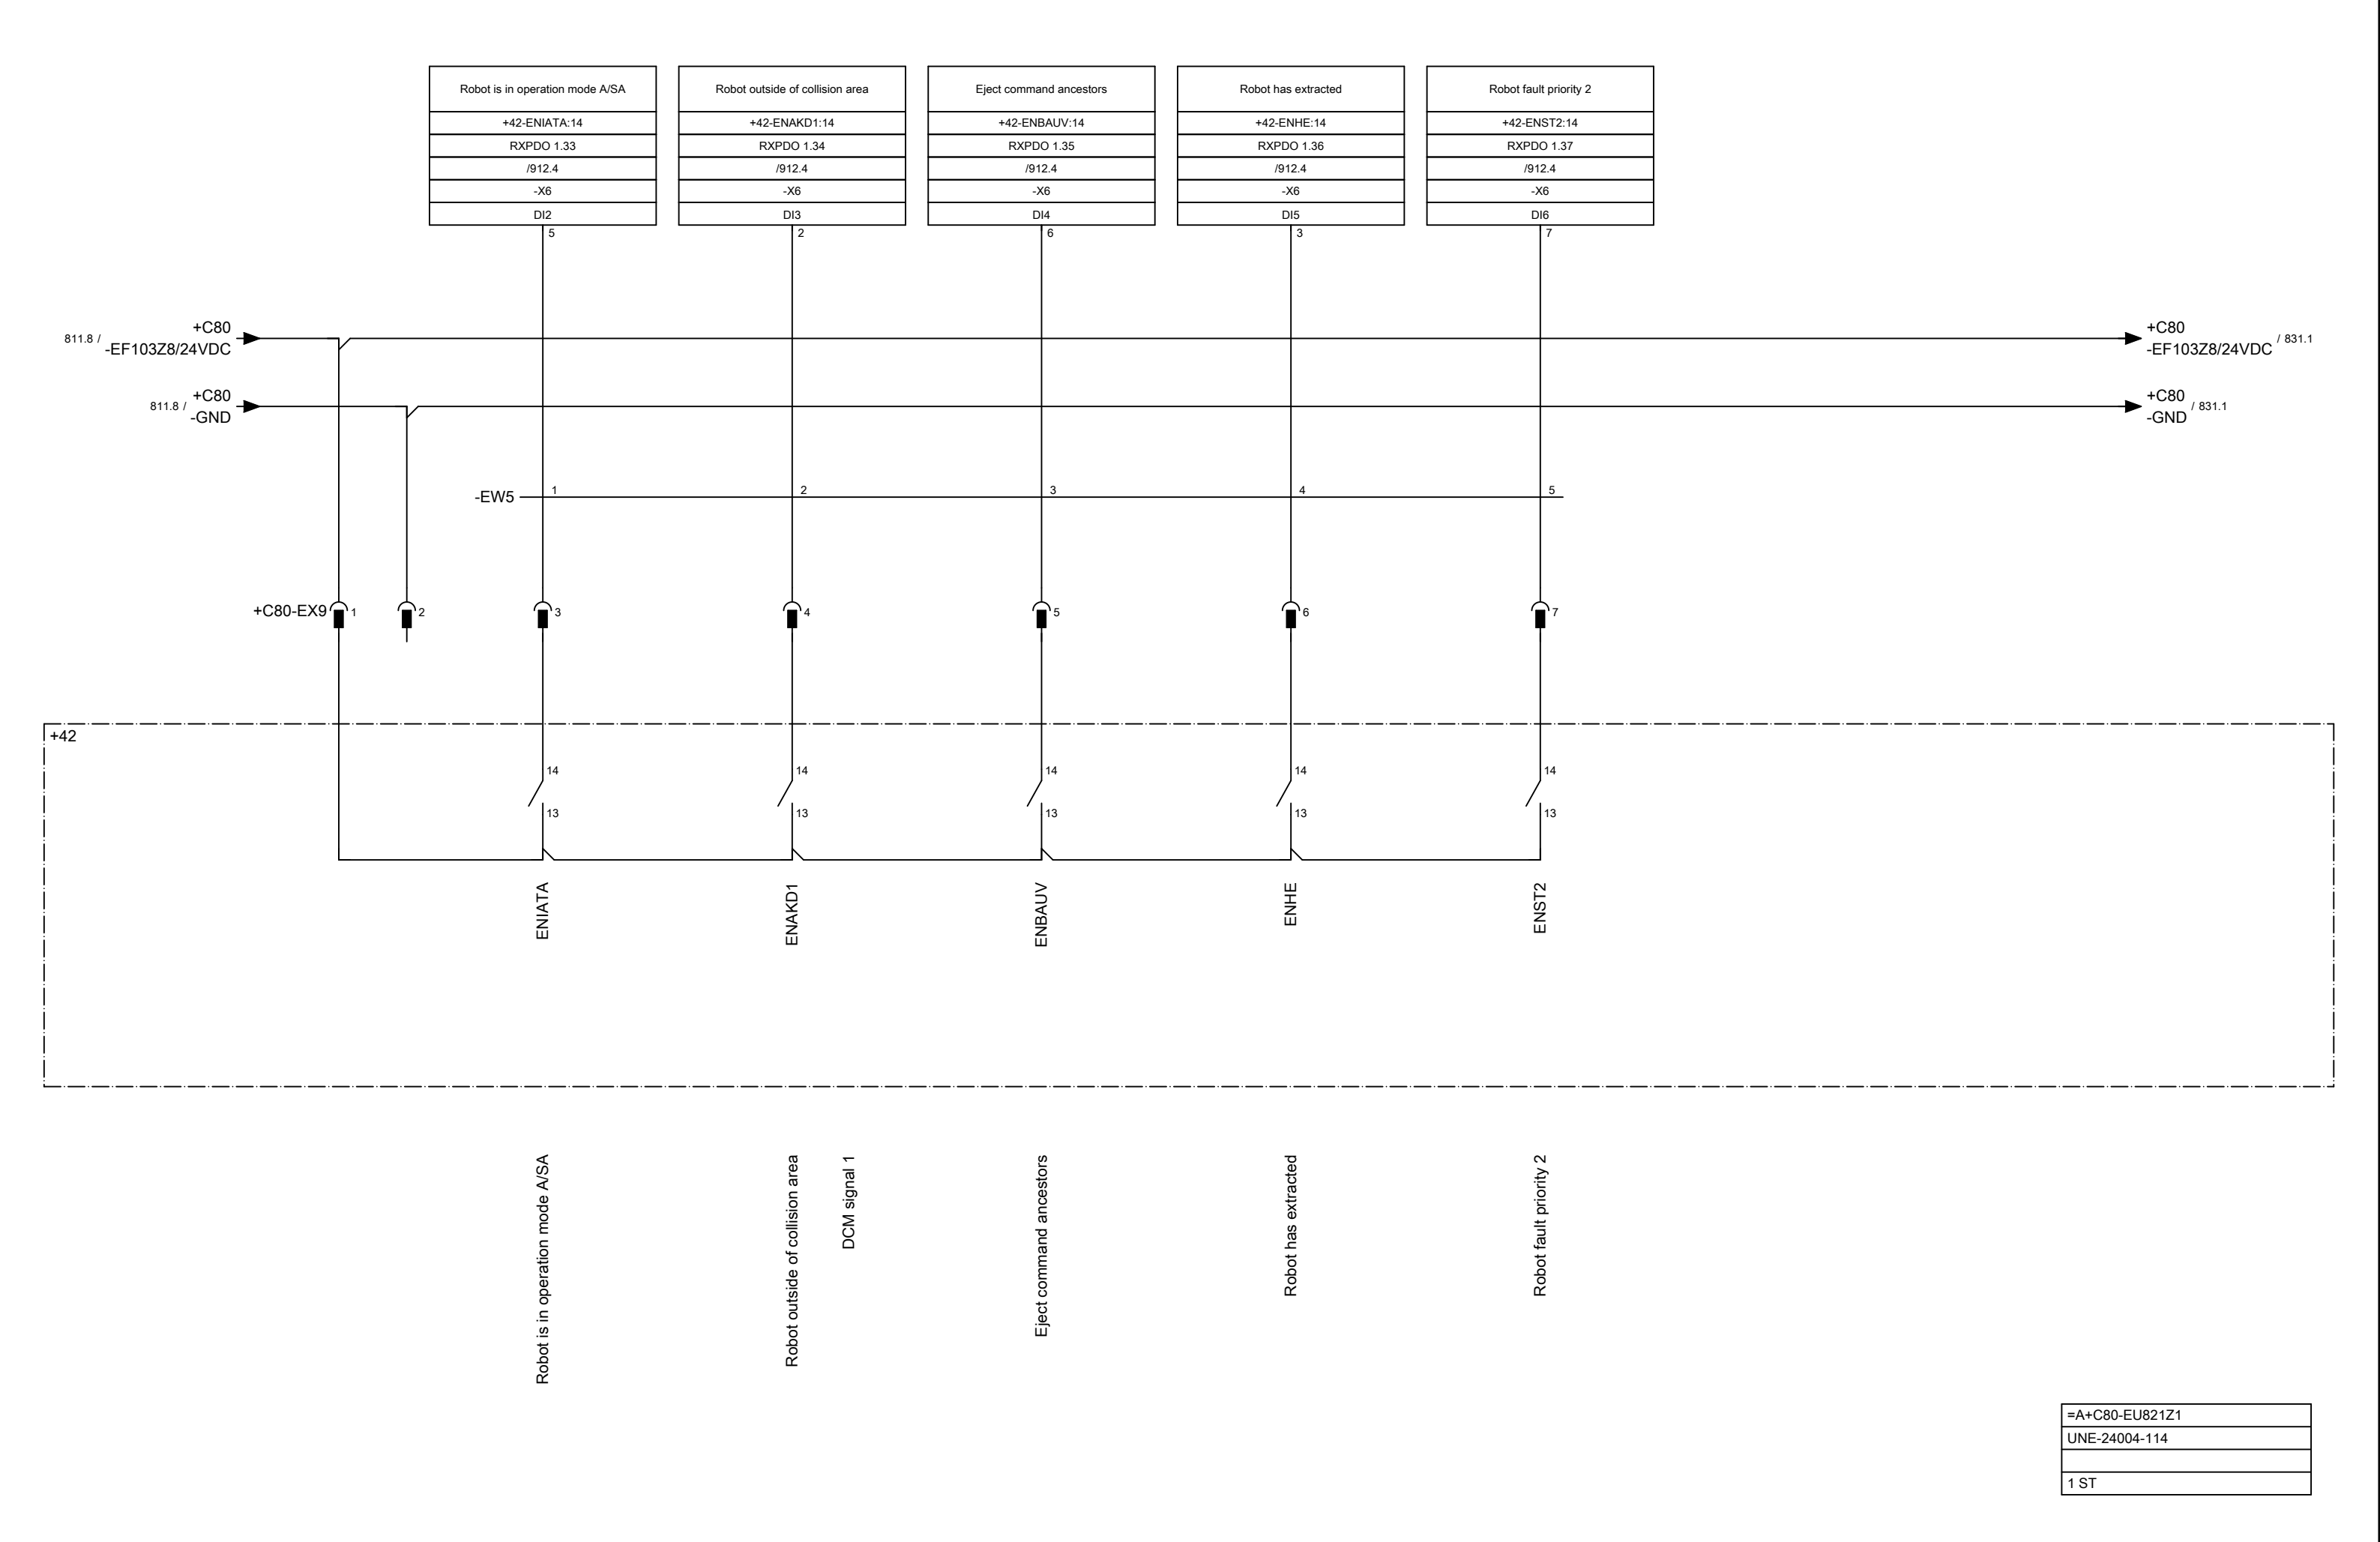

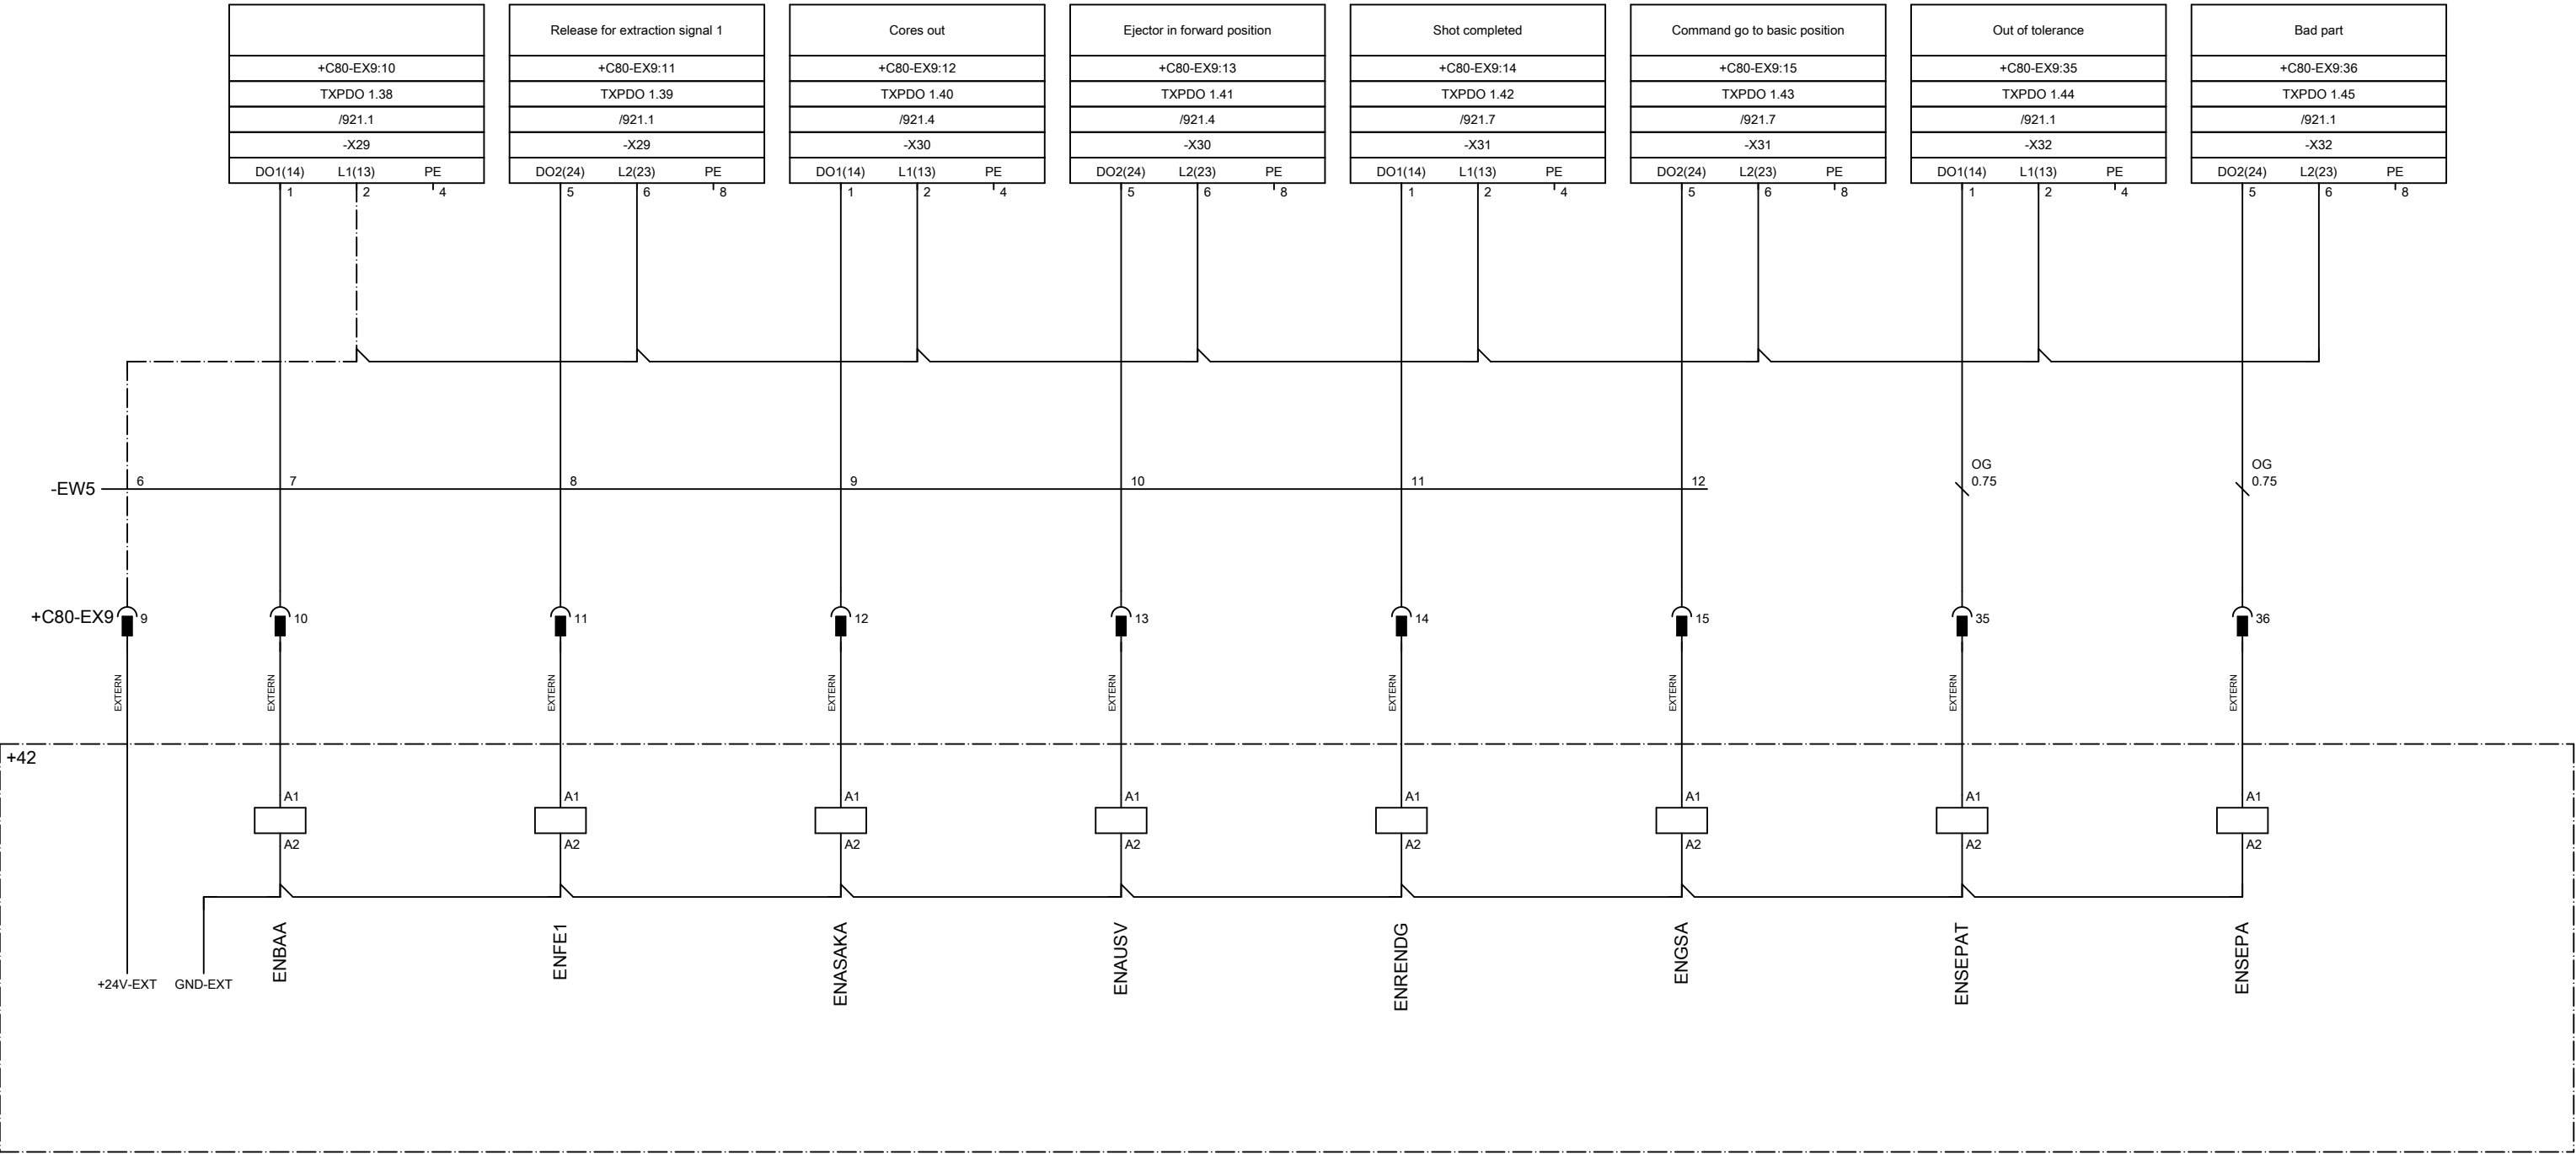

Release for extraction signal 1

Cores out


Ejector in forward position

Shot completed

Command go to basic position

Out of tolerance

Bad part

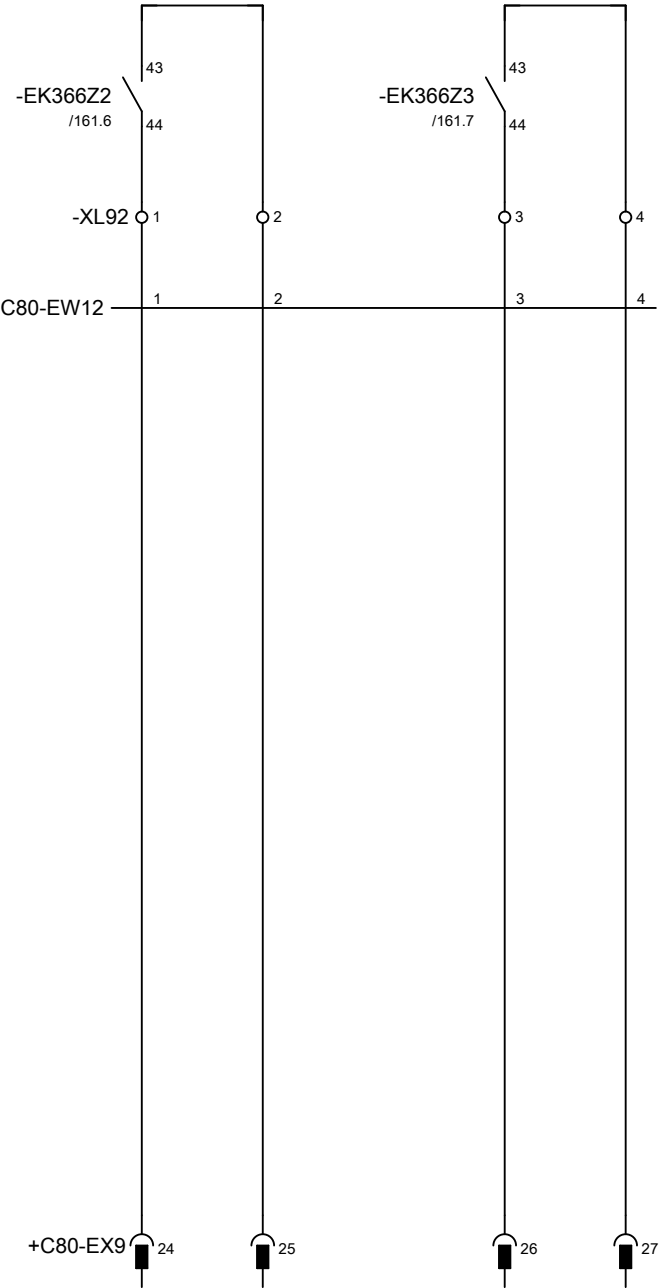



Fencing right

			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 823.01	Replacement of	Replaced by





Periphery interface extraction

		= A	
		+ C72	
ESM-85061	Ecoline	EN / UL	Page 823

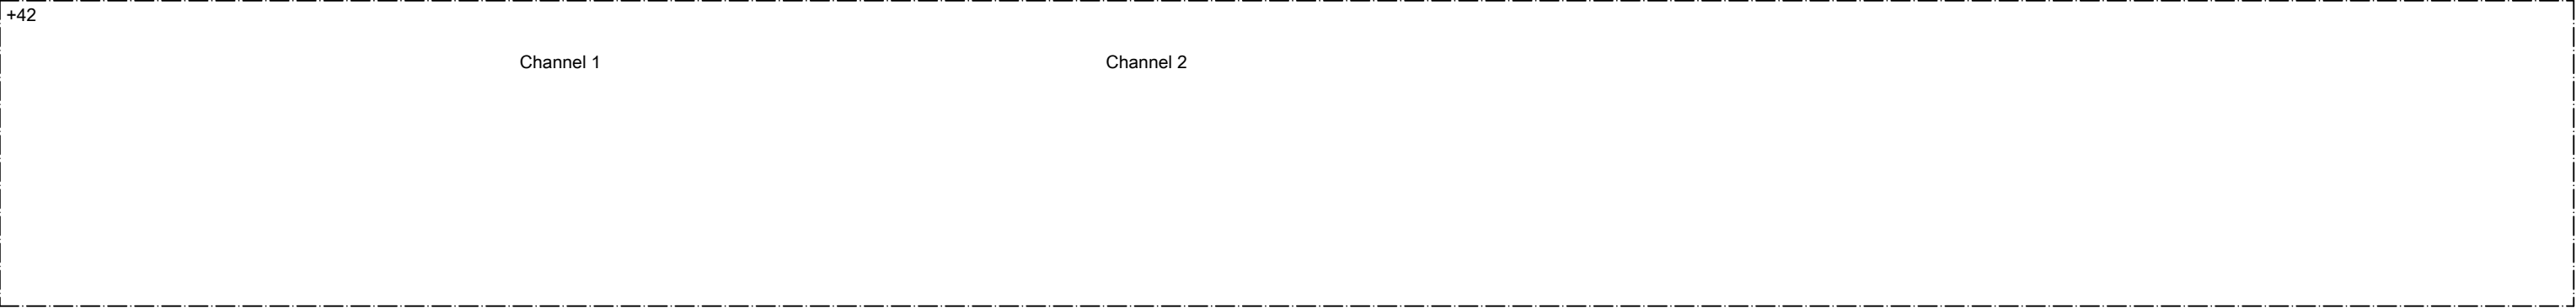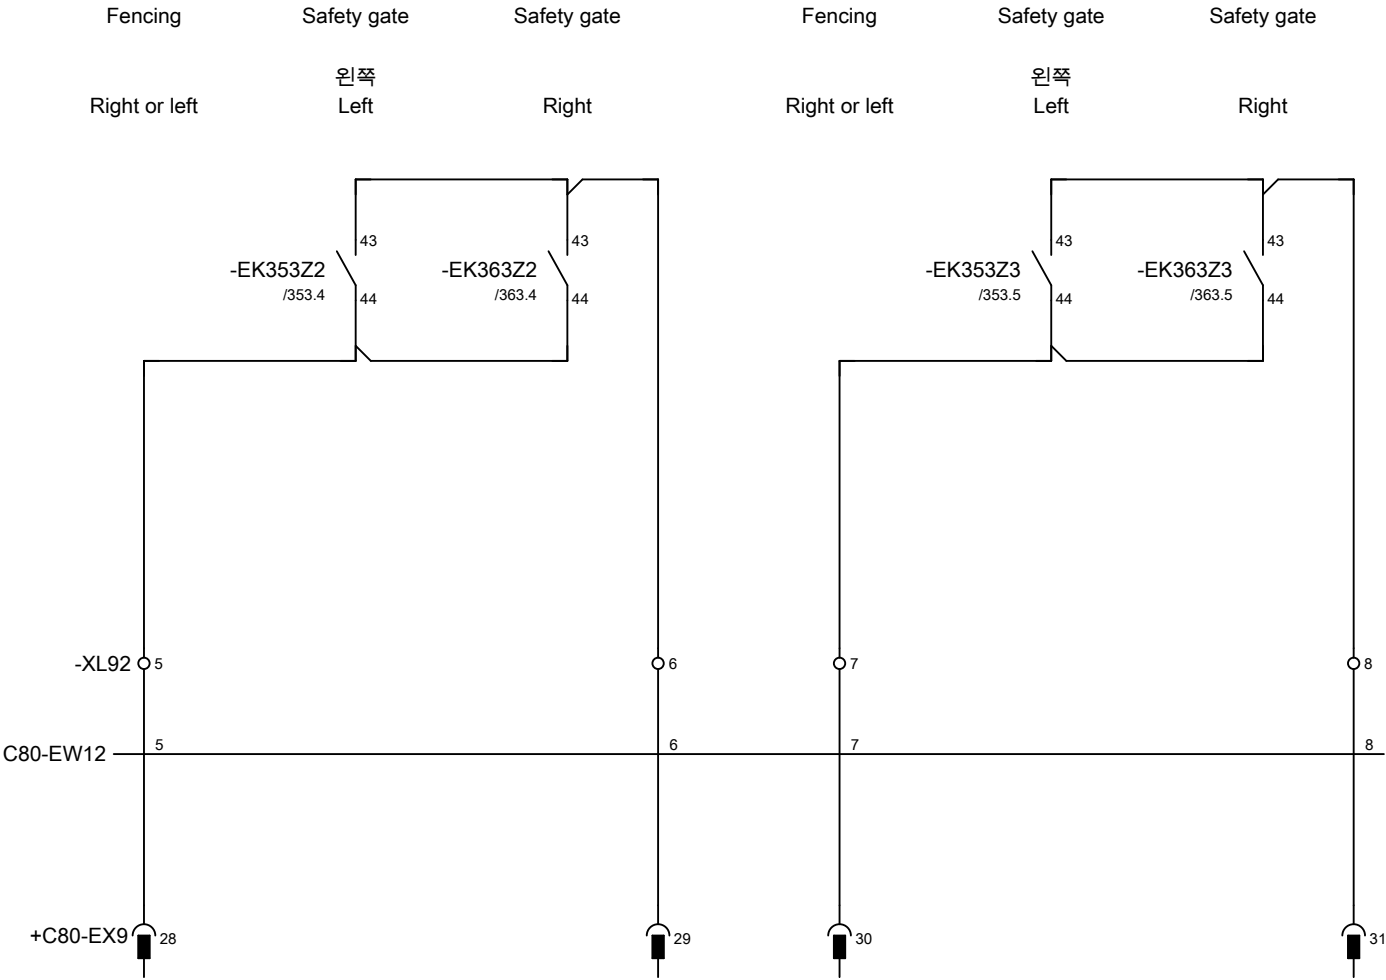


Safety gate left or right side closed

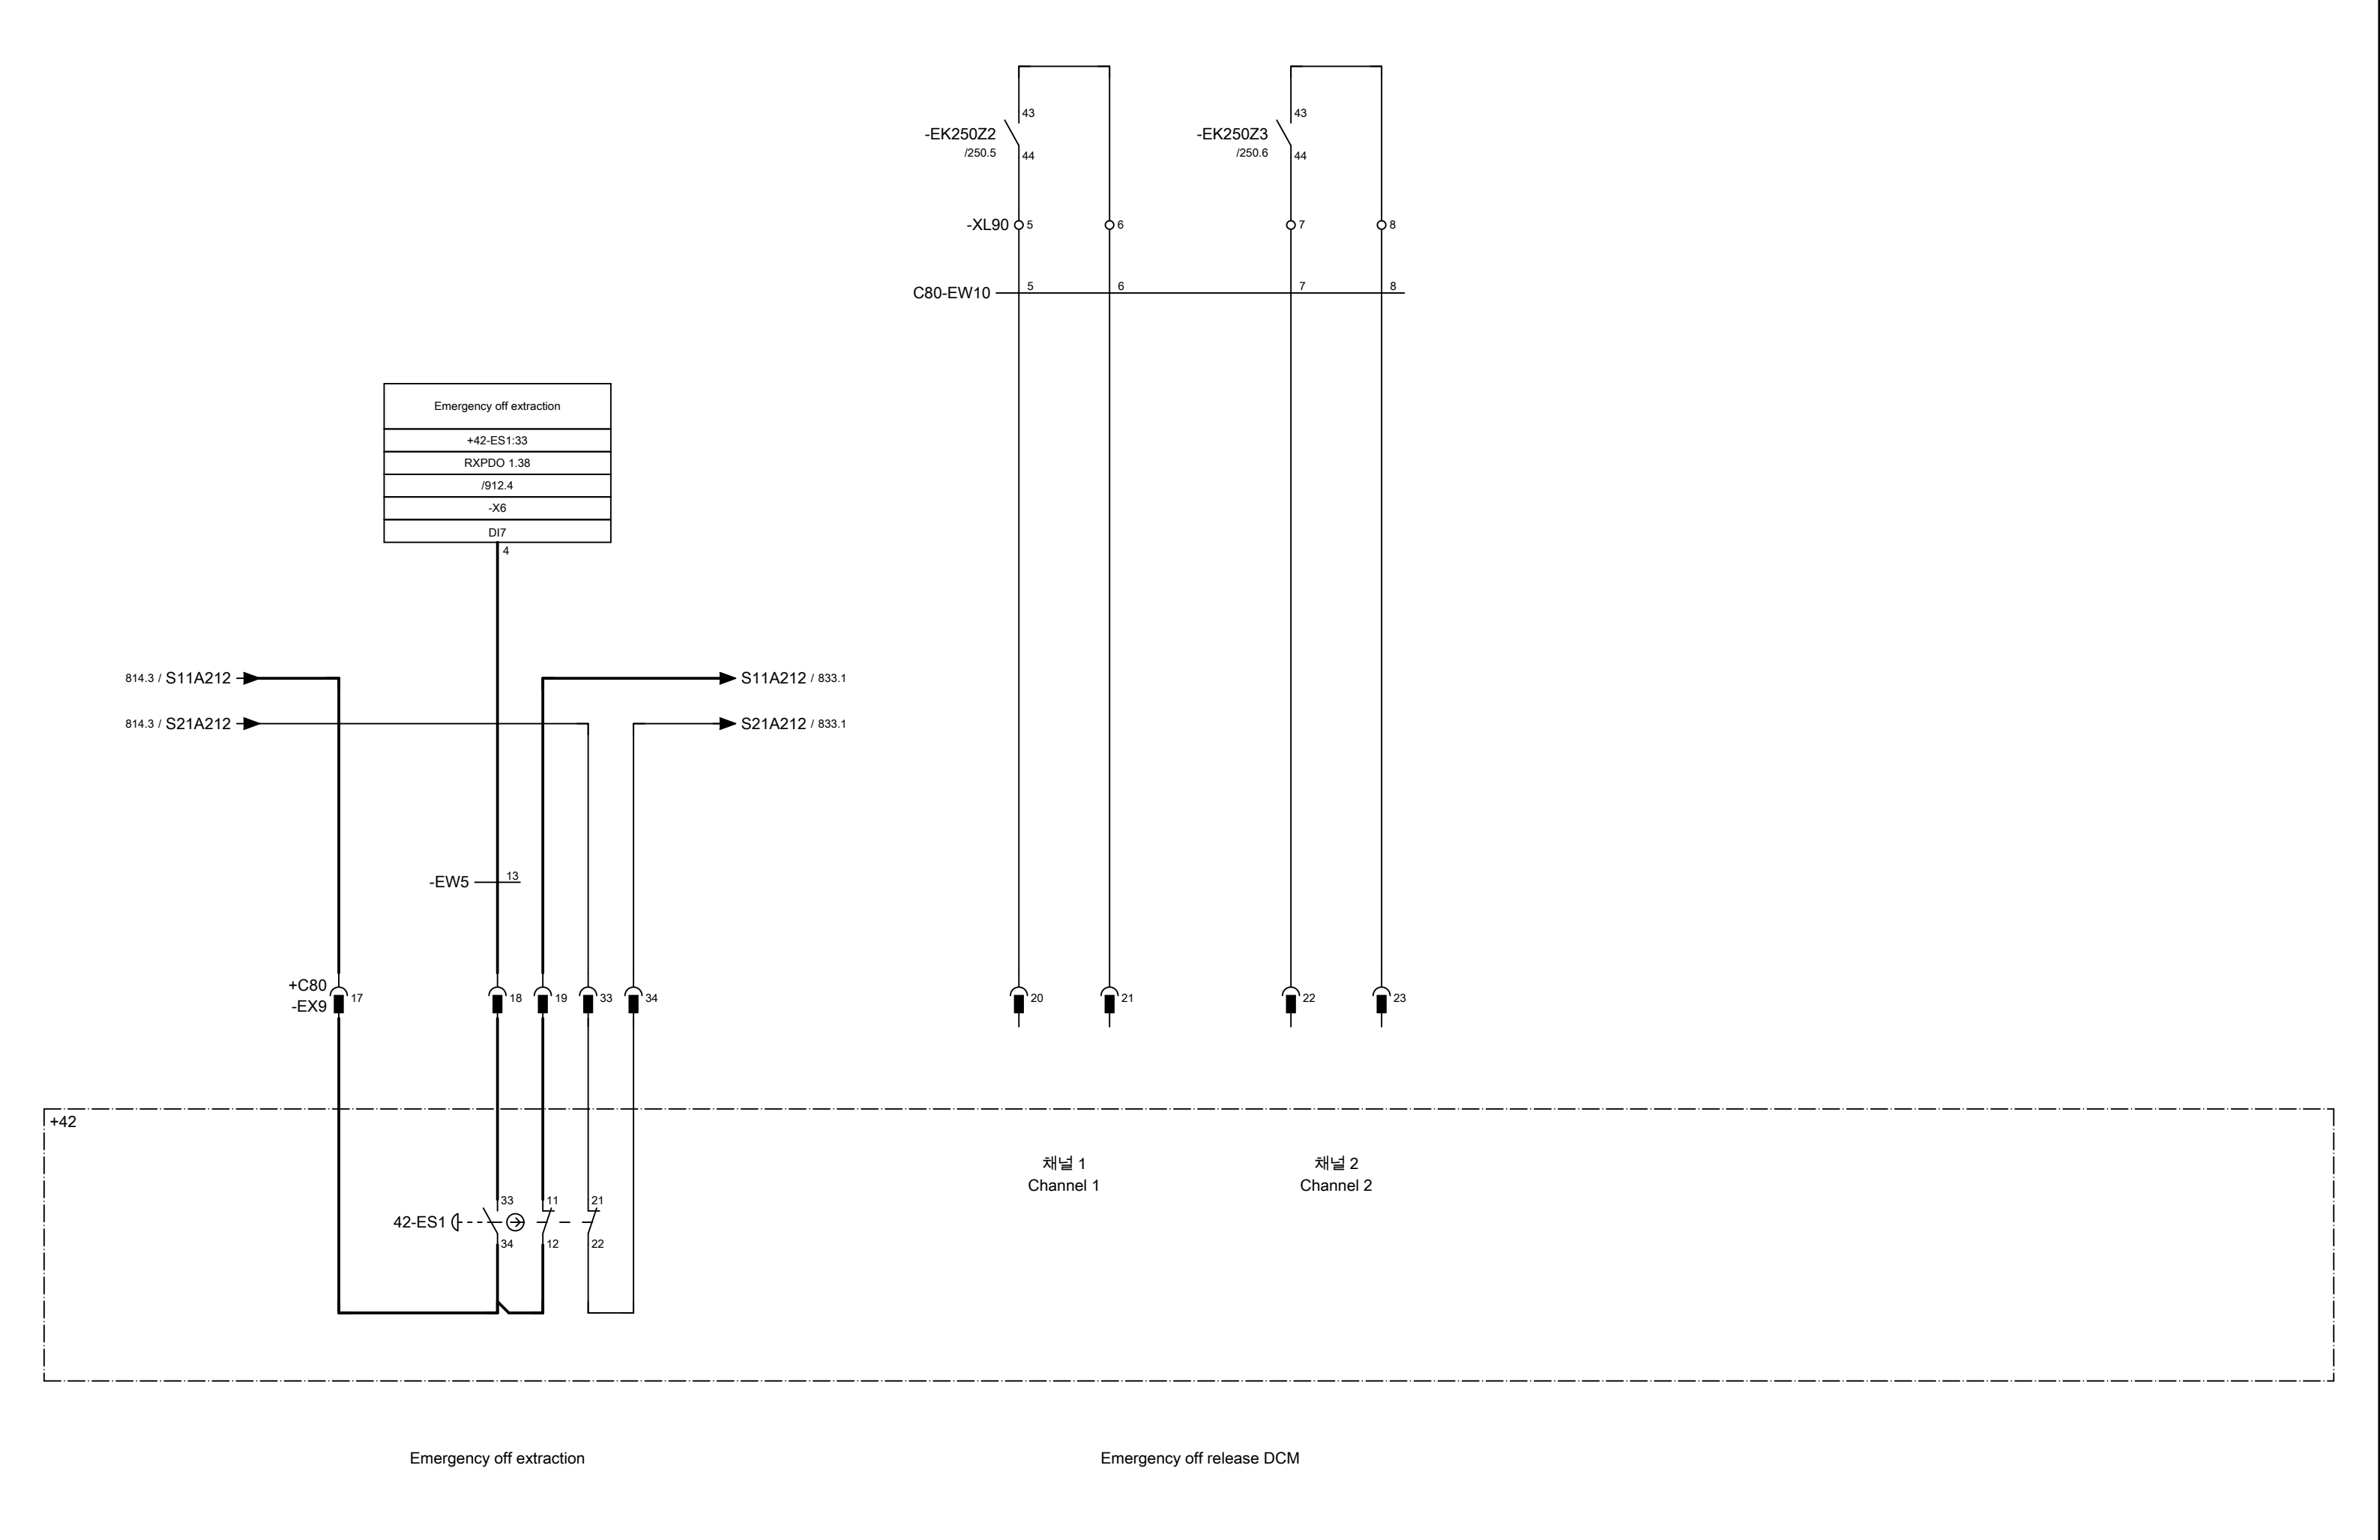

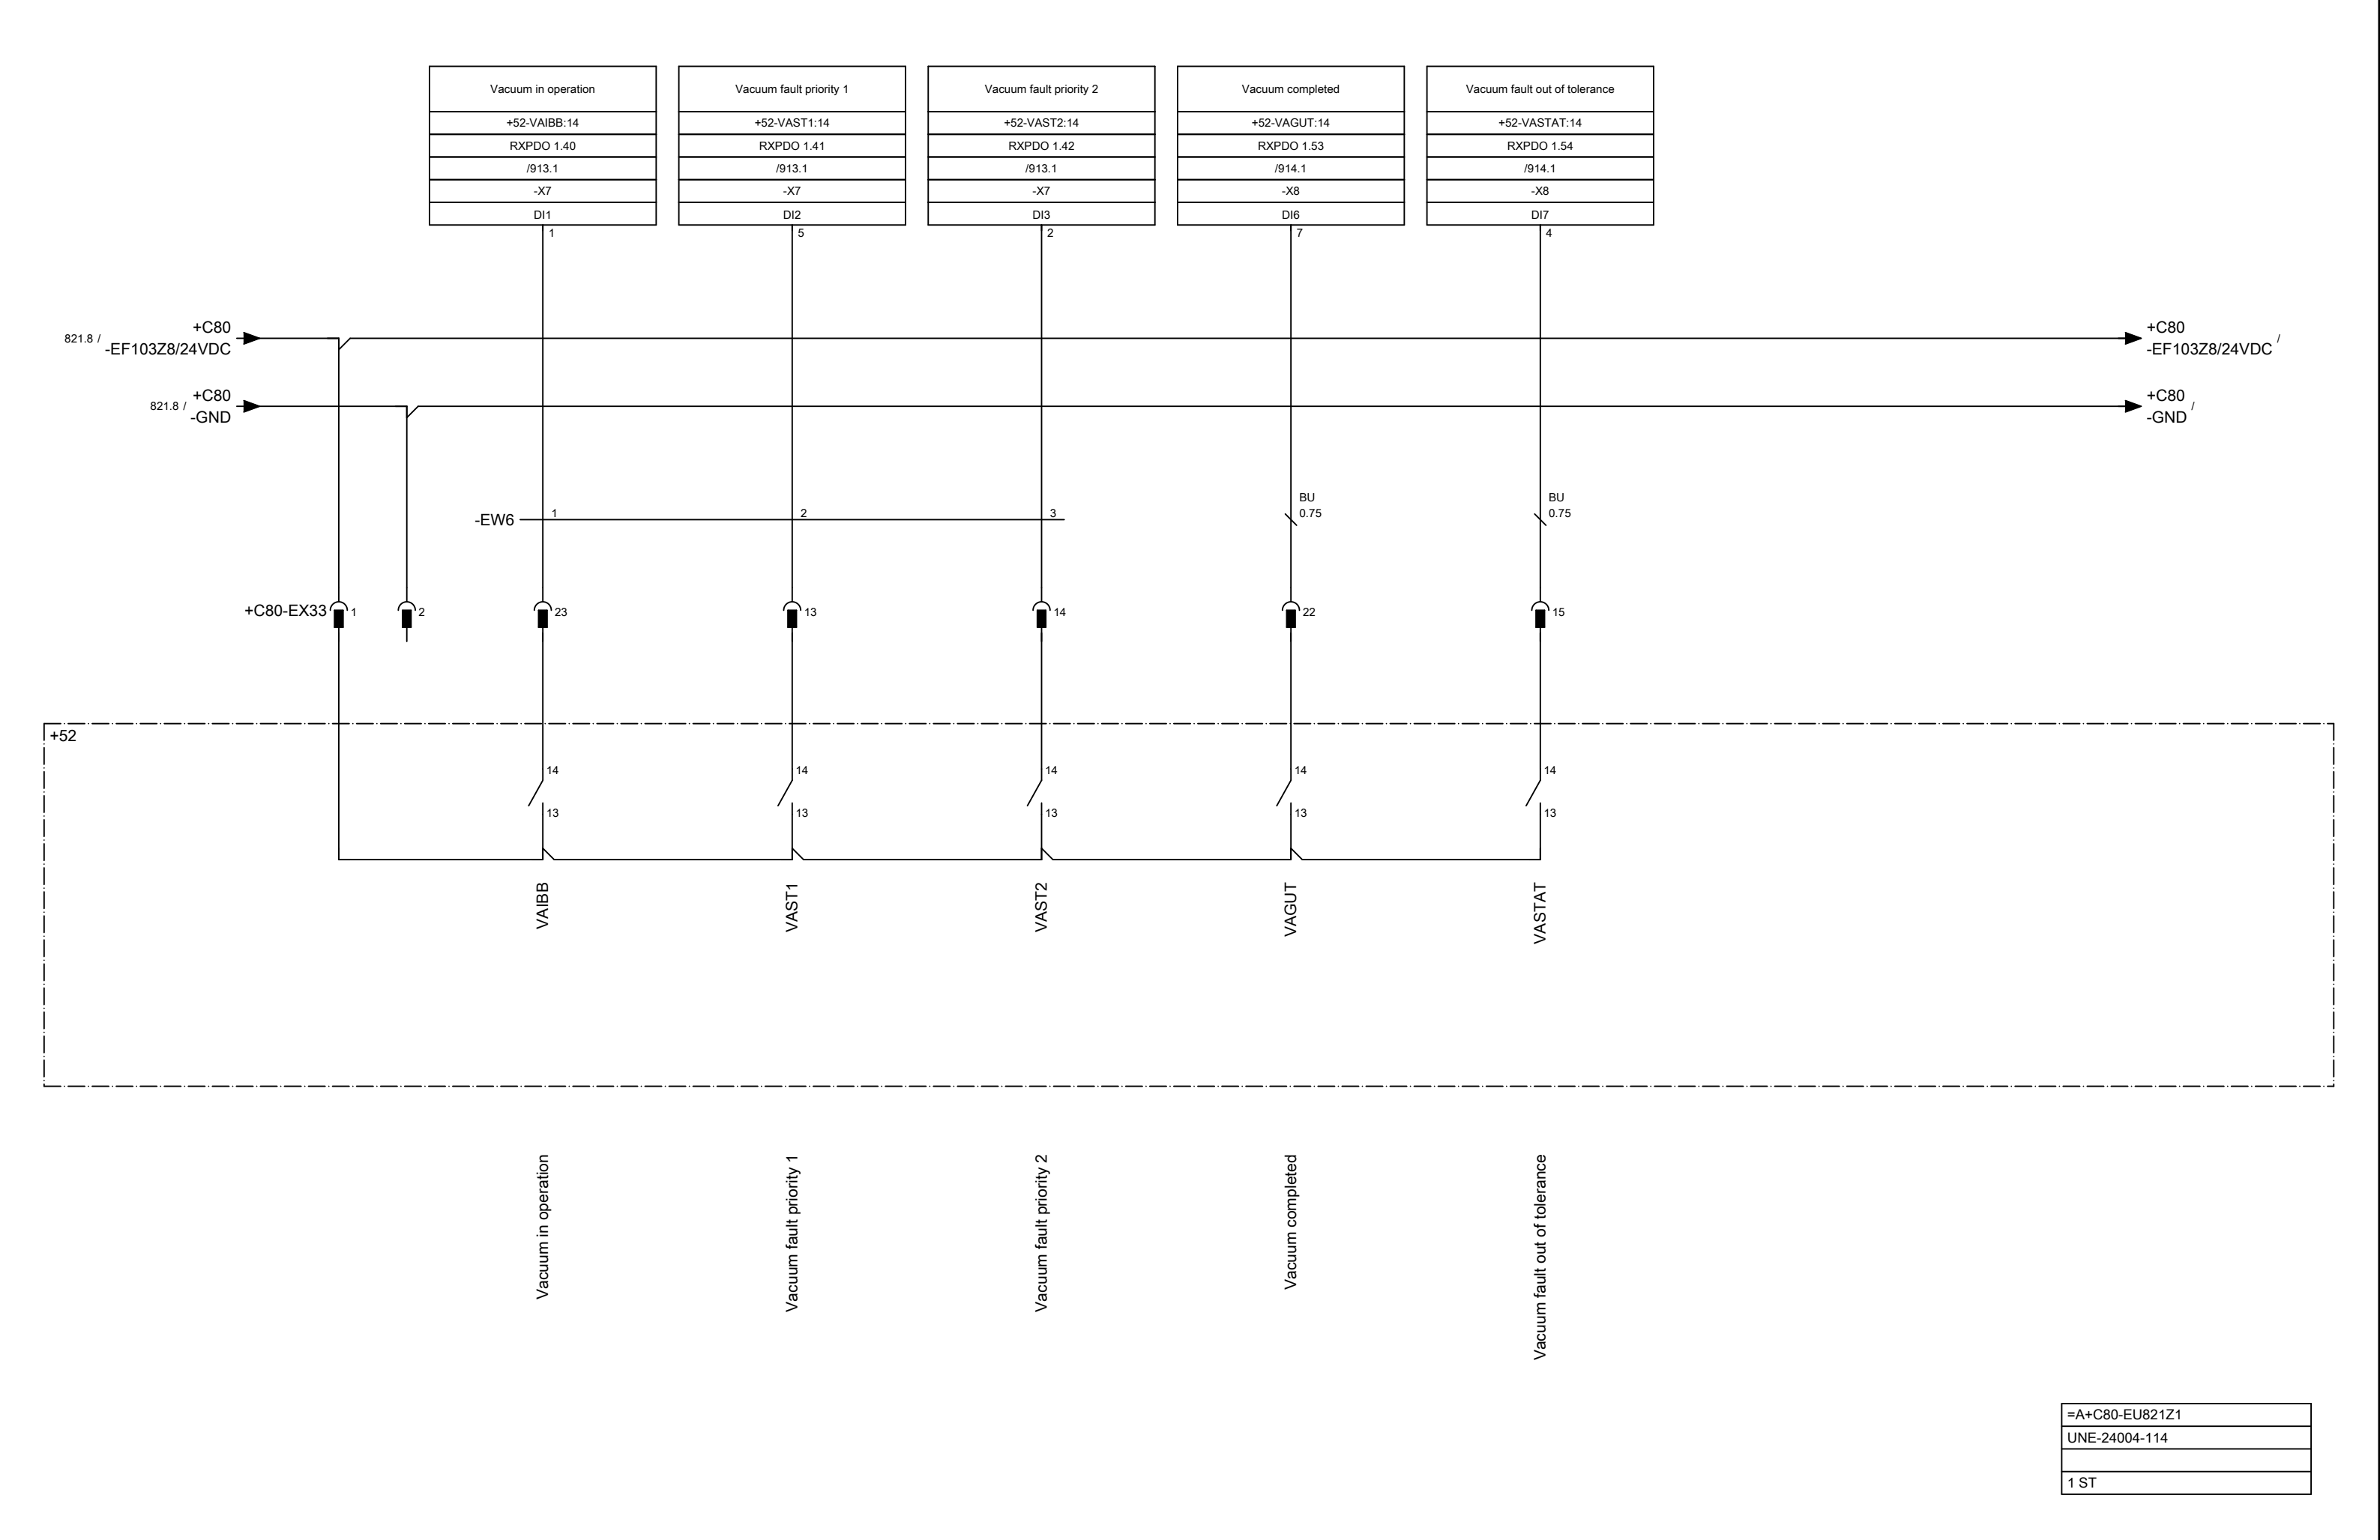

=A+C80-EU821Z1
UNE-24004-114
1 ST

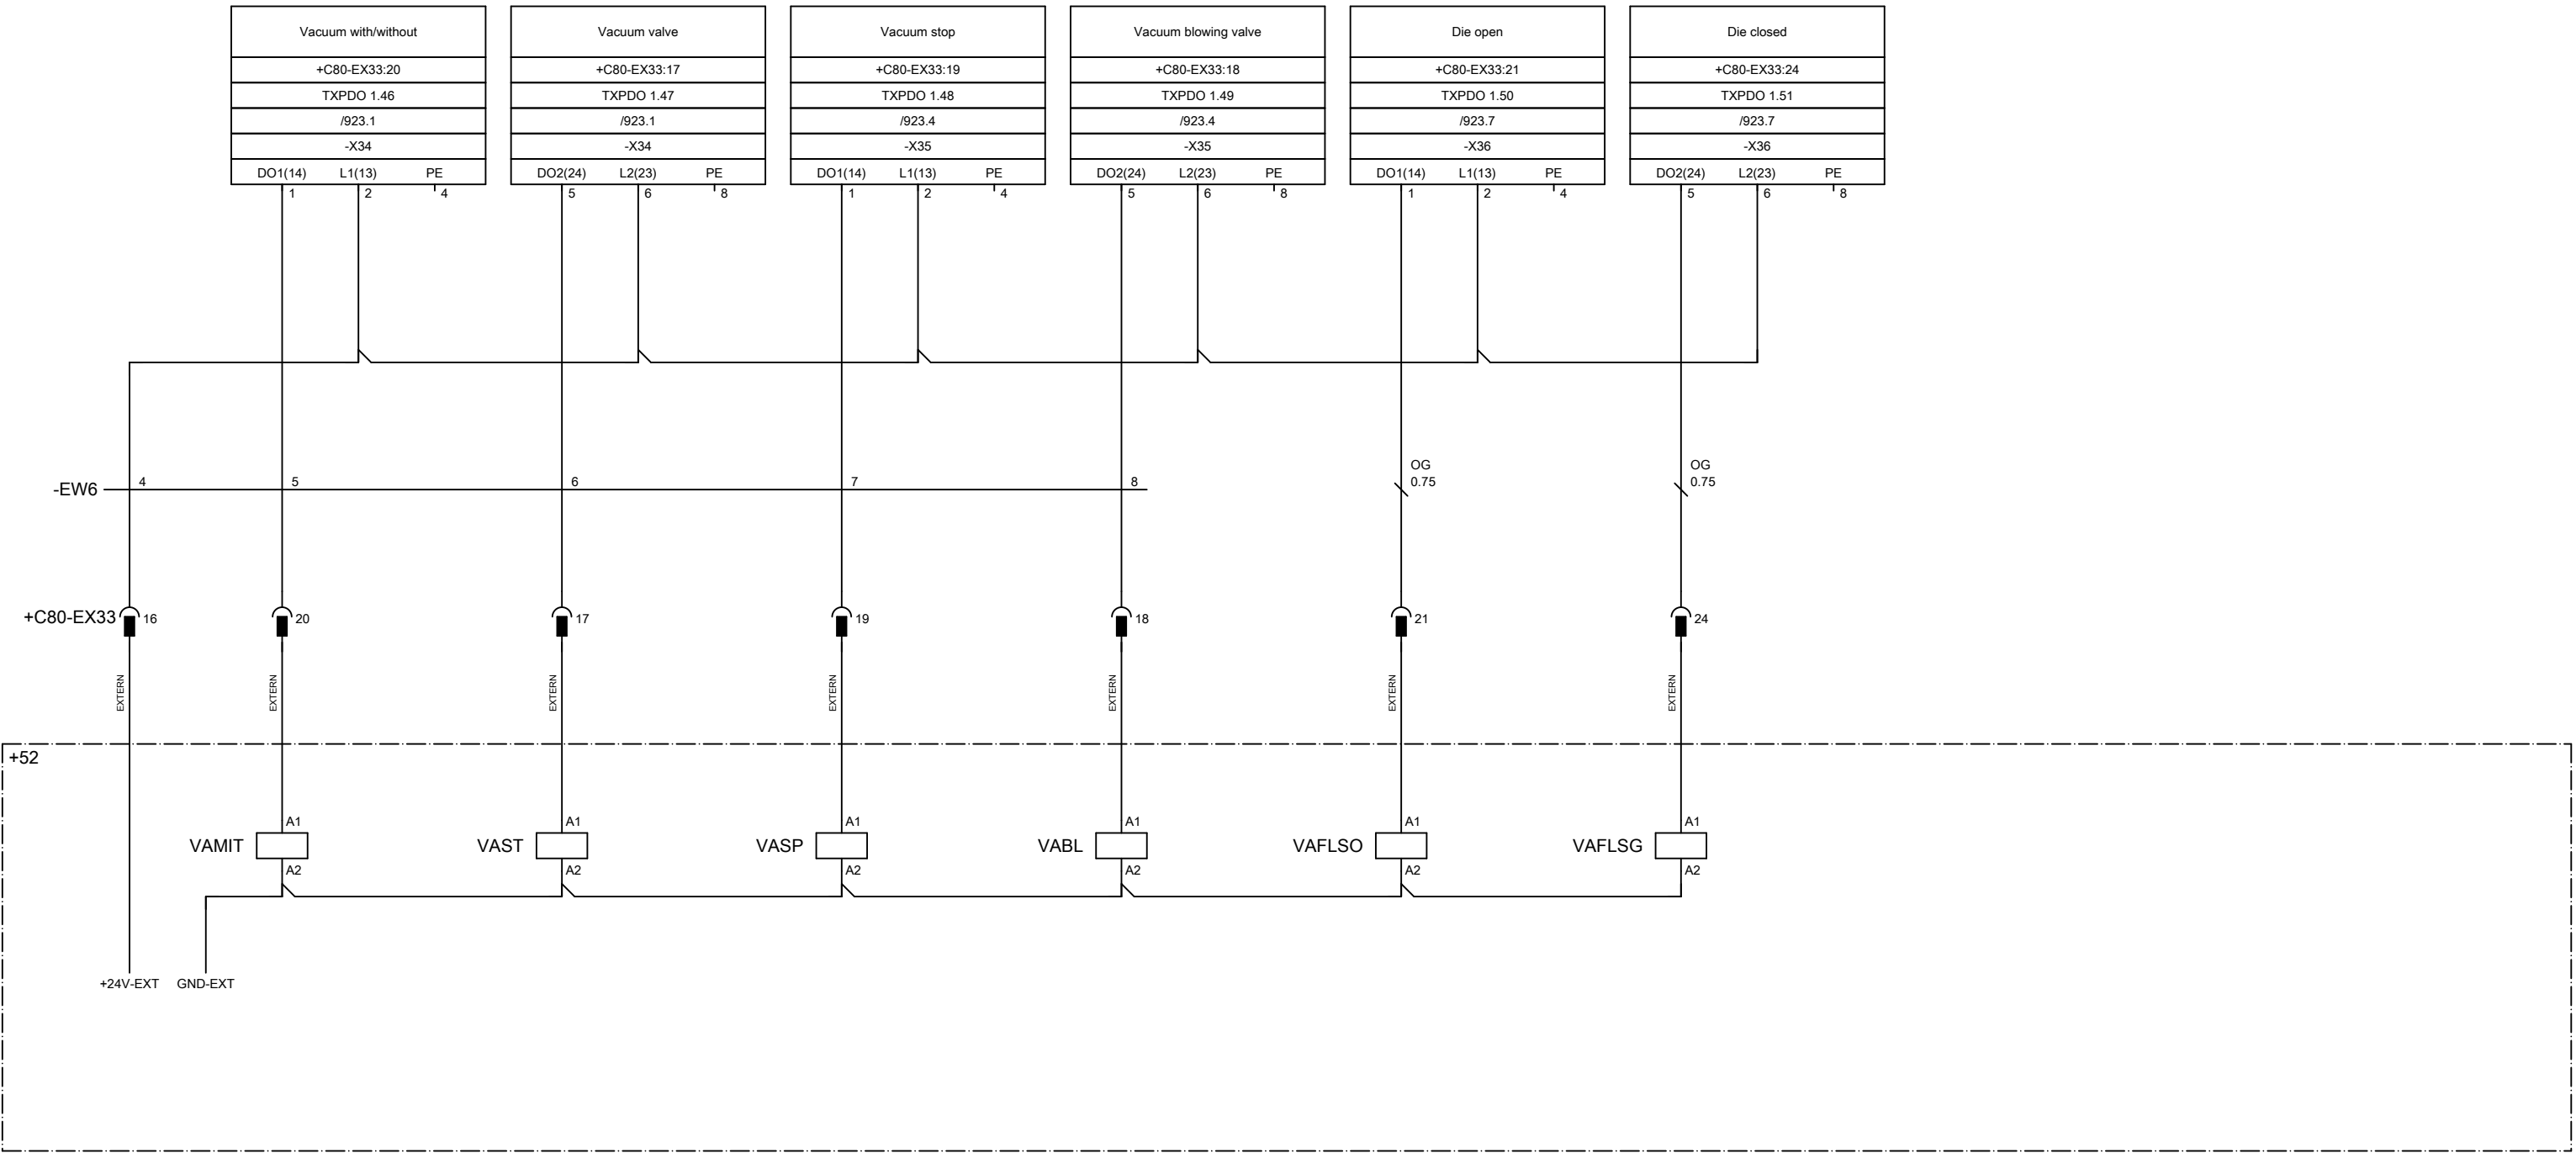

Vacuum with/without


Vacuum valve


Vacuum stop


Vacuum blowing valve


Die open


Die closed


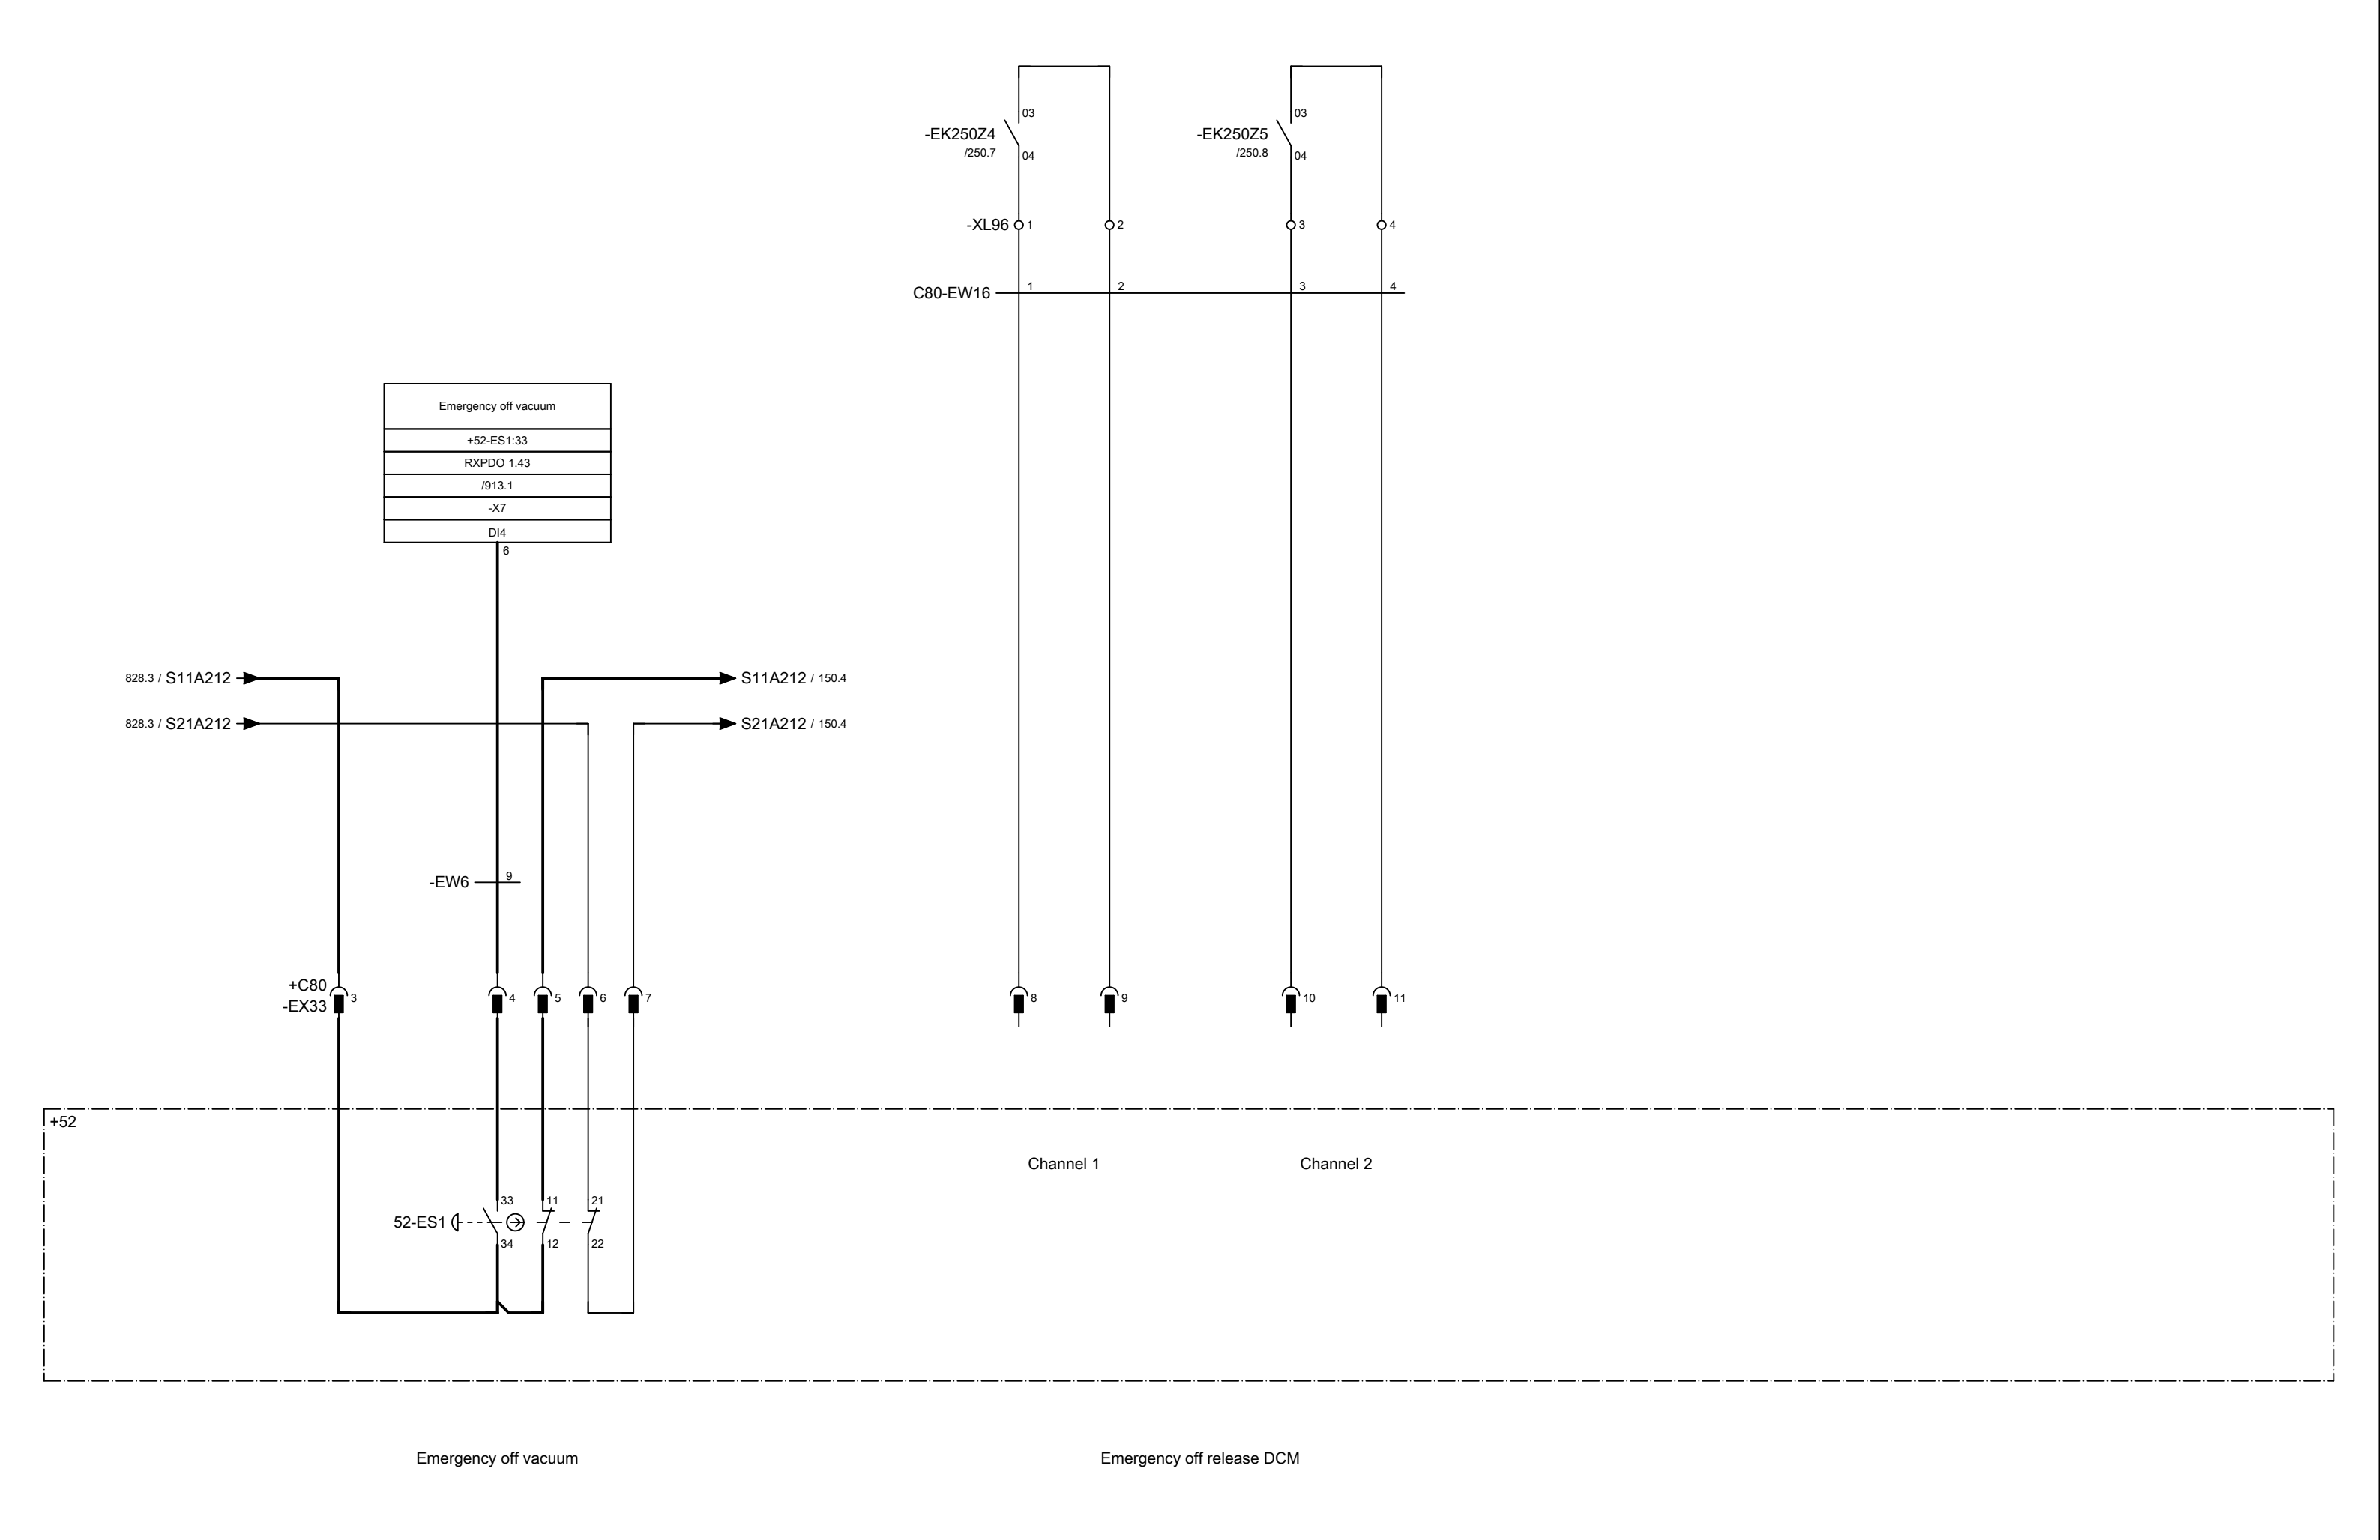




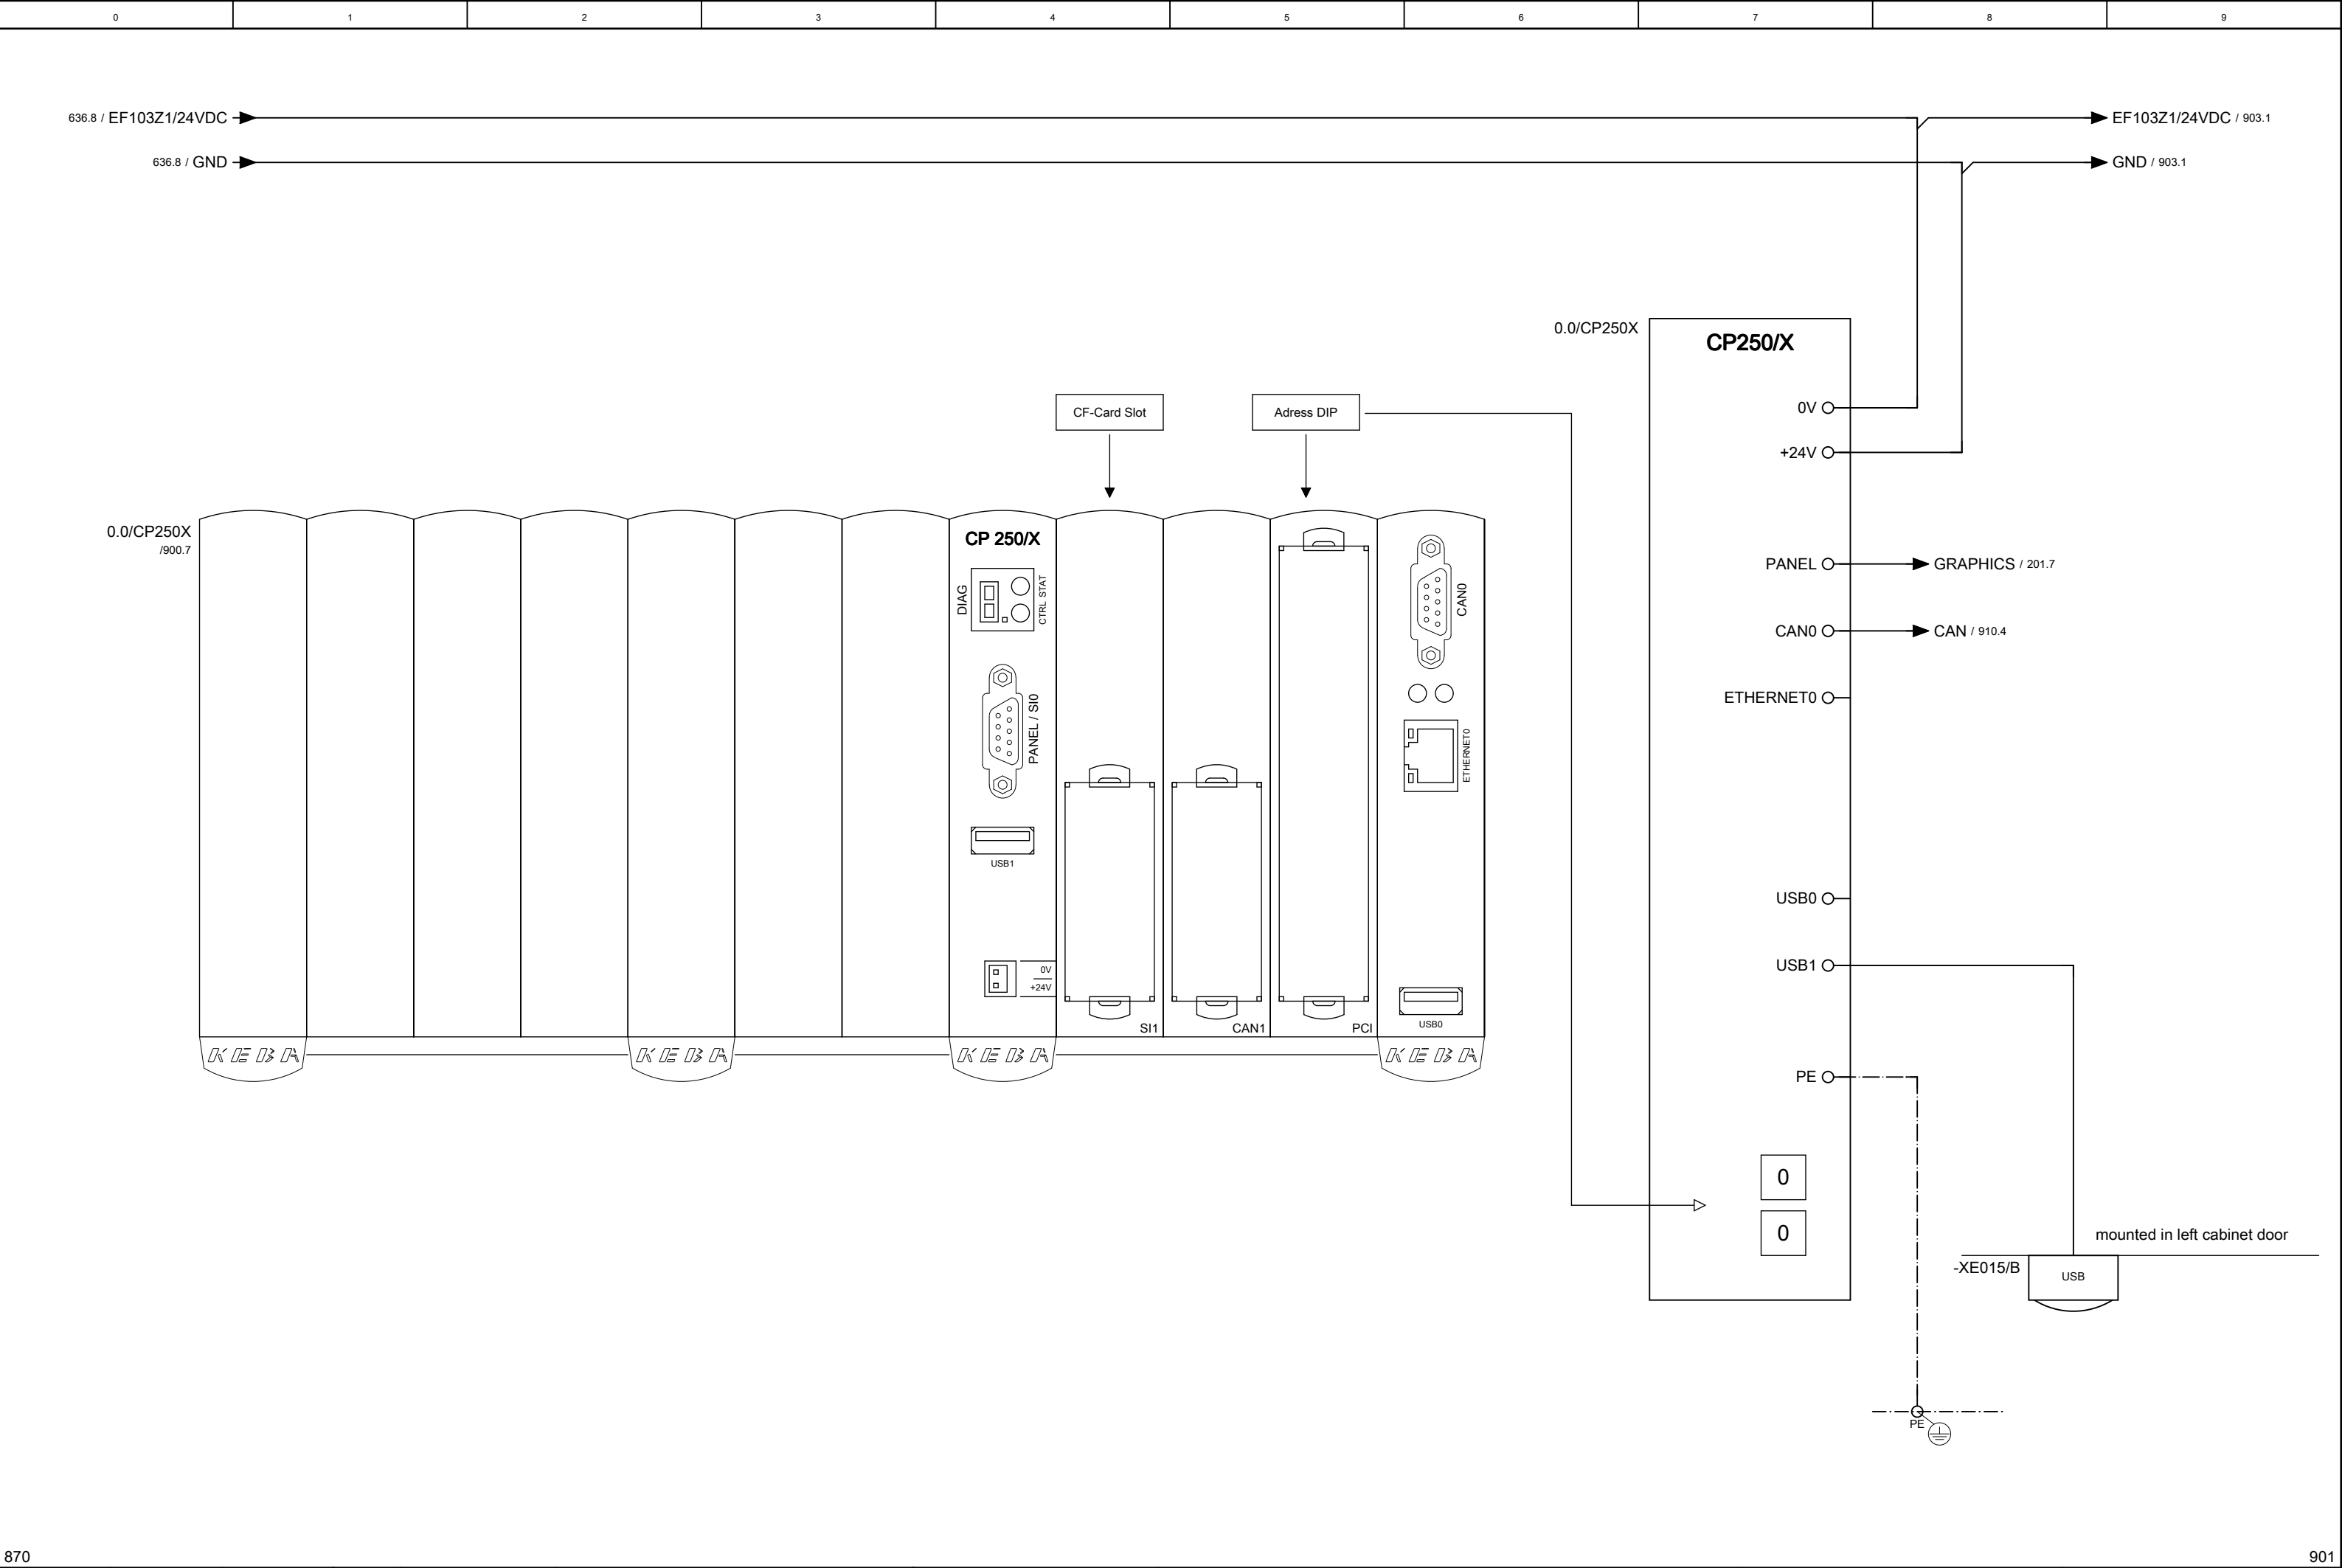


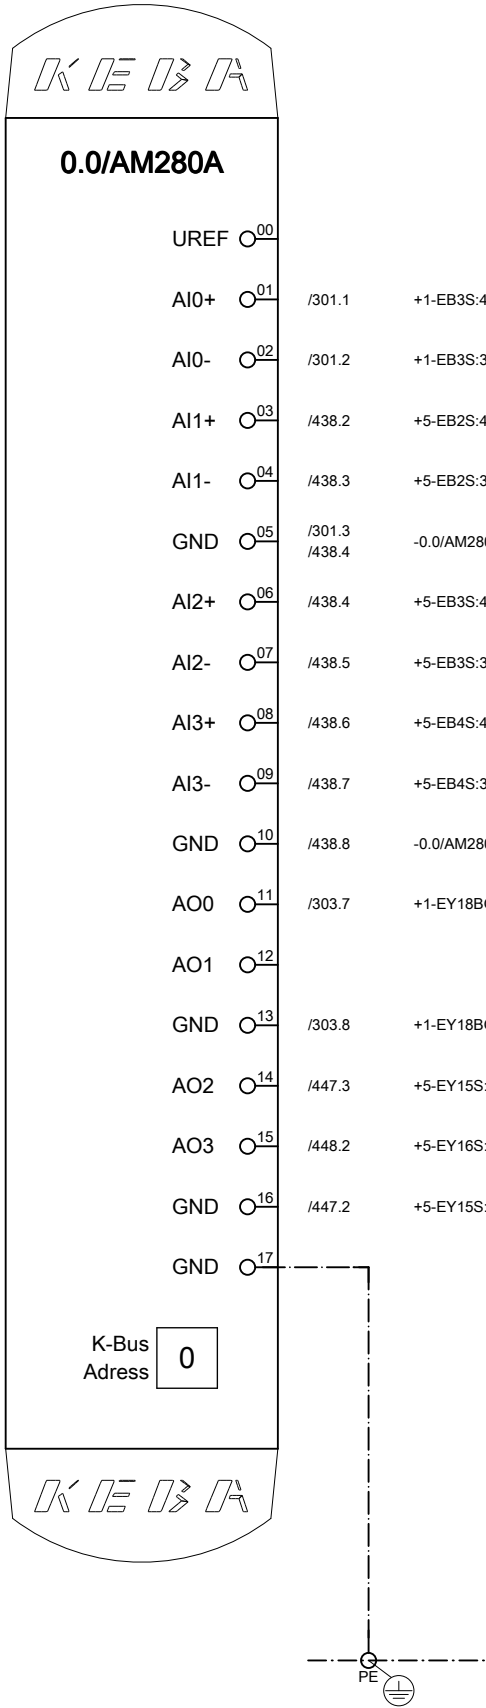


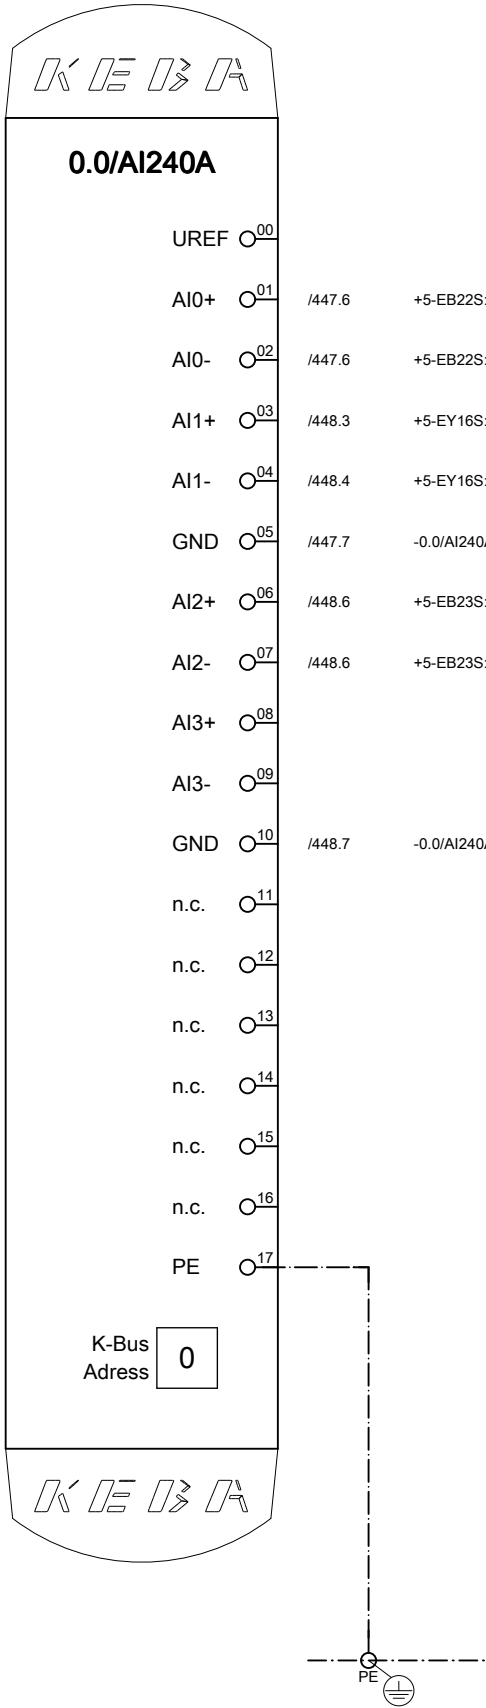

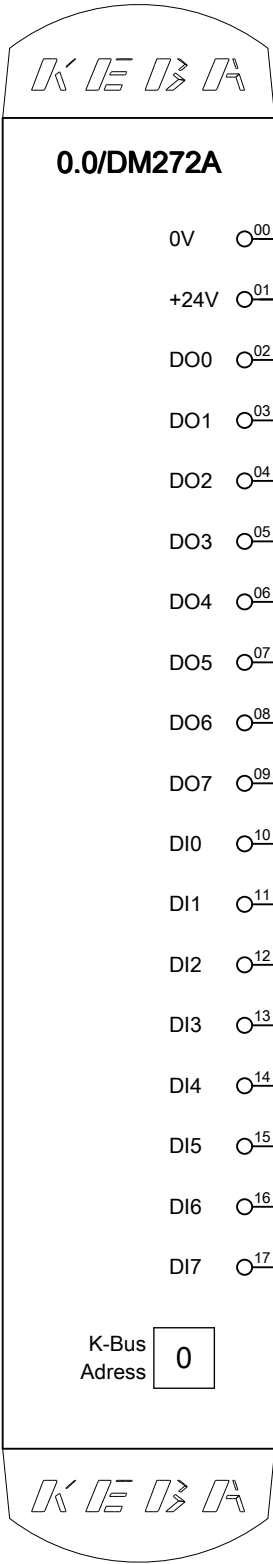



			Appr	GY	Machine-NO. 700026276		Bühler AG - Die Casting	ESM-85061	Ecoline	EN	Page	905
Modification	Date	Name	Original	ESM-85061 / 905.01	Replacement of	Replaced by						

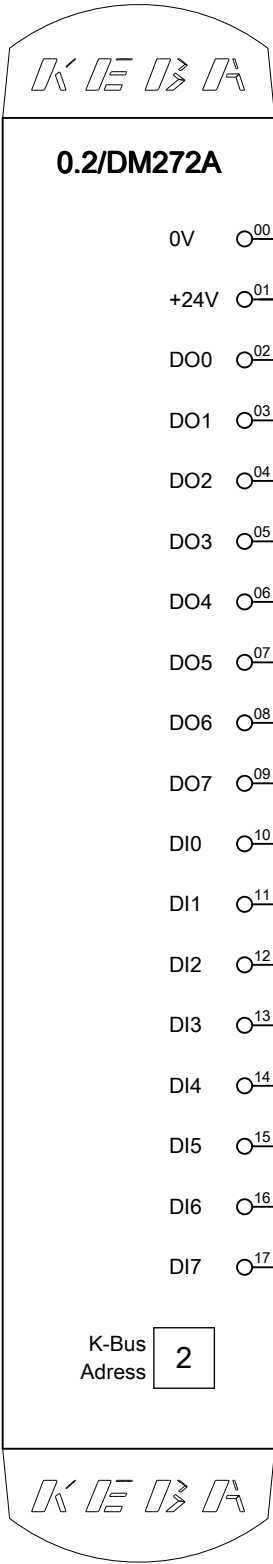

0V		00			
+24V		01			
DO0		02	/398.1	+3-EY12B:1	Move ejector back
DO1		03	/398.2	+3-EY12A:1	Move ejector forward
DO2		04	/401.1	+3-EY1B:1	Core pull M1 extract
DO3		05	/401.2	+3-EY1A:1	Core pull M1 enter
DO4		06	/404.1	+3-EY2B:1	Core pull M2 extract
DO5		07	/404.2	+3-EY2A:1	Core pull M2 enter
DO6		08	/407.1	+3-EY3B:1	Core pull M3 extract
DO7		09	/407.2	+3-EY3A:1	Core pull M3 enter
DI0		10	/398.6	+3-EB25CL:4	Ejector back
DI1		11	/398.7	+3-EB26CL:4	Ejector forward
DI2		12	/401.4	+3-EB3.1CL:14	Core pull M1 extracted
DI3		13	/401.5	+3-EB4.1CL:14	Core pull M1 retracted
DI4		14	/404.4	+3-EB5.1CL:14	Core pull M2 extracted
DI5		15	/404.5	+3-EB6.1CL:14	Core pull M2 retracted
DI6		16	/407.4	+3-EB7.1CL:14	Core pull M3 extracted
DI7		17	/407.5	+3-EB8.1CL:14	Core pull M3 retracted

K-Bus
Adress


2

			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 906.01	Replacement of	Replaced by







			Date	2015/6/29	Customer Woo Su AMS			Keba Overview 0.3/DM272A			= A	
			Ed.		Project Ecoline 84						+ C72	
			Appr	GY	Machine-No. 700026276							
Modification	Date	Name	Original	ESM-85061 / 907.01	Replacement of	Replaced by	Bühler AG - Die Casting		ESM-85061	Ecoline	EN/UL	Page 907


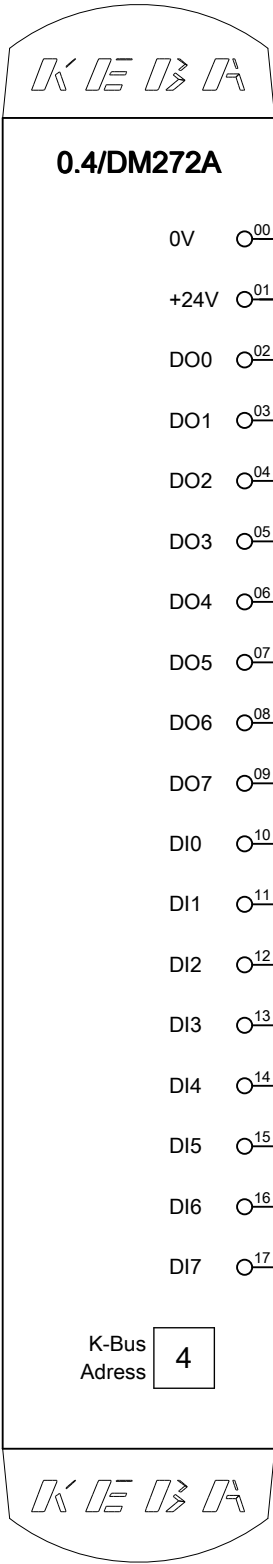




0V	00			
+24V	01			
DO0	02	/410.1	+3-EY4B:1	코어 풀러 M4 밖으로 빼기 Core pull M4 extract
DO1	03	/410.2	+3-EY4A:1	코어 풀러 M4 안으로 넣기 Core pull M4 enter
DO2	04			
DO3	05			
DO4	06			
DO5	07			
DO6	08			
DO7	09			
DI0	10	/410.4	+3-EB9.1CL:14	코어 풀러 M4.1 밖으로 빠짐 Core pull M4.1 retracted
DI1	11	/410.5	+3-EB10.1CL:14	코어 풀러 M4.1 안으로 들어감 Core pull M4.1 entered
DI2	12	/398.5	+3-EB39CL:14	이젝터 금형 측으로 뒤로 Ejector back die side
DI3	13			
DI4	14	/399.4	+3-EB35CL:BK	Engaged
DI5	15	/399.6	+3-EB36CL:BK	Disengaged
DI6	16			
DI7	17			

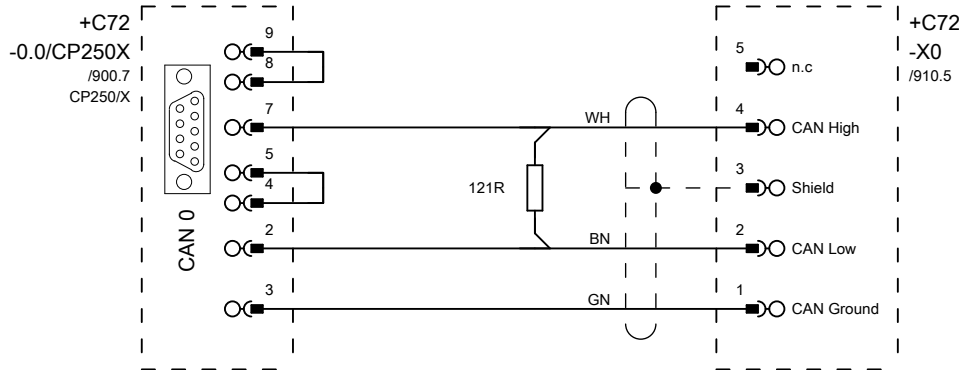

-EU910Z1	UXE-30605-202	PVC-Cable shielded grey	1.5 m
-EU910Z2	UNE-24210-101	Locking screw	2 ST
-EU910Z3	UNE-24210-012	Contact bush	3 ST
-EU910Z4	UNE-24210-007	Socket housing	1 ST
-EU910Z5	UNE-24210-027	Plug housing	1 ST
-EU910Z6	UNE-32200-550	2-conductor multipole connector	1 ST
-EU910Z7	UNE-60025-118	Resistor	1 ST

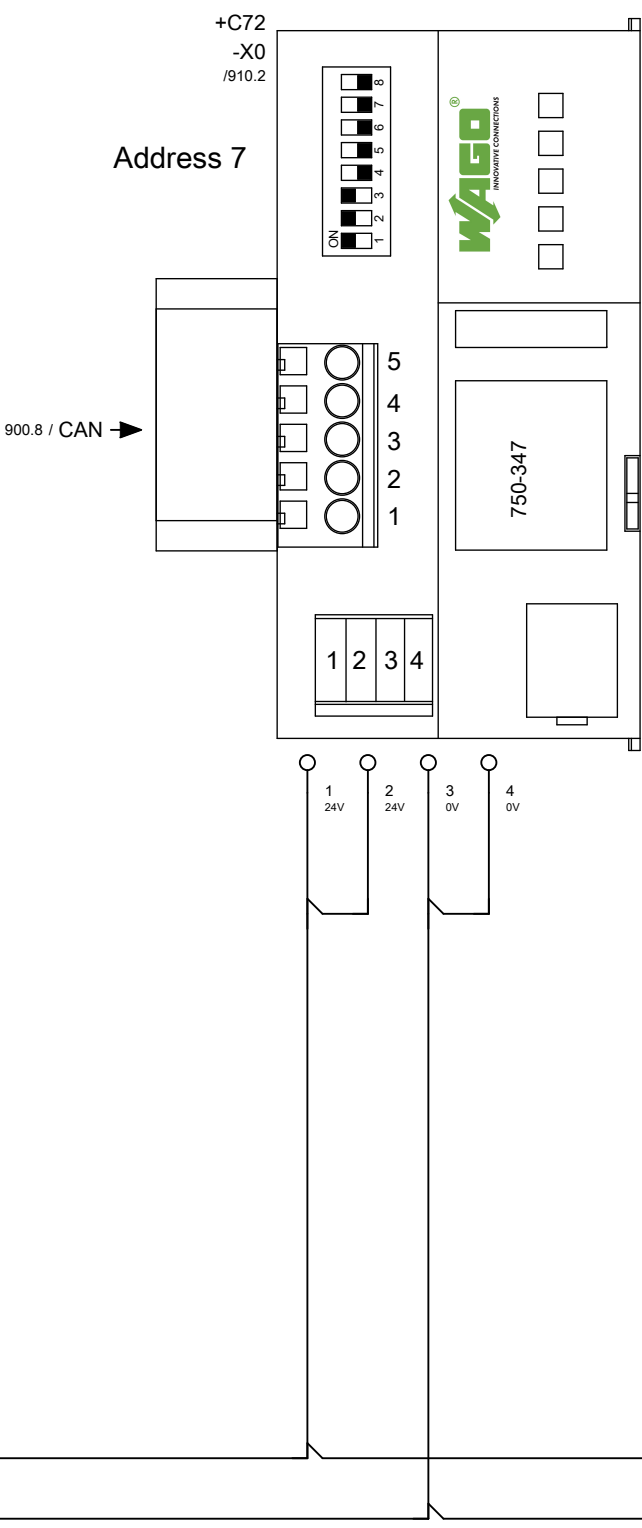

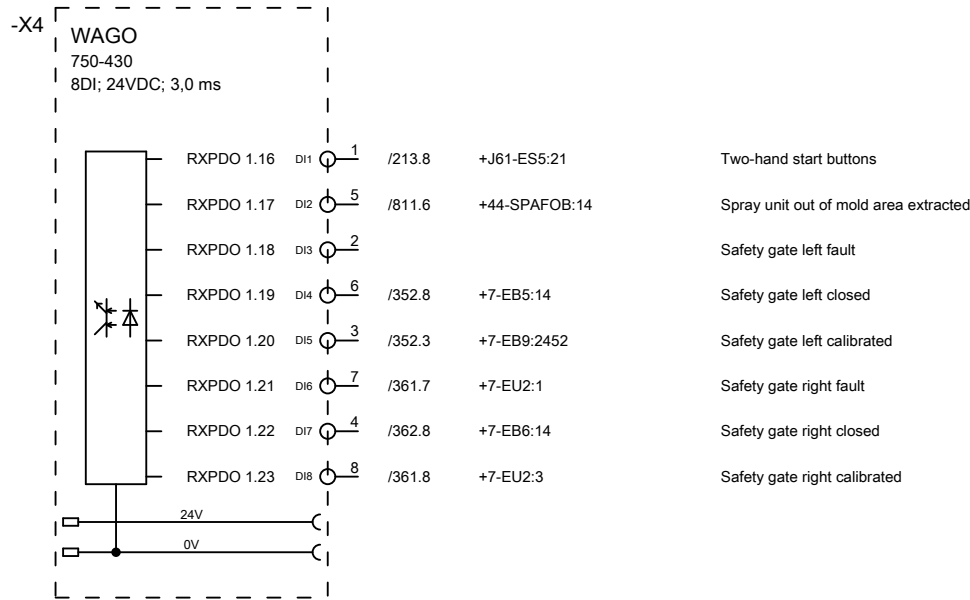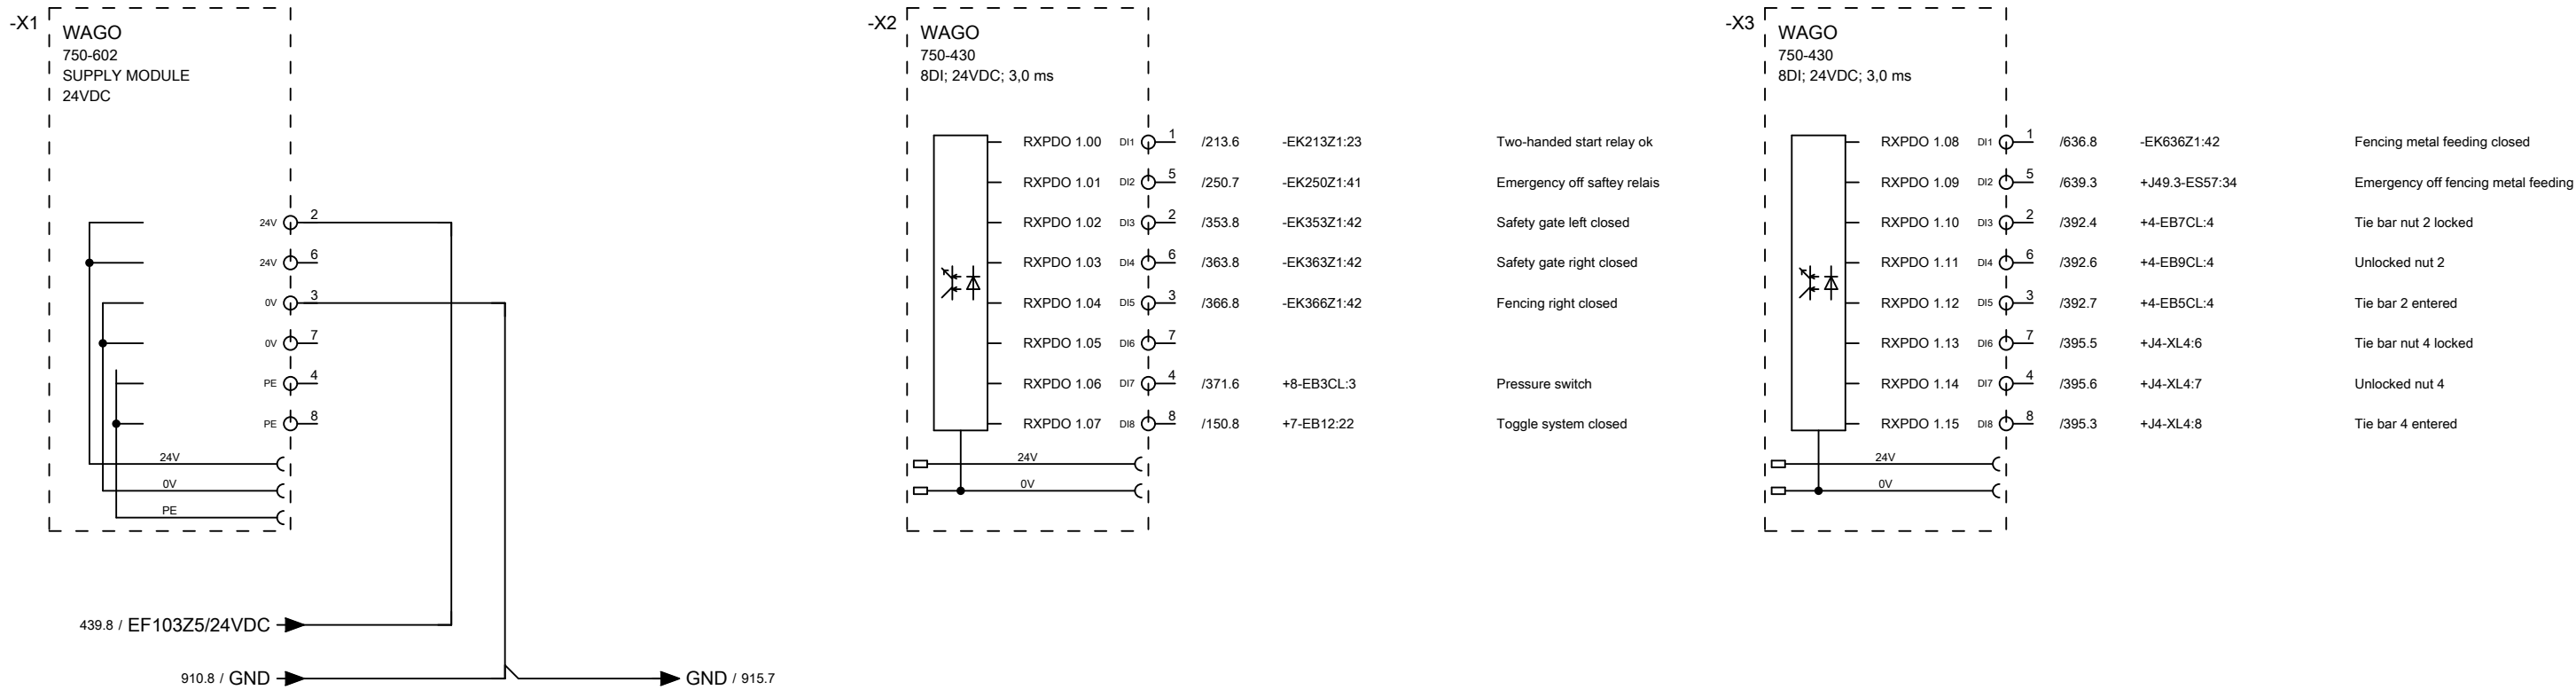

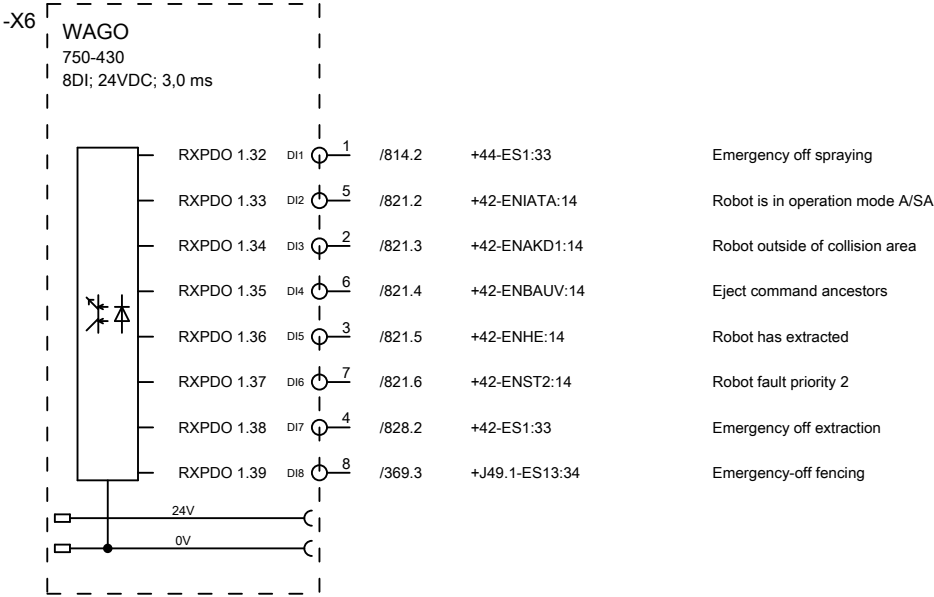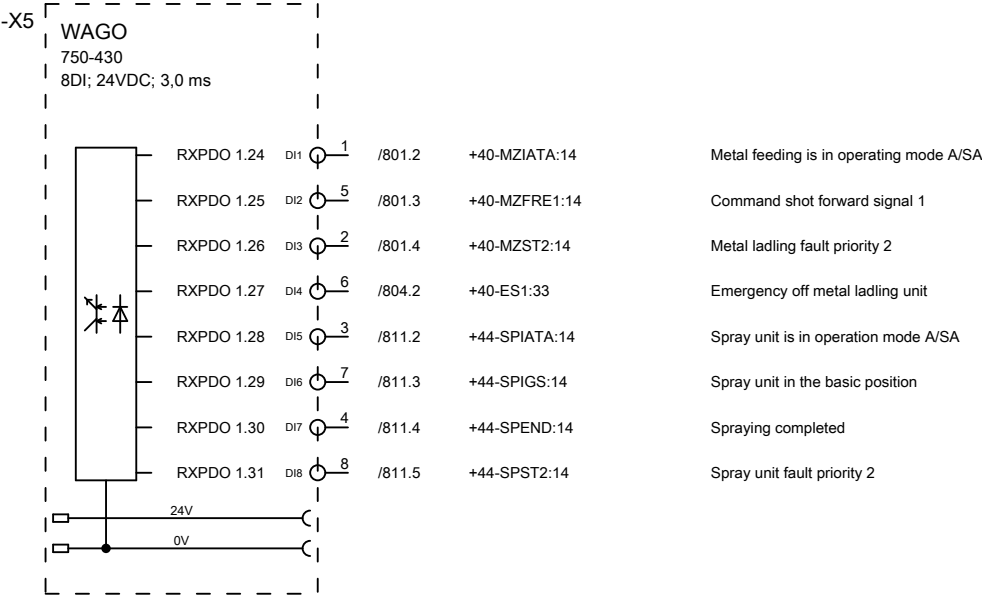


			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 912.01	Replacement of	Replaced by



Bühler AG - Die Casting

Wago overview option MZ, SP, EN

			= A
			+ C72
ESM-85061	Ecoline	EN/UL	Page 912

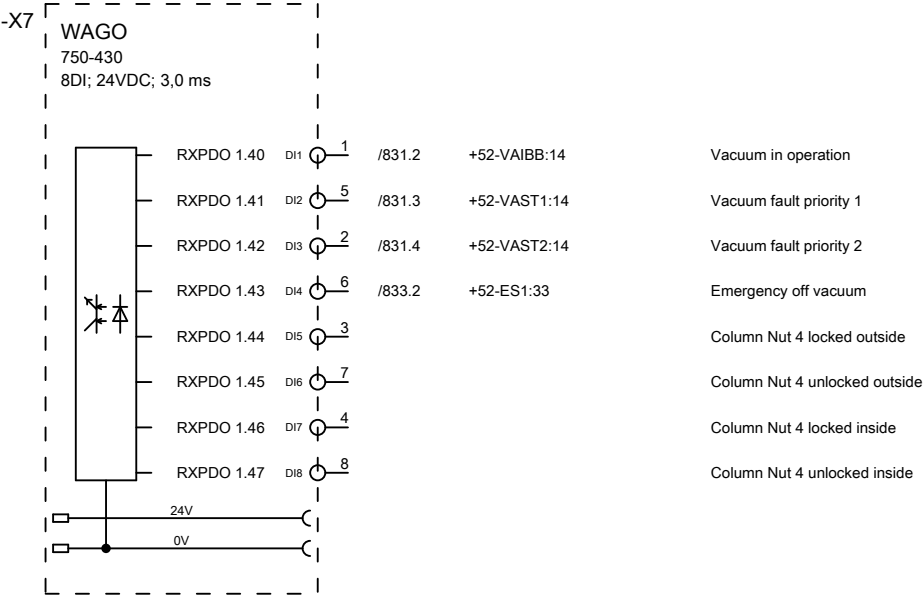



			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 913.01	Replacement of	Replaced by



Bühler AG - Die Casting

Wago overview option SZ4, VA

			= A
			+ C72
ESM-85061	Ecoline	EN/UL	Page 913

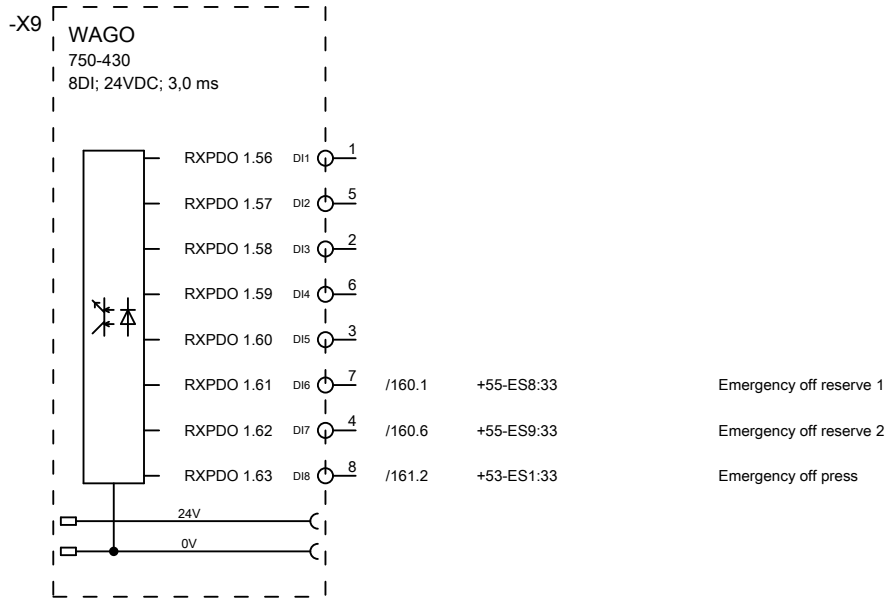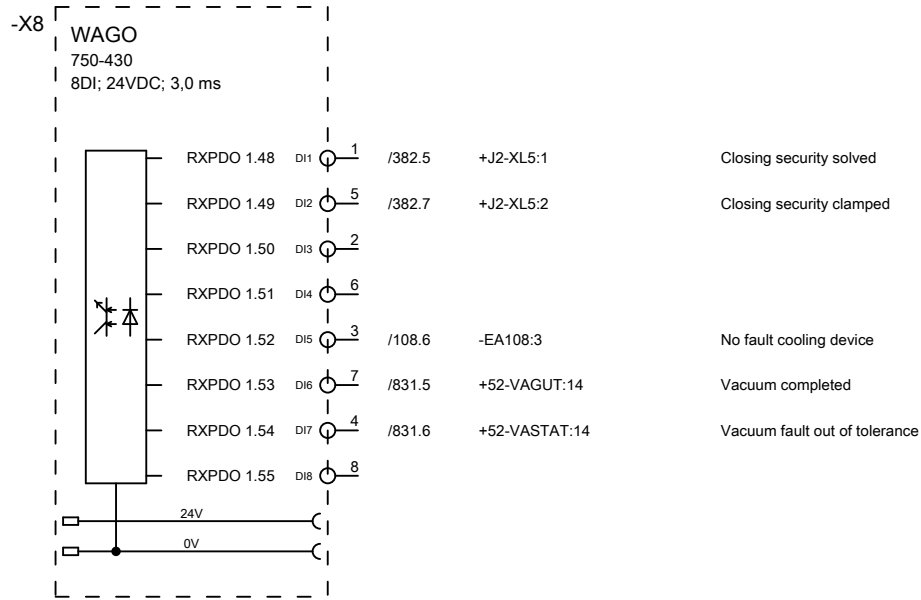







			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 914.03	Replacement of	Replaced by




Bühler AG - Die Casting

Wago overview option MSS, US


			= A
			+ C72
ESM-85061	Ecoline	EN/UL	Page 914

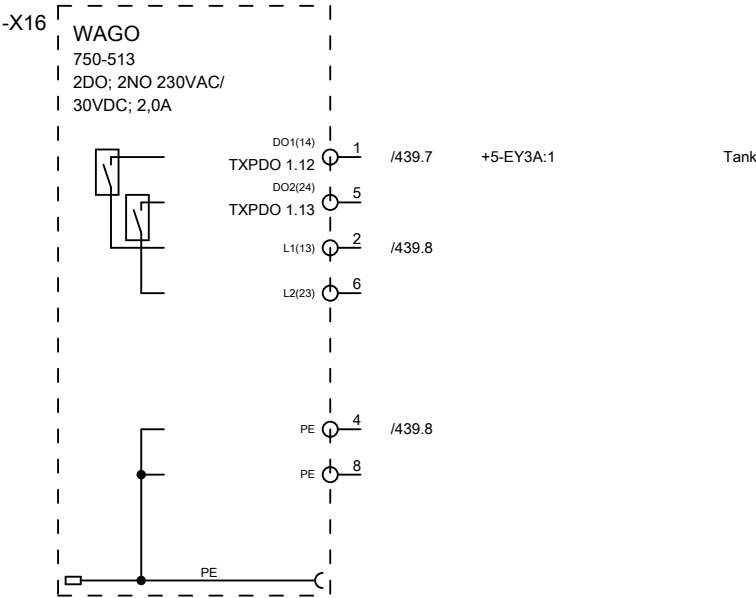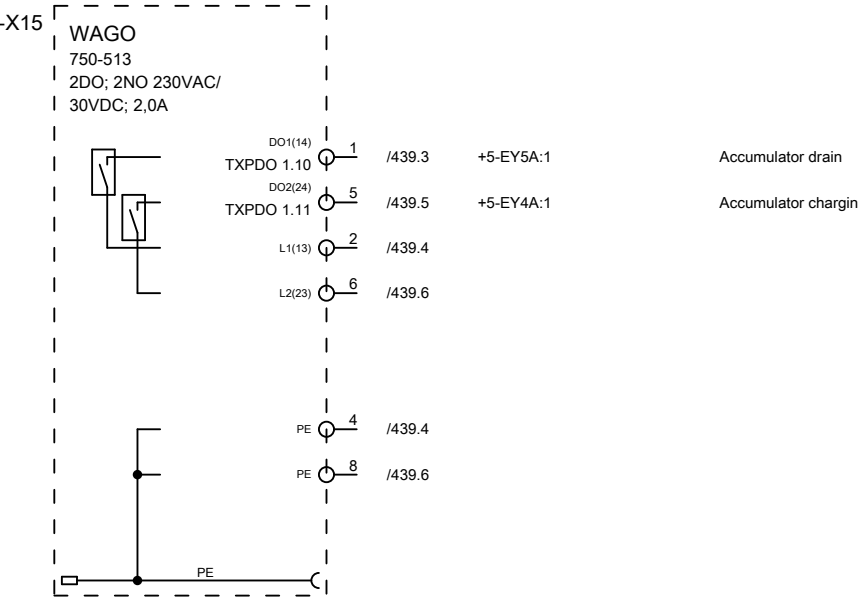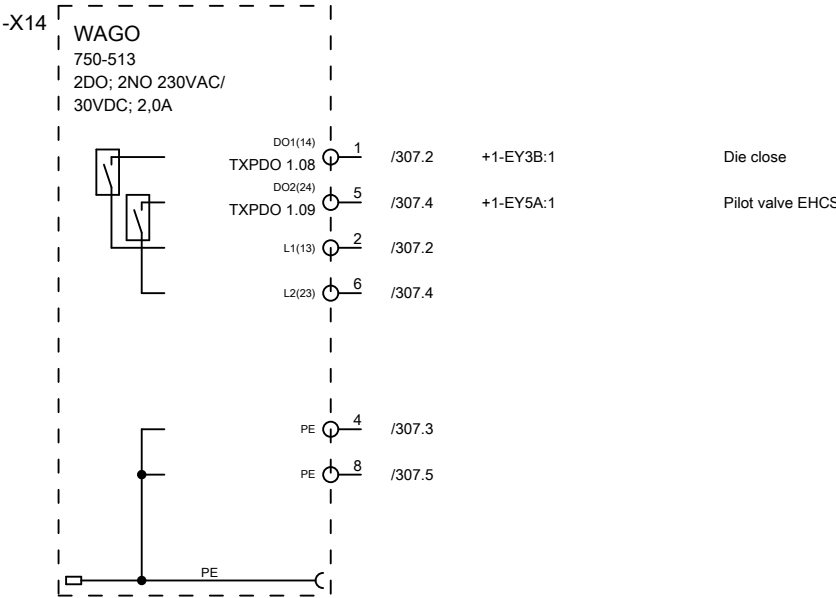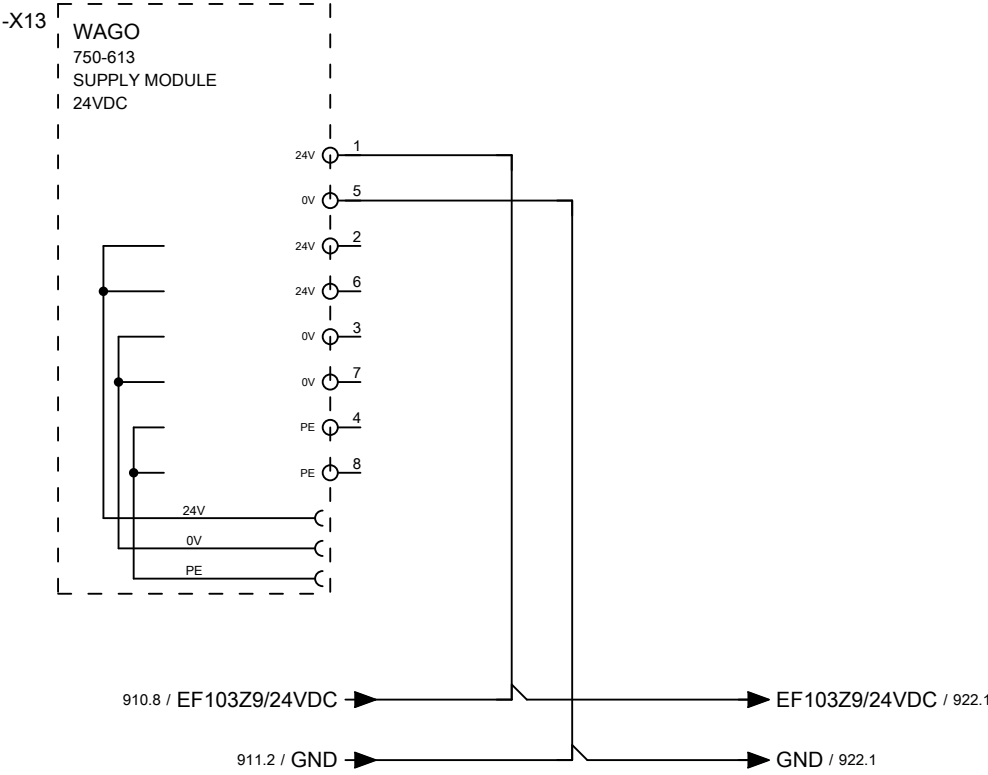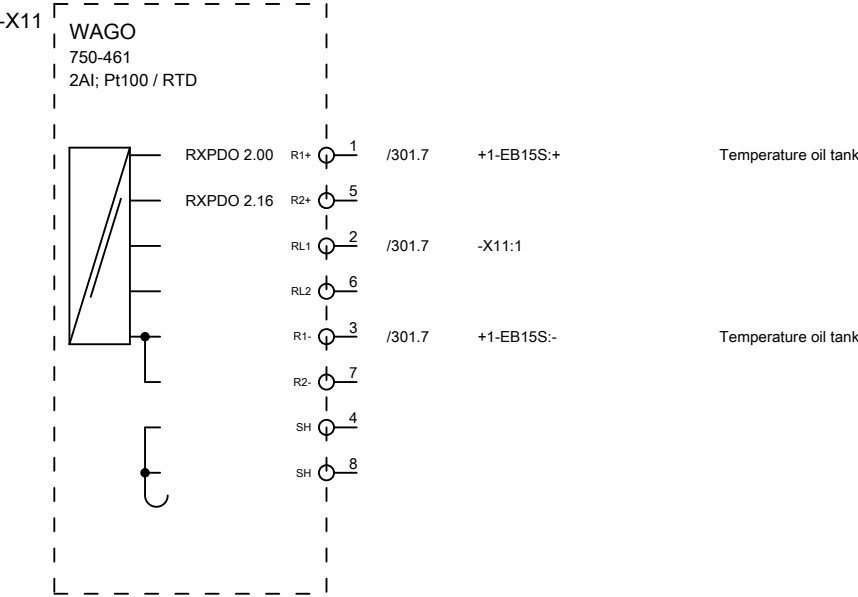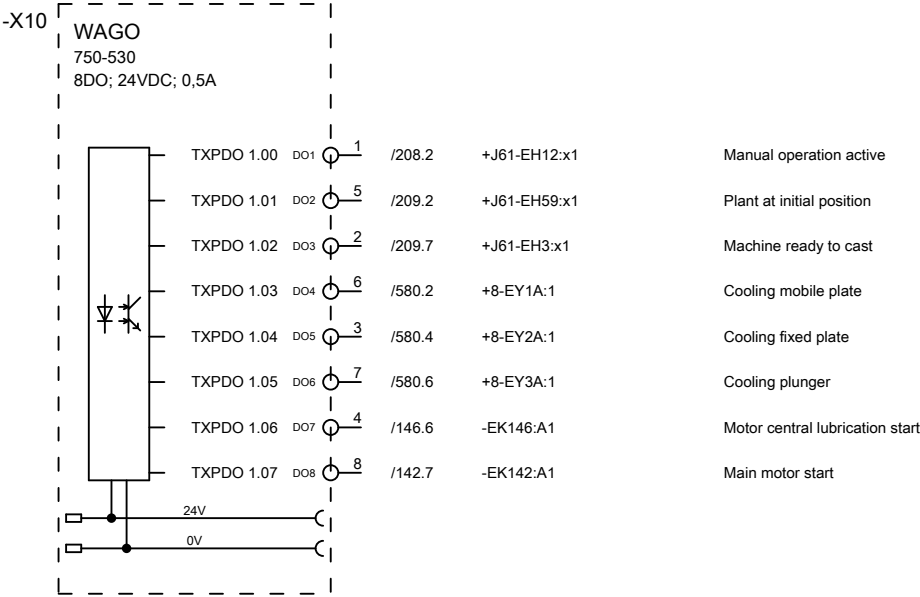

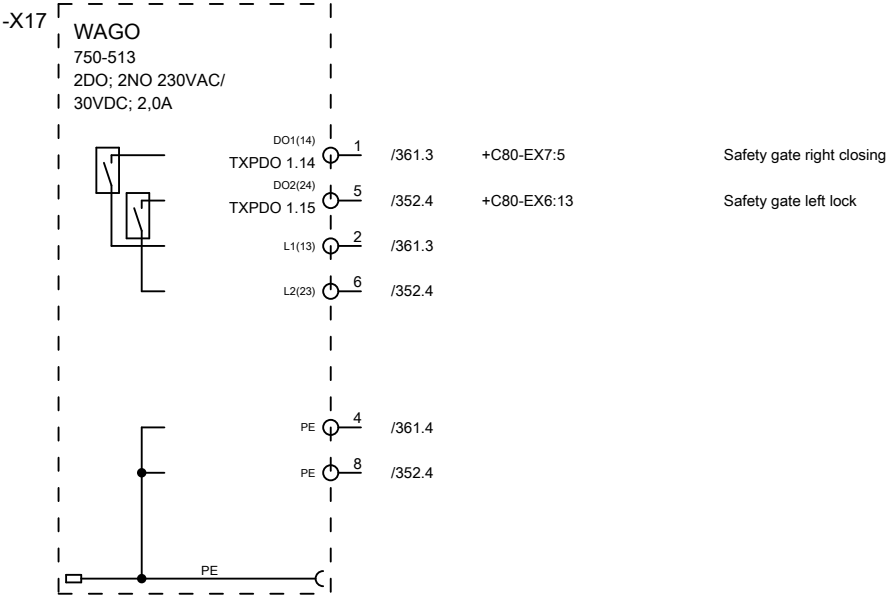


			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 917.01	Replacement of	Replaced by




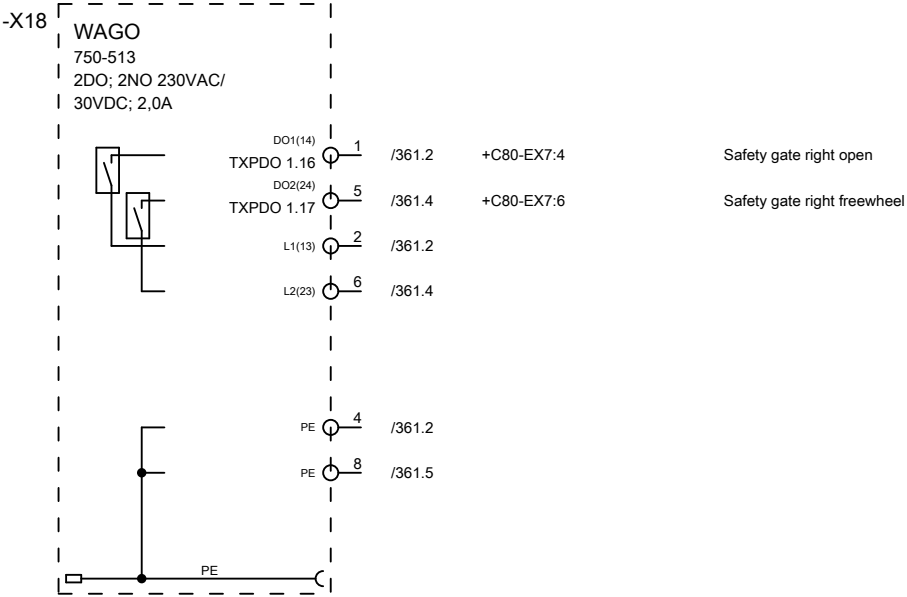

			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 918.02	Replacement of	Replaced by



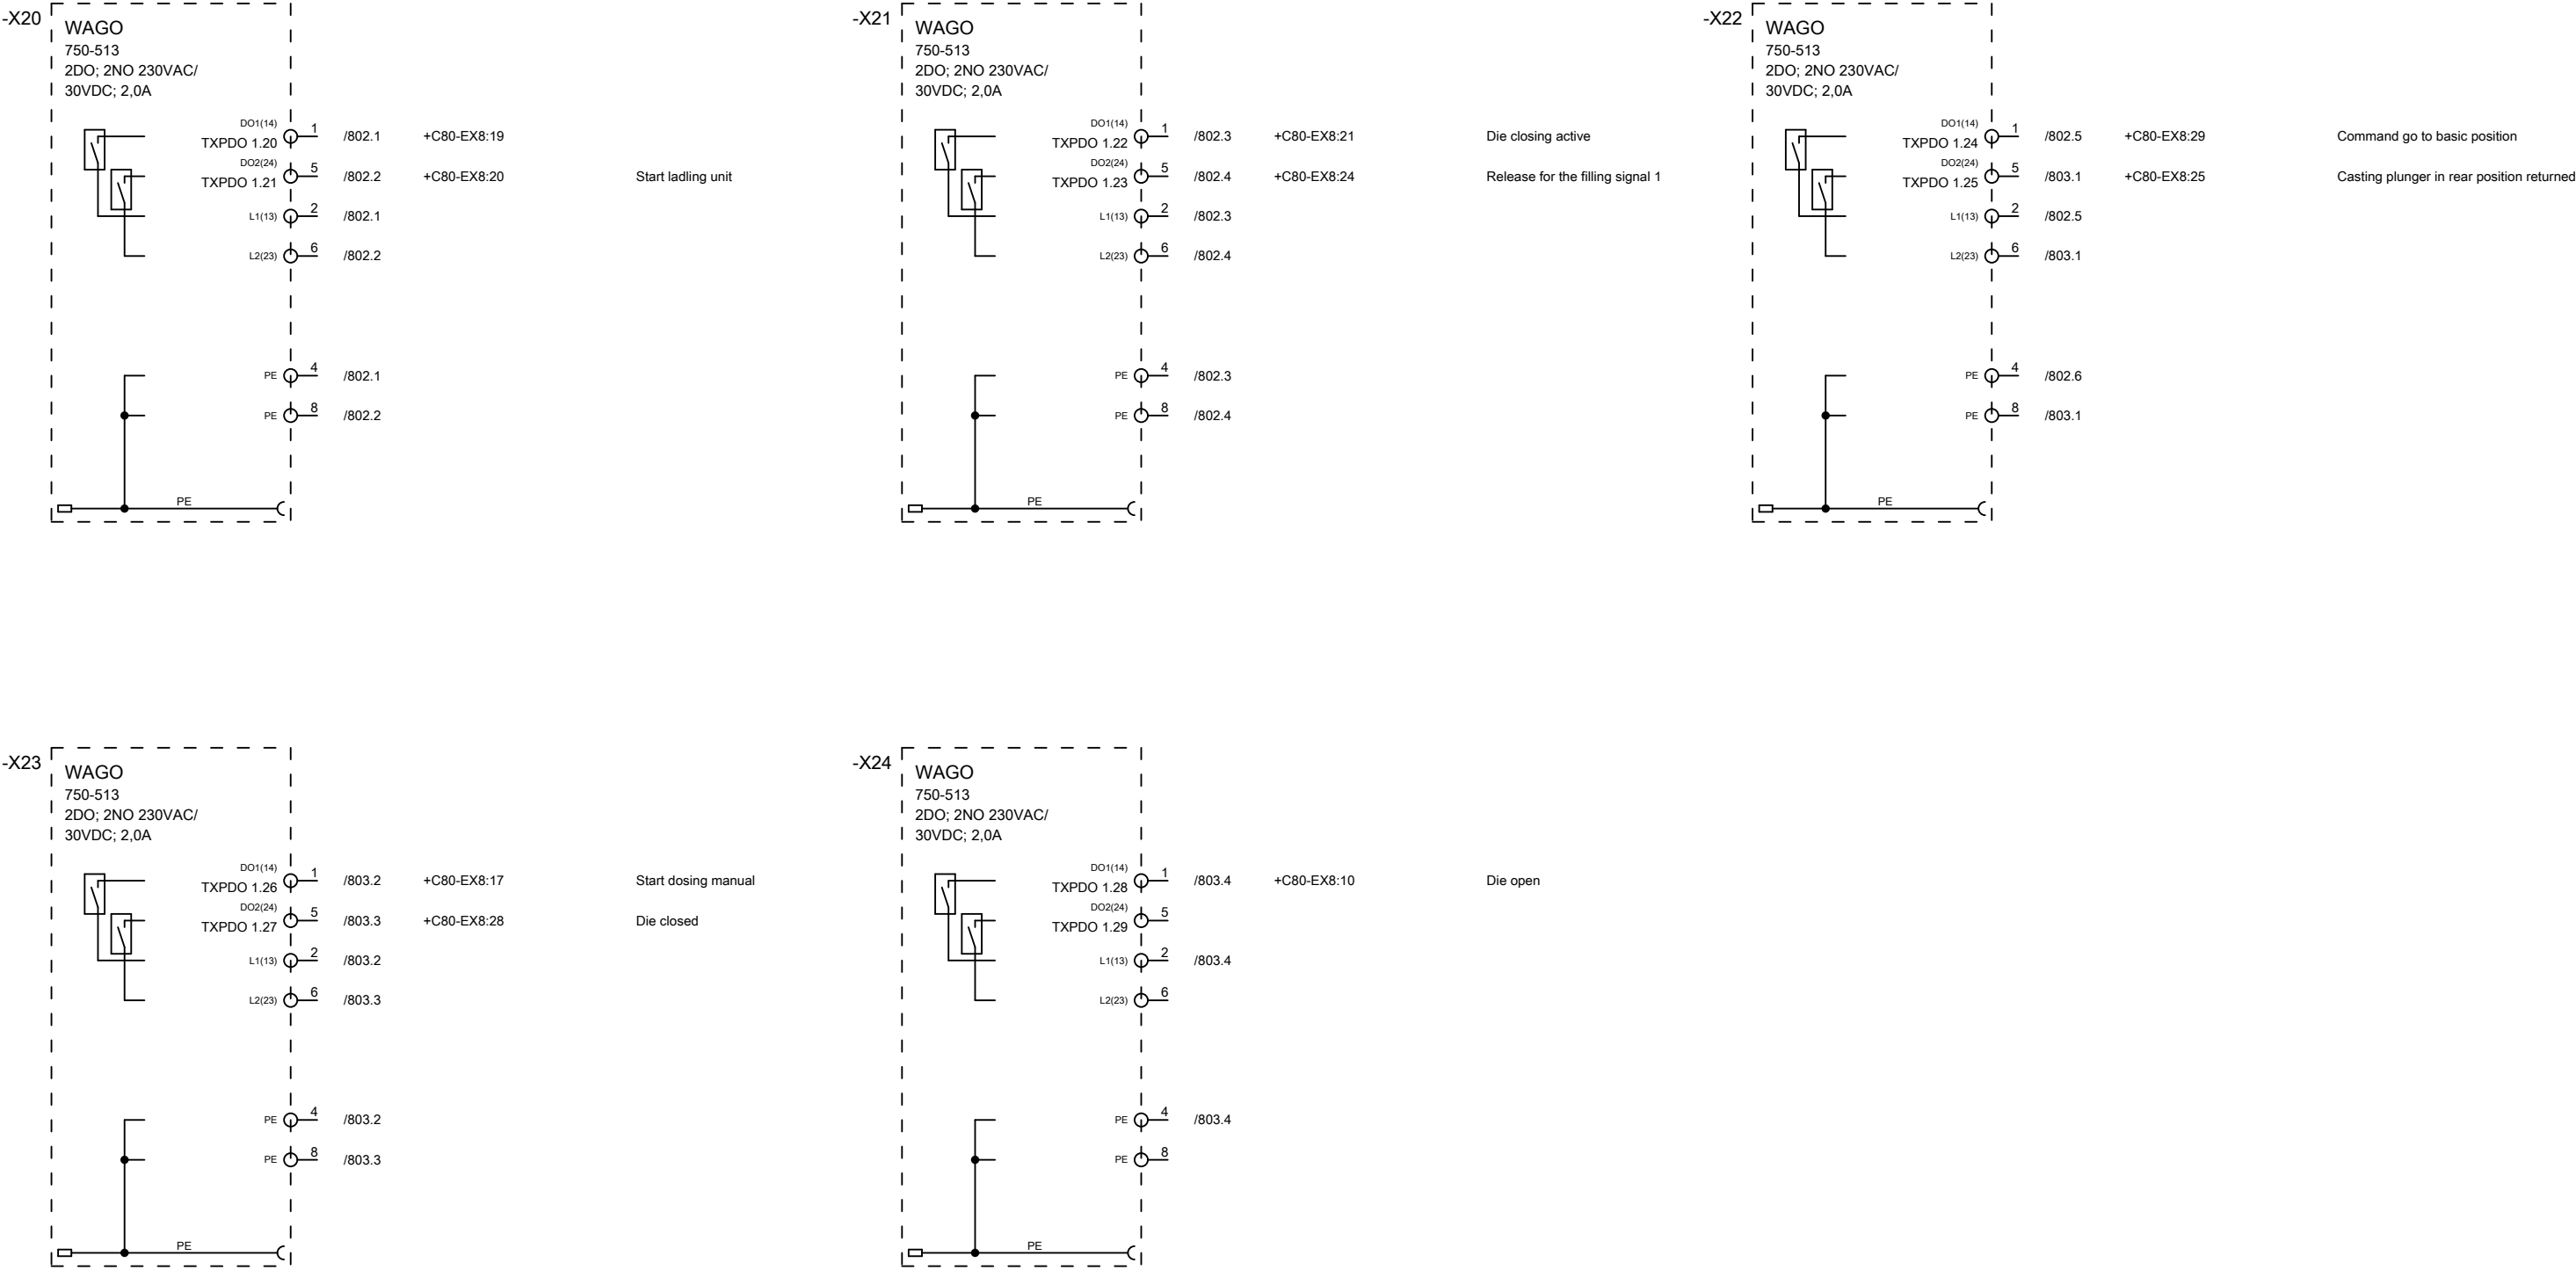

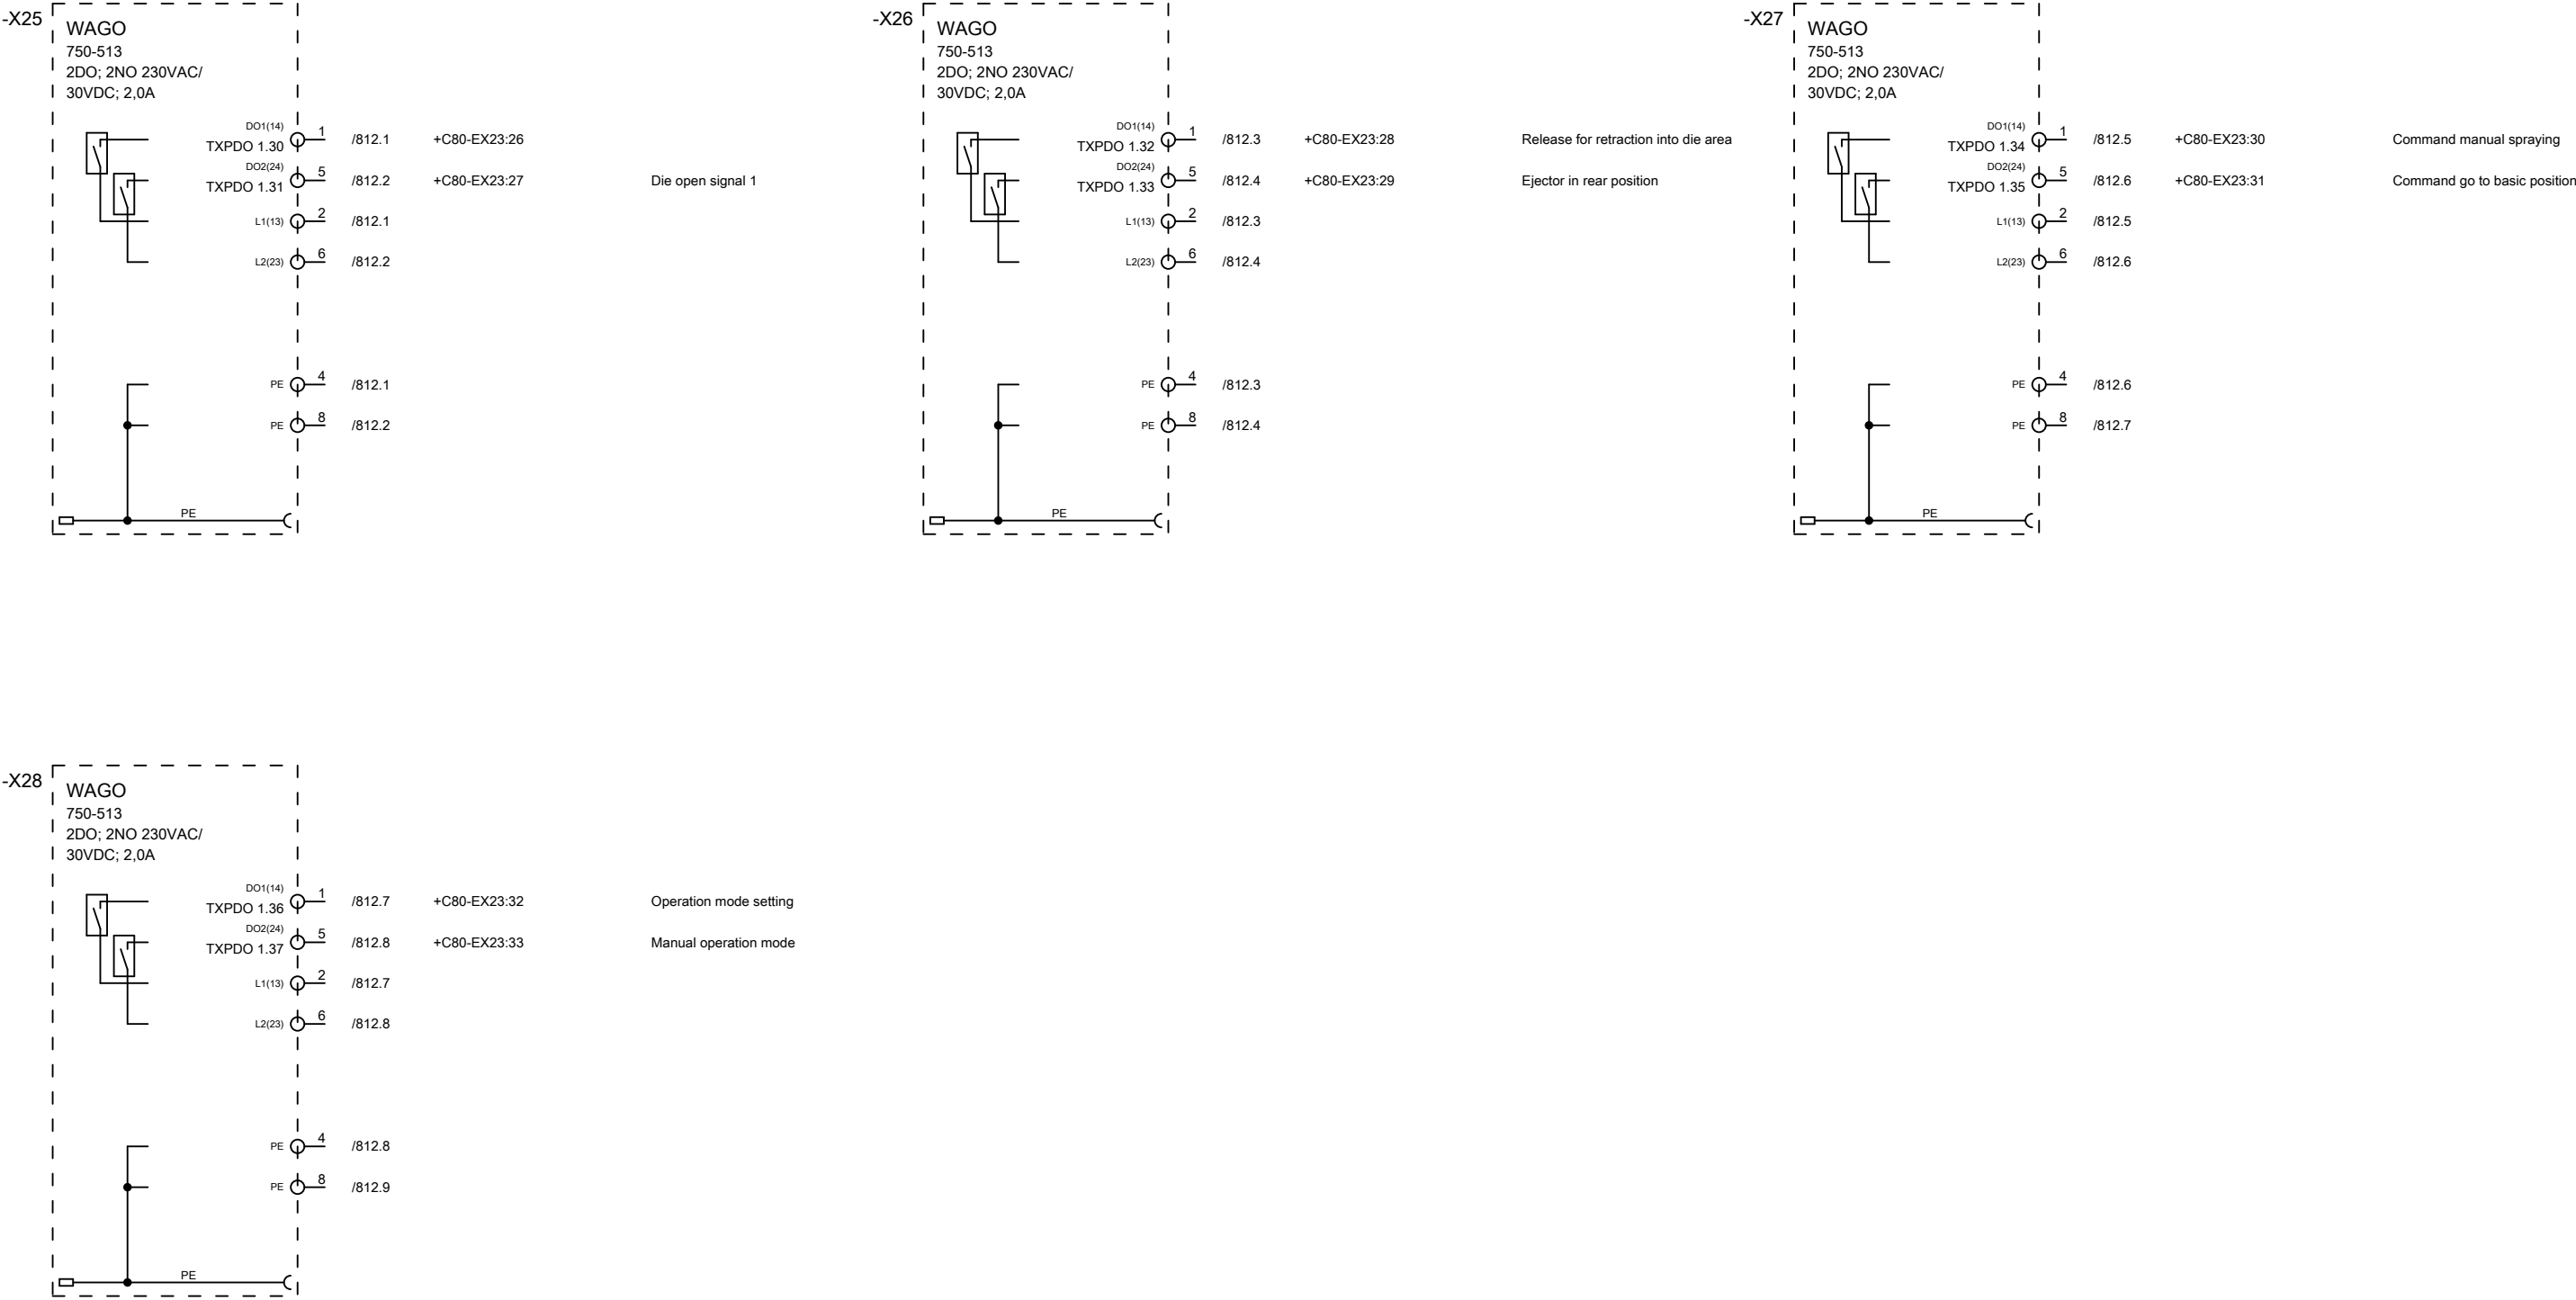


			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 920.01	Replacement of	Replaced by



Bühler AG - Die Casting

Wago overview SP outputs

			= A
			+ C72
ESM-85061	Ecoline	EN/UL	Page 920

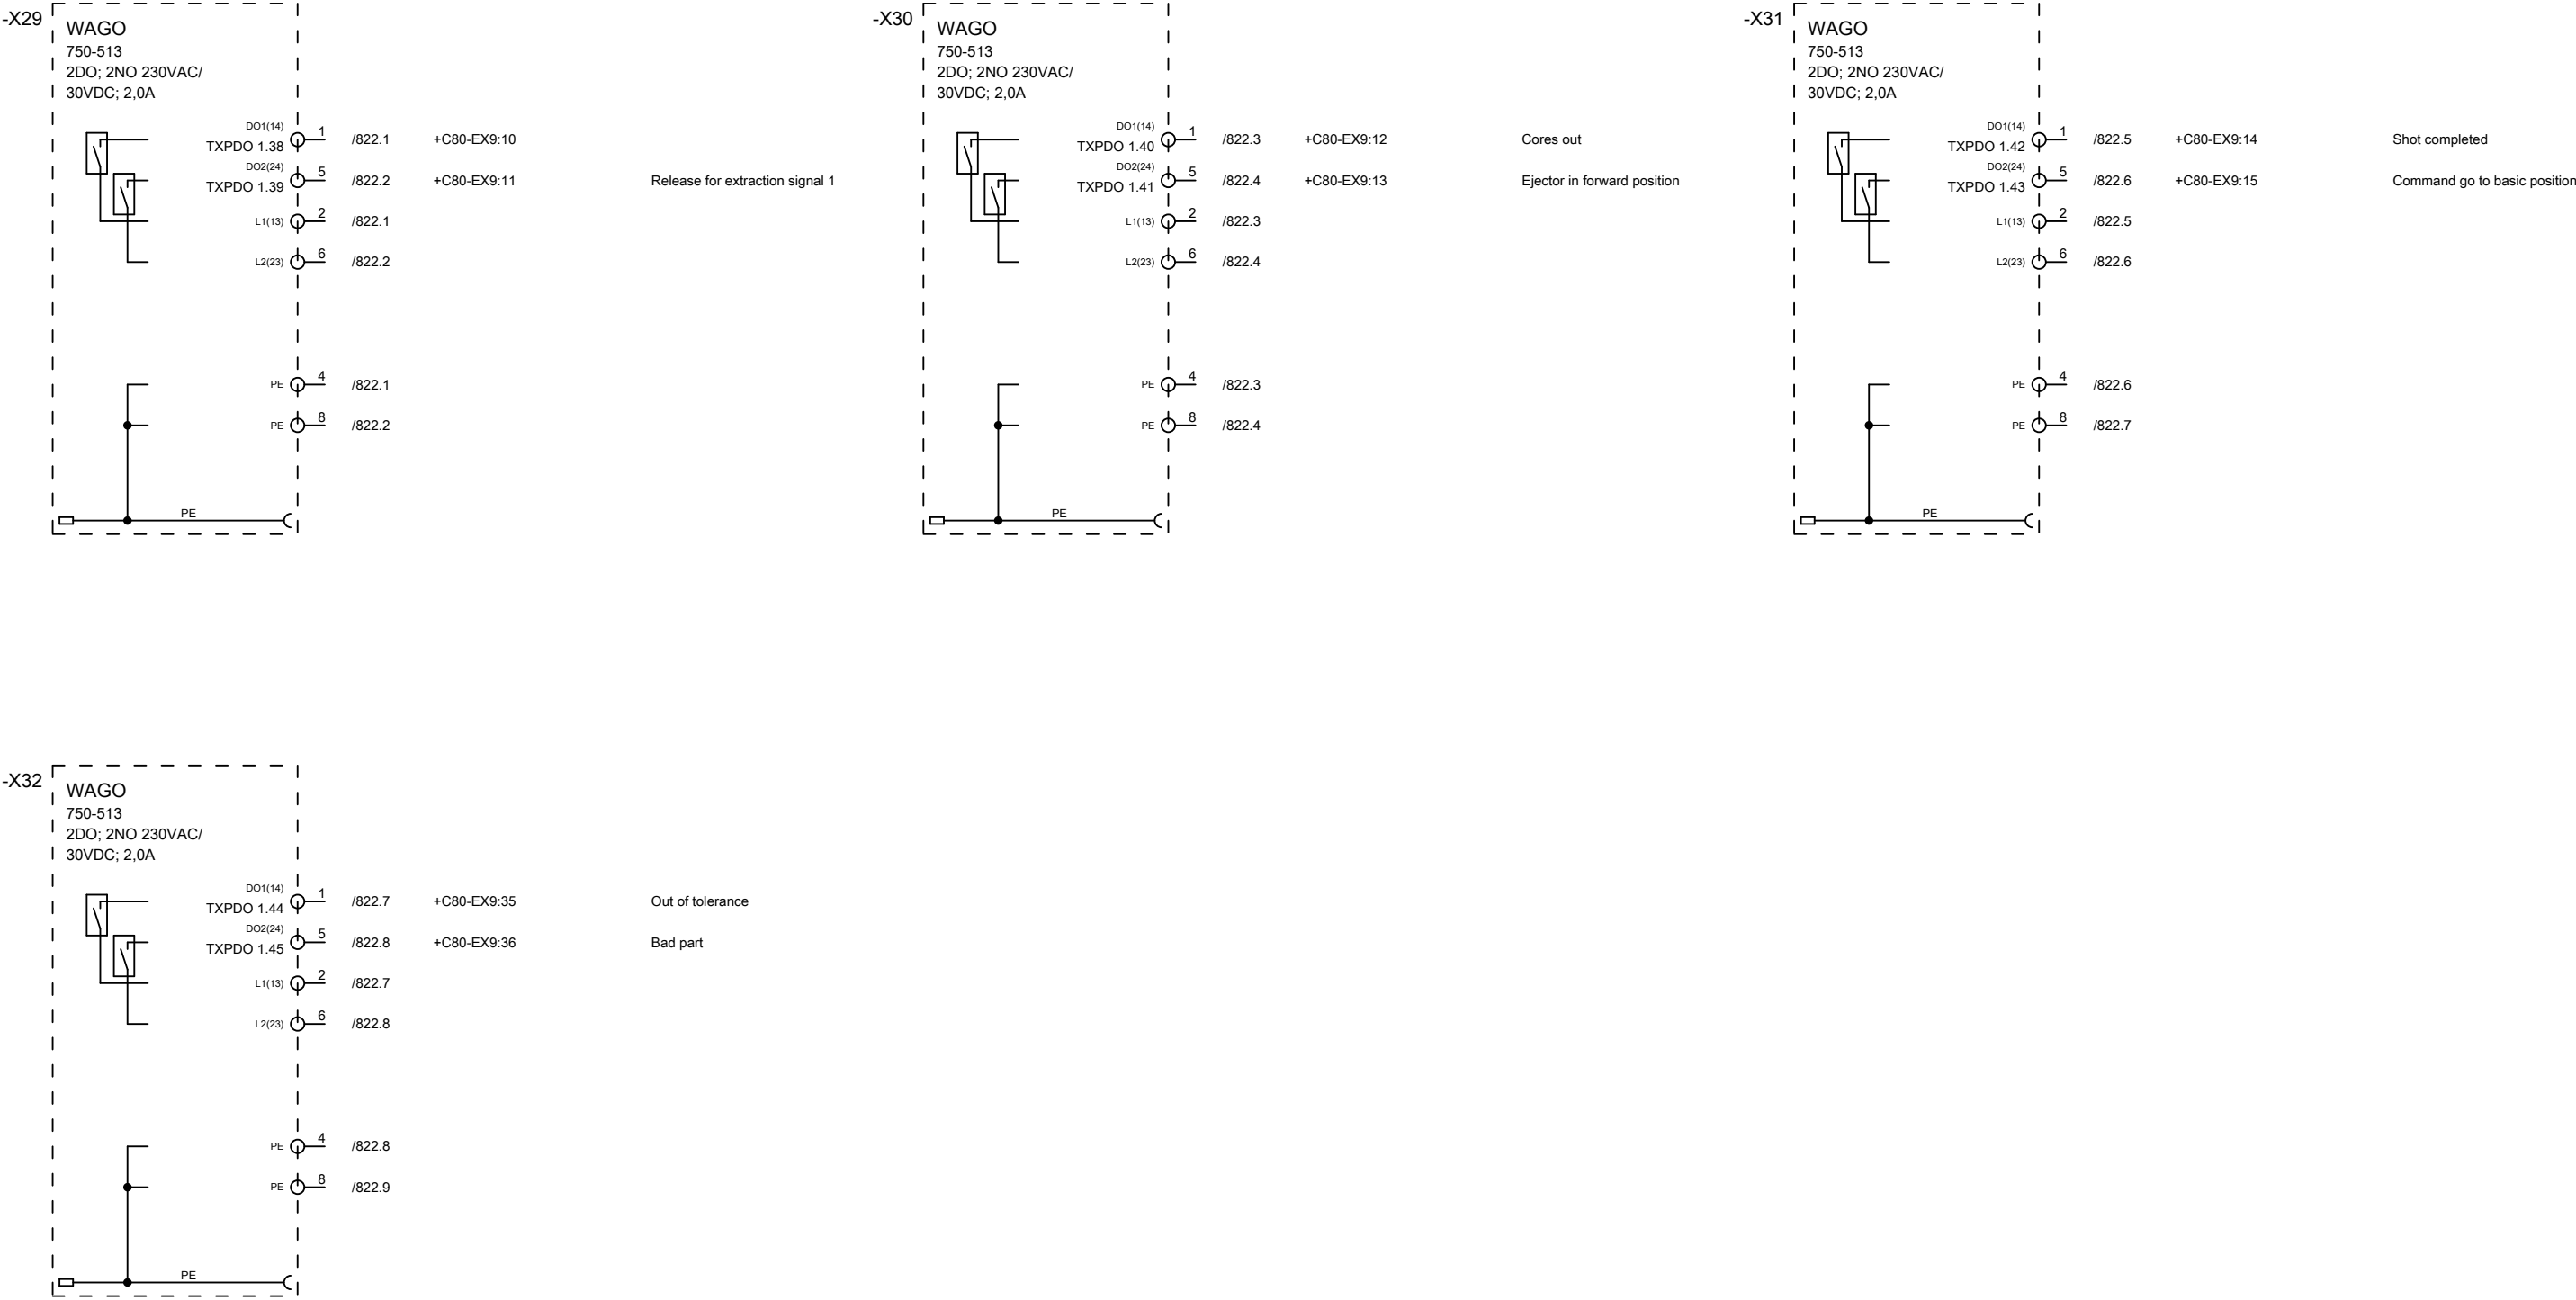


			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 921.02	Replacement of	Replaced by






Bühler AG - Die Casting

Wago overview EN outputs

			= A
			+ C72
ESM-85061	Ecoline	EN/UL	Page 921

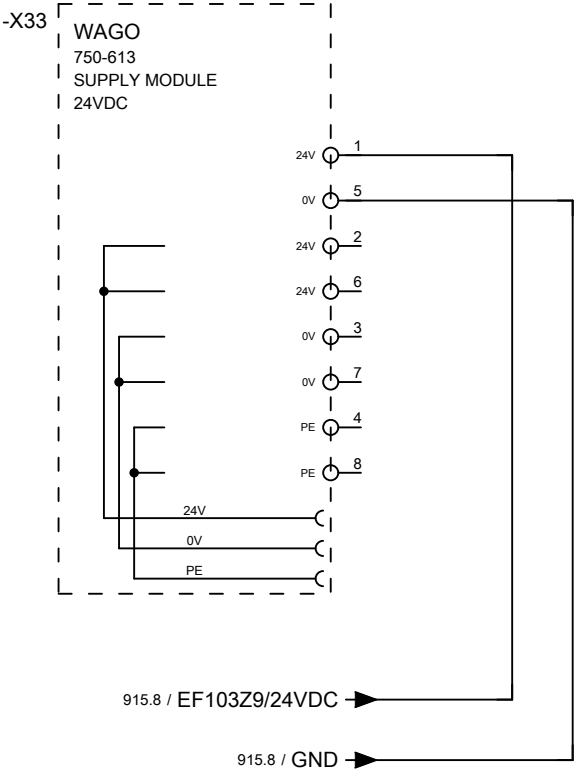

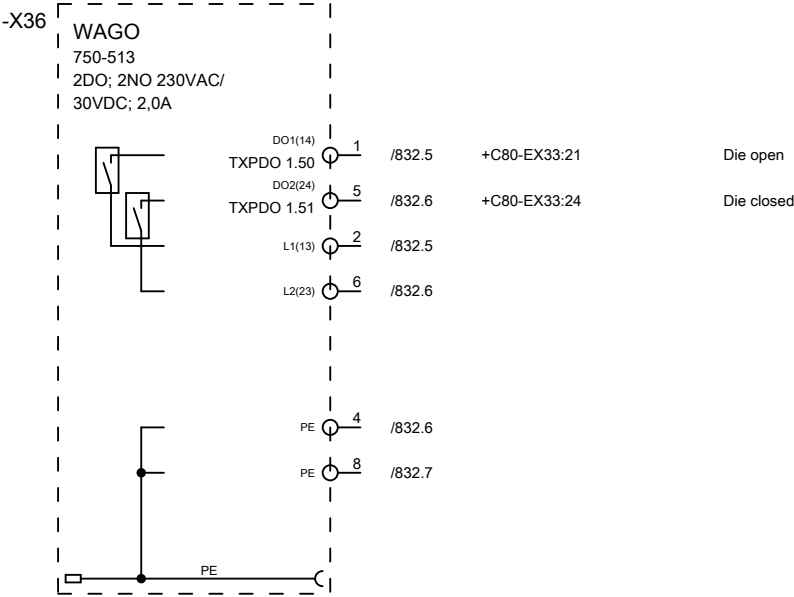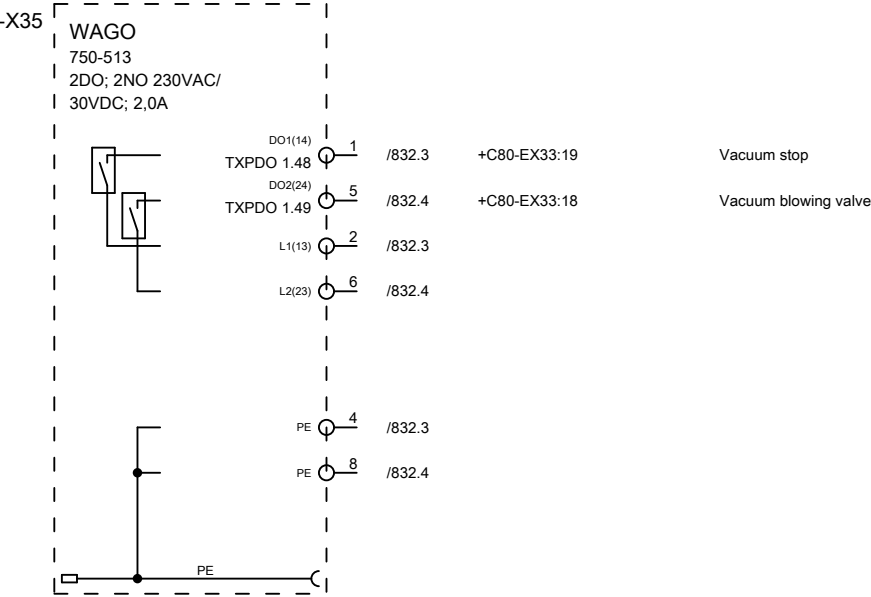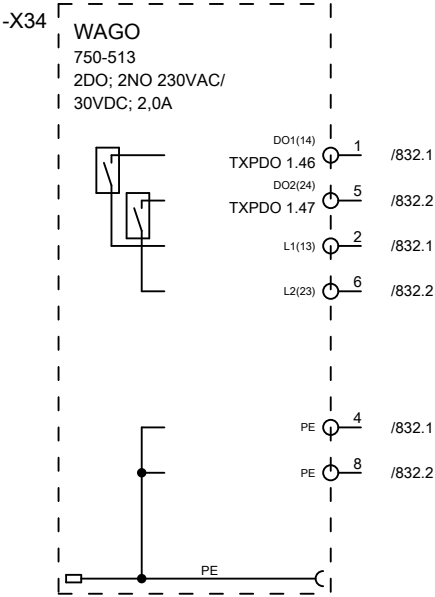

			Date	2015/6/29	Customer	Woo Su AMS
			Ed.		Project	Ecoline 84
			Appr	GY	Machine-No.	700026276
Modification	Date	Name	Original	ESM-85061 / 923.02	Replacement of	Replaced by




Bühler AG - Die Casting

Wago overview VA outputs

			= A
			+ C72
ESM-85061	Ecoline	EN/UL	Page 923

0	1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---	---

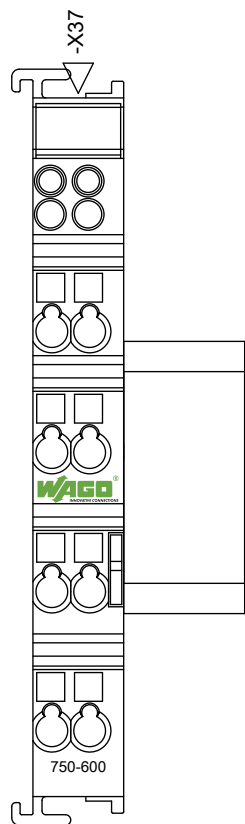

			Date	2015/6/29	Customer Woo Su AMS			Wago overview end clamp			= A	
			Ed.		Project Ecoline 84						+ C72	
			Appr	GY	Machine-No. 700026276							
Modification	Date	Name	Original	ESM-85061 / 929.01	Replacement of	Replaced by	Bühler AG - Die Casting		ESM-85061	Ecoline	EN/UL	Page 929

Plug diagram

BDAG_F22_001

function text	Target designation customer					Cable name	Plug designation =A+C72-C80-EX8						Cable name					Page / column
							Target designation DCM	Connection point	Plug designation	jumper	device connection point	Target designation internal						
									26			-XL91	1					/805.6
Channel 1									27			-XL91	2					/805.7
Fencing metal feeding									30			-XL91	3					/805.8
Channel 2									31			-XL91	4					/805.8

Plug diagram

BDAG_F22_001

function text	Target designation customer					Cable name	Plug designation =A+C72-EX23						Cable name	+C80-EW14					Page / column	
							Target designation DCM	Connection point	Plug designation	jumper	device connection point	Target designation internal								Connection point
Channel 1									17			-XL94	5		5				/813.6	
Release safety gates and fencing									18			-XL94	6		6				/813.7	
Channel 2									19			-XL94	7		7				/813.8	
									20			-XL94	8		8				/813.8	
			</																	

Plug diagram

BDAG_F22_001

function text	Target designation customer					Cable name	Plug designation =A+C72-EX34 Press						Cable name					Page / column
							Target designation DCM	Connection point	Plug designation	jumper	device connection point	Target designation internal	Connection point					
									1									
									2									
							+53-ES1	34	3			-XL128	12					/161.1
Emergency off press							+53-ES1	33	4		RXPDO 1.63	-X9	8					/161.2
Emergency off press							+53-ES1	11	5			-EK250Z1	S12					/161.2
Emergency off press							+53-ES1	21	6			-XL128	14					/161.2
Emergency off press							+53-ES1	22	7			-EK250Z1	S22					/161.2
Emergency off press									8			-EK250Z4	14					/161.4
Channel 1									9			-EK250Z4	13					/161.4
Emergency off release DCM									10			-EK250Z5	14					/161.5
Channel 2									11			-EK250Z5	13					/161.5
Channel 2									12			-EK366Z2	04					/161.6
Channel 1									13			-EK366Z2	03					/161.6
Emergency off release DCM									14			-EK366Z3	04					/161.7
Channel 2									15			-EK366Z3	03					/161.8
									16									
									17									
									18									
									19									
									20									
									21									
									22									
									23									
									24									
									25									
									26									
									27									
									28									
									29									
									30									
									31									
									32									
									33									
									34									
									35									
									36									

Plug diagram

BDAG_F22_001

function text	Target designation customer				+7-EW2	Cable name	Plug designation =A+C80-EX6 Safety gate left						Cable name	-EW4	-EW6			Page / column
							Target designation DCM	Connection point	Plug designation	jumper	device connection point	Target designation internal						
					1		+J7.1-XL6	1	1		+C72-XL84	1		BN			+C72/351.4	
					2		+J7.1-XL6	2	2		+C72-XL84	2		BU			+C72/351.5	
									3									
									4									
									5									
									6									
									7									
					8		+J7.1-XL6	8	8								+C72/352.5	
									9									
					10		+J7.1-XL6	10	10		+C72-XL86	3			3		+C72/352.2	
					11		+J7.1-XL6	11	11								+C72/352.5	
					12		+J7.1-XL6	12	12		RXPDO 1.20	+C72-X4		3			+C72/352.3	
					13		+J7.1-XL6	13	13		TXPDO 1.15	+C72-X17		5			+C72/352.4	
					14		+J7.1-XL6	14	14			+C72-XL86		2		2	+C72/352.7	
					15		+J7.1-XL6	15	15								+C72/352.5	
					16		+J7.1-XL6	16	16		RXPDO 1.19	+C72-X4	6				+C72/352.8	
					17		+J7.1-XL6	17	17			+C72-XL86	4			4	+C72/352.2	
					18		+J7.1-XL6	18	18			+C72-XL86	1			1	+C72/352.6	
					19		+J7.1-XL6	19	19								+C72/352.6	
									20									
									21									
									22									
									23									
									24									
									25									
									26									
									27									
									28									
									29									
									30									
									31									
									32									
									33									
					GNYE		+J7.1-XL6	PE	34			+C72-XL84		PE	GNYE		+C72/351.5	
							-EX6	36	35			+C72-XL61.2		7			+C72/351.3	
							-EX6	35	36		-EX27	11				+C72/351.3		

Plug diagram

BDAG_F22_001

function text	Target designation customer				+7-EW4	Cable name	Plug designation =A+C80-EX7 Safety gate right						Cable name	+C72-EW2	-EW6			Page / column
						cable type	Target designation DCM	Connection point	Plug designation	jumper	device connection point	Target designation internal	Connection point					
					1		+J7.2-XL7	1	1			-EX6	1					+C72/361.7
				2	+J7.2-XL7		2	2			-EX6	2						+C72/361.7
				3	+J7.2-XL7		3	3			+C72-X18	2	1					+C72/361.2
				4	+J7.2-XL7		4	4		TXPDO 1.16	+C72-X18	1	2					+C72/361.2
				5	+J7.2-XL7		5	5		TXPDO 1.14	+C72-X17	1	3					+C72/361.3
				6		+J7.2-XL7	6	6		TXPDO 1.17	+C72-X18	5		4			+C72/361.4	
				7		+J7.2-XL7	7	7		RXPDO 1.21	+C72-X4	7		5				+C72/361.7
				8		+J7.2-XL7	8	8										+C72/362.5
				9		+J7.2-XL7	9	9		RXPDO 1.23	+C72-X4	8		6				+C72/361.8
				10		+J7.2-XL7	10	10			+C72-XL86	7			7			+C72/362.2
				11		+J7.2-XL7	11	11									+C72/362.5	
				12		+J7.2-XL7	12	12										+C72/362.3
				13		+J7.2-XL7	13	13										+C72/362.4
				14		+J7.2-XL7	14	14			+C72-XL86	6			6			+C72/362.7
				15		+J7.2-XL7	15	15										+C72/362.5
				16		+J7.2-XL7	16	16		RXPDO 1.22	+C72-X4	4		8			+C72/362.8	
				17		+J7.2-XL7	17	17			+C72-XL86	8			8			+C72/362.2
				18		+J7.2-XL7	18	18			+C72-XL86	5			5			+C72/362.6
				19		+J7.2-XL7	19	19										+C72/362.6
								20										
								21										
								22										
								23										
								24										
								25										
								26										
								27										
								28										
								29										
								30										
								31										
								32										
								33										
						-EX7	35	34			+C72-XL61.2	6						+C72/361.5
						-EX7	34	35			-EX27	12						+C72/361.5
					GNYE		+J7.2-XL7	PE	36			+C72-XL84	PE				+C72/361.8	

			Date	2015/6/29	Customer Woo Su AMS		 플러그 다이어그램 =A+C80-EX7 Plug diagram =A+C80-EX7			= REPORT	
			Ed.		Project Ecoline 84					+ STE	
			Appr		Machine-No. 700026276						
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 1004

Plug diagram

BDAG_F22_001

function text	Target designation customer					Cable name	Plug designation					Cable name	+C72-EW3	-EW10			Page / column
							Target designation DCM	Connection point	Plug designation	jumper	device connection point	Target designation internal	Connection point				
							+40-MZIATA	13	1			-EX60	1				+C72/801.1
									2			-EX60	2				+C72/801.1
Metal feeding is in operating mode A/SA							+40-MZIATA	14	3		RXPDO 1.24	+C72-X5	1	1			+C72/801.2
									4								
Command shot forward signal 1							+40-MZFRE1	14	5		RXPDO 1.25	+C72-X5	5	2			+C72/801.3
									6								
									7								
Metal ladling fault priority 2							+40-MZST2	14	8		RXPDO 1.26	+C72-X5	2	3			+C72/801.4
									9								
Die open							+40-MZFLSO	A1	10		TXPDO 1.28	+C72-X24	1	13			+C72/803.4
							+40-ES1	34	11			-EX60	14				+C72/804.1
Emergency off metal ladling unit							+40-ES1	33	12		RXPDO 1.27	+C72-X5	6	14			+C72/804.2
Emergency off metal ladling unit							+40-ES1	11	13			-EX23	12				+C72/804.2
Emergency off metal ladling unit									14			+C72-XL90	1		1		+C72/804.4
Channel 1									15			+C72-XL90	2		2		+C72/804.4
							+24V-EXT		16			+C72-X20	2	4			+C72/802.0
Start dosing manual							+40-MZSDM	A1	17		TXPDO 1.26	+C72-X23	1	11			+C72/803.2
									18								
							+40-MZBAA	A1	19		TXPDO 1.20	+C72-X20	1	5			+C72/802.1
Start ladling unit							+40-MZST	A1	20		TXPDO 1.21	+C72-X20	5	6			+C72/802.2
Die closing active							+40-MZFLZU	A1	21		TXPDO 1.22	+C72-X21	1	7			+C72/802.3
									22								
									23								
Release for the filling signal 1							+40-MZFE1	A1	24		TXPDO 1.23	+C72-X21	5	8			+C72/802.4
Casting plunger in rear position returned							+40-MZREGS	A1	25		TXPDO 1.25	+C72-X22	5	10			+C72/803.1
									26								
									27								
Die closed							+40-MZFLSG	A1	28		TXPDO 1.27	+C72-X23	5	12			+C72/803.3
Command go to basic position							+40-MZGSA	A1	29		TXPDO 1.24	+C72-X22	1	9			+C72/802.5
									30								
									31								
									32								
Emergency off metal ladling unit							+40-ES1	21	33			-EX60	13				+C72/804.2
Emergency off metal ladling unit							+40-ES1	22	34			-EX23	21				+C72/804.2
Emergency off release DCM									35			+C72-XL90	3		3		+C72/804.5
Channel 2									36			+C72-XL90	4		4		+C72/804.5

Plug diagram

BDAG_F22_001

function text	Target designation customer					Cable name	Plug designation =A+C80-EX9						Cable name		-EW12	-EW10	+C72-EW5	Page / column	
							Target designation DCM	Connection point	Plug designation	jumper	device connection point	Target designation internal							Connection point
							+42-ENIATA	13	1			-EX23	1					+C72/821.1	
										2			-EX23		2				+C72/821.1
Robot is in operation mode A/SA							+42-ENIATA	14	3		RXPDO 1.33	+C72-X6	5			1			+C72/821.2
Robot outside of collision area							+42-ENAKD1	14	4		RXPDO 1.34	+C72-X6	2			2			+C72/821.3
Eject command ancestors							+42-ENBAUV	14	5		RXPDO 1.35	+C72-X6	6			3			+C72/821.4
Robot has extracted							+42-ENHE	14	6		RXPDO 1.36	+C72-X6	3		4			+C72/821.5	
Robot fault priority 2							+42-ENST2	14	7		RXPDO 1.37	+C72-X6	7			5			+C72/821.6
									8										
							+24V-EXT		9			+C72-X29	2			6			+C72/822.0
							+42-ENBAA	A1	10		TXPDO 1.38	+C72-X29	1			7			+C72/822.1
Release for extraction signal 1							+42-ENFE1	A1	11		TXPDO 1.39	+C72-X29	5		8			+C72/822.2	
Cores out							+42-ENASAKA	A1	12		TXPDO 1.40	+C72-X30	1			9			+C72/822.3
Ejector in forward position							+42-ENASUV	A1	13		TXPDO 1.41	+C72-X30	5			10			+C72/822.4
Shot completed							+42-ENRENDG	A1	14		TXPDO 1.42	+C72-X31	1			11			+C72/822.5
Command go to basic position							+42-ENGSA	A1	15		TXPDO 1.43	+C72-X31	5			12			+C72/822.6
									16										
							+42-ES1	34	17			-EX23	14						+C72/828.1
Emergency off extraction							+42-ES1	33	18		RXPDO 1.38	+C72-X6	4			13			+C72/828.2
Emergency off extraction							+42-ES1	11	19			-EX33	3						+C72/828.2
Emergency off extraction									20			+C72-XL90	5				5		+C72/828.4
Channel 1									21			+C72-XL90	6			6		+C72/828.4	
Emergency off release DCM									22			+C72-XL90	7				7		+C72/828.5
Channel 2									23			+C72-XL90	8				8		+C72/828.5
									24			+C72-XL92	1					1	+C72/823.6
Channel 1									25			+C72-XL92	2					2	+C72/823.7
Fencing right									26			+C72-XL92	3				3	+C72/823.8	
Channel 2									27			+C72-XL92	4					4	+C72/823.8
									28			+C72-XL92	5					5	+C72/824.1
Channel 1									29			+C72-XL92	6					6	+C72/824.3
Safety gate left or right side closed									30			+C72-XL92	7					7	+C72/824.3
Channel 2									31			+C72-XL92	8				8	+C72/824.5	
									32										
Emergency off extraction							+42-ES1	21	33			-EX23	22						+C72/828.2
Emergency off extraction							+42-ES1	22	34			-EX33	6						+C72/828.2
Out of tolerance							+42-ENSEPAT	A1	35		TXPDO 1.44	+C72-X32	1						+C72/822.7
Bad part							+42-ENSEPA	A1	36		TXPDO 1.45	+C72-X32	5					+C72/822.8	

Plug diagram

BDAG_F22_001

function text	Target designation customer					Cable name	Plug designation					Cable name	+C72-EM4	-EM14			Page / column
							Target designation DCM	Connection point	Plug designation	jumper	device connection point	Target designation internal	Connection point				
							+44-SPIATA	13	1			-EX8	1				+C72/811.1
									2			-EX8	2				+C72/811.1
Spray unit is in operation mode A/SA							+44-SPIATA	14	3		RXPDO 1.28	+C72-X5	3	1			+C72/811.2
Spray unit in the basic position							+44-SPIGS	14	4		RXPDO 1.29	+C72-X5	7	2			+C72/811.3
Spray unit out of mold area extracted							+44-SPAFOB	14	5		RXPDO 1.17	+C72-X4	5				+C72/811.6
									6								
									7								
Spraying completed							+44-SPEND	14	8		RXPDO 1.30	+C72-X5	4	3			+C72/811.4
									9								
Spray unit fault priority 2							+44-SPST2	14	10		RXPDO 1.31	+C72-X5	8	4			+C72/811.5
									11								
							+44-ES1	34	12			-EX8	13				+C72/814.1
Emergency off spraying							+44-ES1	33	13		RXPDO 1.32	+C72-X6	1	13			+C72/814.2
Emergency off spraying							+44-ES1	11	14			-EX9	17				+C72/814.2
Emergency off spraying									15			+C72-XL94	1		1		+C72/814.4
Channel 1									16			+C72-XL94	2		2		+C72/814.4
									17								
									18								
									19								
									20								
Emergency off spraying							+44-ES1	21	21			-EX8	34				+C72/814.2
Emergency off spraying							+44-ES1	22	22			-EX9	33				+C72/814.2
Emergency off release DCM									23			+C72-XL94	3		3		+C72/814.5
Channel 2									24			+C72-XL94	4		4		+C72/814.5
							+24V-EXT		25			+C72-X25	2	5			+C72/812.0
							+44-SPBAA	A1	26		TXPDO 1.30	+C72-X25	1	6			+C72/812.1
Die open signal 1							+44-SPFLSO1	A1	27		TXPDO 1.31	+C72-X25	5	7			+C72/812.2
Release for retraction into die area							+44-SPFFOB	A1	28		TXPDO 1.32	+C72-X26	1	8			+C72/812.3
Ejector in rear position							+44-SPAUSZ	A1	29		TXPDO 1.33	+C72-X26	5	9			+C72/812.4
Command manual spraying							+44-SPBZH	A1	30		TXPDO 1.34	+C72-X27	1	10			+C72/812.5
Command go to basic position							+44-SPGSA	A1	31		TXPDO 1.35	+C72-X27	5	11			+C72/812.6
Operation mode setting							+44-SPBAE	A1	32		TXPDO 1.36	+C72-X28	1	12			+C72/812.7
Manual operation mode							+44-SPBAH	A1	33		TXPDO 1.37	+C72-X28	5				+C72/812.8
									34								
									35								
									36								

Plug diagram

BDAG_F22_001

function text	Target designation customer				+49-EV1	Cable name	Plug designation =A+C80-EX27 Fencing right						Cable name	-EW8					Page / column
							Target designation DCM	Connection point	Plug designation	jumper	device connection point	Target designation internal							
					1		+J49.1-XL27	1	1			-EX7	1					+C72/367.1	
					2		+J49.1-XL27	2	2			-EX7	2					+C72/367.1	
					3		+J49.1-XL27	3	3			+C72-XL88	1	1				+C72/367.2	
					4		+J49.1-XL27	4	4			+C72-XL88	2	2				+C72/367.3	
					5		+J49.1-XL27	5	5			+C72-XL88	3	3				+C72/367.3	
					6		+J49.1-XL27	6	6			+C72-XL88	4	4				+C72/367.4	
					7		+J49.1-XL27	7	7			+C72-XL88	5	5				+C72/367.5	
					8		+J49.1-XL27	8	8			+C72-XL88	6	6				+C72/367.5	
					9		+J49.1-XL27	9	9			+C72-XL88	7	7				+C72/367.6	
					10		+J49.1-XL27	10	10		RXPDO 1.39	+C72-XL88	8	8				+C72/367.7	
					11		+J49.1-XL27	11	11			-EX6	36					+C72/367.7	
					12		+J49.1-XL27	12	12			-EX7	35					+C72/367.7	
					13		+J49.1-XL27	13	13			-EX60	12					+C72/367.8	
					14		+J49.1-XL27	14	14			-EX60	11					+C72/367.8	
					15		+J49.1-XL27	15	15									+C72/367.2	
					16		+J49.1-XL27	16	16									+C72/367.2	
					17		+J49.1-XL27	17	17									+C72/367.3	
					18		+J49.1-XL27	18	18									+C72/367.4	
					19		+J49.1-XL27	19	19									+C72/367.4	
									20										
									21										
									22										
									23										
									24										
									25										
									26										
									27										
									28										
									29										
									30										
									31										
									32										
									33										
									34										
									35										
					GNYE		+J49.1-XL27	PE	36			PE						+C72/367.9	

Plug diagram

BDAG_F22_001

function text	Target designation customer					Cable name	Plug designation =A+C80-EX33 Vaccum						Cable name	+C72-EW6	-EW16				Page / column
							Target designation DCM	Connection point	Plug designation	jumper	device connection point	Target designation internal							
							+52-VAIBB	13	1			-EX9	1					+C72/831.1	
										2		-EX9	2					+C72/831.1	
							+52-ES1	34	3			-EX9	19					+C72/833.1	
Emergency off vacuum							+52-ES1	33	4		RXPDO 1.43	+C72-X7	6		9			+C72/833.2	
Emergency off vacuum							+52-ES1	11	5			+C72-XL83	5					+C72/833.2	
Emergency off vacuum							+52-ES1	21	6			-EX9	34					+C72/833.2	
Emergency off vacuum							+52-ES1	22	7			+C72-XL83	6					+C72/833.2	
Emergency off vacuum									8			+C72-XL96	1			1		+C72/833.4	
Channel 1									9			+C72-XL96	2			2		+C72/833.4	
Emergency off release DCM									10			+C72-XL96	3			3		+C72/833.5	
Channel 2									11			+C72-XL96	4			4		+C72/833.5	
									12										
Vacuum fault priority 1							+52-VAST1	14	13		RXPDO 1.41	+C72-X7	5		2			+C72/831.3	
Vacuum fault priority 2							+52-VAST2	14	14		RXPDO 1.42	+C72-X7	2		3			+C72/831.4	
Vacuum fault out of tolerance							+52-VASTAT	14	15		RXPDO 1.54	+C72-X8	4					+C72/831.6	
							+24V-EXT		16			+C72-X34	2		4			+C72/832.0	
Vacuum valve							+52-VAST	A1	17		TXPDO 1.47	+C72-X34	5		6			+C72/832.2	
Vacuum blowing valve							+52-VABL	A1	18		TXPDO 1.49	+C72-X35	5		8			+C72/832.4	
Vacuum stop							+52-VASP	A1	19		TXPDO 1.48	+C72-X35	1		7			+C72/832.3	
Vacuum with/without							+52-VAMIT	A1	20		TXPDO 1.46	+C72-X34	1		5			+C72/832.1	
Die open							+52-VAFLSO	A1	21		TXPDO 1.50	+C72-X36	1					+C72/832.5	
Vacuum completed							+52-VAGUT	14	22		RXPDO 1.53	+C72-X8	7					+C72/831.5	
Vacuum in operation							+52-VAIBB	14	23		RXPDO 1.40	+C72-X7	1		1			+C72/831.2	
Die closed							+52-VAFLSG	A1	24		TXPDO 1.51	+C72-X36	5					+C72/832.6	
									25										
									26										
									27										
									28										
									29										
									30										
									31										
									32										
									33										
									34										
									35										
									36										

Plug diagram

BDAG_F22_001

function text	Target designation customer				+49-EW50	Cable name	Plug designation =A+C80-EX60 Fencing metal feeding						Cable name	-EW9					Page / column
							Target designation DCM	Connection point	Plug designation	jumper	device connection point	Target designation internal							
					1		+J49.3-XL60	1	1			-EX27	1					+C72/637.1	
					2		+J49.3-XL60	2	2			-EX27	2					+C72/637.1	
					3		+J49.3-XL60	3	3			+C72-XL89	1	1				+C72/637.2	
					4		+J49.3-XL60	4	4			+C72-XL89	2	2				+C72/637.3	
					5		+J49.3-XL60	5	5			+C72-XL89	3	3				+C72/637.3	
					6		+J49.3-XL60	6	6			+C72-XL89	4	4				+C72/637.4	
					7		+J49.3-XL60	7	7			+C72-XL89	5	5				+C72/637.5	
					8		+J49.3-XL60	8	8			+C72-XL89	6	6				+C72/637.5	
					9		+J49.3-XL60	9	9			+C72-XL89	7	7				+C72/637.6	
					10		+J49.3-XL60	10	10		RXPDO 1.09	+C72-XL89	8	8				+C72/637.7	
					11		+J49.3-XL60	11	11			-EX27	14					+C72/637.7	
					12		+J49.3-XL60	12	12			-EX27	13					+C72/637.7	
					13		+J49.3-XL60	13	13			-EX8	33					+C72/637.8	
					14		+J49.3-XL60	14	14			-EX8	11					+C72/637.8	
					15		+J49.3-XL60	15	15									+C72/637.2	
					16		+J49.3-XL60	16	16									+C72/637.2	
					17		+J49.3-XL60	17	17									+C72/637.3	
					18		+J49.3-XL60	18	18									+C72/637.4	
					19		+J49.3-XL60	19	19									+C72/637.4	
									20										
									21										
									22										
									23										
									24										
									25										
									26										
									27										
									28										
									29										
									30										
									31										
									32										
									33										
									34										
									35										
					GNYE		+J49.3-XL60	PE	36			PE						+C72/637.9	

Plug diagram

BDAG_F22_001

[illegible]

			Date	2015/6/29	Customer Woo Su AMS		 Bührer AG - Die Casting	플러그 다이어그램 =A+J61-EX61.1 Plug diagram =A+J61-EX61.1			= REPORT	
			Ed.		Project Ecoline 84							
			Appr		Machine-No. 700026276							
Modification	Date	Name	Original		Replacement of	Replaced by			ESM-85061			Page 1011

Plug diagram

BDAG_F22_001

[illegible]

1011

+KLE/2000

			Date	2015/6/29	Customer Woo Su AMS		 플러그 다이어그램 =A+J61-EX61.2 Plug diagram =A+J61-EX61.2			= REPORT	
			Ed.		Project Ecoline 84					+ STE	
			Appr		Machine-No. 700026276						
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 1012

Terminal diagram

BDAG_F13_001

function text	Target designation customer					+2EW2	Cable name	Terminal strip designation					Cable name						Page / column
								=A+C72-EX106					Central lubrication system						
							cable type	Target designation DCM	Connection point	jumper	Target designation internal	Connection point	cable type						
Motor central lubrication						BN	JB-500 GY G			1	•	-EK146	11					/146.2	
						BU				2	•	-EP140	-						/146.2
Motor central lubrication												-EX109	2						
						GNYE				PE	•	PE							/146.3

			Date	2015/6/29	Customer	Woo Su AMS	 터미널 다이어그램 =A+C72-EX106 Terminal diagram =A+C72-EX106			= REPORT	ESM-85061 Page 2000
			Ed.		Project	Ecoline 84				+ KLE	
			Appr		Machine-No.	700026276					
Modification	Date	Name	Original		Replacement of	Replaced by					

Terminal diagram

BDAG_F13_001

function text	Target designation customer					Cable name	Terminal strip designation					Cable name					Page / column
						cable type	Target designation DCM	Connection point	terminal	jumper	Target designation internal	Connection point					
							-EE108	L1	1	•	-XL10	EF101/230V					/108.2
											-EQ100	14					
							-EE108	N	2	•	-XL10	EF101/N					/108.2
											-EM1K1	A2					
							-EE108	PE	PE	•	PE						/108.2

Terminal diagram

BDAG_F13_001

function text	Target designation customer				+7-EW3	Cable name	Terminal strip designation					Cable name					Page / column
						cable type	Target designation DCM	Connection point	terminal	jumper	Target designation internal	Connection point					
					BN		+7-EU2	L1	1	•	-EQ100	14					/361.0
					BU		+7-EU2	N	2	•	-EX106	2					/361.1
					GNYE		+7-EU2	PE	PE	•	PE						/361.1

Terminal diagram

BDAG_F13_001

function text	Target designation customer				+1-EW3	Cable name	Terminal strip designation					Cable name					Page / column
							=A+C72-XL1										
							Drive unit										

Terminal diagram

BDAG_F13_001

function text	Target designation customer				+2-EW1	Cable name	Terminal strip designation					Cable name					Page / column			
							=A+C72-XL2													
								Rear platen												
						cable type	Connection point	jumper	terminal	Connection point	Target designation internal	cable type								
					BN		+J2-XL1	1	1	•	-XL1	1				/296.2				
											-XL3	1								
					BU		+J2-XL1	2	2	•	-XL1	2					/296.2			
											-XL3	2								
					GNYE		+J2-XL1	PE	PE	•	PE					/296.2				

Terminal diagram

BDAG_F13_001

function text	Target designation customer				+3-EM1	Cable name	Terminal strip designation					Cable name					Page / column
						cable type	Target designation DCM	Connection point	terminal	jumper	Target designation internal	Connection point					
					BN		+J3-XL1	1	1	•	-XL2	1					/297.2
					BU		+J3-XL1	2	2	•	-XL2	2					/297.2
											-XL4	2					
					GNYE		+J3-XL1	PE	PE	•	PE						/297.2

Terminal diagram

BDAG_F13_001

function text	Target designation customer				+4-EM1	Cable name	Terminal strip designation					Cable name					Page / column
						cable type	Target designation DCM	Connection point	terminal	jumper	Target designation internal	Connection point					
					BN		+J4-XL1	1	1	•	-XL3	1					/298.2
											-XL5	1					
					BU		+J4-XL1	2	2	•	-XL3	2					/298.2
											-XL5	2					
					GNYE		+J4-XL1	PE	PE	•	PE						/298.2

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer Woo Su AMS		 터미널 다이어그램 =A+C72-XL5 Terminal diagram =A+C72-XL5			= REPORT	
			Ed.		Project Ecoline 84						
			Appr		Machine-No. 700026276						
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2007

Terminal diagram

BDAG_F13_001

[illegible]

Terminal diagram

BDAG_F13_001

function text	Target designation customer				+61-EM1	Cable name	Terminal strip designation					Cable name					Page / column	
							=A+C72-XL61.1											Control column
								Connection point	terminal	jumper	Target designation internal	Connection point	cable type					
					BN		+J61-EX61.1	1	1	•	-EF103Z6	2					/200.2	
												-XL61.3		1				
					BU		+J61-EX61.1	2	2	•	-XL83	HLK1						/200.2
					GNYE		PE			PE	•	PE						/200.2

Terminal diagram

BDAG_F13_001

[illegible]

Terminal diagram

BDAG_F13_001

[illegible]

Terminal diagram

BDAG_F13_001

[illegible]

Terminal diagram

BDAG_F13_001

[illegible]

Terminal diagram

BDAG_F13_001

function text	Target designation customer				+C80-EM4	Cable name	Terminal strip designation					Cable name					Page / column
							=A+C72-XL84										
						cable type	Connection point	terminal	jumper	Target designation internal	Connection point	cable type					
					BN		+C80-EX6	1	1	•	-EF103Z8	2				/351.4	
					BU		+C80-EX6	2	2	•	-XL5	2					/351.5
					GNYE						-EK353Z1	A2					
							+C80-EX6	34	PE	•	PE						/351.5
							+C80-EX7	36	PE	•	PE						/361.8

2015

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer Woo Su AMS		 터미널 다이어그램 =A+C72-XL86 Terminal diagram =A+C72-XL86			= REPORT	
			Ed.		Project Ecoline 84					+ KLE	
			Appr		Machine-No. 700026276						
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2015

Terminal diagram

BDAG_F13_001

function text	Target designation customer				+C80-EM8	Cable name	Terminal strip designation					Cable name					Page / column
							=A+C72-XL88										
							Fencing right										
							Target designation DCM	Connection point	terminal	jumper	Target designation internal	Connection point	cable type				
					1		+C80-EX27	3	1	•	-EK366Z3	32					/367.2
					2		+C80-EX27	4	2	•	-EK366Z1	S11					/367.3
					3		+C80-EX27	5	3	•	-EK366Z1	S12					/367.3
					4		+C80-EX27	6	4	•	-EK366Z1	S21					/367.4
					5		+C80-EX27	7	5	•	-EK366Z1	S22					/367.5
					6		+C80-EX27	8	6	•	-EK366Z3	22					/367.5
					7		+C80-EX27	9	7	•	-EK366Z1	X2					/367.6
					8		+C80-EX27	10	8	•	-X6	8					/367.7

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer Woo Su AMS Project Ecoline 84 Machine-No. 700026276		 Bühler AG - Die Casting	터미널 다이어그램 =A+C72-XL89 Terminal diagram =A+C72-XL89					= REPORT	
			Ed.										+ KLE	
			Appr											
Modification	Date	Name	Original		Replacement of	Replaced by				ESM-85061				Page 2017

Terminal diagram

BDAG_F13_001

[illegible]

Terminal diagram

BDAG_F13_001

function text	Target designation customer					Cable name	Terminal strip designation					Cable name					Page / column
						cable type	Target designation DCM	Connection point	terminal	jumper	Target designation internal	Connection point					
Channel 1							-C80-EX8	26	1	⋮	-EK636Z2	04					/636.1
									1	⋮	-EK636Z2	14					/805.6
									5	,	-EK636Z2	03					/636.3
									2	⋮	-EK636Z2						/636.1
							-C80-EX8	27	2	⋮							/805.7
Fencing metal feeding									6	,	-EK636Z2	13					/636.3
									3	⋮	-EK636Z3	04					/636.2
							-C80-EX8	30	3	⋮							/805.8
									7	,	-EK636Z3	14					/636.4
									4	⋮	-EK636Z3	03					/636.2
Channel 2							-C80-EX8	31	4	⋮							/805.8
									8	,	-EK636Z3	13					/636.4

Terminal diagram

BDAG_F13_001

[illegible]

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer	Woo Su AMS	 터미널 다이어그램 =A+C72-XL94 Terminal diagram =A+C72-XL94			= REPORT	
			Ed.		Project	Ecoline 84				+ KLE	
			Appr		Machine-No.	700026276					
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2021

Terminal diagram

BDAG_F13_001

[illegible]

2021

2023

			Date	2015/6/29	Customer Woo Su AMS		 터미널 다이어그램 =A+C72-XL96 Terminal diagram =A+C72-XL96			= REPORT	
			Ed.		Project Ecoline 84					+ KLE	
			Appr		Machine-No. 700026276						
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2022

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer	Woo Su AMS	 터미널 다이어그램 =A+C72-XL97 Terminal diagram =A+C72-XL97			= REPORT	
			Ed.		Project	Ecoline 84				+ KLE	
			Appr		Machine-No.	700026276					
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2023

Terminal diagram

BDAG_F13_001

[illegible]

2023

2025

			Date	2015/6/29	Customer	Woo Su AMS	 터미널 다이어그램 =A+C72-XL128 Terminal diagram =A+C72-XL128			= REPORT	
			Ed.		Project	Ecoline 84				+ KLE	
			Appr		Machine-No.	700026276					
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2024

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer Woo Su AMS		 터미널 다이어그램 =A+J1-XL3 Terminal diagram =A+J1-XL3			= REPORT	
			Ed.		Project Ecoline 84					+ KLE	
			Appr		Machine-No. 700026276						
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2025

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer	Woo Su AMS	 터미널 다이어그램 =A+J1-XL3 Terminal diagram =A+J1-XL3			= REPORT	
			Ed.		Project	Ecoline 84				+ KLE	
			Appr		Machine-No.	700026276					
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2026

Terminal diagram

BDAG_F13_001

function text	Target designation customer	Terminal strip designation					Cable name	cable type	Page / column						
		=A+J1-XL3													
		Drive unit													
		Cable name	cable type	Target designation DCM	Connection point	terminal	jumper	Target designation internal	Connection point						
Pump 1		+1-EW-EY8A			PE	PE	•	PE						+C72/303.5	
Die close		+1-EW-EY3AB				PE	PE	•	PE						+C72/307.2
Die close		+1-EW-EY5A				PE	PE	•	PE						+C72/307.4
Pilot valve EHCS		+1-EW-EY4A				PE	PE	•	PE						+C72/307.6
	PE	+1-EW-EY28A				PE	PE	•	PE						+C72/308.1
			</												

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer	Woo Su AMS	 터미널 다이어그램 =A+J1-XL4 Terminal diagram =A+J1-XL4			= REPORT	
			Ed.		Project	Ecoline 84		+ KLE			
			Appr		Machine-No.	700026276					
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061		Page 2028	

Terminal diagram

BDAG_F13_001

[illegible]

Terminal diagram

BDAG_F13_001

function text	Target designation customer	+1-EW-EB180P	+1-EW-EB220P	+1-EW-EB60P	+1-EW-EB50LOP	Cable name	Terminal strip designation					Cable name	+1-EW6				Page / column
							Target designation DCM	Connection point	terminal	jumper	Target designation internal	Connection point					
Warning level oil tank							+1-EB70P	1	1	•	+C72-0.0/DM272A	10		1			+C72/301.4
Alarm level oil tank							+1-EB80P	1	2	•	+C72-0.0/DM272A	11		2			+C72/301.5
Pilot valve EHCS					BK		+1-EB5CL	4	3	•	+C72-0.0/DM272A	12		3			+C72/308.6
Pilot valve EHCS					WH		+1-EB50P	2	4	•	+C72-0.0/DM272A	13		4			+C72/308.7
Pressure sensor EHCS				WH			+1-EB60P	4	5	•	+C72-0.0/DM272A	14		5			+C72/307.8
Alarm filter 1 contaminated			BU				+1-EB220P	3	6	•	+C72-0.0/DM272A	15		6			+C72/302.2
Monitoring ball valve main pumps		BK					+1-EB180P	4	7	•	+C72-0.0/DM272A	16		7			+C72/302.4
Level of the oil tank too high							+1-EB100P	1	8	•	+C72-0.0/DM272A	17		8			+C72/301.6

Terminal diagram

BDAG_F13_001

function text	Target designation customer				+1-EW-EB3S	Cable name	Terminal strip designation					Cable name	+1-EW7					Page / column
							Target designation DCM	Connection point	terminal	jumper	Target designation internal	Connection point						
					BN		+1-EB3S	1	1	•	-XL3	1						+C72/301.1
											-XL3	1						
System pressure					BK		+1-EB3S	4	2	•	+C72-0.0/AM280A	01		WH				+C72/301.1
System pressure					BU		+1-EB3S	3	3	•	+C72-0.0/AM280A	02		BN				+C72/301.2
Cooling water oil tank									4	•	-XL3	1						+C72/303.7
Cooling water oil tank									5	•	-XL3	2						+C72/303.7
											-XL3	2						
Cooling water oil tank									6	•	+C72-0.0/AM280A	11		GN				+C72/303.7
Proportional valve									7	•	+C72-0.0/AM280A	13		YE				+C72/303.8
System pressure					SH		+1-EW-EB3S	SH	PE	•	-XL7	PE		SH				+C72/301.2
Proportional valve									PE	•	-XL7	PE		SH				+C72/303.8

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer	Woo Su AMS	 터미널 다이어그램 =A+J2-XL1 Terminal diagram =A+J2-XL1			= REPORT	
			Ed.		Project	Ecoline 84				+ KLE	
			Appr		Machine-No.	700026276					
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2032

Terminal diagram

BDAG_F13_001

function text	Target designation customer	+2-EW-EB10CL	+2-EW-EB12CL	+2-EW-EY1AB	Cable name	cable type	Terminal strip designation					Cable name	cable type	JB-500 GY G				Page / column
							Target designation DCM	Connection point	terminal	jumper	Target designation internal							
Extract tie bar 2					BU		+2-EY4B	2	2	┆								+C72/391.2
					BU		+2-EY4A	2		┆								
Column Nut 2+4 unlock					BU		+2-EY2A	2	2	┆								+C72/391.4
Column Nut 2+4 unlock							+2-EB6CL	3	2	┆								+C72/391.4
Column Nut 2 locked outside					BU		+2-EB8CL	3	2	┆								+C72/391.6
Column Nut 2 unlocked outside	BU						+2-EB10CL	3	2	┆								+C72/391.7
Column Nut 2 locked inside	BU						+2-EB12CL	3	2	┆								+C72/391.8
							PE		PE	┆	+C72-XL2	PE		GNYE				+C72/296.2
Die height adjustment	PE						+2-EY1B	PE	PE	┆	PE							+C72/380.2
Enter tie bar 2					PE		+2-EY4A	PE	PE	┆	PE							+C72/391.2
Enter tie bar 2					PE		+2-EY2A	PE	PE	┆	PE							+C72/391.3

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer	Woo Su AMS	 터미널 다이어그램 =A+J2-XL3 Terminal diagram =A+J2-XL3			= REPORT	
			Ed.		Project	Ecoline 84				+ KLE	
			Appr		Machine-No.	700026276					
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2034

Terminal diagram

BDAG_F13_001

[illegible]

Terminal diagram

BDAG_F13_001

function text	Target designation customer					Cable name	Terminal strip designation					Cable name					Page / column
						cable type	Target designation DCM	Connection point	terminal	jumper	Target designation internal	Connection point					
Closing security solved									1	•	+C72-X8	1					+C72/382.5
Closing security clamped									2	•	+C72-X8	5					+C72/382.7
Closing security clamped									3	•	+C72-RES	2-EW5					+C72/382.7
Closing security clamped									4	•	+C72-RES	2-EW5					+C72/382.7

Terminal diagram

BDAG_F13_001

function text	Target designation customer					Cable name	Terminal strip designation					Cable name	+2-EM6					Page / column
						cable type	Target designation DCM	Connection point	terminal	jumper	Target designation internal	Connection point	cable type					
Pulse counter die height adjustment							+2-EB2S	GND	1	•	+C72-0.0/MM240A	INC0:1		WH				+C72/373.6
Pulse counter die height adjustment							+2-EB2S	UB	2	•	+C72-0.0/MM240A	INC0:2		BN				+C72/373.6
Pulse counter die height adjustment									3	•	+C72-0.0/MM240A	INC0:3		GN				+C72/373.6
Pulse counter die height adjustment							+2-EB2S	B+	4	•	+C72-0.0/MM240A	INC0:4		YE				+C72/373.6
Stroke measuring closing cylinder							+2-EB2S	A+	5	•	+C72-0.0/MM240A	INC0:5		GY				+C72/373.7
Stroke measuring closing cylinder									6	•	+C72-0.0/MM240A	INC0:6		PK				+C72/373.7
Stroke measuring closing cylinder									7	•	+C72-0.0/MM240A	INC0:7		BU				+C72/373.7
Stroke measuring closing cylinder							+2-EB2S	B-	8	•	+C72-0.0/MM240A	INC0:8		RD				+C72/373.7
Stroke measuring closing cylinder							+2-EB2S	A-	9	•	+C72-0.0/MM240A	INC0:9		BK				+C72/373.7
Stroke measuring closing cylinder									PE	•	PE			SH				+C72/373.8

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer	Woo Su AMS	 터미널 다이어그램 =A+J3-XL1 Terminal diagram =A+J3-XL1			= REPORT	
			Ed.		Project	Ecoline 84				+ KLE	
			Appr		Machine-No.	700026276					
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2038

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer	Woo Su AMS	 터미널 다이어그램 =A+J3-XL1 Terminal diagram =A+J3-XL1			= REPORT	
			Ed.		Project	Ecoline 84				+ KLE	
			Appr		Machine-No.	700026276					
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2039

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer	Woo Su AMS	 터미널 다이어그램 =A+J3-XL2 Terminal diagram =A+J3-XL2			= REPORT	
			Ed.		Project	Ecoline 84				+ KLE	
			Appr		Machine-No.	700026276					
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2040

Terminal diagram

BDAG_F13_001

function text	Target designation customer			+3-EW-EB26CL	+3-EW-EB25CL	Cable name	Terminal strip designation					Cable name	+3-EW3				Page / column	
							=A+J3-XL3											
						cable type	Target designation DCM	Connection point	terminal	jumper	Target designation internal	Connection point	cable type					
Ejector back					BK		+3-EB25CL	4	1	•	+C72-0.2/DM272A	10		1			+C72/398.6	
							-EX398	6										
Ejector forward				BK			+3-EB26CL	4	2	•	+C72-0.2/DM272A	11		2				+C72/398.7
Core pull M1 extracted							-ER401Z1		3	•	+C72-0.2/DM272A	12		3				+C72/401.4
Core pull M1 retracted							-ER401Z2		4	•	+C72-0.2/DM272A	13		4				+C72/401.5
Core pull M2 extracted							-ER404Z1		5	•	+C72-0.2/DM272A	14		5			+C72/404.4	
Core pull M2 retracted							-ER404Z2		6	•	+C72-0.2/DM272A	15		6				+C72/404.5
Core pull M3 extracted							-ER407Z1		7	•	+C72-0.2/DM272A	16		7				+C72/407.4
Core pull M3 retracted							-ER407Z2		8	•	+C72-0.2/DM272A	17		8				+C72/407.5
Core pull M1 enter							-ER401Z1			GND	┌	-XL1		2				+C72/401.4
Core pull M1 extracted							-ER401Z2			GND	┌	-XL1	2				+C72/401.5	
Core pull M2 enter							-ER404Z1			GND	┌	-XL1	2					+C72/404.4
Core pull M2 extracted							-ER404Z2			GND	┌	-XL1	2					+C72/404.5
Core pull M3 enter							-ER407Z1			GND	┌	-XL1	2					+C72/407.4
Core pull M3 extracted							-ER407Z2			GND	┌	-XL1	2					+C72/407.5
Core pull M4 enter							-ER410Z1			GND	┌	-XL1	2				+C72/410.4	
Core pull M4.1 retracted							-ER410Z2			GND	┌							+C72/410.5

Terminal diagram

BDAG_F13_001

function text		Target designation customer		Cable name		cable type		Terminal strip designation				Cable name		cable type		Page / column			
								Target designation DCM		Connection point	terminal	jumper	Target designation internal		Connection point				
Pressure switch				+8-EW-EB3CL	JB-500 GY G	BU		+8-EB3CL	3	1	.		+C72-XL83		1				+C72/371.6
								+7-EB7	24	2	•								+C72/150.1
								+7-EB11	22	2	•								+C72/150.3
								+7-EB8	24	2	•								+C72/150.5
								+7-EB12	22	2	•		+C72-XL83		2				+C72/150.8
								+7-EB8	12	3	.		+C72-XL83		3				+C72/150.6
								+7-EB12	14	4	.		+C72-XL83		4				+C72/150.7
								+7-EB7	11	5	.		+C72-XL83		5				+C72/150.1
								+7-EB11	13	6	.		+C72-XL83		6				+C72/150.2
										7	.		+C72-RES		3-EW4				+C72/150.4
										8	.		+C72-RES		3-EW4				+C72/150.4
								+7-EB7	12	HKL1	•								+C72/150.1
								+7-EB8	11	HKL1	•								+C72/150.6
								+7-EB11	14	HKL2	•								+C72/150.3
								+7-EB12	13	HKL2	•								+C72/150.7

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer	Woo Su AMS	 터미널 다이어그램 =A+J4-XL1 Terminal diagram =A+J4-XL1			= REPORT	
			Ed.		Project	Ecoline 84				+ KLE	
			Appr		Machine-No.	700026276					
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2043

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer Woo Su AMS		 터미널 다이어그램 =A+J4-XL2 Terminal diagram =A+J4-XL2			= REPORT	
			Ed.		Project Ecoline 84					+ KLE	
			Appr		Machine-No. 700026276						
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2044

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer Woo Su AMS Project Ecoline 84 Machine-No. 700026276		 Bühler AG - Die Casting	터미널 다이어그램 =A+J4-XL3 Terminal diagram =A+J4-XL3				= REPORT	
			Ed.							+ KLE			
			Appr										
Modification	Date	Name	Original		Replacement of	Replaced by	ESM-85061					Page 2045	

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer	Woo Su AMS	 터미널 다이어그램 =A+J4-XL4 Terminal diagram =A+J4-XL4			= REPORT	
			Ed.		Project	Ecoline 84				+ KLE	
			Appr		Machine-No.	700026276					
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2046

Terminal diagram

BDAG_F13_001

[illegible]

		Date	2015/6/29	Customer Woo Su AMS Project Ecoline 84 Machine-No. 700026276	 터미널 다이어그램 =A+J5-XL1 Terminal diagram =A+J5-XL1			= REPORT	
		Ed.						+ KLE	
		Appr							
Modification	Date	Name	Original	Replacement of	Replaced by	ESM-85061		Page 2047	

Terminal diagram

BDAG_F13_001

function text	Target designation customer				+8-EW-EY4A	Cable name	Terminal strip designation					Cable name	+5-EW2					Page / column
							=A+J5-XL2											
					+5-EW-EY2A			Connection point	terminal	jumper	Target designation internal	Connection point	cable type	JZ-500 GY G				
Casting plunger back						MURRTERM			1	•	+C72-0.3/DM272A	10		1			+C72/435.3	
Accumulator charged							-ER435		2	•	+C72-0.3/DM272A	11		2			+C72/435.4	
Accumulator charged									3	•	+C72-RES	5-EW2		3			+C72/435.4	
Accumulator charged									4	•	+C72-RES	5-EW2		4			+C72/435.5	
Accumulator charged									5	•	+C72-RES	5-EW2		5			+C72/435.5	
Switch on intensifier						BN	-EK439	11	6	•	+C72-0.3/DM272A	07		6			+C72/440.3	
Casting plunger							+8-EY4A	1	7	•	+C72-0.3/DM272A	08		7			+C72/449.3	
Switch-on accumulator				BN			+5-EY2A	1	8	•	+C72-0.3/DM272A	09		8			+C72/439.1	

Terminal diagram

BDAG_F13_001

function text	Target designation customer		+5-EW-EY3A	+5-EW-EY4A	+5-EW-EY5A	Cable name	Terminal strip designation					Cable name	+5-EW3					Page / column	
							=A+J5-XL3												
							Target designation DCM	Connection point	terminal	jumper	Target designation internal	Connection point	cable type	JZ-500 GY G					
Accumulator drain					BN		+5-EY5A	1	1	•	+C72-X15	1		1				+C72/439.3	
							-ERC439.1												
Accumulator charging				BN			+5-EY4A	1	2	•	+C72-X15	5			2				+C72/439.5
							-ERC439.2												
Tank			BN				+5-EY3A	1	3	•	+C72-X16	1		3				+C72/439.7	
							-ERC439.3				-EK439	A1							
Tank										4	•	+C72-RES		5-EW3		4			+C72/439.8
Tank										5	•	+C72-RES		5-EW3		5			+C72/439.8
Tank										6	•	+C72-RES		5-EW3		6			+C72/439.8
Tank										7	•	+C72-RES		5-EW3		7			+C72/439.8
Tank										8	•	+C72-RES		5-EW3		8			+C72/439.9
					</														

Terminal diagram

BDAG_F13_001

function text	Target designation customer		+5-EW-EB4S	+5-EW-EB3S	+5-EW-EB2S	Cable name	Terminal strip designation						Cable name	+5-EW5				Page / column	
							=A+J5-XL5												
							Target designation DCM	Connection point	terminal	jumper	Target designation internal	Connection point	cable type	TRONIC-CY (LY-CY) GY					
					BN		+5-EB2S	1	1		-XL1	1						+C72/438.2	
Plunger actuating primary pressure				BN			+5-EB3S	1	1										+C72/438.4
Plunger actuating secondary pressure			BN				+5-EB4S	1	1		-XL1	1							+C72/438.6
Plunger actuating primary pressure					BK		+5-EB2S	4	2	•	+C72-0.0/AM280A	03			BN				+C72/438.2
Plunger actuating primary pressure					BU		+5-EB2S	3	3	•	+C72-0.0/AM280A	04			GN				+C72/438.2
Plunger actuating secondary pressure					BK		+5-EB3S	4	4	•	+C72-0.0/AM280A	06		YE				+C72/438.4	
Plunger actuating secondary pressure					BU		+5-EB3S	3	5	•	+C72-0.0/AM280A	07			GY				+C72/438.5
Accumulator pressure gas side			BK				+5-EB4S	4	6	•	+C72-0.0/AM280A	08			PK				+C72/438.6
Accumulator pressure gas side			BU				+5-EB4S	3	7	•	+C72-0.0/AM280A	09			BU				+C72/438.7
							-XL6	1	8	•	+C72-0.0/AM280A	16			VT				+C72/447.2
							-XL6	2	9	•	+C72-0.0/AM280A	14		RD				+C72/447.3	
							-XL6	8	10	•	+C72-0.0/AM280A	15			BK				+C72/448.2
Plunger actuating primary pressure					SH		+5-EW-EB2S		PE	•	PE								+C72/438.3
Plunger actuating secondary pressure					SH		+5-EW-EB3S		PE	•	PE								+C72/438.5
Accumulator pressure gas side			SH				+5-EW-EB4S		PE	•	PE								+C72/438.7
Accumulator pressure gas side											-XL5	PE							
									PE	•	+5-EW5	SH			SH				+C72/438.7
												-XL5		PE					
							PE		PE	•	PE				SH				+C72/447.3
							PE		PE	•									+C72/448.2

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer	Woo Su AMS	 터미널 다이어그램 =A+J5-XL6 Terminal diagram =A+J5-XL6			= REPORT	
			Ed.		Project	Ecoline 84				+ KLE	
			Appr		Machine-No.	700026276					
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2051

Terminal diagram

BDAG_F13_001

function text	Target designation customer				+S-EW-EB1S	Cable name	Terminal strip designation					Cable name	+S-EW7					Page / column
						cable type	Target designation DCM	Connection point	terminal	jumper	Target designation internal	Connection point						
					WH		+5-EB1S	GND	1	┆	+C72-0.0/MM240A	INC1:1		WH				+C72/437.4
									2	┆	+C72-0.0/MM240A	INC1:2		BN				+C72/437.4
									3	┆	+C72-0.0/MM240A	INC1:3		GN				+C72/437.4
					GY		+5-EB1S	B+	4	┆	+C72-0.0/MM240A	INC1:4		YE				+C72/437.4
Stroke measuring plunger					GN		+5-EB1S	A+	5	┆	+C72-0.0/MM240A	INC1:5		GY				+C72/437.4
Stroke measuring plunger					BN		+5-EB1S	UB	6	┆	+C72-0.0/MM240A	INC1:6		PK				+C72/437.5
Stroke measuring plunger									7	┆	+C72-0.0/MM240A	INC1:7		BU				+C72/437.5
Stroke measuring plunger					PK		+5-EB1S	B-	8	┆	+C72-0.0/MM240A	INC1:8		RD				+C72/437.5
Stroke measuring plunger					YE		+5-EB1S	A-	9	┆	+C72-0.0/MM240A	INC1:9		BK				+C72/437.5
Stroke measuring plunger									PE	┆	+S-EW7	SH		SH				+C72/437.5



Terminal diagram

BDAG_F13_001

[illegible]

Terminal diagram

BDAG_F13_001

function text	Target designation customer					Cable name	Terminal strip designation					Cable name	+7-EW4	+7-EW14			Page / column
							Target designation DCM	Connection point	terminal	jumper	Target designation internal	Connection point					
							+7-EU2	4	1		+C80-EX7	1	1				+C72/361.7
							+7-EU2	1									+C72/362.2
							+7-EB6	13	1								+C72/362.8
							+7-EU2	2	2		+C80-EX7	2	2				+C72/361.7
									2								+C72/362.4
							-ER362Z1		2								+C72/362.8
									3		+C80-EX7	3	3				+C72/361.2
							+7-EU2	4	4		+C80-EX7	4	4				+C72/361.2
							+7-EU2	3	5		+C80-EX7	5	5				+C72/361.3
							+7-EU2	7	6		+C80-EX7	6	6				+C72/361.4
							+7-EU2	1	7		+C80-EX7	7	7				+C72/361.7
							+7-EU2	5	8								+C72/361.5
									8		+C80-EX7	8	8				+C72/362.5
							+7-EU2	3	9		+C80-EX7	9	9				+C72/361.8
							+7-EB4	21	10		+C80-EX7	10	10				+C72/362.2
									11		+C80-EX7	11	11				+C72/362.5
									12		+C80-EX7	12	12				+C72/362.3
									13		+C80-EX7	13	13				+C72/362.4
							+7-EB3	14	14		+C80-EX7	14	14				+C72/362.7
									15		+C80-EX7	15	15				+C72/362.5
							+7-EB6	14	16		+C80-EX7	16	16				+C72/362.8
							-ER362Z1										
							+7-EB4	22	17		+C80-EX7	17	17				+C72/362.2
							+7-EB3	13	18		+C80-EX7	18	18				+C72/362.6
							PE		PE		+C80-EX7	36	GNYE				+C72/361.8
											PE						
							+7-EB6	PE	PE		PE						+C72/362.8
							+7-EB4	PE									
							+7-EB3	PE									

Terminal diagram

BDAG_F13_001

[illegible]

			Date	2015/6/29	Customer Woo Su AMS		 터미널 다이어그램 =A+J49.1-XL27 Terminal diagram =A+J49.1-XL27			= REPORT	
			Ed.		Project Ecoline 84					+ KLE	
			Appr		Machine-No. 700026276						
Modification	Date	Name	Original		Replacement of	Replaced by		ESM-85061			Page 2055

Terminal diagram

BDAG_F13_001

[illegible]

Cable overview

BDAG_F10_002

cable type	Cable description	device tag	Conductrs	cross-section	Length	function text
JZ-500 GY G		=A+C72-EW2	9	1	2	
LÜTZE-SILFLEX® N		=A+C72-EW3	21	0,5	2	Metal feeding is in operating mode A/SA
		=A+C72-EW4	14	0,5	2	Spray unit is in operation mode A/SA
		=A+C72-EW5	14	0,5	2	Robot is in operation mode A/SA
		=A+C72-EW6	14	0,5	2	Vacuum in operation
JB-500 GY G		=A+C80-EW4	3	1.5	0.7	
JZ-500 GY G		=A+C80-EW6	9	1	0.7	
		=A+C80-EW8	9	1		
		=A+C80-EW9	9	1		Fencing metal feeding
		=A+C80-EW10	9	1	0.7	Emergency off metal ladling unit
		=A+C80-EW12	9	1	0.7	
		=A+C80-EW14	9	1	0.7	
		=A+C80-EW16	9	1	0.7	Emergency off vacuum
		=A+1-EW-EB3S				System pressure
		=A+1-EW-EB5CL/OP	4	0.34		Tankcartridge closing cylinder
		=A+1-EW-EB6OP	4	0.34		Tankcartridge closing cylinder
		=A+1-EW-EB18OP	4	0.34		Alarm filter 1 contaminated
		=A+1-EW-EB22OP	4	0.34		
		=A+1-EW-EY3AB	4	0.75		Die opening
		=A+1-EW-EY4A	3	0.75		Pilot valve EHCS
		=A+1-EW-EY5A	3	0.75		Die close
		=A+1-EW-EY8A	3	0.75		Pump 1
MURRTHERM		=A+1-EW-EY16A	3	1		Pump %0 full
PUR		=A+1-EW-EY18BG	6	0.75		Cooling water oil tank
		=A+1-EW-EY27AB	4	0.75		Pump %0 reduced
		=A+1-EW-EY28A	3	0.75		
JB-750 GY G		=A+1-EW1	4	10	2.5	Main motor
		=A+1-EW2	4	10	2.5	Main motor

Cable overview

BDAG_F10_002

cable type	Cable description	device tag	Conductrs	cross-section	Length	function text
JB-500 GY G		=A+1-EW3	3	1.5	2	Power supply +J1
JZ-500 GY G		=A+1-EW4	9	1	3	Tankcartridge closing cylinder
		=A+1-EW5	9	1	3	Temperature oil tank
		=A+1-EW6	9	1	3	Warning level oil tank
TRONIC-CY (LiY-CY) GY		=A+1-EW7	4	0.75	3	System pressure
JB-500 GY G		=A+2-EW-EB3	3	1	5	Minimum die height
		=A+2-EW-EB4	3	1	5	Maximum die height
		=A+2-EW-EB5CL	4	0.34		Die closed
		=A+2-EW-EB6CL	4	0.34		Column Nut 2+4 unlock
		=A+2-EW-EB8CL	4	0.34		Column Nut 2 locked outside
		=A+2-EW-EB10CL	4	0.34		Column Nut 2 unlocked outside
		=A+2-EW-EB12CL	4	0.34		Column Nut 2 locked inside
		=A+2-EW-EB501CL	4	0.34		
		=A+2-EW-EY1AB	4	0.75		
		=A+2-EW-EY2A	3	0.75		Enter tie bar 2
		=A+2-EW-EY4AB	4	0.75		Extract tie bar 2
JB-500 GY G		=A+2-EW1	3	1.5	3.5	Power supply +J2
		=A+2-EW2	3	1.5	9	Motor central lubrication
JZ-500 GY G		=A+2-EW3	9	1	5	Maximum die height
		=A+2-EW4	9	1	5	Warning level monitoring
TRONIC-CY (LiY-CY) GY		=A+2-EW6	10	0,34	5	Pulse counter die height adjustment
		=A+3-EW-EB25CL	4	0.34		Ejector back die side
		=A+3-EW-EB26CL	4	0.34		Ejector back
		=A+3-EW-EY1AB	4	0.75		Core pull M1 extract
		=A+3-EW-EY2AB	4	0.75		Core pull M2 extract
		=A+3-EW-EY3AB	4	0.75		Core pull M3 extract
		=A+3-EW-EY4AB	4	0.75		Core pull M4 extract
		=A+3-EW-EY12AB	4	0.75		Move ejector back

Cable overview

BDAG_F10_002

cable type	Cable description	device tag	Conductrs	cross-section	Length	function text
		=A+3-EW-EY14AB	4	0.75		Engage
JB-500 GY G		=A+3-EW1	3	1.5	8	Power supply +J3
JZ-500 GY G		=A+3-EW2	9	1	8	Move ejector back
		=A+3-EW3	9	1	8	Ejector back
		=A+3-EW4	9	1	8	Pressure switch
		=A+3-EW5	9	1	8	Engage
		=A+3-EW8	7	1	8	Ejector back die side
		=A+4-EW-EB5CL	4	0.34		Unlocked nut 2
		=A+4-EW-EB7CL	4	0.34		Unlock nut 2
		=A+4-EW-EB9CL	4	0.34		Tie bar nut 2 locked
		=A+4-EW-EY1AB	4	0.75		Core pull F1 extract
		=A+4-EW-EY2AB	4	0.75		Core pull F2 extract
MURRTHERM		=A+4-EW-EY5A	3	1		
JB-500 GY G		=A+4-EW1	3	1.5	10.5	Power supply +J4
JZ-500 GY G		=A+4-EW2	9	1	10.5	Unlock nut 2
		=A+4-EW3	9	1	10.5	Core pull F1 extracted
		=A+4-EW4	9	1	10.5	Tie bar nut 2 locked
		=A+5-EW-EB1S	4	0.34		
		=A+5-EW-EB2S	4	0.34	5	
PUR		=A+5-EW-EB3S	4	0.25		Plunger actuating primary pressure
		=A+5-EW-EB4S	4	0.25		Plunger actuating secondary pressure
		=A+5-EW-EB5CL	4	0.34		
PUR		=A+5-EW-EB22S	4	0.25		Pilot control V1
		=A+5-EW-EB23S	4	0.34	5	Pilot control V2
		=A+5-EW-EY2A	3	0.75		
		=A+5-EW-EY3A	3	0.75		Accumulator charging
		=A+5-EW-EY4A	3	0.75		Accumulator drain
		=A+5-EW-EY5A	3	0.75		Switch-on accumulator

Cable overview

BDAG_F10_002

cable type	Cable description	device tag	Conductrs	cross-section	Length	function text
PUR		=A+5-EW-EY15S	6	0.75		Pilot control V1
TRONIC-CY (LiY-CY) GY		=A+5-EW-EY16S	6	0.75	3	Pilot control V2
JB-500 GY G		=A+5-EW1	3	1.5	11.5	Power supply +J5
JZ-500 GY G		=A+5-EW2	9	1	11.5	Casting plunger back
		=A+5-EW3	9	1	11.5	Accumulator drain
TRONIC-CY (LiY-CY) GY		=A+5-EW5	10	0,34	11.5	Plunger actuating primary pressure
		=A+5-EW6	8	0.75	11.5	Pilot control V1
		=A+5-EW7	10	0,34	11.5	Stroke measuring plunger
JB-500 GY G		=A+6-EW-EY2A	3	1.5	3	
JB-500 GY G		=A+7-EW-EB7	5	1	4	
		=A+7-EW-EB8	5	1	2	
		=A+7-EW-EB11	5	1	4	
		=A+7-EW-EB12	5	1	2	
JZ-500 GY G		=A+7-EW2	20	1	7	
JB-500 GY G		=A+7-EW3	3	1.5	5	
JZ-500 GY G		=A+7-EW4	20	1	5	
		=A+7-EW13	1	10	5	Potential equalization
		=A+7-EW14	1	10	5	Potential equalization
JB-500 GY G		=A+8-EW-EB3CL	3	1	3	Pressure switch
		=A+8-EW-EB4CL/5OP	5	1	5	Warning level monitoring
		=A+8-EW-EY1A	3	1	9	
		=A+8-EW-EY2A	3	1	9	Cooling mobile plate
		=A+8-EW-EY3A	3	1	9	Cooling fixed plate
MURRTHERM		=A+8-EW-EY4A	3	1		
JB-500 GY G		=A+49-EW-EB1	5	1	3	
		=A+49-EW-EB1.1	3	1	5	
		=A+49-EW-EB50	5	1	3	
		=A+49-EW-EB50.1	3	1	5	

Cable overview

BDAG_F10_002

cable type	Cable description	device tag	Conductrs	cross-section	Length	function text
JZ-500 GY G		=A+49-EW1	20	1	15	Fencing right
		=A+49-EW50	20	1	15	Fencing metal feeding
JB-500 GY G		=A+61-EW1	3	1.5	10	Power supply +J61
JZ-500 GY G		=A+61-EW2	9	1	10	Control column
JB-500 GY G		=A+61-EW3	3	1.5	10	Power supply +J61
JZ-500 GY G		=A+61-EW4	9	1	10	Control column

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+C72-0.0/AI240A =A+C72/902.2	1 PC	Analog input module	AI240/A	KEBA AG	68370	UXE-36957-252
=A+C72-0.0/AI240A =A+C72/902.2	2 PC	Plug Combicon		Phoenix Contact	1757077	UNE-24271-108
=A+C72-0.0/AI240A =A+C72/902.2	1 PC	Plug Combicon		Phoenix Contact	1757019	UNE-24271-102
=A+C72-0.0/AM280A =A+C72/901.2	1 PC	Anoalog mixed module	AM280/A	KEBA AG	68367	UXE-36957-253
=A+C72-0.0/AM280A =A+C72/901.2	1 PC	Plug Combicon		Phoenix Contact	1757019	UNE-24271-102
=A+C72-0.0/AM280A =A+C72/901.2	2 PC	Plug Combicon		Phoenix Contact	1757077	UNE-24271-108
=A+C72-0.0/CP250X =A+C72/900.7	1 PC	CPU	CP250/X	KEBA AG	71580	UXE-36957-298
=A+C72-0.0/CP250X =A+C72/900.7	1 PC	Compact Flash Card 2GB Fa. Swissbit		Bühler Uzwil AG	UXE-36913-021	UXE-36913-021
=A+C72-0.0/CP250X =A+C72/900.7	1 PC	Plug Combicon		Phoenix Contact	1757019	UNE-24271-102
=A+C72-0.0/DM272A =A+C72/904.2	1 PC	Digital mixed module	DM272/A	KEBA AG	70258	UXE-36957-257
=A+C72-0.0/DM272A =A+C72/904.2	1 PC	Plug Combicon		Phoenix Contact	1757019	UNE-24271-102
=A+C72-0.0/DM272A =A+C72/904.2	2 PC	Plug Combicon		Phoenix Contact	1757077	UNE-24271-108
=A+C72-0.1/DM272A =A+C72/905.2	1 PC	Digital mixed module	DM272/A	KEBA AG	70258	UXE-36957-257
=A+C72-0.1/DM272A =A+C72/905.2	1 PC	Plug Combicon		Phoenix Contact	1757019	UNE-24271-102
=A+C72-0.1/DM272A =A+C72/905.2	2 PC	Plug Combicon		Phoenix Contact	1757077	UNE-24271-108
=A+C72-0.2/DM272A =A+C72/906.2	1 PC	Digital mixed module	DM272/A	KEBA AG	70258	UXE-36957-257
=A+C72-0.2/DM272A =A+C72/906.2	1 PC	Plug Combicon		Phoenix Contact	1757019	UNE-24271-102
=A+C72-0.2/DM272A =A+C72/906.2	2 PC	Plug Combicon		Phoenix Contact	1757077	UNE-24271-108
=A+C72-0.3/DM272A =A+C72/907.2	1 PC	Digital mixed module	DM272/A	KEBA AG	70258	UXE-36957-257

BDAG_F01_004_Eco

+KAB/3004

4001

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+C72-0.3/DM272A =A+C72/907.2	1 PC	Plug Combicon		Phoenix Contact	1757019	UNE-24271-102
=A+C72-0.3/DM272A =A+C72/907.2	2 PC	Plug Combicon		Phoenix Contact	1757077	UNE-24271-108
=A+C72-0.4/DM272A =A+C72/908.2	1 PC	Digital mixed module	DM272/A	KEBA AG	70258	UXE-36957-257
=A+C72-0.4/DM272A =A+C72/908.2	1 PC	Plug Combicon		Phoenix Contact	1757019	UNE-24271-102
=A+C72-0.4/DM272A =A+C72/908.2	2 PC	Plug Combicon		Phoenix Contact	1757077	UNE-24271-108
=A+C72-0.0/MM240A =A+C72/903.2	1 PC	Incremental encoder		KEBA AG	71784	UXE-36957-258
=A+C72-0.0/MM240A =A+C72/903.2	1 PC	Plug Combicon		Phoenix Contact	1757035	UNE-24271-104
=A+C72-EA108 =A+C72/108.5	1 PCS	Temperature controller		Rittal	3110000	UXE-36100-051
=A+C72-EE108 =A+C72/108.2	1 PC	Cooling device		Rittal		SK3370.320
=A+C72-EE108 =A+C72/108.2	1 PC	plate		Bühler Shenzen		GCEO-11305-001
=A+C72-EF101Z1 =A+C72/101.1	1 PC	Miniature circuit-breaker C60 UL1077 2P 6A D	C60N 6A	Schneider Electric AG	24520	UNE-22200-158
=A+C72-EF101Z2 =A+C72/101.2	1 PC	Miniature circuit-breaker C60 UL1077 2P 6A D	C60N 6A	Schneider Electric AG	24520	UNE-22200-158
=A+C72-EF103Z1 =A+C72/103.1	1 PC	Miniature circuit-breaker C60 UL1077 1P 4A D	C60N 4A	Schneider Electric AG	24503	UNE-22200-137
=A+C72-EF103Z2 =A+C72/103.2	1 PC	Miniature circuit-breaker C60 UL1077 1P 10A D	C60N 10A	Schneider Electric AG	24506	UNE-22200-140
=A+C72-EF103Z3 =A+C72/103.3	1 PC	Miniature circuit-breaker C60 UL1077 1P 10A D	C60N 10A	Schneider Electric AG	24506	UNE-22200-140
=A+C72-EF103Z4 =A+C72/103.4	1 PC	Miniature circuit-breaker C60 UL1077 1P 10A D	C60N 10A	Schneider Electric AG	24506	UNE-22200-140
=A+C72-EF103Z5 =A+C72/103.4	1 PC	Miniature circuit-breaker C60 UL1077 1P 10A D	C60N 10A	Schneider Electric AG	24506	UNE-22200-140
=A+C72-EF103Z6 =A+C72/103.5	1 PC	Miniature circuit-breaker C60 UL1077 1P 4A D	C60N 4A	Schneider Electric AG	24503	UNE-22200-137
=A+C72-EF103Z7 =A+C72/103.6	1 PC	Miniature circuit-breaker C60 UL1077 1P 4A D	C60N 4A	Schneider Electric AG	24503	UNE-22200-137

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+C72-EF103Z8 =A+C72/103.7	1 PC	Miniature circuit-breaker C60 UL1077 1P 4A D	C60N 4A	Schneider Electric AG	24503	UNE-22200-137
=A+C72-EF103Z9 =A+C72/103.7	1 PC	Miniature circuit-breaker C60 UL1077 1P 4A D	C60N 4A	Schneider Electric AG	24503	UNE-22200-137
=A+C72-EG102 =A+C72/102.2	1 PC	Power supply		PULS	QT40.241	UNE-80210-021
=A+C72-EK142 =A+C72/142.7	1 PC	Relay	24V	Phoenix Contact	2966472	UXE-28080-221
=A+C72-EK142 =A+C72/142.7	1 PC	Continuous plug-in bridge		Phoenix Contact	2966692	UXE-28080-251
=A+C72-EK146 =A+C72/146.6	1 PC	Relay	24V	Phoenix Contact	2966472	UXE-28080-221
=A+C72-EK213Z1 =A+C72/213.0	1 PC	Safety module		Schmersal	1166524	UNE-36901-191
=A+C72-EK214Z1 =A+C72/214.4	1 PC	Relay	24V	Phoenix Contact	2966472	UXE-28080-221
=A+C72-EK250Z1 =A+C72/250.1	1 PC	Safety module		Schmersal	1193471	UNE-36901-186
=A+C72-EK250Z2 =A+C72/250.5	1 PC	Auxiliary contactor	24V	Schneider Electric AG	CAD32BD	UNE-28007-311
=A+C72-EK250Z3 =A+C72/250.6	1 PC	Auxiliary contactor	24V	Schneider Electric AG	CAD32BD	UNE-28007-311
=A+C72-EK250Z4 =A+C72/250.7	1 PC	Auxiliary contactor	24V	Schneider Electric AG	CAD32BD	UNE-28007-311
=A+C72-EK250Z4 =A+C72/250.7	1 PC	Auxiliary switch block 4 S + 0 Ö		Schneider Electric AG	LADN40	UNE-28007-218
=A+C72-EK250Z5 =A+C72/250.8	1 PC	Auxiliary contactor	24V	Schneider Electric AG	CAD32BD	UNE-28007-311
=A+C72-EK250Z5 =A+C72/250.8	1 PC	Auxiliary switch block 4 S + 0 Ö		Schneider Electric AG	LADN40	UNE-28007-218
=A+C72-EK353Z1 =A+C72/353.1	1 PC	Safety module		Schmersal	1193471	UNE-36901-186
=A+C72-EK353Z2 =A+C72/353.4	1 PC	Auxiliary contactor	24V	Schneider Electric AG	CAD32BD	UNE-28007-311
=A+C72-EK353Z3 =A+C72/353.5	1 PC	Auxiliary contactor	24V	Schneider Electric AG	CAD32BD	UNE-28007-311
=A+C72-EK363Z1 =A+C72/363.1	1 PC	Safety module		Schmersal	1193471	UNE-36901-186

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+C72-EK363Z2 =A+C72/363.4	1 PC	Auxiliary contactor	24V	Schneider Electric AG	CAD32BD	UNE-28007-311
=A+C72-EK363Z3 =A+C72/363.5	1 PC	Auxiliary contactor	24V	Schneider Electric AG	CAD32BD	UNE-28007-311
=A+C72-EK366Z1 =A+C72/366.1	1 PC	Safety module		Schmersal	1193471	UNE-36901-186
=A+C72-EK366Z2 =A+C72/161.6	1 PC	Auxiliary switch block 4 S + 0 Ö		Schneider Electric AG	LADN40	UNE-28007-218
=A+C72-EK366Z2 =A+C72/366.4	1 PC	Auxiliary contactor	24V	Schneider Electric AG	CAD32BD	UNE-28007-311
=A+C72-EK366Z3 =A+C72/161.7	1 PC	Auxiliary switch block 4 S + 0 Ö		Schneider Electric AG	LADN40	UNE-28007-218
=A+C72-EK366Z3 =A+C72/366.5	1 PC	Auxiliary contactor	24V	Schneider Electric AG	CAD32BD	UNE-28007-311
=A+C72-EK636Z1 =A+C72/636.1	1 PC	Safety module		Schmersal	1193471	UNE-36901-186
=A+C72-EK636Z2 =A+C72/636.5	1 PC	Auxiliary contactor	24V	Schneider Electric AG	CAD32BD	UNE-28007-311
=A+C72-EK636Z3 =A+C72/636.6	1 PC	Auxiliary contactor	24V	Schneider Electric AG	CAD32BD	UNE-28007-311
=A+C72-EM1F1 =A+C72/140.1	1 PC	Termal relay 37..50A - class 10A	37..50A	Schneider Electric AG	LRD3357	UNE-28007-420
=A+C72-EM1F2 =A+C72/140.2	1 PC	Termal relay 37..50A - class 10A	37..50A	Schneider Electric AG	LRD3357	UNE-28007-420
=A+C72-EM1K1 =A+C72/140.6	1 PC	Contactor TeSys LC1-D - 3P - AC-3 440V 65A Coil 230 V AC	230V	Schneider Electric AG	LC1D65P7	UNE-28007-087
=A+C72-EM1K1 =A+C72/140.6	1 PC	Auxiliary switch block		Schneider Electric AG	LAD8N11	UNE-28007-203
=A+C72-EM1K1 =A+C72/140.6	1 PC	Timer block		Schneider Electric AG	LAD-S2	UNE-28007-232
=A+C72-EM1K2 =A+C72/140.7	1 PC	Contactor TeSys LC1-D - 3P - AC-3 440V 65A Coil 230 V AC	230V	Schneider Electric AG	LC1D65P7	UNE-28007-087
=A+C72-EM1K3 =A+C72/140.7	1 PC	Contactor TeSys LC1-D - 3P - AC-3 440V 65A Coil 230 V AC	230V	Schneider Electric AG	LC1D65P7	UNE-28007-087
=A+C72-EP140 =A+C72/140.8	1 PC	Operating hours counter	230VAC 50/60Hz	Novitas AG	BW 70.89	UXE-34001-011
=A+C72-EQ100 =A+C72/100.1	1 PC	Disconnect switch, three-pole	100A	Schneider Electric AG	LV429629	UNE-24493-001

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+C72-EQ100 =A+C72/100.1	1 PC	Auxiliary switch block		Schneider Electric AG	GV7AE11	UNE-24484-161
=A+C72-EQ100 =A+C72/100.1	1 PC	Rotary drive NSX100/250		Schneider Electric AG	LV429338	UNE-22206-127
=A+C72-EQ100 =A+C72/100.1	2 PC	Terminal cover		Schneider Electric AG	29321	UNE-22205-141
=A+C72-EQ101 =A+C72/101.1	1 PC	Motor overload switch GV2-RT - 4..6.3A	4..6.3A	Schneider Electric AG	GV2RT10	UNE-24484-056
=A+C72-EQ102 =A+C72/102.2	1 PC	Motor overload switch GV2-RT - 2.5..4A	2.5..4A	Schneider Electric AG	GV2RT08	UNE-24484-055
=A+C72-ER1C1 =A+C72/140.6	1 PC	RC network 110..240 V AC		Schneider Electric AG	LA4DA2U	UNE-28007-617
=A+C72-ER1C2 =A+C72/140.7	1 PC	RC network 110..240 V AC		Schneider Electric AG	LA4DA2U	UNE-28007-617
=A+C72-ER1C3 =A+C72/140.8	1 PC	RC network 110..240 V AC		Schneider Electric AG	LA4DA2U	UNE-28007-617
=A+C72-ER150Z1 =A+C72/150.8	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810
=A+C72-ET101 =A+C72/101.1	1 PC	Transformer	1000VA	Bühler Uzwil AG	UNE-12105-067	UNE-12105-067
=A+C72-EU70Z1 =A+C72/70.1	1 M	Cable protective hose		PMA	CYLG-48B	UNE-32001-203
=A+C72-EU70Z2 =A+C72/70.0	1 M	Cable protective hose		PMA	CYLG-48B	UNE-32001-203
=A+C72-EU70Z3 =A+C72/70.0	1 M	Cable protective hose		PMA	CYLG-48B	UNE-32001-203
=A+C72-EU70Z4 =A+C72/70.2	1 M	Cable protective hose		PMA	CYLG-48B	UNE-32001-203
=A+C72-EU70Z5 =A+C72/70.4	1 M	Cable protective hose		PMA	CYLG-48B	UNE-32001-203
=A+C72-EU70Z6 =A+C72/70.6	1 PCS	Protective hose		Weyer	JSB-PVC-38B	UYZ-00003-004
=A+C72-EU70Z7 =A+C72/70.7	1 PCS	Protective hose		Weyer	JSB-PVC-38B	UYZ-00003-004
=A+C72-EU70Z8 =A+C72/70.7	1 PCS	Protective hose		Weyer	JSB-PVC-38B	UYZ-00003-004
=A+C72-EU70Z9 =A+C72/70.6	1 M	Cable protective hose		Bühler Uzwil AG	TBOR2000-15	UNE-32003-011

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+C72-EU80Z1 =A+C72/80.2	1 PC	Control cabinet Ecoline		Bühler Uzwil AG	GCEO-10435-001	GCEO-10435-001
=A+C72-EU80Z2 =A+C72/80.2	1 M	Top rail hat EN 50 022 (35x7.5)		Bühler Uzwil AG	UNE-32209-080	UNE-32209-080
=A+C72-EU80Z3 =A+C72/80.2	1 M	Wiring channel 60x40mm		Bühler Uzwil AG	UXE-32213-011	UXE-32213-011
=A+C72-EU80Z4 =A+C72/80.2	5 PC	Shield clamp		Weidmüller	79400 20931	UNE-32203-025
=A+C72-EU80Z5 =A+C72/80.2	1 PC	Mounting frame		Icotek	CF16	UNE-32030-011
=A+C72-EU80Z6 =A+C72/80.2	1 PC	Module 3x Ø3.5 - 10.5		Icotek	CM15W40	UNE-32030-021
=A+C72-EU80Z7 =A+C72/80.2	4 PC	Module 2x Ø3.5 - 16.5		Icotek	CM20W40	UNE-32030-022
=A+C72-EU80Z8 =A+C72/80.2	2 PC	Module 1x Ø10 - 25		Icotek	CM30W40	UNE-32030-024
=A+C72-EU80Z9 =A+C72/80.2	1 M	Wire 1.5mm², green-yellow		Bühler Uzwil AG Lütze	UNE-30013-022 101322	UNE-30013-022
=A+C72-EU80Z9 =A+C72/80.2	1 M	Wire 2.5mm², green-yellow		Bühler Uzwil AG	UNE-30013-023 101694	UNE-30013-023
=A+C72-EU80Z9 =A+C72/80.2	1 M	Wire 10mm², green-yellow		Bühler Uzwil AG	UNE-30013-026 101071	UNE-30013-026
=A+C72-EU80Z9 =A+C72/80.2	1 M	Wire 1.5mm², red		Bühler Uzwil AG Lütze	UNE-30013-032 101672	UNE-30013-032
=A+C72-EU80Z9 =A+C72/80.2	1 M	Wire 2.5mm², red		Bühler Uzwil AG	UNE-30013-033 101691	UNE-30013-033
=A+C72-EU80Z9 =A+C72/80.2	1 M	Wire 1mm², blue		Bühler Uzwil AG	UNE-30013-101 101670	UNE-30013-101
=A+C72-EU80Z9 =A+C72/80.2	1 M	Wire 10mm², blue		Bühler Uzwil AG	UNE-30013-106 101381	UNE-30013-106
=A+C72-EU80Z9 =A+C72/80.2	1 M	Wire 1.5mm², red-white		Bühler Uzwil AG Lütze	UNE-30013-162 140038	UNE-30013-162
=A+C72-EU80Z9 =A+C72/80.2	1 M	Wire 2.5mm², red-white		Bühler Uzwil AG	UNE-30013-163 140039	UNE-30013-163
=A+C72-EU80Z9 =A+C72/80.2	1 M	Wire 1mm², blue-white		Bühler Uzwil AG	UNE-30013-183 101678	UNE-30013-183
=A+C72-EU80Z9 =A+C72/80.2	1 M	Wire 10mm², blue-white		Bühler Uzwil AG	UNE-30013-188 140040	UNE-30013-188

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+C72-EU80Z10 =A+C72/80.5	25 PC	Doubles conductor end sleeve 0.75mm white		Weidmüller	156432109	UNE-32110-202
=A+C72-EU80Z11 =A+C72/80.5	2 PC	Cable screwing M32x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-007	UNE-32114-007
=A+C72-EU80Z12 =A+C72/80.5	2 PC	Counter nut EMC M32x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-227	UNE-32114-227
=A+C72-EU80Z13 =A+C72/80.5	2 PC	Cable screwing M40x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-008	UNE-32114-008
=A+C72-EU80Z14 =A+C72/80.5	2 PC	Counter nut EMC M40x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-228	UNE-32114-228
=A+C72-EU80Z15 =A+C72/80.5	2 PC	Reduction metric M40x1.5		Bühler Uzwil AG	UNE-32114-362	UNE-32114-362
=A+C72-EU80Z17 =A+C72/80.5	19 PC	Cable screwing M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-004	UNE-32114-004
=A+C72-EU80Z18 =A+C72/80.5	4 PC	Full dog point M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-254	UNE-32114-254
=A+C72-EU80Z19 =A+C72/80.2	1 PC	Module 1x Ø10 - 32		Icotek	CM40/10-32	UNE-32030-025
=A+C72-EU80Z20 =A+C72/80.5	1 M	Shrink sleeve		Bühler Uzwil AG	UNE-32000-053	UNE-32000-053
=A+C72-EU80Z20 =A+C72/80.5	1 M	Shrink sleeve		Bühler Uzwil AG	UNE-32000-055	UNE-32000-055
=A+C72-EU80Z20 =A+C72/80.5	1 M	Shrink sleeve		Bühler Uzwil AG	UNE-32000-060	UNE-32000-060
=A+C72-EU80Z20 =A+C72/80.5	1 M	Shrink sleeve		Bühler Uzwil AG	UNE-32000-133	UNE-32000-133
=A+C72-EU80Z20 =A+C72/80.5	1 M	Shrink sleeve		Bühler Uzwil AG	UNE-32000-135	UNE-32000-135
=A+C72-EU80Z21 =A+C72/80.5	6 PC	Cable shoe		Bühler Uzwil AG	UNE-32107-531	UNE-32107-531
=A+C72-EU80Z21 =A+C72/80.5	6 PC	Cable shoe		Bühler Uzwil AG	UNE-32107-541	UNE-32107-541
=A+C72-EU80Z22 =A+C72/80.2	50 PC	Conductor end sleeve isolated 0.5mm white		Weidmüller	UNE-32110-106	UNE-32110-106
=A+C72-EU80Z22 =A+C72/80.2	50 PC	Conductor end sleeve isolated 0.75mm grey		Weidmüller	156420129	UNE-32110-116
=A+C72-EU80Z22 =A+C72/80.2	1000 PC	Conductor end sleeve isolated 1mm red		Weidmüller	156420229	UNE-32110-120

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+C72-EU80Z22 =A+C72/80.2	20 PC	Conductor end sleeve isolated 2.5mm blue		Weidmüller	156420519	UNE-32110-128
=A+C72-EU80Z22 =A+C72/80.2	10 PC	Conductor end sleeve isolated 10mm red		Weidmüller	156421009	UNE-32110-135
=A+C72-EU80Z22 =A+C72/80.2	50 PC	Doubles conductor end sleeve 0.75mm white		Weidmüller	156432119	UNE-32110-203
=A+C72-EU80Z22 =A+C72/80.2	50 PC	Doubles conductor end sleeve 1mm red		Weidmüller	156433219	UNE-32110-205
=A+C72-EU80Z23 =A+C72/80.7	1 PC	End plate		Weidmüller	105000	UNE-32205-151
=A+C72-EU80Z23 =A+C72/80.7	1 PC	Cover plate 1 MM / 0.039 IN THICK		Wago	283-357	UNE-32206-035
=A+C72-EU80Z23 =A+C72/80.7	5 PC	End and intermediate plate 4 mm dick		Wago	283-320	UNE-32206-080
=A+C72-EU80Z24 =A+C72/80.7	1 M	Cable duct 40x80mm		Bühler Uzwil AG	UNE-32214-311	UNE-32214-311
=A+C72-EU80Z24 =A+C72/80.7	1 M	Cable duct 25x80mm		Bühler Uzwil AG	UNE-32214-313	UNE-32214-313
=A+C72-EU80Z24 =A+C72/80.7	1 M	Cable duct 40x85mm		Bühler Uzwil AG	UNE-32214-314	UNE-32214-314
=A+C72-EU80Z25 =A+C72/80.7	2 PC	Hex cap screw M6x65		Bühler Uzwil AG	UNN-10009-160	UNN-10009-160
=A+C72-EU80Z25 =A+C72/80.7	4 PC	Hex cap screw M6	M6x0.8d	Bühler Uzwil AG	UNN-12001-154	UNN-12001-154
=A+C72-EU80Z25 =A+C72/80.7	4 PC	U-Washer M6	M6	Bühler Uzwil AG	UNN-14000-003	UNN-14000-003
=A+C72-EU80Z26 =A+C72/80.7	1 PC	Central point of earthing		Rittal	DK7829.200	UXE-32206-011
=A+C72-EU80Z27 =A+C72/80.7	1 M	CR neoprene-elastomere plate		Bühler Uzwil AG	UNR-51634-002	UNR-51634-002
=A+C72-EU80Z27 =A+C72/80.7	1 M	CR neoprene-elastomere plate		Bühler Uzwil AG	UNR-51634-003	UNR-51634-003
=A+C72-EU80Z28 =A+C72/80.7	1 M	Double-sided adhesive tape		Bühler Uzwil AG	UXB-26010-082	UXB-26010-082
=A+C72-EU80Z29 =A+C72/80.7	20 PC	Cold terminal tubular bare end EN16-18		Bühler Shenzen	DACHAN-0216	DACHAN-0216
=A+C72-EU80Z29 =A+C72/80.7	1 PC	Forked end wire diameter10mm, fork inside diameter-4, tail length7.5mm		Bühler Shenzen	DACHAN-0228	DACHAN-0228

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzhen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+C72-EU80Z29 =A+C72/80.7	20 PC	Phillips round head self-drilling screw D5x12		Bühler Shenzhen	ENN-10005-005	ENN-10005-005
=A+C72-EU80Z29 =A+C72/80.7	1 PC	L35Aluminium strip L=650 (30/230/450/620) milling groove		Bühler Shenzhen	S11-40005-001	S11-40005-001
=A+C72-EU80Z29 =A+C72/80.7	1 PC	L35Aluminium strip L=280 (30/150/250)		Bühler Shenzhen	S11-40006-001	S11-40006-001
=A+C72-EU80Z29 =A+C72/80.7	1 PC	L35Aluminium strip L=720 (30/300/500/690)		Bühler Shenzhen	S11-40006-002	S11-40006-002
=A+C72-EU80Z29 =A+C72/80.7	1 PC	L35Aluminium strip L=910 (30/300/600/880)		Bühler Shenzhen	S11-40006-003	S11-40006-003
=A+C72-EU80Z29 =A+C72/80.7	1 PC	L35Aluminium strip L=940 (30/300/600/910)		Bühler Shenzhen	S11-40006-004	S11-40006-004
=A+C72-EU80Z29 =A+C72/80.7	12 PC	Cold terminal tubular bare end UT4-4		Bühler Shenzhen	SXR-5021-005	SXR-5021-005
=A+C72-EU80Z29 =A+C72/80.7	3 PC	Cold terminal tubular bare end UT6-4		Bühler Shenzhen	SXR-5021-006	SXR-5021-006
=A+C72-EU80Z29 =A+C72/80.7	8 PC	Open connection nasal 100A		Bühler Shenzhen	SXR-5032-002	SXR-5032-002
=A+C72-EU80Z29 =A+C72/80.7	1 PC	Braided copper wire		Bühler Shenzhen	SXR-B015-001	SXR-B015-001
=A+C72-EU80Z30 =A+C72/80.7	10 PCS	Serrated lock washer M6		Bühler Uzwil AG	UXN-14025-008	UXN-14025-008
=A+C72-EU80Z30 =A+C72/80.7	8 PCS	Serrated lock washer M8		Bühler Uzwil AG	UXN-14025-009	UXN-14025-009
=A+C72-EU80Z30 =A+C72/80.7	4 PCS	Serrated lock washer M10		Bühler Uzwil AG	UXN-14025-011	UXN-14025-011
=A+C72-EU80Z30 =A+C72/80.7	9 PCS	Serrated lock washer M5		Bühler Uzwil AG	UXN-14025-014	UXN-14025-014
=A+C72-EU80Z30 =A+C72/80.7	2 PCS	Serrated lock washer M4		Bühler Uzwil AG	UXN-14025-015	UXN-14025-015
=A+C72-EU80Z31 =A+C72/80.7	1 PCS	Counter nut EMC M50x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-229	UNE-32114-229
=A+C72-EU80Z33 =A+C72/80.7	1 PC	Cable screwing M50x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-009	UNE-32114-009
=A+C72-EU100Z1 =A+C72/100.6	3 PCS	Earthing strap 25mm2		Bühler Uzwil AG	UNE-30920-211	UNE-30920-211
=A+C72-EU101Z1 =A+C72/101.1	2 PC	Connection bar		Schneider Electric AG	14881	UNE-22200-651

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+C72-EU101Z1 =A+C72/101.1	2 PC	Connection terminal		Schneider Electric AG	14885	UNE-22200-601
=A+C72-EU101Z1 =A+C72/101.1	1 PC	Connection terminal		Eaton Industries	BK25/3-PKZ0	UNE-24481-533
=A+C72-EU101Z1 =A+C72/101.1	1 PC	Busbar connection point 45mm		Schneider Electric AG	GV2-G245	UNE-24484-074
=A+C72-EU101Z2 =A+C72/101.2	1 M	Wire 1.5mm², black		Bühler Uzwil AG	UNE-30013-002	UNE-30013-002
=A+C72-EU101Z3 =A+C72/101.4	1 M	Wire 4mm2 shortcircuit proof		Helukabel	38503	UNE-30016-011
=A+C72-EU102Z1 =A+C72/102.3	1 M	Wire 2.5mm², black		Bühler Uzwil AG	UNE-30013-003	UNE-30013-003
=A+C72-EU103Z1 =A+C72/103.1	1 PC	Connection terminal		Schneider Electric AG	14885	UNE-22200-601
=A+C72-EU103Z1 =A+C72/103.1	1 PC	Connection bar		Schneider Electric AG	14881	UNE-22200-651
=A+C72-EU140.2Z3 =A+C72/140.7	2 PC	Reduction metric M40x1.5		Bühler Uzwil AG	UNE-32114-362	UNE-32114-362
=A+C72-EU140.2Z4 =A+C72/140.7	2 PC	Reduction metric M50x1.5		Bühler Uzwil AG	UNE-32114-364	UNE-32114-364
=A+C72-EU140.3Z1 =A+C72/140.7	8 PC	Cable shoe >10-16mm2		Bühler Shenzen	GD-0182	GD-0182
=A+C72-EU140.3Z2 =A+C72/140.7	1 M	Wire 10mm2 shortcircuit proof		Helukabel	38505	UNE-30016-013
=A+C72-EU250Z3 =A+C72/250.0	1 M	Wire 1mm², orange		Bühler Uzwil AG	UNE-30013-091 101382	UNE-30013-091
=A+C72-EU910Z1 =A+C72/910.0	1 M	PVC-Cable shielded grey Conductors coloured pair stranded		Helukabel	19971 110633	UXE-30605-202
=A+C72-EU910Z2 =A+C72/910.0	2 PC	Locking screw		FCT	F-440	UNE-24210-101
=A+C72-EU910Z3 =A+C72/910.0	3 PC	Contact bush		FCT	FK-20SL	UNE-24210-012
=A+C72-EU910Z4 =A+C72/910.0	1 PC	Socket housing		FCT	FL-09S7K121	UNE-24210-007
=A+C72-EU910Z5 =A+C72/910.0	1 PC	Plug housing		FCT	F-PHGR1A2	UNE-24210-027
=A+C72-EU910Z6 =A+C72/910.0	1 PC	2-conductor multipole connector 5-pole		Wago	231-2305/026-000	UNE-32200-550

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+C72-EU910Z7 =A+C72/910.0	1 PC	Resistor		Bühler Uzwil AG	UNE-60025-118	UNE-60025-118
=A+C72-EX34 =A+C72/161.0	1 PC	Plug-in connector female 36-pole		AMP	207019-1	UNE-24004-113
=A+C72-EX34 =A+C72/161.0	1 PC	Plug-in connector male 36-pole		AMP	207020-1	UNE-24004-114
=A+C72-EX34 =A+C72/161.0	13 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+C72-EX34 =A+C72/161.0	13 PC	Contact bush Ø0.75-1.5		AMP	163083-8	UNE-24005-517
=A+C72-X0 =A+C72/910.5	1 PC	CANopen ECO fieldbus coupler MSS		Wago	750-347	UYZ-00002-001
=A+C72-X1 =A+C72/911.0	1 PC	Supply module		Wago	750-602	UXE-36500-161
=A+C72-X2 =A+C72/911.3	1 PC	8 channel digital input terminal		Wago	750-430	UXE-36500-047
=A+C72-X3 =A+C72/911.6	1 PC	8 channel digital input terminal		Wago	750-430	UXE-36500-047
=A+C72-X4 =A+C72/911.0	1 PC	8 channel digital input terminal		Wago	750-430	UXE-36500-047
=A+C72-X5 =A+C72/912.0	1 PC	8 channel digital input terminal		Wago	750-430	UXE-36500-047
=A+C72-X6 =A+C72/912.3	1 PC	8 channel digital input terminal		Wago	750-430	UXE-36500-047
=A+C72-X7 =A+C72/913.0	1 PC	8 channel digital input terminal		Wago	750-430	UXE-36500-047
=A+C72-X8 =A+C72/914.0	1 PC	8 channel digital input terminal		Wago	750-430	UXE-36500-047
=A+C72-X9 =A+C72/914.3	1 PC	8 channel digital input terminal		Wago	750-430	UXE-36500-047
=A+C72-X10 =A+C72/915.0	1 PC	8 channel digital output terminal		Wago	750-530	UXE-36500-077
=A+C72-X11 =A+C72/915.3	1 PC	2-Channel analog input module		Wago	750-461	UXE-36500-068
=A+C72-X13 =A+C72/915.6	1 PC	Supply module PASSIVE		Wago	750-613	UXE-36500-171
=A+C72-X14 =A+C72/915.0	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzhen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+C72-X15 =A+C72/915.3	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X16 =A+C72/915.6	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X17 =A+C72/917.0	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X18 =A+C72/918.0	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X20 =A+C72/919.0	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X21 =A+C72/919.3	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X22 =A+C72/919.6	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X23 =A+C72/919.0	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X24 =A+C72/919.3	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X25 =A+C72/920.0	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X26 =A+C72/920.3	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X27 =A+C72/920.6	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X28 =A+C72/920.0	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X29 =A+C72/921.0	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X30 =A+C72/921.3	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X31 =A+C72/921.6	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X32 =A+C72/921.0	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X33 =A+C72/922.0	1 PC	Supply module PASSIVE		Wago	750-613	UXE-36500-171
=A+C72-X34 =A+C72/923.0	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+C72-X35 =A+C72/923.3	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X36 =A+C72/923.6	1 PC	2-Channel relay output module		Wago	750-513	UXE-36500-102
=A+C72-X37 =A+C72/929.4	1 PC	End module		Wago	750-600	UXE-36500-192
=A+C72-XE015/B =A+C72/900.8	1 PC	USB-port		KEBA AG	75778	UXE-36957-315
=A+C80-EU80Z1 =A+C72/80.0	1 M	Top rail hat EN 50 022 (35x7.5)		Bühler Uzwil AG	UNE-32209-080	UNE-32209-080
=A+C80-EU80Z2 =A+C72/80.0	3 PC	Spacer bolt M6x30		Bühler Uzwil AG	UNN-10170-005	UNN-10170-005
=A+C80-EU80Z3 =A+C72/80.0	1 PC	Connector plate		Bühler Uzwil AG	GCEU-10549-001	GCEU-10549-001
=A+C80-EU80Z4 =A+C72/80.0	1 PC	Cover		Bühler Uzwil AG	GCEU-10552-001	GCEU-10552-001
=A+C80-EU80Z5 =A+C72/80.0	1 PC	Plate		Bühler Uzwil AG	GCEU-10555-001	GCEU-10555-001
=A+C80-EU80Z6 =A+C72/80.0	1 M	Sealing tape CR foam strip, self-adhesive		Bühler Uzwil AG	UNR-53745-020	UNR-53745-020
=A+C80-EU80Z7 =A+C72/80.0	2 PC	Connection fitting	M63x1.5	PMA	SVND-M638GT	UNE-32023-417
=A+C80-EU80Z8 =A+C72/80.0	12 PC	U-Washer M6		Bühler Uzwil AG	UNN-14002-001	UNN-14002-001
=A+C80-EU80Z9 =A+C72/80.0	12 PC	Lock nut M6		Bühler Uzwil AG	UNN-12016-004	UNN-12016-004
=A+C80-EU80Z10 =A+C72/80.0	1 PC	Connection fitting	M63x1.5	PMA	MVVV-M638-14	UNE-32023-530
=A+C80-EU351Z1 =A+C72/351.0	1 PC	Plug-in connector male 36-pole		AMP	207020-1	UNE-24004-114
=A+C80-EU351Z1 =A+C72/351.0	18 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+C80-EU361Z1 =A+C72/361.0	1 PC	Plug-in connector male 36-pole		AMP	207020-1	UNE-24004-114
=A+C80-EU361Z1 =A+C72/361.0	18 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+C80-EU580Z1 =A+C72/580.7	1 PC	Support		Bühler Uzwil AG	GCEU-10507-001	GCEU-10507-001

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzhen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+C80-EU580Z2 =A+C72/580.7	1 M	Shrink sleeve ATUM 19/6		Bühler Uzwil AG	UNE-32000-145	UNE-32000-145
=A+C80-EU580Z3 =A+C72/580.7	3 PC	Hose screw connector M12x1.5		AGRO AG	5010.337.012	UNE-32021-102
=A+C80-EU580Z4 =A+C72/580.7	3 PC	Stabilizing sleeve		AGRO AG	5031.037.009	UNE-32001-422
=A+C80-EU580Z5 =A+C72/580.7	1 M	Metallic hose Black		AGRO AG	2140.801.010	UNE-32001-402
=A+C80-EU580Z6 =A+C72/580.7	1 M	Metallic hose Black		AGRO AG	2140.801.010	UNE-32001-402
=A+C80-EU580Z7 =A+C72/580.7	1 M	Metallic hose Black		AGRO AG	2140.801.010	UNE-32001-402
=A+C80-EU801Z1 =A+C72/801.8	1 PC	Plug-in connector male 36-pole		AMP	207020-1	UNE-24004-114
=A+C80-EU801Z1 =A+C72/801.8	28 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+C80-EU811Z1 =A+C72/811.8	1 PC	Plug-in connector male 36-pole		AMP	207020-1	UNE-24004-114
=A+C80-EU811Z1 =A+C72/811.8	33 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+C80-EU821Z1 =A+C72/821.8;=A+C72/831.8	2 PC	Plug-in connector male 36-pole		AMP	207020-1	UNE-24004-114
=A+C80-EU821Z1 =A+C72/821.8;=A+C72/831.8	56 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+C80-EX6 =A+C72/351.6	1 PC	Plug-in connector female 36-pole		AMP	207019-1	UNE-24004-113
=A+C80-EX6 =A+C72/351.6	1 PC	Plug-in connector male 36-pole		AMP	207020-1	UNE-24004-114
=A+C80-EX6 =A+C72/351.6	18 PC	Contact bush Ø0.75-1.5		AMP	163083-8	UNE-24005-517
=A+C80-EX6 =A+C72/351.6	2 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+C80-EX6 =A+C72/351.6	1 M	Wire 1mm², blue		Bühler Uzwil AG	UNE-30013-101 101670	UNE-30013-101
=A+C80-EX7 =A+C72/361.9	1 PC	Plug-in connector female 36-pole		AMP	207019-1	UNE-24004-113
=A+C80-EX7 =A+C72/361.9	1 PC	Plug-in connector male 36-pole		AMP	207020-1	UNE-24004-114

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+C80-EX7 =A+C72/361.9	18 PC	Contact bush Ø0.75-1.5		AMP	163083-8	UNE-24005-517
=A+C80-EX7 =A+C72/361.9	2 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+C80-EX7 =A+C72/361.9	1 M	Wire 1mm², blue		Bühler Uzwil AG	UNE-30013-101 101670	UNE-30013-101
=A+C80-EX8 =A+C72/801.0	1 PC	Plug-in connector female 36-pole		AMP	207019-1	UNE-24004-113
=A+C80-EX8 =A+C72/801.0	1 PC	Plug-in connector male 36-pole		AMP	207020-1	UNE-24004-114
=A+C80-EX8 =A+C72/801.0	28 PC	Contact bush Ø0.75-1.5		AMP	163083-8	UNE-24005-517
=A+C80-EX8 =A+C72/801.0	4 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+C80-EX8 =A+C72/801.0	1 M	Wire 1mm², blue		Bühler Uzwil AG	UNE-30013-101 101670	UNE-30013-101
=A+C80-EX9 =A+C72/821.0	1 PC	Plug-in connector female 36-pole		AMP	207019-1	UNE-24004-113
=A+C80-EX9 =A+C72/821.0	1 PC	Plug-in connector male 36-pole		AMP	207020-1	UNE-24004-114
=A+C80-EX9 =A+C72/821.0	33 PC	Contact bush Ø0.75-1.5		AMP	163083-8	UNE-24005-517
=A+C80-EX9 =A+C72/821.0	6 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+C80-EX9 =A+C72/821.0	1 M	Wire 1mm², blue		Bühler Uzwil AG	UNE-30013-101 101670	UNE-30013-101
=A+C80-EX23 =A+C72/811.0	1 PC	Plug-in connector female 36-pole		AMP	207019-1	UNE-24004-113
=A+C80-EX23 =A+C72/811.0	1 PC	Plug-in connector male 36-pole		AMP	207020-1	UNE-24004-114
=A+C80-EX23 =A+C72/811.0	33 PC	Contact bush Ø0.75-1.5		AMP	163083-8	UNE-24005-517
=A+C80-EX23 =A+C72/811.0	6 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+C80-EX23 =A+C72/811.0	1 M	Wire 1mm², blue		Bühler Uzwil AG	UNE-30013-101 101670	UNE-30013-101
=A+C80-EX27 =A+C72/367.0	1 PC	Plug-in connector female 36-pole		AMP	207019-1	UNE-24004-113

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+C80-EX27 =A+C72/367.0	1 PC	Plug-in connector male 36-pole		AMP	207020-1	UNE-24004-114
=A+C80-EX27 =A+C72/367.0	15 PC	Contact bush Ø0.75-1.5		AMP	163083-8	UNE-24005-517
=A+C80-EX27 =A+C72/367.0	4 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+C80-EX27 =A+C72/367.0	1 M	Wire 1mm², blue		Bühler Uzwil AG	UNE-30013-101 101670	UNE-30013-101
=A+C80-EX33 =A+C72/831.0	1 PC	Plug-in connector female 36-pole		AMP	207019-1	UNE-24004-113
=A+C80-EX33 =A+C72/831.0	1 PC	Plug-in connector male 36-pole		AMP	207020-1	UNE-24004-114
=A+C80-EX33 =A+C72/831.0	23 PC	Contact bush Ø0.75-1.5		AMP	163083-8	UNE-24005-517
=A+C80-EX33 =A+C72/831.0	4 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+C80-EX33 =A+C72/831.0	1 M	Wire 1mm², blue		Bühler Uzwil AG	UNE-30013-101 101670	UNE-30013-101
=A+C80-EX60 =A+C72/637.0	1 PC	Plug-in connector female 36-pole		AMP	207019-1	UNE-24004-113
=A+C80-EX60 =A+C72/637.0	1 PC	Plug-in connector male 36-pole		AMP	207020-1	UNE-24004-114
=A+C80-EX60 =A+C72/637.0	15 PC	Contact bush Ø0.75-1.5		AMP	163083-8	UNE-24005-517
=A+C80-EX60 =A+C72/637.0	4 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+C80-EX60 =A+C72/637.0	1 M	Wire 1mm², blue		Bühler Uzwil AG	UNE-30013-101 101670	UNE-30013-101
=A+J1-ERC307Z1 =A+C72/307.2	1 PC	Diode CRD4-250		Allen-Bradley	199-MSMD1	UNE-28005-405
=A+J1-ERC307Z2 =A+C72/307.4	1 PC	Diode CRD4-250		Allen-Bradley	199-MSMD1	UNE-28005-405
=A+J1-EU295Z1 =A+C72/295.5	1 PC	Terminal box +J1	UNE-14281-032 (300x200x120)	Bühler Uzwil AG	GCEO-10606-001	GCEO-10606-001
=A+J1-EU295Z1 =A+C72/295.5	40 PC	3-conductor through terminal block		Wago	280-641	UNE-32201-101
=A+J1-EU295Z1 =A+C72/295.5	7 PC	3-conductor earth terminal block		Wago	280-637	UNE-32202-511

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J1-EU295Z2 =A+C72/295.5	1 M	Top rail hat EN 50 022 (35x7.5)		Bühler Uzwil AG	UNE-32209-080	UNE-32209-080
=A+J1-EU295Z3 =A+C72/295.5	6 PC	Cable screwing M8x1.25 Thread metric		Bühler Uzwil AG	UNE-32114-001	UNE-32114-001
=A+J1-EU295Z4 =A+C72/295.5	6 PC	Counter nut EMC M8x1.25 Thread metric		Bühler Uzwil AG	UNE-32114-221	UNE-32114-221
=A+J1-EU295Z5 =A+C72/295.5	15 PC	Cable screwing M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-004	UNE-32114-004
=A+J1-EU295Z6 =A+C72/295.5	15 PC	Counter nut EMC M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-224	UNE-32114-224
=A+J1-EU295Z7 =A+C72/295.5	4 PC	Lock nut M8		Bühler Uzwil AG	UNN-12016-005	UNN-12016-005
=A+J1-EU295Z8 =A+C72/295.5	4 PC	U-Washer M8	M8	Bühler Uzwil AG	UNN-14000-005	UNN-14000-005
=A+J2-ERC380Z1 =A+C72/380.2	1 PC	Diode CRD4-250		Allen-Bradley	199-MSMD1	UNE-28005-405
=A+J2-ERC380Z2 =A+C72/380.2	1 PC	Diode CRD4-250		Allen-Bradley	199-MSMD1	UNE-28005-405
=A+J2-EU296Z1 =A+C72/296.5	1 PC	Termina box +J2		Bühler Uzwil AG		GCES-10746-001
=A+J2-EU296Z1 =A+C72/296.5	47 PC	3-conductor through terminal block		Wago	280-641	UNE-32201-101
=A+J2-EU296Z1 =A+C72/296.5	4 PC	3-conductor earth terminal block		Wago	280-637	UNE-32202-511
=A+J2-EU296Z2 =A+C72/296.5	2 M	Top rail hat EN 50 022 (35x7.5)		Bühler Uzwil AG	UNE-32209-080	UNE-32209-080
=A+J2-EU296Z3 =A+C72/296.5	1 PC	Support		Bühler Uzwil AG	GCEU-10543-001	GCEU-10543-001
=A+J2-EU296Z4 =A+C72/296.5	4 PC	Hex cap screw M8x25		Bühler Uzwil AG	UNN-10008-216	UNN-10008-216
=A+J2-EU296Z5 =A+C72/296.5	4 PC	Lock nut M8		Bühler Uzwil AG	UNN-12016-005	UNN-12016-005
=A+J2-EU296Z6 =A+C72/296.5	12 PC	Cable screwing M8x1.25 Thread metric		Bühler Uzwil AG	UNE-32114-001	UNE-32114-001
=A+J2-EU296Z7 =A+C72/296.5	12 PC	Counter nut EMC M8x1.25 Thread metric		Bühler Uzwil AG	UNE-32114-221	UNE-32114-221
=A+J2-EU296Z8 =A+C72/296.5	12 PC	Cable screwing M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-004	UNE-32114-004

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J2-EU296Z9 =A+C72/296.5	12 PC	Counter nut EMC M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-224	UNE-32114-224
=A+J2-EU296Z10 =A+C72/296.5	2 PC	Connection fitting	M63x1.5	PMA	SVND-M638GT	UNE-32023-417
=A+J2-EU296Z11 =A+C72/296.5	2 PC	Counter nut M63x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-210	UNE-32114-210
=A+J2-EU296Z12 =A+C72/296.5	2 PC	Spacer bolt M6x30		Bühler Uzwil AG	UNN-10170-005	UNN-10170-005
=A+J2-EU296Z14 =A+C72/296.5	2 PC	Pipe clamp Ø16		Bühler Uzwil AG	UNN-22009-010	UNN-22009-010
=A+J2-EU296Z15 =A+C72/296.5	2 PC	End socket Ø25mm		Bühler Uzwil AG	UNE-32062-005	UNE-32062-005
=A+J2-EU296Z16 =A+C72/296.5	2 PC	Pipe clamp M25		Bühler Uzwil AG	UNE-32063-045	UNE-32063-045
=A+J2-EU296Z17 =A+C72/296.5	2 M	Hydraulic hose DN10		Bühler Uzwil AG	UXR-56207-020	UXR-56207-020
=A+J2-EU296Z18 =A+C72/296.5	1 M	Aluminium pipe Ø25mm		Bühler Uzwil AG	UNE-32060-045	UNE-32060-045
=A+J2-EU296Z20 =A+C72/296.5	1 PC	Counter nut M63x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-210	UNE-32114-210
=A+J2-EU296Z21 =A+C72/296.5	2 PC	Treat seal	M63x1.5	PMA	SVN4-M63	UNE-32023-448
=A+J3-ER398Z1 =A+C72/398.5	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810
=A+J3-ER401Z1 =A+C72/401.4	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810
=A+J3-ER401Z2 =A+C72/401.5	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810
=A+J3-ER404Z1 =A+C72/404.4	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810
=A+J3-ER404Z2 =A+C72/404.5	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810
=A+J3-ER407Z1 =A+C72/407.4	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810
=A+J3-ER407Z2 =A+C72/407.5	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810
=A+J3-ER410Z1 =A+C72/410.4	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J3-ER410Z2 =A+C72/410.5	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810
=A+J3-EU297Z1 =A+C72/297.5	1 PC	Terminal box +J3		Bühler Uzwil AG		GCEU-11946-001
=A+J3-EU297Z1 =A+C72/297.5	41 PC	3-conductor through terminal block		Wago	280-641	UNE-32201-101
=A+J3-EU297Z1 =A+C72/297.5	5 PC	3-conductor earth terminal block		Wago	280-637	UNE-32202-511
=A+J3-EU297Z2 =A+C72/297.5	1 M	Top rail hat EN 50 022 (35x7.5)		Bühler Uzwil AG	UNE-32209-080	UNE-32209-080
=A+J3-EU297Z3 =A+C72/297.5	2 PC	Cover plate		Bühler Uzwil AG	GDU-50056-010	GDU-50056-010
=A+J3-EU297Z4 =A+C72/297.5	1 PC	Support		Bühler Uzwil AG	GKU-30221-010	GKU-30221-010
=A+J3-EU297Z5 =A+C72/297.5	1 PC	Support		Bühler Uzwil AG	GKU-40111-010	GKU-40111-010
=A+J3-EU297Z6 =A+C72/297.5	1 M	Aluminium pipe Ø25mm		Bühler Uzwil AG	UNE-32060-045	UNE-32060-045
=A+J3-EU297Z7 =A+C72/297.5	10 PC	Cable screwing M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-004	UNE-32114-004
=A+J3-EU297Z8 =A+C72/297.5	11 PC	Counter nut EMC M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-224	UNE-32114-224
=A+J3-EU297Z9 =A+C72/297.5	5 PC	Flat rubber seal		Harting	09 30 006 0318	UNE-24013-523
=A+J3-EU297Z10 =A+C72/297.5	20 PC	Flat head screw M4x16		Bühler Uzwil AG	UNN-10112-652	UNN-10112-652
=A+J3-EU297Z11 =A+C72/297.5	20 PC	Lock nut M4		Bühler Uzwil AG	UNN-12016-002	UNN-12016-002
=A+J3-EU297Z12 =A+C72/297.5	10 PC	Flat head screw M3x10		Bühler Uzwil AG	UNN-10112-634	UNN-10112-634
=A+J3-EU297Z13 =A+C72/297.5	10 PC	Lock nut M3		Bühler Uzwil AG	UNN-12016-001	UNN-12016-001
=A+J3-EU297Z14 =A+C72/297.5	4 PC	Lock nut M8		Bühler Uzwil AG	UNN-12016-005	UNN-12016-005
=A+J3-EU297Z15 =A+C72/297.5	4 PC	Hex cap screw M8x25		Bühler Uzwil AG	UNN-10008-216	UNN-10008-216
=A+J3-EU297Z16 =A+C72/297.5	4 PC	Full dog point M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-254	UNE-32114-254

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J3-EU297Z17 =A+C72/297.5	2 PC	End socket Ø25mm		Bühler Uzwil AG	UNE-32062-005	UNE-32062-005
=A+J3-EU297Z18 =A+C72/297.5	2 PC	Pipe clamp M25		Bühler Uzwil AG	UNE-32063-045	UNE-32063-045
=A+J3-EU297Z19 =A+C72/297.5	2 PC	Spacer bolt M6x30		Bühler Uzwil AG	UNN-10170-005	UNN-10170-005
=A+J3-EU297Z20 =A+C72/297.5	2 PC	Connection fitting	M63x1.5	PMA	SVND-M638GT	UNE-32023-417
=A+J3-EU297Z21 =A+C72/297.5	2 PC	Counter nut M63x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-210	UNE-32114-210
=A+J3-EU297Z22 =A+C72/297.5	1 PCS	Multi cable screwing M16x1.5 2x D=3.5-5.0	M16x1.5	Bühler Uzwil AG	UNE-32114-064	UNE-32114-064
=A+J3-EU398Z1 =A+C72/398.2	1 PC	Male insert, Han 6E		Harting	09 33 006 2601	UNE-24013-521
=A+J3-EU398Z2 =A+C72/398.2	1 PC	Female insert, Han 6E		Harting	09 33 006 2701	UNE-24013-522
=A+J3-EU398Z3 =A+C72/398.2	1 PC	Socket shell Standard hoods/housings		Harting	19 30 006 1540	UNE-24013-551
=A+J3-EU398Z4 =A+C72/398.4	1 PCS	Attachment housing mit Metaldeckel und Metallbügel		Harting	09 30 006 0318.ML	UNE-24013-535
=A+J3-EU398Z5 =A+C72/398.4	4 PC	Cable screwing M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-004	UNE-32114-004
=A+J3-EU398Z6 =A+C72/398.4	1 ST	E jector		Bühler Uzwil AG	GKU-30177-059	GKU-30177-059
=A+J3-EU399Z1 =A+C72/399.6	5 PC	Cable screwing M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-004	UNE-32114-004
=A+J3-EU399Z2 =A+C72/399.6	5 PC	Counter nut EMC M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-224	UNE-32114-224
=A+J3-EU401Z1 =A+C72/401.6	1 PC	Male insert, Han 6E		Harting	09 33 006 2601	UNE-24013-521
=A+J3-EU401Z2 =A+C72/401.6	1 PC	Female insert, Han 6E		Harting	09 33 006 2701	UNE-24013-522
=A+J3-EU401Z3 =A+C72/401.6	1 PC	Socket shell Standard hoods/housings		Harting	19 30 006 1540	UNE-24013-551
=A+J3-EU401Z4 =A+C72/401.6	1 PCS	Attachment housing mit Metaldeckel und Metallbügel		Harting	09 30 006 0318.ML	UNE-24013-535
=A+J3-EU401Z5 =A+C72/401.6	4 PC	Cable screwing M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-004	UNE-32114-004

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J3-EU401Z6 =A+C72/401.6	1 PC	Label core pull M1		Bühler Uzwil AG	GKU-40207-010	GKU-40207-010
=A+J3-EU404Z1 =A+C72/404.6	1 PC	Male insert, Han 6E		Harting	09 33 006 2601	UNE-24013-521
=A+J3-EU404Z2 =A+C72/404.6	1 PC	Female insert, Han 6E		Harting	09 33 006 2701	UNE-24013-522
=A+J3-EU404Z3 =A+C72/404.6	1 PC	Socket shell Standard hoods/housings		Harting	19 30 006 1540	UNE-24013-551
=A+J3-EU404Z4 =A+C72/404.6	1 PCS	Attachment housing mit Metaldeckel und Metallbügel		Harting	09 30 006 0318.ML	UNE-24013-535
=A+J3-EU404Z5 =A+C72/404.6	4 PC	Cable screwing M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-004	UNE-32114-004
=A+J3-EU404Z6 =A+C72/404.6	1 PC	Label core pull M2		Bühler Uzwil AG	GKU-40207-020	GKU-40207-020
=A+J3-EU407Z1 =A+C72/407.6	1 PC	Male insert, Han 6E		Harting	09 33 006 2601	UNE-24013-521
=A+J3-EU407Z2 =A+C72/407.6	1 PC	Female insert, Han 6E		Harting	09 33 006 2701	UNE-24013-522
=A+J3-EU407Z3 =A+C72/407.6	1 PC	Socket shell Standard hoods/housings		Harting	19 30 006 1540	UNE-24013-551
=A+J3-EU407Z4 =A+C72/407.6	1 PCS	Attachment housing mit Metaldeckel und Metallbügel		Harting	09 30 006 0318.ML	UNE-24013-535
=A+J3-EU407Z5 =A+C72/407.6	1 PC	Cable screwing M20x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-005	UNE-32114-005
=A+J3-EU407Z6 =A+C72/407.6	1 PC	Label core pull M3		Bühler Uzwil AG	GKU-40207-030	GKU-40207-030
=A+J3-EU410Z1 =A+C72/410.6	1 PC	Male insert, Han 6E		Harting	09 33 006 2601	UNE-24013-521
=A+J3-EU410Z2 =A+C72/410.6	1 PC	Female insert, Han 6E		Harting	09 33 006 2701	UNE-24013-522
=A+J3-EU410Z3 =A+C72/410.6	1 PC	Socket shell Standard hoods/housings		Harting	19 30 006 1540	UNE-24013-551
=A+J3-EU410Z4 =A+C72/410.6	1 PCS	Attachment housing mit Metaldeckel und Metallbügel		Harting	09 30 006 0318.ML	UNE-24013-535
=A+J3-EU410Z5 =A+C72/410.6	1 PC	Cable screwing M20x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-005	UNE-32114-005
=A+J3-EU410Z6 =A+C72/410.6	1 ST	Label core pull M4		Bühler Uzwil AG	GKU-40207-040	GKU-40207-040

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J4-ER419Z1 =A+C72/419.4	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810
=A+J4-ER419Z2 =A+C72/419.5	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810
=A+J4-ER422Z1 =A+C72/422.4	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810
=A+J4-ER422Z2 =A+C72/422.5	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810
=A+J4-EU298Z1 =A+C72/298.5	1 PC	Terminal box	UNE-14281-032 (300x200x120)	Bühler Uzwil AG	GCEU-10691-001	GCEU-10691-001
=A+J4-EU298Z1 =A+C72/298.5	36 PC	3-conductor through terminal block		Wago	280-641	UNE-32201-101
=A+J4-EU298Z1 =A+C72/298.5	2 PC	3-conductor earth terminal block		Wago	280-637	UNE-32202-511
=A+J4-EU298Z2 =A+C72/298.5	1 M	Top rail hat EN 50 022 (35x7.5)		Bühler Uzwil AG	UNE-32209-080	UNE-32209-080
=A+J4-EU298Z4 =A+C72/298.5	1 PC	Support		Bühler Uzwil AG	GKU-40111-020	GKU-40111-020
=A+J4-EU298Z5 =A+C72/298.5	1 PC	Support		Bühler Uzwil AG	GCEU-10533-001	GCEU-10533-001
=A+J4-EU298Z6 =A+C72/298.5	3 PC	Cover plate		Bühler Uzwil AG	GDU-50056-010	GDU-50056-010
=A+J4-EU298Z7 =A+C72/298.5	1 PC	Sub-plates		Bühler Uzwil AG	GCEO-10561-001	GCEO-10561-001
=A+J4-EU298Z8 =A+C72/298.5	1 PCS	Hose gland M48x2 0°		Weyer	DPJ-38-M48	UYZ-00003-002
=A+J4-EU298Z9 =A+C72/298.5	1 PCS	Hose gland M48x2 90°		Weyer	DWJ-38-M48	UYZ-00003-003
=A+J4-EU298Z10 =A+C72/298.5	1 M	Aluminium pipe Ø25mm		Bühler Uzwil AG	UNE-32060-045	UNE-32060-045
=A+J4-EU298Z11 =A+C72/298.5	5 PC	Flat rubber seal		Harting	09 30 006 0318	UNE-24013-523
=A+J4-EU298Z12 =A+C72/298.5	20 PC	Flat head screw M4x16		Bühler Uzwil AG	UNN-10112-652	UNN-10112-652
=A+J4-EU298Z13 =A+C72/298.5	20 PC	Lock nut M4		Bühler Uzwil AG	UNN-12016-002	UNN-12016-002
=A+J4-EU298Z14 =A+C72/298.5	10 PC	Flat head screw M3x10		Bühler Uzwil AG	UNN-10112-634	UNN-10112-634

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J4-EU298Z15 =A+C72/298.5	10 PC	Lock nut M3		Bühler Uzwil AG	UNN-12016-001	UNN-12016-001
=A+J4-EU298Z16 =A+C72/298.5	4 PC	Hex cap screw M8x25		Bühler Uzwil AG	UNN-10008-216	UNN-10008-216
=A+J4-EU298Z17 =A+C72/298.5	4 PC	Lock nut M8		Bühler Uzwil AG	UNN-12016-005	UNN-12016-005
=A+J4-EU298Z18 =A+C72/298.5	1 PC	Pipe clamp Ø48		Bühler Uzwil AG	UNN-22013-148	UNN-22013-148
=A+J4-EU298Z19 =A+C72/298.5	2 PC	Spacer bolt M6x30		Bühler Uzwil AG	UNN-10170-005	UNN-10170-005
=A+J4-EU298Z20 =A+C72/298.5	4 PC	U-Washer M8	M8	Bühler Uzwil AG	UNN-14000-005	UNN-14000-005
=A+J4-EU298Z21 =A+C72/298.5	11 PC	Counter nut EMC M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-224	UNE-32114-224
=A+J4-EU298Z22 =A+C72/298.5	4 PC	Full dog point M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-254	UNE-32114-254
=A+J4-EU298Z23 =A+C72/298.5	2 PC	End socket Ø25mm		Bühler Uzwil AG	UNE-32062-005	UNE-32062-005
=A+J4-EU298Z24 =A+C72/298.5	2 PC	Pipe clamp M25		Bühler Uzwil AG	UNE-32063-045	UNE-32063-045
=A+J4-EU298Z25 =A+C72/298.5	11 PC	Cable screwing M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-004	UNE-32114-004
=A+J4-EU298Z26 =A+C72/298.5	2 PC	Connection fitting	M63x1.5	PMA	SVND-M638GT	UNE-32023-417
=A+J4-EU298Z30 =A+C72/298.5	1 PC	Sub-plates		Bühler Uzwil AG	GCEO-10562-001	GCEO-10562-001
=A+J4-EU392Z1 =A+C72/392.1	0 M	Metallic hose		AGRO AG	1080.101.014	UNE-32001-503
=A+J4-EU392Z1 =A+C72/392.1	2 PCS	Stabilizing sleeve		AGRO AG	5031.027.011	UNE-32001-523
=A+J4-EU392Z1 =A+C72/392.1	2 PC	Hose screw connector M16x1.5		AGRO AG	5010.337.016	UNE-32021-103
=A+J4-EU392Z1 =A+C72/392.1	2 PC	Counter nut EMC M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-224	UNE-32114-224
=A+J4-EU392Z1 =A+C72/392.1	1 PC	Reduction metric M20x1.5		Bühler Uzwil AG	UNE-32114-356	UNE-32114-356
=A+J4-EU392Z1 =A+C72/392.1	2 PC	Counter nut EMC M20x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-225	UNE-32114-225

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J4-EU392Z1 =A+C72/392.1	1 PC	Full dog point M20x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-255	UNE-32114-255
=A+J4-EU392Z1 =A+C72/392.1	2 PCS	Multi cable screwing M16x1.5 2x D=3.5-5.0	M16x1.5	Bühler Uzwil AG	UNE-32114-064	UNE-32114-064
=A+J4-EU419Z1 =A+C72/419.6	1 PC	Male insert, Han 6E		Harting	09 33 006 2601	UNE-24013-521
=A+J4-EU419Z2 =A+C72/419.6	1 PC	Female insert, Han 6E		Harting	09 33 006 2701	UNE-24013-522
=A+J4-EU419Z3 =A+C72/419.6	1 PC	Socket shell Standard hoods/housings		Harting	19 30 006 1540	UNE-24013-551
=A+J4-EU419Z4 =A+C72/419.6	1 PCS	Attachment housing mit Metaldeckel und Metallbügel		Harting	09 30 006 0318.ML	UNE-24013-535
=A+J4-EU419Z5 =A+C72/419.6	4 PC	Cable screwing M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-004	UNE-32114-004
=A+J4-EU419Z6 =A+C72/419.6	1 PC	Label core pull F1		Bühler Uzwil AG	GKU-40207-110	GKU-40207-110
=A+J4-EU422Z1 =A+C72/422.6	1 PC	Male insert, Han 6E		Harting	09 33 006 2601	UNE-24013-521
=A+J4-EU422Z2 =A+C72/422.6	1 PC	Female insert, Han 6E		Harting	09 33 006 2701	UNE-24013-522
=A+J4-EU422Z3 =A+C72/422.6	1 PC	Socket shell Standard hoods/housings		Harting	19 30 006 1540	UNE-24013-551
=A+J4-EU422Z4 =A+C72/422.6	1 PCS	Attachment housing mit Metaldeckel und Metallbügel		Harting	09 30 006 0318.ML	UNE-24013-535
=A+J4-EU422Z5 =A+C72/422.6	4 PC	Cable screwing M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-004	UNE-32114-004
=A+J4-EU422Z6 =A+C72/422.6	1 PC	Label core pull F2		Bühler Uzwil AG	GKU-40207-120	GKU-40207-120
=A+J5-EK439 =A+C72/439.6	1 PC	Relay	24V	Phoenix Contact	2966472	UXE-28080-221
=A+J5-ER435 =A+C72/435.4	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-820	EKB-95089-820
=A+J5-ERC439.1 =A+C72/439.4	1 PC	Diode CRD4-250		Allen-Bradley	199-MSMD1	UNE-28005-405
=A+J5-ERC439.2 =A+C72/439.6	1 PC	Diode CRD4-250		Allen-Bradley	199-MSMD1	UNE-28005-405
=A+J5-ERC439.3 =A+C72/439.8	1 PC	Diode CRD4-250		Allen-Bradley	199-MSMD1	UNE-28005-405

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J5-EU299Z1 =A+C72/299.5	1 PC	Terminal box	UNE-14283-041 (600x300x155)	Bühler Uzwil AG	GCAR-00002-970	GCAR-00002-970
=A+J5-EU299Z1 =A+C72/299.5	69 PC	3-conductor through terminal block		Wago	280-641	UNE-32201-101
=A+J5-EU299Z1 =A+C72/299.5	9 PC	3-conductor earth terminal block		Wago	280-637	UNE-32202-511
=A+J5-EU299Z2 =A+C72/299.5	1 M	Top rail hat EN 50 022 (35x7.5)		Bühler Uzwil AG	UNE-32209-080	UNE-32209-080
=A+J5-EU299Z3 =A+C72/299.5	1 PC	Seals		Bühler Uzwil AG	GKO-50174-010	GKO-50174-010
=A+J5-EU299Z4 =A+C72/299.5	1 PC	Support		Bühler Uzwil AG	GCEU-10129-001	GCEU-10129-001
=A+J5-EU299Z5 =A+C72/299.5	1 PC	Support		Bühler Uzwil AG	GCEU-10500-001	GCEU-10500-001
=A+J5-EU299Z7 =A+C72/299.5	1 PC	Seals		Bühler Uzwil AG	GFM-50058-010	GFM-50058-010
=A+J5-EU299Z8 =A+C72/299.5	1 PC	Cover plate		Bühler Uzwil AG	GND-40805-010	GND-40805-010
=A+J5-EU299Z9 =A+C72/299.5	1 PCS	Hose gland M48x2 0°		Weyer	DPJ-38-M48	UYZ-00003-002
=A+J5-EU299Z10 =A+C72/299.5	1 PCS	Hose gland M48x2 90°		Weyer	DWJ-38-M48	UYZ-00003-003
=A+J5-EU299Z12 =A+C72/299.5	4 PC	Vibration damper		Bühler Uzwil AG	UNN-48124-052	UNN-48124-052
=A+J5-EU299Z13 =A+C72/299.5	12 PC	Hex cap screw M10x16		Bühler Uzwil AG	UNN-10008-274	UNN-10008-274
=A+J5-EU299Z14 =A+C72/299.5	8 PC	Lock nut M10		Bühler Uzwil AG	UNN-12016-006	UNN-12016-006
=A+J5-EU299Z15 =A+C72/299.5	2 PC	Pipe clamp Ø25		Bühler Uzwil AG	UNN-22013-025	UNN-22013-025
=A+J5-EU299Z16 =A+C72/299.5	2 M	Aluminium pipe Ø25mm		Bühler Uzwil AG	UNE-32060-045	UNE-32060-045
=A+J5-EU299Z17 =A+C72/299.5	2 PC	End socket Ø25mm		Bühler Uzwil AG	UNE-32062-005	UNE-32062-005
=A+J5-EU299Z18 =A+C72/299.5	16 PC	Hex cap screw M6x16		Bühler Uzwil AG	UNN-10008-152	UNN-10008-152
=A+J5-EU299Z19 =A+C72/299.5	14 PC	Lock nut M6		Bühler Uzwil AG	UNN-12016-004	UNN-12016-004

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J5-EU299Z20 =A+C72/299.5	5 PC	Full dog point M12x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-251	UNE-32114-251
=A+J5-EU299Z21 =A+C72/299.5	1 PC	Cable screwing M25x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-006	UNE-32114-006
=A+J5-EU299Z22 =A+C72/299.5	14 PC	Cable screwing M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-004	UNE-32114-004
=A+J5-EU299Z23 =A+C72/299.5	1 PC	Counter nut EMC M20x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-225	UNE-32114-225
=A+J5-EU299Z24 =A+C72/299.5	17 PC	Full dog point M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-254	UNE-32114-254
=A+J5-EU299Z25 =A+C72/299.5	17 PC	Counter nut EMC M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-224	UNE-32114-224
=A+J5-EU299Z26 =A+C72/299.5	6 PC	Stabilizing sleeve		AGRO AG	5031.037.009	UNE-32001-422
=A+J5-EU299Z27 =A+C72/299.5	8 PC	Hose screw connector M12x1.5		AGRO AG	5010.337.012	UNE-32021-102
=A+J5-EU299Z28 =A+C72/299.5	6 PC	Reduction metric M16x1.5		Bühler Uzwil AG	UNE-32114-354	UNE-32114-354
=A+J5-EU299Z29 =A+C72/299.5	1 PC	Earthing strap 16mm2		Bühler Uzwil AG	UNE-30920-001	UNE-30920-001
=A+J5-EU299Z30 =A+C72/299.7	2 PC	Pipe clamp Ø14		Bühler Uzwil AG	UNE-32096-323	UNE-32096-323
=A+J5-EU299Z31 =A+C72/299.7	2 M	Wire 1mm², blue		Bühler Uzwil AG	UNE-30013-101 101670	UNE-30013-101
=A+J5-EU299Z32 =A+C72/299.7	2 M	Wire 2.5mm², green-yellow		Bühler Uzwil AG	UNE-30013-023 101694	UNE-30013-023
=A+J5-EU299Z33 =A+C72/299.7	1 PC	Cover		Bühler Uzwil AG	GCAR-00002-650	GCAR-00002-650
=A+J5-EU299Z34 =A+C72/299.7	4 PC	Hex cap screw M10x16		Bühler Uzwil AG	UNN-10008-274	UNN-10008-274
=A+J5-EU299Z35 =A+C72/299.7	1 PCS	Hose gland M48x2 0°		Weyer	DPJ-38-M48	UYZ-00003-002
=A+J5-EU299Z36 =A+C72/299.7	1 PCS	Hose gland M48x2 45°		Weyer	DNJ-38-M48	UYZ-00003-001
=A+J5-EU299Z37 =A+C72/299.7	10 M	Metallic hose Black		AGRO AG	2140.801.010	UNE-32001-402
=A+J5-EU299Z38 =A+C72/299.7	1 M	Shrink sleeve ATUM 19/6		Bühler Uzwil AG	UNE-32000-145	UNE-32000-145

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzhen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J5-EU299Z39 =A+C72/299.7	1 M	Cable protective hose		Bühler Uzwil AG	TBOR2000-15	UNE-32003-011
=A+J5-EU299Z40 =A+C72/299.7	1 M	Wiring channel 60x40mm		Bühler Uzwil AG	UXE-32213-011	UXE-32213-011
=A+J5-EU299Z41 =A+C72/299.7	1 PC	Sub-plates		Bühler Uzwil AG	GCEO-10561-001	GCEO-10561-001
=A+J5-EU299Z42 =A+C72/299.7	1 PC	Full dog point M20x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-255	UNE-32114-255
=A+J5-EU299Z43 =A+C72/299.7	1 M	Cable protective hose		Bühler Uzwil AG	TBOR2000-15	UNE-32003-011
=A+J5-EU299Z50 =A+C72/299.7	1 PC	Sub-plates		Bühler Uzwil AG	GCEO-10562-001	GCEO-10562-001
=A+J5-EU440Z1 =A+C72/440.3	1 PC	Quick acting electronic control		Bühler Uzwil AG	EKP-84220-810	EKP-84220-810
=A+J7.1-ER352Z1 =A+C72/352.8	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810
=A+J7.1-EU352Z1 =A+C72/352.8	1 PC	Terminal box BHT 200x200x120		Rittal	KL1502.510	UNE-14281-031
=A+J7.1-EU352Z1 =A+C72/352.8	1 PC	Cable screwing M25x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-006	UNE-32114-006
=A+J7.1-EU352Z1 =A+C72/352.8	1 PC	Counter nut EMC M25x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-226	UNE-32114-226
=A+J7.1-EU352Z1 =A+C72/352.8	4 PC	Cable screwing M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-004	UNE-32114-004
=A+J7.1-EU352Z1 =A+C72/352.8	5 PC	Counter nut EMC M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-224	UNE-32114-224
=A+J7.1-EU352Z1 =A+C72/352.8	1 PC	Full dog point M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-254	UNE-32114-254
=A+J7.1-EU352Z1 =A+C72/352.8	4 M	PVC-Instrument cable grey Conductors coloured		Helukabel	11051 100051	UNE-30100-053
=A+J7.1-EU352Z1 =A+C72/352.8	1 M	Top rail hat EN 50 022 (35x7.5)		Bühler Uzwil AG	UNE-32209-080	UNE-32209-080
=A+J7.1-EU352Z1 =A+C72/352.8	2 PC	Screwless end stop		Wago	249-116	UNE-32209-181
=A+J7.1-EU352Z1 =A+C72/352.8	20 PC	Designation card white		Wago	209-501	UNE-32118-001
=A+J7.1-EU352Z1 =A+C72/352.8	2 PC	3-conductor earth terminal block		Wago	280-637	UNE-32202-511

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J7.1-EU352Z1 =A+C72/352.8	1 M	Wire 1mm², green-yellow		Bühler Uzwil AG	UNE-30013-021 101322	UNE-30013-021
=A+J7.1-EU352Z1 =A+C72/352.8	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810
=A+J7.1-EU352Z1 =A+C72/352.8	1 M	Wire 1mm², blue		Bühler Uzwil AG	UNE-30013-101 101670	UNE-30013-101
=A+J7.1-EU352Z1 =A+C72/352.8	3 PC	Cable screwing M20x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-005	UNE-32114-005
=A+J7.1-EU352Z1 =A+C72/352.8	4 M	PVC-Cable grey Conductors numbered		Helukabel	10068 100410	UNE-30500-067
=A+J7.2-ER362Z1 =A+C72/362.8	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810
=A+J7.2-EU361Z1 =A+C72/361.8	2 M	PVC-Cable grey Conductors numbered	8x1mm2	Helukabel Lütze	10070 100411	UNE-30500-068
=A+J7.2-EU362Z1 =A+C72/362.8	1 PC	Terminal box BHT 200x200x120		Rittal	KL1502.510	UNE-14281-031
=A+J7.2-EU362Z1 =A+C72/362.8	1 PC	Cable screwing M25x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-006	UNE-32114-006
=A+J7.2-EU362Z1 =A+C72/362.8	1 PC	Counter nut EMC M25x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-226	UNE-32114-226
=A+J7.2-EU362Z1 =A+C72/362.8	4 PC	Cable screwing M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-004	UNE-32114-004
=A+J7.2-EU362Z1 =A+C72/362.8	5 PC	Counter nut EMC M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-224	UNE-32114-224
=A+J7.2-EU362Z1 =A+C72/362.8	1 PC	Full dog point M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-254	UNE-32114-254
=A+J7.2-EU362Z1 =A+C72/362.8	4 M	PVC-Instrument cable grey Conductors coloured		Helukabel	11051 100051	UNE-30100-053
=A+J7.2-EU362Z1 =A+C72/362.8	1 M	Top rail hat EN 50 022 (35x7.5)		Bühler Uzwil AG	UNE-32209-080	UNE-32209-080
=A+J7.2-EU362Z1 =A+C72/362.8	2 PC	Screwless end stop		Wago	249-116	UNE-32209-181
=A+J7.2-EU362Z1 =A+C72/362.8	20 PC	Designation card white		Wago	209-501	UNE-32118-001
=A+J7.2-EU362Z1 =A+C72/362.8	2 PC	3-conductor earth terminal block		Wago	280-637	UNE-32202-511
=A+J7.2-EU362Z1 =A+C72/362.8	1 M	Wire 1mm², green-yellow		Bühler Uzwil AG	UNE-30013-021 101322	UNE-30013-021

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J7.2-EU362Z1 =A+C72/362.8	1 PC	Resistor		Bühler Uzwil AG	EKB-95089-810	EKB-95089-810
=A+J7.2-EU362Z1 =A+C72/362.8	1 M	Wire 1mm², blue		Bühler Uzwil AG	UNE-30013-101 101670	UNE-30013-101
=A+J7.2-EU362Z1 =A+C72/362.8	3 PC	Cable screwing M20x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-005	UNE-32114-005
=A+J7.2-EU362Z1 =A+C72/362.8	4 M	PVC-Cable grey Conductors numbered		Helukabel	10068 100410	UNE-30500-067
=A+J49.1-ES1 =A+C72/367.5	1 PC	Mounting/lamp holder LED-Module green, 24V/18mA		Schneider Electric AG	ZB4-BVB3	UNE-24445-102
=A+J49.1-ES1 =A+C72/367.5	1 PC	Auxiliary switch block		Schneider Electric AG	ZBE-101	UNE-24445-301
=A+J49.1-ES1 =A+C72/367.5	1 PC	Front element		Schneider Electric AG	ZB4-BW333	UNE-24445-032
=A+J49.1-ES5 =A+C72/367.1	1 PC	Clamping flange/auxiliary contact block		Schneider Electric AG	ZB4-BZ101	UNE-24445-201
=A+J49.1-ES5 =A+C72/367.1	1 PC	Front element		Schneider Electric AG	ZB4-BA2	UNE-24445-022
=A+J49.1-ES13 =A+C72/367.7	1 PC	Front element Emergency off red Ø40		Schneider Electric AG	ZB4-BS844	UNE-24445-171
=A+J49.1-ES13 =A+C72/367.7	1 PC	Clamping flange/auxiliary contact block Double contact block 1 NO/1 NC		Schneider Electric AG	ZB4-BZ105	UNE-24445-205
=A+J49.1-ES13 =A+C72/367.7	1 PC	Auxiliary switch block 1 Opener		Schneider Electric AG	ZBE-102	UNE-24445-302
=A+J49.1-ES13 =A+C72/367.7	1 PC	Unterlegeschild Emergency off yellow Ø60		Schneider Electric AG	ZBY-9101	UNE-24445-541
=A+J49.1-ES17 =A+C72/367.7	1 PC	Front element Emergency off red Ø40		Schneider Electric AG	ZB4-BS844	UNE-24445-171
=A+J49.1-ES17 =A+C72/367.7	1 PC	Clamping flange/auxiliary contact block Double contact block 1 NO/1 NC		Schneider Electric AG	ZB4-BZ105	UNE-24445-205
=A+J49.1-ES17 =A+C72/367.7	1 PC	Auxiliary switch block 1 Opener		Schneider Electric AG	ZBE-102	UNE-24445-302
=A+J49.1-ES17 =A+C72/367.7	1 PC	Unterlegeschild Emergency off yellow Ø60		Schneider Electric AG	ZBY-9101	UNE-24445-541
=A+J49.1-EU1 =A+C72/367.7	1 PC	Terminal box BHT 300x200x120		Rittal	KL1503.510	UNE-14281-032
=A+J49.1-EU2 =A+C72/367.7	2 PC	Cable screwing M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-004	UNE-32114-004

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J49.1-EU3 =A+C72/367.7	1 PC	Cable screwing M20x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-005	UNE-32114-005
=A+J49.1-EU4 =A+C72/367.7	2 PC	Counter nut EMC M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-224	UNE-32114-224
=A+J49.1-EU5 =A+C72/367.7	1 PC	Counter nut EMC M20x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-225	UNE-32114-225
=A+J49.1-EU6 =A+C72/367.7	1 PC	Cable shoe isolated		Bühler Uzwil AG	UNE-32106-004	UNE-32106-004
=A+J49.1-EU7 =A+C72/367.7	1 M	Top rail hat EN 50 022 (35x7.5)		Bühler Uzwil AG	UNE-32209-080	UNE-32209-080
=A+J49.1-EU8 =A+C72/367.7	1 M	Wire 1mm², blue		Bühler Uzwil AG	UNE-30013-101 101670	UNE-30013-101
=A+J49.1-EU9 =A+C72/367.7	1 PC	Plug-in connector male 36-pole		AMP	207020-1	UNE-24004-114
=A+J49.1-EU10 =A+C72/367.7	15 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+J49.1-EU11 =A+C72/367.7	1 PC	ECO+J49.1 Carving nameplate frame		Bühler Shenzen	ECO-FXX-001	ECO-FXX-001
=A+J49.1-EU12 =A+C72/367.7	1 PC	ECO+J49.1 Carving nameplate frame		Bühler Shenzen	ECO-FXX-002	ECO-FXX-002
=A+J49.1-EU13 =A+C72/367.7	1 PC	Plate		Bühler Uzwil AG	GCAP-10083-001	GCAP-10083-001
=A+J49.1-EU14 =A+C72/367.7	1 PC	Plate		Bühler Uzwil AG	GCAP-10084-001	GCAP-10084-001
=A+J61-EH3 =A+C72/209.7	1 PC	Mounting/lamp holder LED-Module green, 24V/18mA		Schneider Electric AG	ZB4-BVB3	UNE-24445-102
=A+J61-EH3 =A+C72/209.7	1 PC	Front element Indicator light green		Schneider Electric AG	ZB4-BV033	UNE-24445-002
=A+J61-EH12 =A+C72/208.2	1 PC	Mounting/lamp holder		Schneider Electric AG	ZB4-BVB6	UNE-24445-105
=A+J61-EH12 =A+C72/208.2	1 PC	Front element		Schneider Electric AG	ZB4-BV063	UNE-24445-005
=A+J61-ES2 =A+C72/212.1	1 PC	Frontelement Not-Aus rot Ø40		Schneider Electric AG	ZB4-BS944	UNE-24445-175
=A+J61-ES2 =A+C72/212.1	1 PC	Clamping flange/auxiliary contact block Double contact block 1 NO/1 NC		Schneider Electric AG	ZB4-BZ105	UNE-24445-205
=A+J61-ES2 =A+C72/212.1	1 PC	Auxiliary switch block 1 Opener		Schneider Electric AG	ZBE-102	UNE-24445-302

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J61-ES2 =A+C72/212.1	1 PC	Unterlegeschild Emergency off yellow Ø60		Schneider Electric AG	ZBY-9101	UNE-24445-541
=A+J61-ES4 =A+C72/213.5	1 PC	Clamping flange/auxiliary contact block Double contact block 1 NO/1 NC		Schneider Electric AG	ZB4-BZ105	UNE-24445-205
=A+J61-ES4 =A+C72/213.5	1 PC	Front element Green button Ø40		Schneider Electric AG	ZB4-BC3	UNE-24445-642
=A+J61-ES4 =A+C72/213.5	1 PC	Auxiliary switch block 1 Opener		Schneider Electric AG	ZBE-102	UNE-24445-302
=A+J61-ES5 =A+C72/213.7	1 PC	Clamping flange/auxiliary contact block Double contact block 1 NO/1 NC		Schneider Electric AG	ZB4-BZ105	UNE-24445-205
=A+J61-ES5 =A+C72/213.7	1 PC	Front element Green button Ø40		Schneider Electric AG	ZB4-BC3	UNE-24445-642
=A+J61-ES5 =A+C72/213.7	1 PC	Auxiliary switch block 1 Opener		Schneider Electric AG	ZBE-102	UNE-24445-302
=A+J61-ES6 =A+C72/210.6	1 PC	Clamping flange/auxiliary contact block		Schneider Electric AG	ZB4-BZ101	UNE-24445-201
=A+J61-ES6 =A+C72/210.6	1 PC	Front element		Schneider Electric AG	ZB4-BA2	UNE-24445-022
=A+J61-ES10 =A+C72/210.1	1 PC	Clamping flange/auxiliary contact block		Schneider Electric AG	ZB4-BZ101	UNE-24445-201
=A+J61-ES10 =A+C72/210.1	1 PC	Front element Knob switch groping- detent-groping		Schneider Electric AG	ZB4-BD5	UNE-24445-314
=A+J61-ES10 =A+C72/210.1	1 PC	Auxiliary switch block		Schneider Electric AG	ZBE-101	UNE-24445-301
=A+J61-ES11 =A+C72/210.4	1 PC	Clamping flange/auxiliary contact block		Schneider Electric AG	ZB4-BZ101	UNE-24445-201
=A+J61-ES11 =A+C72/210.4	1 PC	Front element Knob switch groping- detent-groping		Schneider Electric AG	ZB4-BD5	UNE-24445-314
=A+J61-ES11 =A+C72/210.4	1 PC	Auxiliary switch block		Schneider Electric AG	ZBE-101	UNE-24445-301
=A+J61-ES12 =A+C72/210.8	1 PC	Front element Black button Ø60		Schneider Electric AG	ZB4-BR2	UNE-24445-644
=A+J61-ES12 =A+C72/210.8	1 PC	Clamping flange/auxiliary contact block		Schneider Electric AG	ZB4-BZ101	UNE-24445-201
=A+J61-ES13 =A+C72/216.3	1 PC	Clamping flange/auxiliary contact block		Schneider Electric AG	ZB4-BZ101	UNE-24445-201
=A+J61-ES13 =A+C72/216.3	1 PC	Front element		Schneider Electric AG	ZB4-BA2	UNE-24445-022

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J61-ES45 =A+C72/205.2	1 PC	Clamping flange/auxiliary contact block		Schneider Electric AG	ZB4-BZ101	UNE-24445-201
=A+J61-ES45 =A+C72/205.2	1 PC	Front element Knob switch detent-detent-detent		Schneider Electric AG	ZB4-BD3	UNE-24445-313
=A+J61-ES59 =A+C72/209.1	1 PC	Mounting/lamp holder/auxiliary switch block		Schneider Electric AG	ZB4-BW0B11	UNE-24445-211
=A+J61-ES59 =A+C72/209.1	1 PC	Front element		Schneider Electric AG	ZB4-BW313	UNE-24445-031
=A+J61-ES63 =A+C72/208.3	1 PC	Front element		Schneider Electric AG	ZB4-BC6	UNE-24445-643
=A+J61-ES63 =A+C72/208.3	1 PC	Clamping flange/auxiliary contact block		Schneider Electric AG	ZB4-BZ101	UNE-24445-201
=A+J61-ES88 =A+C72/215.3	1 PC	Clamping flange/auxiliary contact block		Schneider Electric AG	ZB4-BZ101	UNE-24445-201
=A+J61-ES88 =A+C72/215.3	1 PC	Front element		Schneider Electric AG	ZB4-BA2	UNE-24445-022
=A+J61-ES90 =A+C72/209.4	1 PC	Front element		Schneider Electric AG	ZB4-BA2	UNE-24445-022
=A+J61-ES90 =A+C72/209.4	1 PC	Clamping flange/auxiliary contact block		Schneider Electric AG	ZB4-BZ101	UNE-24445-201
=A+J61-ES91 =A+C72/209.5	1 PC	Clamping flange/auxiliary contact block		Schneider Electric AG	ZB4-BZ101	UNE-24445-201
=A+J61-ES91 =A+C72/209.5	1 PC	Front element Knob switch groping- detent-groping		Schneider Electric AG	ZB4-BD5	UNE-24445-314
=A+J61-ES91 =A+C72/209.5	1 PC	Auxiliary switch block		Schneider Electric AG	ZBE-101	UNE-24445-301
=A+J61-ES94 =A+C72/214.2	1 PC	Clamping flange/auxiliary contact block Double contact block 2 NO		Schneider Electric AG	ZB4-BZ103	UNE-24445-203
=A+J61-ES94 =A+C72/214.2	1 PC	Front element		Schneider Electric AG	ZB4-BG2	UNE-24445-361
=A+J61-EU1 =A+C72/200.0	1 PC	Terminal box control column		Bühler Uzwil AG	GCEO-10607-001	GCEO-10607-001
=A+J61-EU2 =A+C72/200.0	1 PC	Front cover control column		Bühler Uzwil AG	GCEO-10597-001	GCEO-10597-001
=A+J61-EU3 =A+C72/200.0	1 PC	Mounting frame		Icotek	CF8	UNE-32030-012
=A+J61-EU4 =A+C72/200.0	2 PC	Module 2x Ø3.5 - 16.5		Icotek	CM20W40	UNE-32030-022

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J61-EU5 =A+C72/200.0	2 PC	Sub-plates		Bühler Uzwil AG	GCEO-10562-001	GCEO-10562-001
=A+J61-EU6 =A+C72/200.0	5 PC	Cover		Bühler Uzwil AG	GCEO-10563-001	GCEO-10563-001
=A+J61-EU8 =A+C72/200.0	1 PC	Support		Bühler Uzwil AG	GCEU-10507-001	GCEU-10507-001
=A+J61-EU9 =A+C72/200.0	2 PC	Hose screw connector	M63x1.5	AGRO AG	X5010.63.56	UNE-32020-209
=A+J61-EU10 =A+C72/200.0	2 M	Metallic hose		AGRO AG	1080.101.051	UNE-32001-509
=A+J61-EU11 =A+C72/200.0	1 PC	Counter nut M63x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-210	UNE-32114-210
=A+J61-EU20 =A+C72/200.0	1 PC	Protective foil 8.4"		KEBA AG	xxxxxx	UND-75500-124
=A+J61-EX61.1 =A+C72/200.1	1 PC	Plug-in connector female 12-pole		AMP	207017-1	UNE-24004-107
=A+J61-EX61.1 =A+C72/200.1	1 PC	Plug-in connector male 12-pole		AMP	207018-1	UNE-24004-108
=A+J61-EX61.1 =A+C72/200.1	12 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+J61-EX61.2 =A+C72/200.4	1 PC	Plug-in connector female 12-pole		AMP	207017-1	UNE-24004-107
=A+J61-EX61.2 =A+C72/200.4	1 PC	Plug-in connector male 12-pole		AMP	207018-1	UNE-24004-108
=A+J61-EX61.2 =A+C72/200.4	12 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+J61-OP430 =A+C72/201.1	1 PC	Touchpanel DVI/RS485		KEBA AG	81976	UXE-36957-262
=A+J61-OP430 =A+C72/201.1	1 PC	Connector kit		KEBA AG	72236	UXE-36957-297
=A+J61-OP430 =A+C72/201.1	1 PC	Video cable LVDS 10m		KEBA AG	69220	UXE-36957-310
=A+49-EB1.1 =A+C72/367.4	1 PC	Position switch		Elan Schaltelemente GmbH	1344205	UNE-26080-002
=A+49-EB1.1 =A+C72/367.4	1 PC	Operating key		Elan Schaltelemente GmbH	1349000	UNE-26080-011
=A+49-EB50.1 =A+C72/637.4	1 PC	Position switch		Elan Schaltelemente GmbH	1344205	UNE-26080-002

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+49-EB50.1 =A+C72/637.4	1 PC	Operating key		Elan Schaltelemente GmbH	1349000	UNE-26080-011
=A+49-EY1 =A+C72/367.2	1 PC	Safety position switch with locking magnet		Elan Schaltelemente GmbH	101915024	UNE-26085-001
=A+49-EY50 =A+C72/637.2	1 PC	Safety position switch with locking magnet		Elan Schaltelemente GmbH	101915024	UNE-26085-001
=A+J49.3-ES51 =A+C72/637.5	1 PC	Mounting/lamp holder LED-Module green, 24V/18mA		Schneider Electric AG	ZB4-BVB3	UNE-24445-102
=A+J49.3-ES51 =A+C72/637.5	1 PC	Auxiliary switch block		Schneider Electric AG	ZBE-101	UNE-24445-301
=A+J49.3-ES51 =A+C72/637.5	1 PC	Front element		Schneider Electric AG	ZB4-BW333	UNE-24445-032
=A+J49.3-ES53 =A+C72/637.1	1 PC	Clamping flange/auxiliary contact block		Schneider Electric AG	ZB4-BZ101	UNE-24445-201
=A+J49.3-ES53 =A+C72/637.1	1 PC	Front element		Schneider Electric AG	ZB4-BA2	UNE-24445-022
=A+J49.3-ES57 =A+C72/637.7	1 PC	Front element Emergency off red Ø40		Schneider Electric AG	ZB4-BS844	UNE-24445-171
=A+J49.3-ES57 =A+C72/637.7	1 PC	Clamping flange/auxiliary contact block Double contact block 1 NO/1 NC		Schneider Electric AG	ZB4-BZ105	UNE-24445-205
=A+J49.3-ES57 =A+C72/637.7	1 PC	Auxiliary switch block 1 Opener		Schneider Electric AG	ZBE-102	UNE-24445-302
=A+J49.3-ES57 =A+C72/637.7	1 PC	Unterlegeschild Emergency off yellow Ø60		Schneider Electric AG	ZBY-9101	UNE-24445-541
=A+J49.3-ES59 =A+C72/637.7	1 PC	Front element Emergency off red Ø40		Schneider Electric AG	ZB4-BS844	UNE-24445-171
=A+J49.3-ES59 =A+C72/637.7	1 PC	Clamping flange/auxiliary contact block Double contact block 1 NO/1 NC		Schneider Electric AG	ZB4-BZ105	UNE-24445-205
=A+J49.3-ES59 =A+C72/637.7	1 PC	Auxiliary switch block 1 Opener		Schneider Electric AG	ZBE-102	UNE-24445-302
=A+J49.3-ES59 =A+C72/637.7	1 PC	Unterlegeschild Emergency off yellow Ø60		Schneider Electric AG	ZBY-9101	UNE-24445-541
=A+J49.3-EU1 =A+C72/637.7	1 PC	Terminal box BHT 300x200x120		Rittal	KL1503.510	UNE-14281-032
=A+J49.3-EU2 =A+C72/637.7	2 PC	Cable screwing M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-004	UNE-32114-004
=A+J49.3-EU3 =A+C72/637.7	1 PC	Cable screwing M20x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-005	UNE-32114-005

BDAG_F01_004_Eco

Parts list

BUZ = Bühler Uzwil
BSHE = Bühler Shenzen

Device Designation Placement	Quantity	Designation	Technical data	BUZ Supplier BSHE Supplier	BUZ Order number BSHE Order number	BUZ Part number BSHE Part number
=A+J49.3-EU4 =A+C72/637.7	2 PC	Counter nut EMC M16x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-224	UNE-32114-224
=A+J49.3-EU5 =A+C72/637.7	1 PC	Counter nut EMC M20x1.5 Thread metric		Bühler Uzwil AG	UNE-32114-225	UNE-32114-225
=A+J49.3-EU6 =A+C72/637.7	1 PC	Cable shoe isolated		Bühler Uzwil AG	UNE-32106-004	UNE-32106-004
=A+J49.3-EU7 =A+C72/637.7	1 M	Top rail hat EN 50 022 (35x7.5)		Bühler Uzwil AG	UNE-32209-080	UNE-32209-080
=A+J49.3-EU8 =A+C72/637.7	1 M	Wire 1mm², blue		Bühler Uzwil AG	UNE-30013-101 101670	UNE-30013-101
=A+J49.3-EU9 =A+C72/637.7	1 PC	Plug-in connector male 36-pole		AMP	207020-1	UNE-24004-114
=A+J49.3-EU10 =A+C72/637.7	15 PC	Contact pin Ø0.75-1.5		AMP	163081-8	UNE-24005-516
=A+J49.3-EU11 =A+C72/637.7	1 PC	ECO+J49.3 Carving nameplate frame		Bühler Shenzen	ECO-FXX-003	ECO-FXX-003
=A+J49.3-EU13 =A+C72/637.7	1 PC	Plate		Bühler Uzwil AG	GCAP-10083-001	GCAP-10083-001
=A+J49.3-EU14 =A+C72/637.7	1 PC	Plate		Bühler Uzwil AG	GCAP-10084-001	GCAP-10084-001

BDAG_F01_004_Eco