



Adjustable Light Installation Guide

Version History

Version	Revised By	Changes	Date
1.0	Lee Kaufman	Initial Version	2/1/2018
1.1	Lee Kaufman	Updated for 2 Light Types	3/11/2018

1. Overview


This guide will detail the steps needed to initially configure and test the new wattage and color tunable LED lights.

Please refer to Subway installation guide for remaining details.


2. Set 2x2 Light Fixture Wattage

- 1) Set **All lights to 30W** using the “Watt Tunable” switch or dip switches (depending on light type) shown below on the back of the light. This should be the same for all lights in the store.

Light Type A

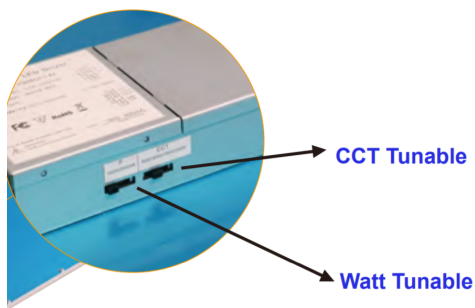

Light Type B

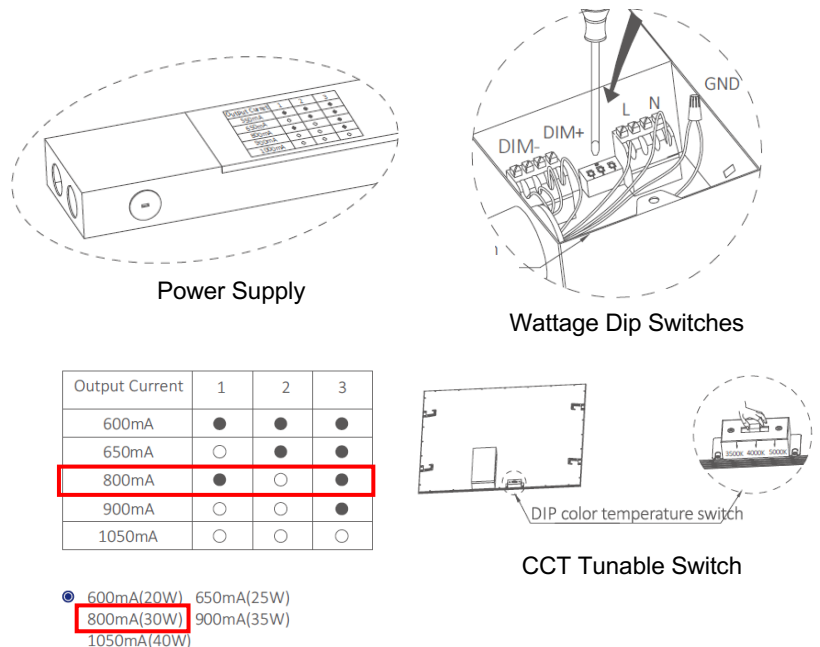

Output Current	1	2	3
600mA	●	●	●
650mA	○	●	●
800mA	●	○	●
900mA	○	○	●
1050mA	○	○	○

● 600mA(20W) 650mA(25W)
● 800mA(30W) 900mA(35W)
○ 1050mA(40W)

Wattage Dip Switch Settings

3. Set and Test 2x2 Light Fixture Color (CCT)

- 1) Start out by installing and setting two (2) lights to 3,500K using the “CCT Tunable” switch shown above on the back of the lights. Install the lights in the hung ceiling in a “remote portion of the shop” not subject to exterior light (perhaps the back of the kitchen or back of the house).
- 2) Using the Sekonic C-700-U light meter, take a CCT reading (temperature) **approximately 3 feet from the light (ceiling)**. It is important that the reading NOT be affected by sunlight.
- 3) **If the CCT reading is between 3,441K and LOWER than 3,959K**, leave the “CCT Tunable” switch at 3,500K and proceed with remainder of installation setting ALL REMAINING lights to 3,500K
- 4) **If the CCT reading is BELOW 3,441K** change the “CCT Tunable” switch on BOTH lights to 4,000K and repeat test (change can be made with power on to the fixtures). If the CCT reading falls between **3,441K and LOWER than 3,959K** leave the “CCT Tunable” switch at 4,000K and proceed with remainder of installation setting ALL REMAINING lights to 4,000K

4. Record Results

- 1) Once the installation has been completed with the “Watt Tunable” set to 30W and the “CCT Tunable” switch at either 3,500K or 4,000K take CCT (temperature) at several locations through the shop at **approximately 3 feet from the light (ceiling)** being careful not to let outside sunlight affect the readings (don’t take reading adjacent to a window, etc.
- 2) Notate location and CCT readings

Shop No	Address	Location 1 Name	Location 1 CCT Reading	Location 2 Name	Location 2 CCT Reading	Location 3 Name	Location 3 CCT Reading	Location 4 Name	Location 4 Name	Location 5 CCT Reading	Location 5 CCT Reading
1857	123 Anywhere	Kitchen	3,525	Front Back	3,587	Back Kitchen	3,600	Front Bathroom	3,589	Office	3,650