


Вид со стороны рога / View from pogo side

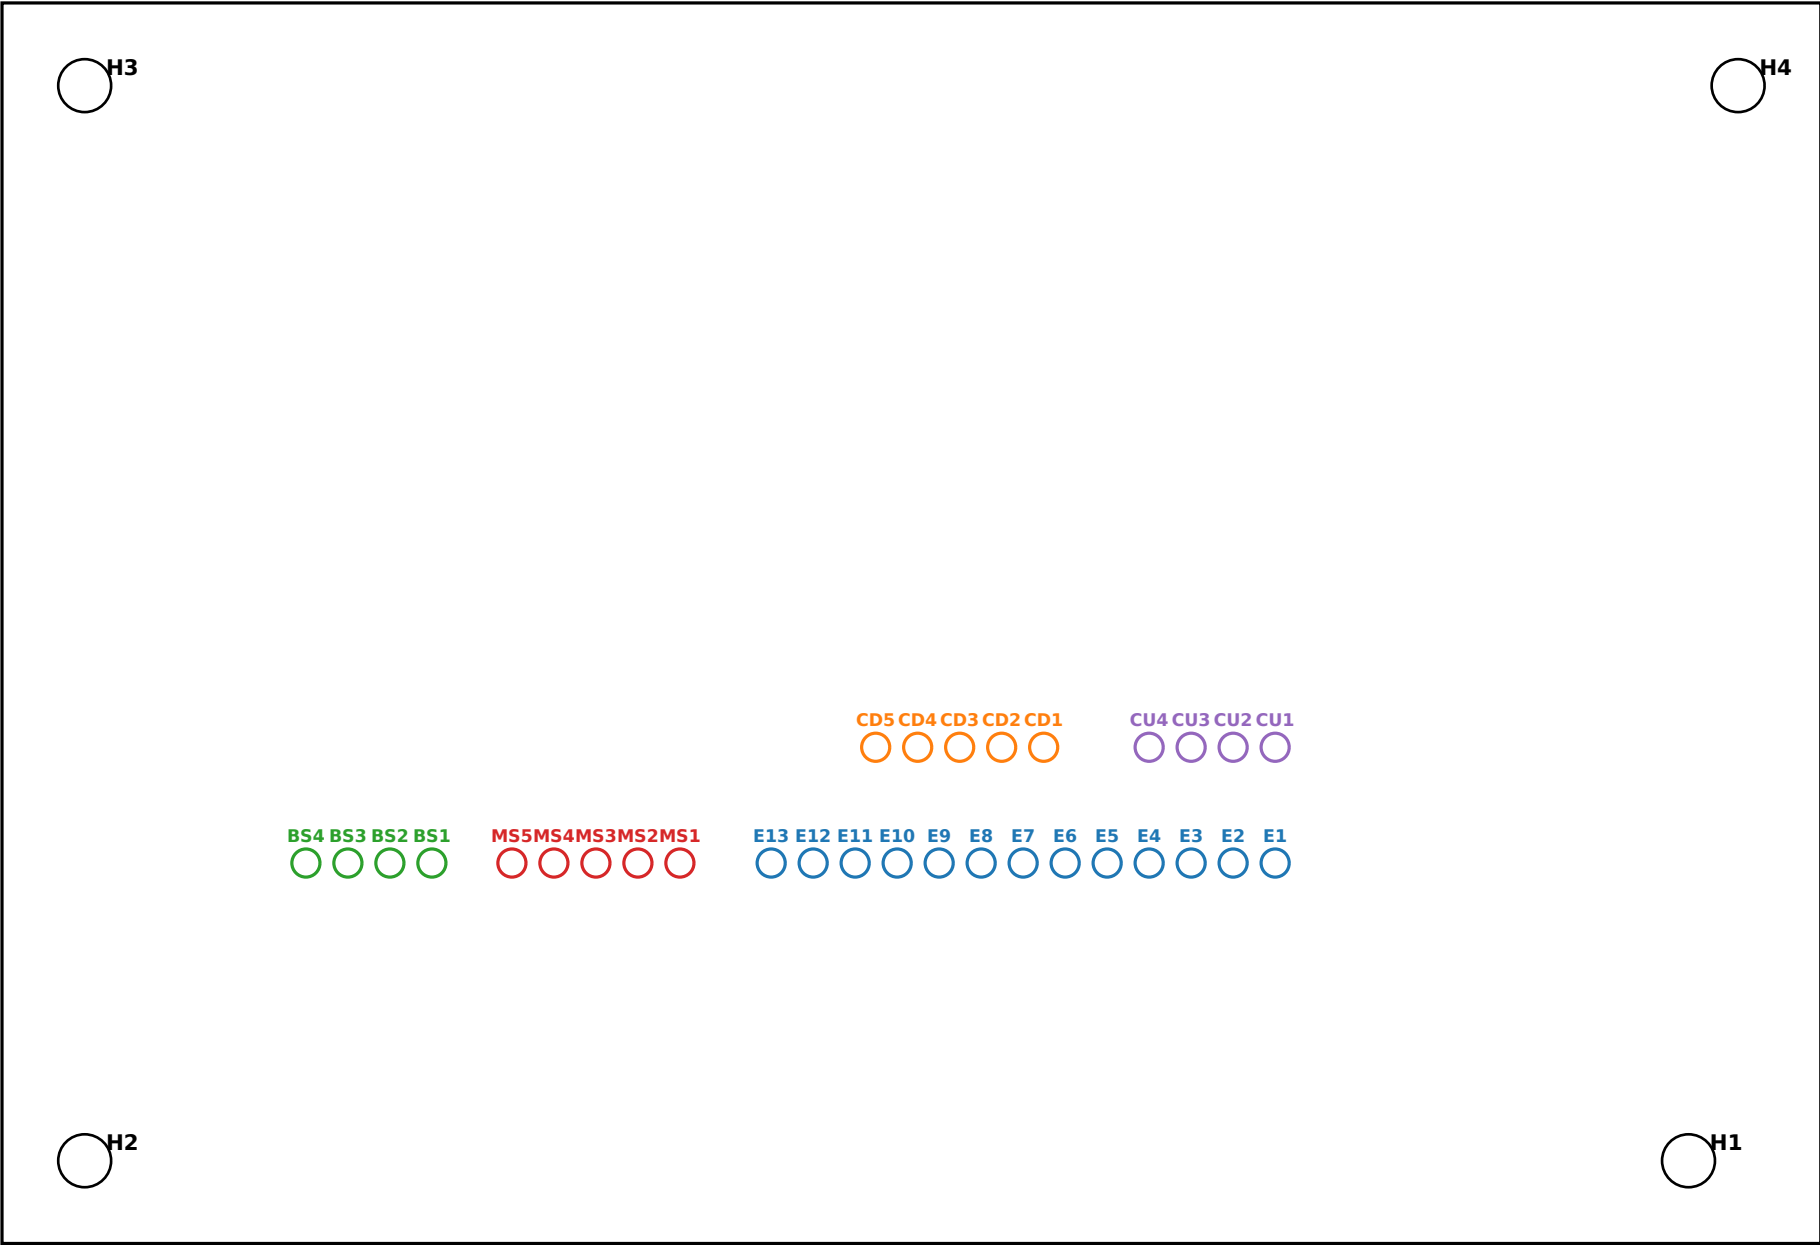

Начало координат Xf=0, Yf=0 / Fixture origin at lower left
Xf = 110.00 - Xboard; Yf = Yboard. Повторное зеркало запрещено / Do not mirror again

Контактные ряды / Contact rows

TP_EOL: Y=23.00, Xboard 33.00..63.48, contacts 1..13

TP_CELL_USB: Y=30.00, Xboard 33.00..40.62, contacts 1..4

TP_MCU_SWD: Y=23.00, Xboard 69.00..79.16, contacts 1..5

TP_CELL_DBG: Y=30.00, Xboard 47.00..57.16, contacts 1..5

Группы / Groups

- E TP_EOL, 13 contacts
- MS TP_MCU_SWD, 5 contacts
- BS TP_BLE_SWD, 4 contacts
- CU TP_CELL_USB, 4 contacts
- CD TP_CELL_DBG, 5 contacts

Опорные размеры / Datum

PCB outline: 110.00 x 75.00 mm
Pogo pads: diameter 1.70 mm
Pitch in each group: 2.54 mm
Mounting holes: diameter 3.20 mm NPTH
H1 is asymmetric and is the orientation key

Критические правила / Critical rules

GND mates first and disconnects last.
VTREF and rail sense are never sources.
BOOT0 is driven only while NRST is asserted.
BG95 debug uses 1.8 V only.
TP_CELL_USB is isolated from STM32 J11.
CELL_USB_VBUS is current limited.
All outputs stay high-Z until reference is valid.

TP_BLE_SWD: Y=23.00, Xboard 84.00..91.62, contacts 1..4