SMARTBRIDGE EXTERNSHIP

IOT based Air Quality Monitoring System

Internet of Things

P. Nischal - 20BCR7111
Tushar Singh - 20BCT0197

Abstract

With rapid advancement in technology, the air pollution levels are growing at an alarming rate. According to a worldwide study done by Green Car Congress in 2019, about 120 deaths out of 100,000 per year are caused due to air pollution. WHO emphasises that about 97% of cities in middle and low income countries do not meet the air quality guidelines. The toxic gases pose serious environmental and increase potential health risks such as stroke, heart disease, lung cancer, asthma, and several other life altering diseases. Thus, proper monitoring of air and noise pollution is required to ensure healthy and better future. This project proposes a universal, efficient, and cost-effective air quality monitoring device that uses gas sensors to measure air quality levels in a particular area. This data is then constantly transmitted over the cloud, ensuring real-time monitoring in an area. This allows the concerned parties to keep track of air quality levels and enact necessary measures to curb pollution levels in the affected areas.

Table of Contents

Introduction

In developing countries like India, air pollution poses a major hazard to healthy living. In countries like India, people will spend their hard-earned money only on things which they require, afford and can be versatile in terms of their function.

In this project, we propose a cost-effective air quality monitoring system integrated with weather sensing functionalities using NodeMCU, MQ135 gas sensor, BME280 sensor and ThingSpeak Cloud Platform for visualisation.

Literature Review

Title	Author	Journal/Conference	Year	Findings
A New Black Crabon Sensor for Dense Air Quality Monitoring Networks	J. J. Caubel, T.E. Cados, T.W. Krichstetter	IEEE	2018	A new BC sensor—the Aerosol Black Carbon Detector (ABCD)-designed for dense deployment in air quality monitoring networks was presented. This sensor provides Black Carbon concentration in the atmosphere. The system uses photodiodes and RH/T sensors interfaced with a Microcontroller Unit.
An IoT Based Air Pollution Monitoring System for Smart Cities	Harsh Gupta, Dhananjay Bhardwaj, Himanshu Agrawal, Vinay Anand Tikkiwal, Arun Kumar	ICSETS	2019	Proposed an IoT Based Air Pollution Monitoring System for Smart Cities, which uses multiple sensors to continuously monitor atmospheric parameters like Temperature, Humidity, CO, Smoke, LPG, PM 2.5, and PM 10 levels. They proposed a Raspberry Pi system that sends its data to a ThingSpeak Channel over the cloud, and the same data is visualised over a mobile application. The mobile application was equipped with firebase API providing features like Authentication, Messaging, Analytics, etc.
A mobile application for assessment of air pollution exposure	G. Lo Re, D. Peri, S. D. Vassallo	IEEE	2013	A system over Arduino was proposed that collects air quality related data using sensors like MQ7, MQ2 and MQ135 and communicated this data to a user through a mobile application. The data collected is uploaded over the cloud i.e., Ubidots using Internet connection through ESP8266 module. The app also uses historical data collected

				from the sensors to train and execute a prediction model.
IoT Based Air Pollution Monitoring System using Arduino	Monika Singh, Misha Kumari, Pradeep Kumar Chauhan	International Research Journal of Engineering and Technology, IRJET	2019	Proposed an IoT Based Air Pollution System interfacing hardware through Arduino microcontroller. The system is equipped with MQ135 and MQ6 gas sensors, which senses different types of gases in the air. Access to the internet is provided through the addition of a Wi-Fi module. An LCD panel and buzzer is used to communicate data to the user.
IoT based air pollution monitoring and predictor system on Beagle Bone Black	Nitin Sadashiv Desai, John Sahaya Rani Alex	International Conference on Nextgen Electronic Technologies, ICNET	2017	Proposed a system over the beagle bone interface that measures the levels of CO2, CO, and noise in the environment. Data was aggregated over Azure Cloud using python SQL. A reserved database in the form of .CSV file is created over the beagle bone, the same is them uploaded over the cloud and then deleted at end of the day. This data is then used to train a Machine Learning service.
Air Quality Monitoring System Based on ISO/IEC/IEEE 21451 Standards	K. S. E. Phala, A. Kumar, and Gerhard P. Hancke	IEEE	2016	Proposed an air quality monitoring system that is composed of a monitoring station, communication links, a sink node, and a data server. They created a GSM module-based sink node with data server as a PC. The data was collected and stored on a micro-SD card in text format and the data server. They used MySQL database. Infrared and electrochemical sensors were used to measure CO, CO2, SO2 and NO2 levels in the air. A test incubator was constructed to evaluate the performance of the senor unit. The base station consists of a sink node and a master computer equipped with a GUI application. The data flows from the sensor node to the sink using GSM and then the same is transferred over to the master computer for visualisation and storage.

IoT based air pollution monitoring system using Arduino	Poonam Pal, Ritik Gupta, Sanjana Tiwari, Ashutosh Sharma	IRJET	2017	Proposed a system to monitor air quality using Arduino. They utilised the MQ135 sensor to sense different types of harmful gases. The sensor outputs were configured to provide a PPM reading. The system was interfaced with a Wi-Fi module to provide internet access to enable communication with the webpage and LCD panel was used to provide visual output.
Iot Based Air and Sound Pollution Monitoring System	Rajat Sankhe, Pravin Shirodkar, Avinash Nangare, Abhishek Yadav, Gauri Salunkhe	IJERT	2017	Proposed a system using carbon sensors for sensing Carbon particulates and other pollutants in the air and provides output as analog readings which are later converted into Digital readings by the ADC. The values are communicated visually through an LCD display. If the pollutants exceed a certain threshold buzzer was sounded and a notification is sent on the webpage over a smart phone using a GPRS module.
Internet of Things Mobile – Air Pollution Monitoring System (IoT-Mobair)	Swati Dhingara, Rajasekhara Babu Madda, Amir H. Gandomi, Rizwan Patan, Mahmoud Daneshmand	IEEE	2019	Describes an implementation of an IoT based air pollution detection using a Wireless Sensor Network (WSNs) and a Mobile Application (IoT-Mobair). The mobile application also incorporates Google Maps Navigation. The proposed system uses Arduino Uno, ESP8266 Wi-Fi module, gas sensors, Ubidots cloud service and Android Application. The application provides location specific Air Quality indices, Health related information,
IoT Enabled Air Pollution Monitoring and Awareness Creation System	Yamunathangam, K. Pritheka, P. Varuna	IRJET	2018	Average pollution index was computed using matlab algorithm and time-controlled results were communicated through an android app. The app also provided location-based air quality index and health related information to ensure user awareness.

Proposed Architecture

The following diagram represents the various hardware components and software dependencies of the proposed system. The major hardware components include NodeMCU, MQ135 gas sensor and BME180 Humidity, Temperature and Pressure sensor. Secondary components include a power supply like solar powered or rechargeable battery. Software dependencies include Arduino IDE for deployment of programming code onto the microcontroller and ThingSpeak for data visualisation over the web.

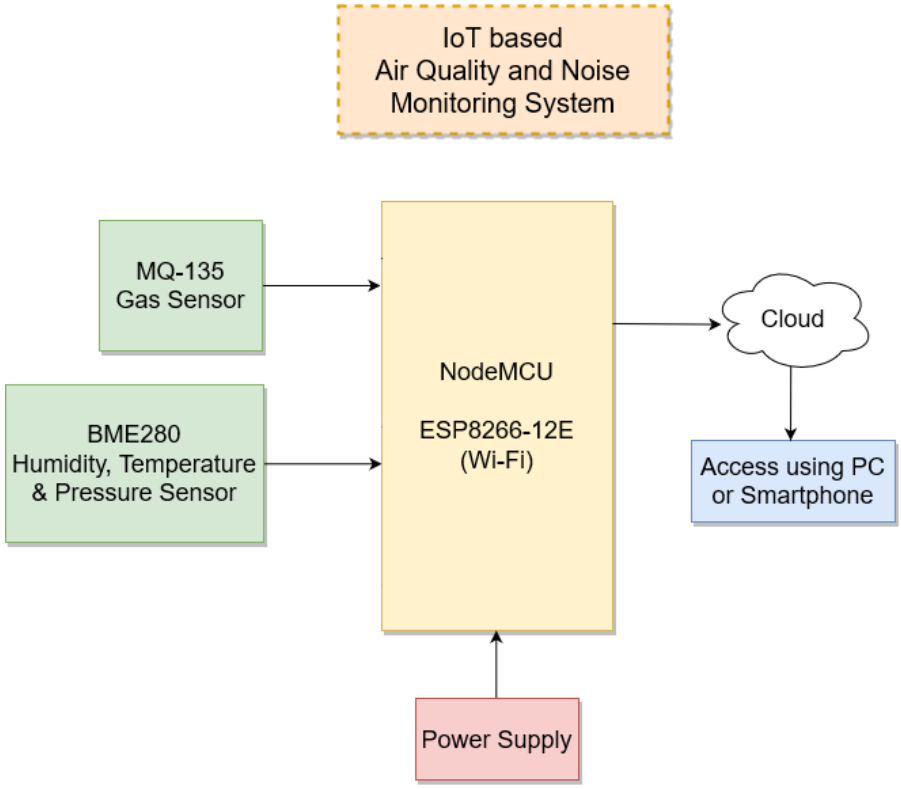

Hardware Requirements

1. **NodeMCU (ESP8266):** It is a development board (Microcontroller) which includes firmware that runs on the ESP8266 Wi-Fi SoC from Espressif Systems, and hardware which is based on the ESP-12E module. It is used for circuiting and allows data transfer using the Wi-Fi protocol.

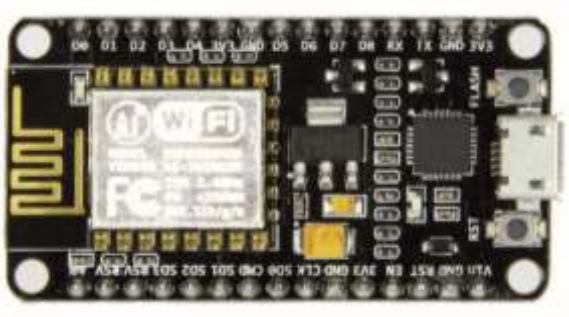

2. **BEM280 Humidity, Temperature & Pressure, Sensor**: It is an integrated environmental sensor which is very small sized with low power consumption. This Atmospheric Sensor Breakout is the easy way to measure barometric pressure, humidity, and temperature readings all without taking up too much space. It works on I2C Communication.

3. **MQ135 Gas Sensor**: The MQ135 gas sensor senses the gases like ammonia nitrogen, oxygen, alcohols, aromatic compounds, sulfide and smoke. MQ135 gas sensor can be implemented to detect the smoke, benzene, steam, and other harmful gases. It has the potential to detect different harmful gases. It is at a low cost and particularly suitable for Air quality monitoring applications. It has two outputs: analog output and TTL output. The TTL output is low signal light that can be accessed through the IO ports on the Microcontroller. The analog output is a concentration i.e., increasing voltage is directly proportional to increasing concentration. This sensor has a long life and reliable stability as well.

BME280 can also be replaced with DHT11 or DHT22 temperature and humidity sensors.

Software Requirements

1. **The Arduino Integrated Development Environment (IDE):** It is the main text editing program used for Arduino programming. It is where you'll be typing up your code before uploading it to the board you want to program. Arduino code is referred to as sketches.

2. **ThingSpeak**: It is an IoT analytics platform service that allows you to aggregate, visualize, and analyse live data streams in the cloud. We can send data to ThingSpeak from your devices, create instant visualization of live data, and send alerts.

Proposed Circuit

MQ135 is an analog sensor so connect its A0 pin to A0 pin of NodeMCU. Connect the VCC pin to Vin 5V & GND to GND on breadboard. And then we have BME280 Sensor which works on I2C Communication so connect it SCL & SDA pin to I2C pin of NodeMCU i.e., D1, D2.

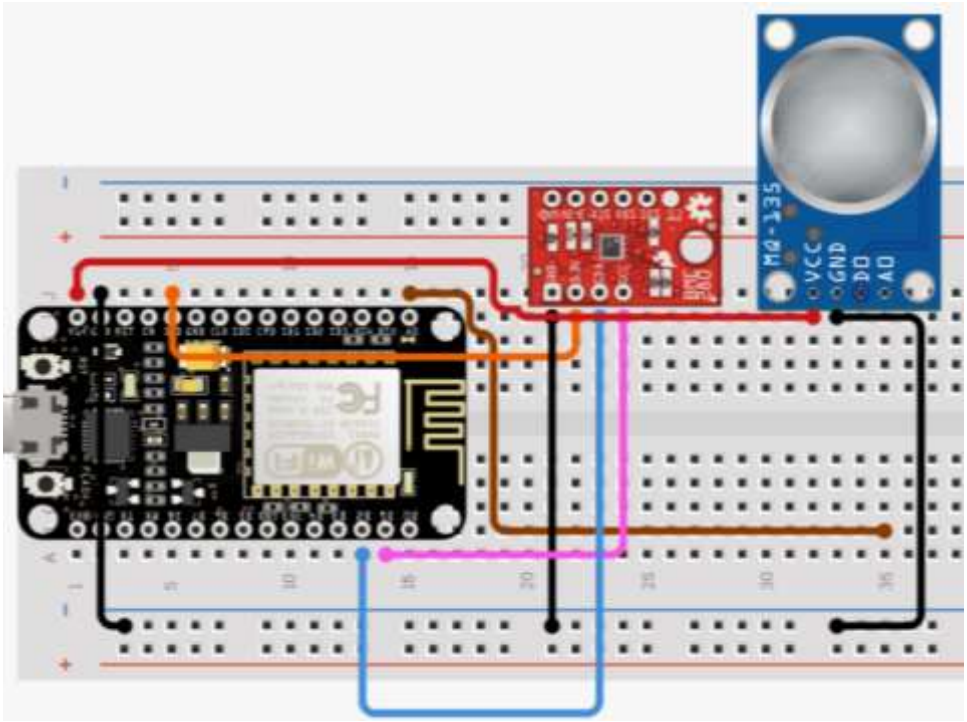

The proposed circuit can be configured/modified based on the functionalities needed. For example, addition of MQ6 gas sensor for LPG detection.

Implementation

Circuiting

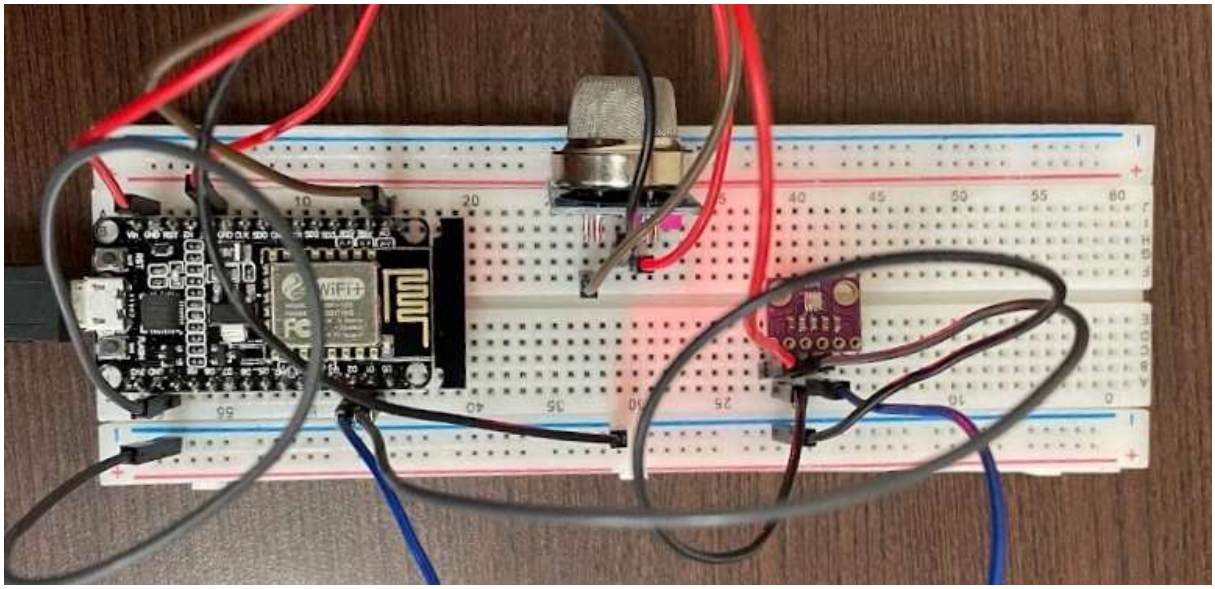

Code

```
#include <ESP8266WiFi.h>
#include <Wire.h>
#include <Adafruit_Sensor.h>
#include <Adafruit_BME280.h>
#include "MQ135.h"
#include <Arduino.h>
#include "ThingSpeak.h"

float h, t;
Adafruit_BME280 bme;

const char* apiKey = "B188N8MI5X2B0OS3";
const char* ssid = "Nischal";
const char* password = "password123";
const char* server = "api.thingspeak.com";

WiFiClient client;
void setup(){
  Serial.begin(9600);
  delay(10);
  Serial.println();
  Serial.print("Connecting to ");
  Serial.println(ssid);
  WiFi.begin(ssid, password);

  while (WiFi.status()!= WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
```

```
  Serial.println("");
  Serial.println("WiFi connected");

  Serial.println(WiFi.localIP());
  if (!bme.begin()){
    Serial.println("Could not find a valid BME280 sensor, check wiring!");
    while (1);
  }
  ThingSpeak.begin(client);
}

void loop(){
  static unsigned long OledTimer=millis();
    if (millis() - OledTimer >=10000){
      OledTimer=millis();
      MQ135 gasSensor = MQ135(A0);
      float air_quality = gasSensor.getPPM();
      Serial.print("Air Quality: ");
      Serial.print(air_quality);
      Serial.println("  PPM");
      Serial.println();
      ThingSpeak.setField(1, air_quality);
      h = bme.readHumidity();
      t = bme.readTemperature();
      t = t*1.8+32.0;
      ThingSpeak.setField(2, t);
      ThingSpeak.setField(3, h);
      ThingSpeak.writeFields(1706264, apiKey);
      Serial.print("Temperature = ");
      Serial.println(t);
      Serial.print("Humidity = ");
      Serial.println(h);

      Serial.println(".........................................");
    }
  }
```

Result and Conclusion

The proposed air quality monitoring system provides data about the air quality, temperature, and humidity, which can be easily visualised through plots over the ThingSpeak channel. This allows the user to keep track of their exposure to polluted air and make necessary lifestyle changes to safeguard their health. The project also focuses on making air quality monitoring systems accessible to all, which is done by reducing costs by switching high end sensors with cost effective and reliable sensors.

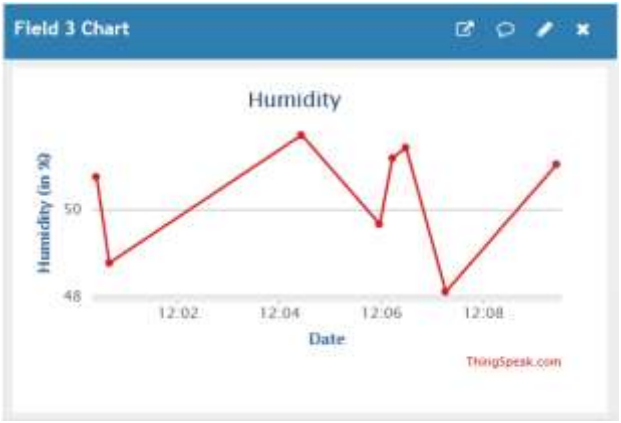

References

[1] J. J. Caubel, T.E. Cados, T.W. Krichstetter, (2018) 'A New Black Crabon Sensor for Dense Air Quality Monitoring Networks', IEEE.

[2] Harsh Gupta, Dhananjay Bhardwaj, Himanshu Agrawal, Vinay Anand Tikkiwal, Arun Kumar, (2019) 'An IoT Based Air Pollution Monitoring System for Smart Cities', ICSETS.

[3] G. Lo Re, D. Peri, S. D. Vassallo, (2013) 'A mobile application for assessment of air pollution exposure', IEEE.

[4] Monika Singh, Misha Kumari, Pradeep Kumar Chauhan, (2019) 'IoT Based Air Pollution Monitoring System using Arduino', International Research Journal of Engineering and Technology, IRJET.

[5] Nitin Sadashiv Desai, John Sahaya Rani Alex, (2017) 'IoT based air pollution monitoring and predictor system on Beagle Bone Black', International Conference on Nextgen Electronic Technologies, ICNET.

[6] K. S. E. Phala, A. Kumar, and Gerhard P. Hancke, (2016) 'Air Quality Monitoring System Based on ISO/IEC/IEEE 21451 Standards', IEEE.

[7] Poonam Pal, Ritik Gupta, Sanjana Tiwari, Ashutosh Sharma, (2017) 'IoT based air pollution monitoring system using Arduino', International Research Journal of Engineering and Technology, IRJET.

[8] Rajat Sankhe, Pravin Shirodkar, Avinash Nangare, Abhishek Yadav, Gauri Salunkhe (2017) 'Iot Based Air and Sound Pollution Monitoring System', International Journal of Engineering Research & Technology, IJERT.

[9] Swati Dhingara, Rajasekhara Babu Madda, Amir H. Gandomi, Rizwan Patan, Mahmoud Daneshmand, (2019) 'Internet of Things Mobile – Air Pollution Monitoring System (IoT-Mobair)', IEEE.

[10] Yamunathangam, K. Pritheka, P. Varuna, (2018) 'IoT Enabled Air Pollution Monitoring and Awareness Creation System', International Journal of Recent Technology and Engineering, IRJET.