COCO TOUCH - 1:1 bending template

Print at 100 % (no 'fit to page'). Check: the 50 mm ruler below must measure 50 mm.



FRONT rectangle + divider (1.2 mm)

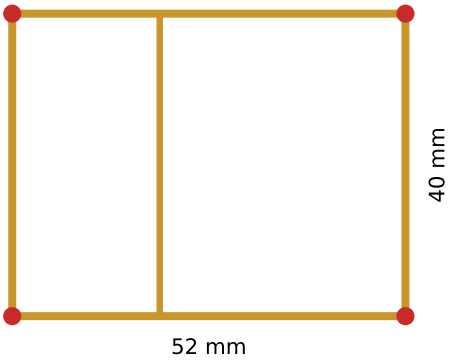

BACK rectangle + divider (1.2 mm)

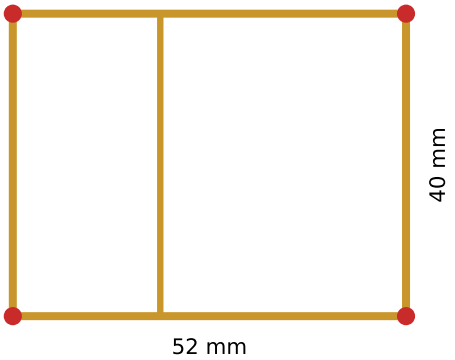

Red dots = 90° bends. Start a rectangle in the middle of the bottom side so the joint is hidden.

strut 20 mm x4 (1.2 mm)

divider 40 mm x2 (1.2 mm)

seat / floor bar 32.5 mm (see case drawing)



battery ring Ø17.2 mm x2 - wrap the wire around a 16 mm rod (a spare 16340 in its wrap works) and leave a 3 mm tab.

OLED outline 27.3 x 27.8 mm with its 4 mounting holes.
Measure your module: hole spacing varies (about 23 x 24 mm).
Posts: 0.9 mm wire through each hole, soldered to the front frame.

COCO VOICE - 1:1 bending template

Print at 100 % (no 'fit to page'). Check: the 50 mm ruler below must measure 50 mm.



FRONT rectangle + divider (1.2 mm)

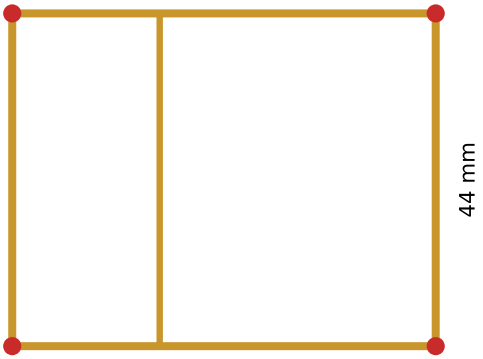

BACK rectangle + divider (1.2 mm)

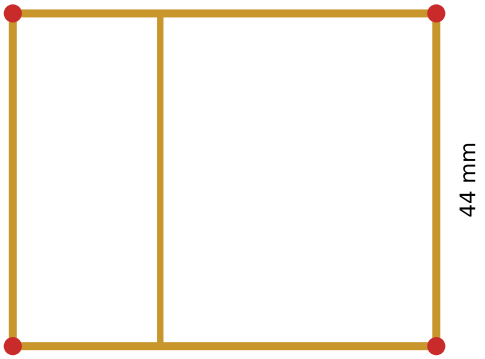

Red dots = 90° bends. Start a rectangle in the middle of the bottom side so the joint is hidden.

strut 30 mm x4 (1.2 mm)

divider 44 mm x2 (1.2 mm)

seat / floor bar 36.5 mm (see case drawing)



battery ring Ø17.2 mm x2 - wrap the wire around a 16 mm rod (a spare 16340 in its wrap works) and leave a 3 mm tab.

OLED outline 27.3 x 27.8 mm with its 4 mounting holes.
Measure your module: hole spacing varies (about 23 x 24 mm).
Posts: 0.9 mm wire through each hole, soldered to the front frame.