PCB-mounted PTD904-2015K-B203: footprint review

Top/component view. Shaft points right (+X). Pattern read from the actual project-local .kicad_mod.

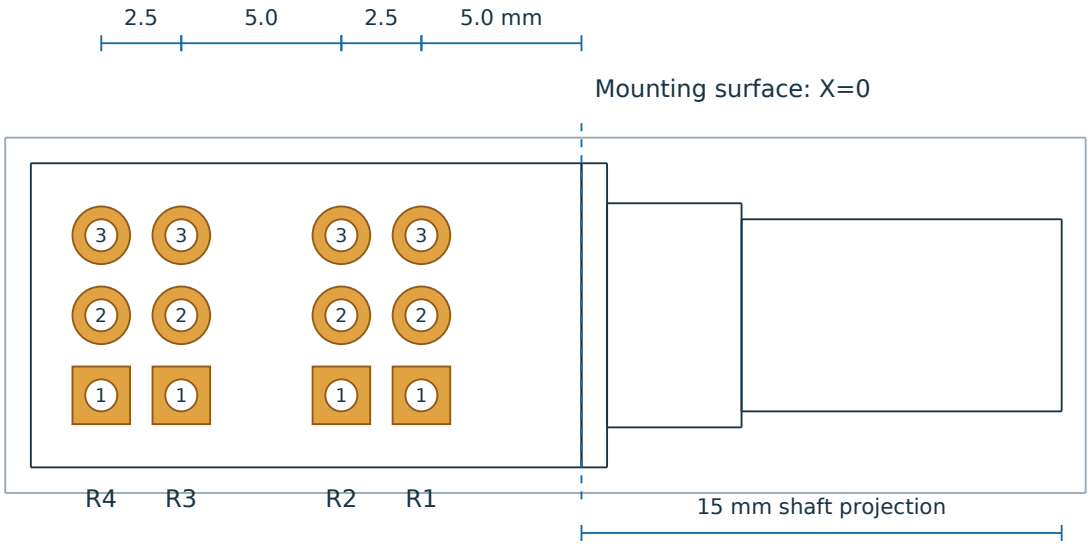

12 plated holes: manufacturer nominal diameter 1.0 mm (+0.2/-0); chosen footprint drill 1.0 mm.

Terminal rows: 1 at Y=+2.5 mm, wiper 2 at Y=0, terminal 3 at Y=-2.5 mm; total row span 5.0 mm.

Section columns: R1/R2/R3/R4 at X=-5/-7.5/-12.5/-15 mm from the mounting surface.

Pad IDs Rn.t preserve Bourns section Rn and terminal t. R1 is the gang nearest the shaft.

Copper pads: 1.8 mm; annular ring 0.4 mm. Body 17.2 mm long, 9.5 mm wide; front lip 0.8 mm.

M7 x 0.75 bushing, 6 mm knurled shaft, L=15 mm; K shaft bushing length B=5 mm.

Courtyard includes the body and shaft. No extra mounting holes are shown in the manufacturer pattern.

Source: Bourns PTD90 rev04/24, pages 2-4. Page 2 supplies a 1:1 template for physical sample checking.

This is a footprint artifact only. No PCB placement, routing, enclosure fit or physical sample fit is claimed.

PTD904 actual-size template: print at 100%

Disable fit-to-page. Verify the 20 mm scale bar with a ruler before checking the actual part.

20 mm



Top/component view: R4 at left; R1 nearest shaft at right. Shaft points +X.

Compare all 12 lead centres and body outline. Paper fit check is still pending.