


CONNECTORS



1x4 ribbon to the footswitch board. \nIN GND / OUT GND: jack sleeves (star ground).


INPUT + DRY BUFFER (U1A) + GAIN CELL (U1B): gain = 1 + (R7 || LDR) / (R6 + SUSTAIN), x3 to x23



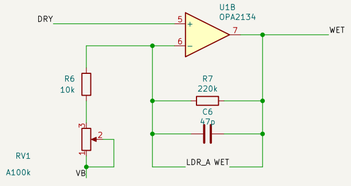


SUSTAIN: wiper tied to pin 1, as the original (CW = more gain into the LDR)


OUTPUT: BLEND (dry <–> compressed) + VOLUME

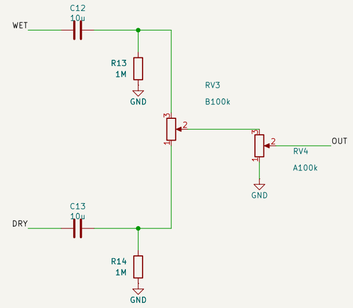

BLEND CW = compressed (WET), CCW = dry. Both paths are in phase.


POWER + BIAS: reverse protection, VB = 4.5 V

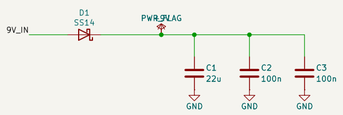

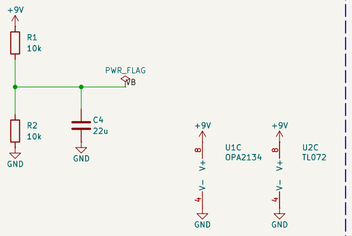



U1 OPA2134 (audio), U2 TL072 (side chain).


SIDE CHAIN (U2): differential bridge drive from WET, buffered off the audio path

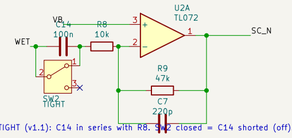


TIGHT (v1.1): C14 in series with R8; SW2 closed = C14 shorted (off).



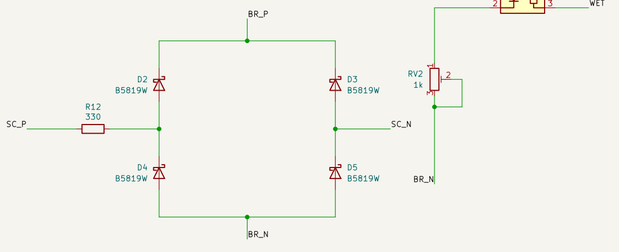

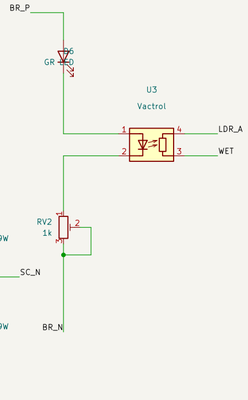

Full-wave bridge driven between SC_P and SC_N (9.4x WET).

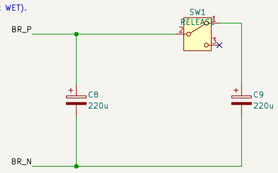

Gain-reduction LED + vactrol LED + RV2 trim in series. RELEASE: FAST = 220u, SLOW = 440u.

ON LED (panel): lit by the footswitch through LED_K



Side chain on its own op-amp (detector no longer loads the audio output)
Hollis Flatline optical compressor, Atomium mods, plus dry buffer, BLEND, GR LED, RELEASE
Super-Freq

Sheet: /
File: Flatline.kicad_sch

Title: Flatline+ (1590B)

Size: A2	Date:	**Rev: 1.0**
KiCad E.D.A. 10.0.4		Id: 1/1