

MULTI-FUNCTION JUMP STARTER

Auto mobile power supply
innovative solutions Founder



Model: CY-A3




Please read the instruction carefully. So you will be familiar with the product soon and use it smoothly and conveniently.

FCC warning:
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

PRODUCT LAYOUT :



- ① Power button
- ② LED display
- ③ LED Flash light
- ④ Jump Start Socket Output 12V
- ⑤ Type-C Input/Output
- ⑥ USB Output

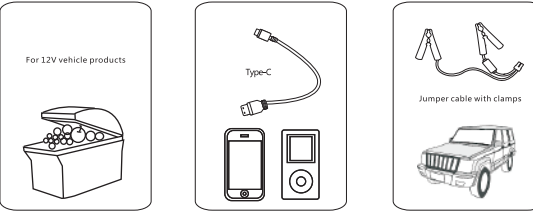


PRODUCT PARAMETER :

Model:	CY-A3
Capacity:	16000mAh(59.2WH)
Charging time:	About 1.5h-5.5h: 5V3A/20V3A
Start current:	2000A
Peak current:	4000A
Product size:	237*88.2*26.4mm
Type-C output:	5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A
Type-C input:	5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A
USB-A*2 output:	2.4A*5V, 5V3A, 9V/2A, 12V/1.5A
Weight:	797g
Operation temp:	-20℃ ~60℃

A: OPERATION GUIDANCE

Charging for Jump Starter itself:

1. Plug the home adaptor into the universal socket
 2. Connect Type-C input port of Jump Starter to the end of home adaptor.
- Or
1. Plug the car adaptor into the socket of cigarette lighter.
 2. Connect Type-C into port of Jump Starter to the end of car adaptor.

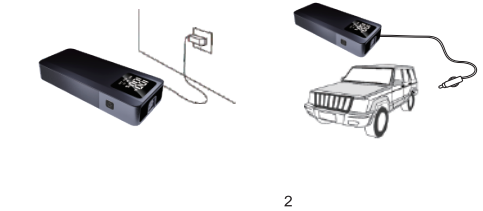


For Jump start of 12 vehicle.

1. Insure that the number of power are not less than 50%.
2. Connect the red battery to the positive pole of your vehicle' s battery and connect the black one to the negative pole.
3. Plug the cord of Jumper cable into the jump starter' s socket
4. Start the vehicle
5. When the vehicle starts, remove jumper cable from Jump Starter and disconnect red and black battery clamps From the vehicle battery terminals within 30 seconds.
6. Leave the vehicle's engine running



For charging for mobile phone or tablets

1. Plug the USB cable to USB output port.
2. Select appropriate connector for your mobile phones or tablet and use it to connect the switch cable B with your mobile phone or tablet.

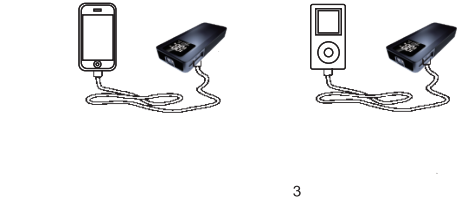

For power supply to 12V vehicle products or 12V electronics

1. plug the optional switch cable to 12V 2A output port.
2. Connect the optional switch cable and 12V vehicle product or 12V electronics.
3. Press the switch button to power supply.

LED illumination

Press the power button for 3 seconds to start the LED illumination and then 4 modes of LED light appear in sequence(normal.SOS.strobe.off)if you press lightly.

B. PARTS LIST

#	Parts Name	Quantity
1	Jump Starter	x1
2	Jumper cable	x1
3	USB cable	x1
4	User Manual	x1

C. FAQ:

- Q:** How to turn off this appliance?
A: This appliance will power off automatically when there is no load or charging is complete
- Q:** How long does it take to charge my mobile phone fully?
A: About 1 hour.
- Q:** How long does it take to charge a notebook fully?
A: 3~4hours.

- Q:** How many times can this appli ance on a full charge to start a vehicle?
A: About 30 times.
- Q:** How long will the power of battery of this appliance remain?
A: 3~6 months,however,we suggest you recharge it every 3months.
- Q:** Why does it sometimes can not start a car when the temperature is below zero degree like -20℃?
A: Please have a try for more than once to warm it.Then It will work as usual.

This unit is designed for jump starting 12V car batteries only and rated for gasoline engines up to 8 liters and diesel engines up to 5 liters. Do not attempt to jump start vehicles with a higher battery rating,or different voltage.If the vehicle isn't started immediately, please wait for 1minute to allow device to cool down. Do not try to restart the vehicle after three consecutive attempts as this may damage the unit. Checkyour vehicle for other possible reasons why it can't be restarted.

D. TROUBLE SHOOTING:

Finding	Cause	Remedies
Jumper starter is still not full charged while its 4 indicator light are solid.	60% charging for longer storage of Jump Starter when no use	Unplug the adaptor and plug it again
No response when I press the switch	Low voltage protection of Jump starter is started	Plug the adaptor into the 15V 1A input port to activate
Jump Starter is a bit hot when charging for Notebook	The charging current is a bit high(3.5A)	Remove the battery from your Note book and use this appliance to supply power for it directly. Or disconnect Jump Starter from your Notebook and connect them when it is cool

E. TOXIC AND HARMFUL SUBSTANCES

Composition and amount of toxic and harmful substances in Jump Starter				
Pb	Hg	Cd	Cr(VI)	PBB
o	o	o	o	o
O:Indicate all homogeneous materials' hazardous substances content are below the MCV limit specified in the standard 2002/95/ec(RoHs).				

F. WARNING:

1. Do remove the product from vehicle within 1 minute after the vehicle started.It may cause danger !
 2. Do not connect the two clamps.It may lead danger !
 3. Do not decompose product. It may lead danger !
 4. In the process of charging, when the indicator lights are fully lit, the charging plug should be pulled out. For avoiding of overcharging, which will shorten the battery's life.
- Always take care when using the appliance.
This appliance is not intended for using by kids or infirm person without supervision.
Do not use as a toy.
Do not put the appliance in wet places.
Do not immerse the appliance in water.
Do not operate the appliance in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.
Do not modify or disassemble Jump Starter. Only a repair technician may repair this unit.
Do not expose the appliance to heat.
Do not store in locations where the temperature may exceed 70℃.
Charge only at ambient temperature between 0℃~60℃.
Charge only using the charger provided with the appliance.
Under extreme conditions, battery leakage may occur. Carefully wipe the liquid off using a cloth and avoid skin or eye contact, rinse immediately with clean water and seek medical attention.
At the end of their useful life, discard the appliance with due care for our environment.