



# PC-104 Adapter Documentation

---

*PC-104 Adapter Documentation*

*SpaceLab, Universidade Federal de Santa Catarina, Florianópolis - Brazil*



**PC-104 Adapter Documentation**  
*October, 2020*

**Project Chief:**  
Eduardo Augusto Bezerra

**Authors:**  
Gabriel Mariano Marcelino

**Contributing Authors:**  
André Martins Pio de Mattos  
Edemar Morsch Filho  
Yan Castro Azeredo

**Revision Control:**

Version	Author	Changes	Date
0.1	Gabriel M. Marcelino	Document creation	2020/06/21



© 2020 by SpaceLab. PC-104 Adapter Documentation. This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/>.



---

## List of Figures

---

1.1	PC-104 adapter boards. . . . .	1
2.1	Top view of the top board (real size). . . . .	3
2.2	Bottom view of the top board (real size). . . . .	4
2.3	Top view of the bottom board (real size). . . . .	4
2.4	Bottom view of the bottom board (real size). . . . .	5
2.5	PC-104 pinout reference. . . . .	5
2.6	Pin numbering of the PicoBlade connector. . . . .	6
3.1	Solder sequence of the PicoBlade connectors. . . . .	9
3.2	Alignment of the PC-104 connectors. . . . .	10



---

## List of Tables

---

2.1	Pinout of the PicoBlade connectors of the Top Board. . . . .	6
2.2	Pinout of the PicoBlade connectors of the Bottom Board. . . . .	7
2.3	Bill of Materials (BOM) of the top board. . . . .	7
2.4	Bill of Materials (BOM) of the bottom board. . . . .	7





---

# Contents

---

List of Figures	v
List of Tables	vii
Nomenclature	vii
<b>1 Introduction</b>	<b>1</b>
<b>2 Hardware Overview</b>	<b>3</b>
2.1 Top Board . . . . .	3
2.2 Bottom Board . . . . .	3
2.3 Pinout . . . . .	3
2.3.1 Top Board . . . . .	4
2.3.2 Bottom Board . . . . .	4
2.4 Bill of Materials . . . . .	4
<b>3 Assembly Instructions</b>	<b>9</b>
3.1 Top Board . . . . .	9
3.2 Bottom Board . . . . .	9
3.3 Cables . . . . .	10
<b>References</b>	<b>11</b>



# CHAPTER 1

---

## Introduction

---

[1]  
[2]

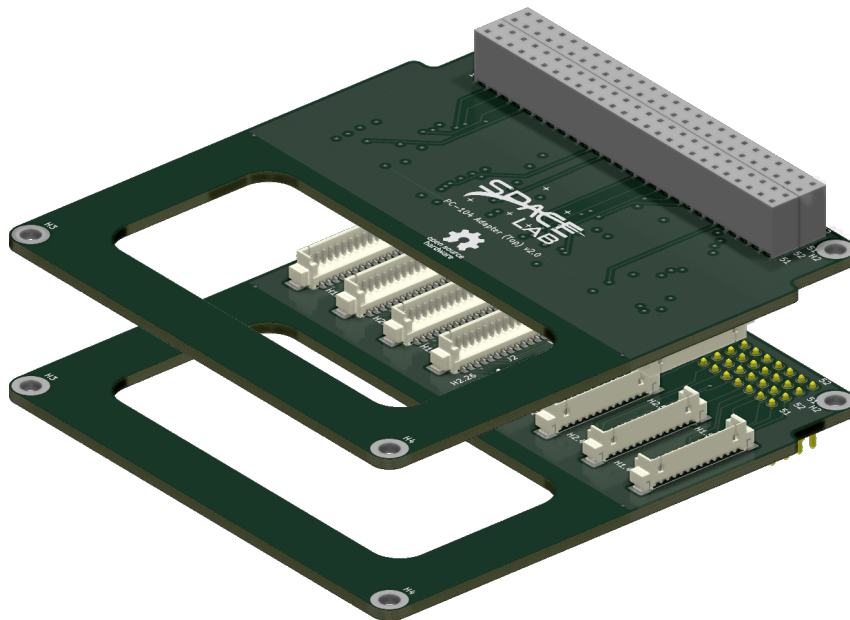


Figure 1.1: PC-104 adapter boards.



## CHAPTER 2

---

### Hardware Overview

---

[3]

### 2.1 Top Board

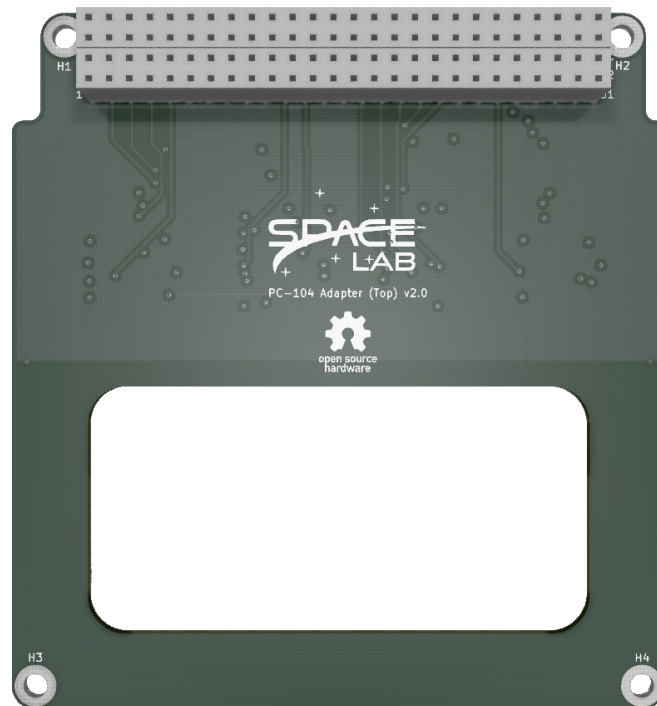


Figure 2.1: Top view of the top board (real size).

### 2.2 Bottom Board

### 2.3 Pinout

The pinout of the connectors are available in this section. The pin numbering reference of the PC-104 and the PicoBlade connectors can be seen in Figures 2.5 and 2.6.

The connection between the PicoBlade connectors and the PC-104 bus is available below.

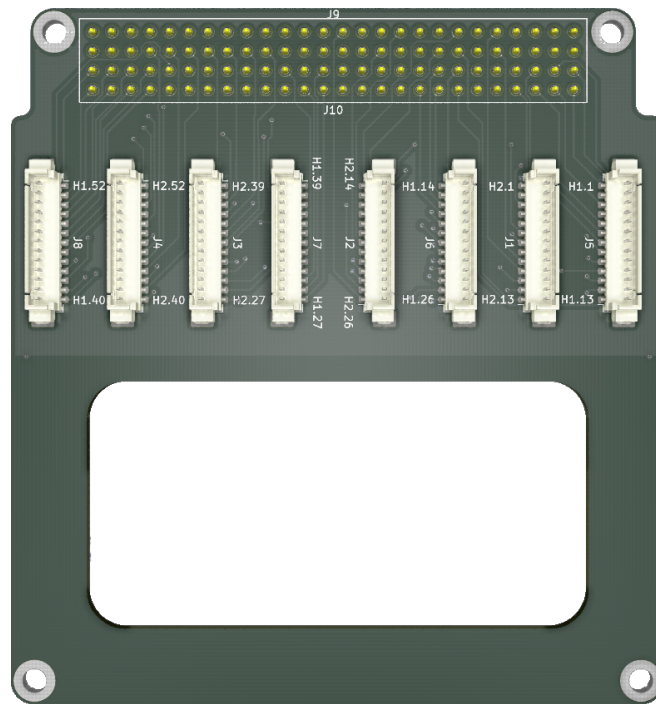


Figure 2.2: Bottom view of the top board (real size).

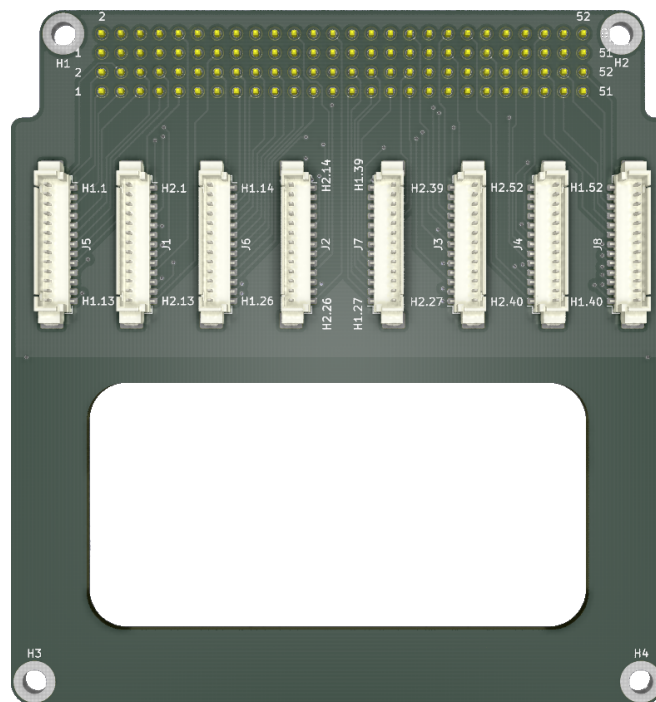


Figure 2.3: Top view of the bottom board (real size).

### 2.3.1 Top Board

### 2.3.2 Bottom Board

## 2.4 Bill of Materials

The Bill of Materials (BOM) of the top and bottom boards are available in Tables 2.3 and 2.4, respectively.

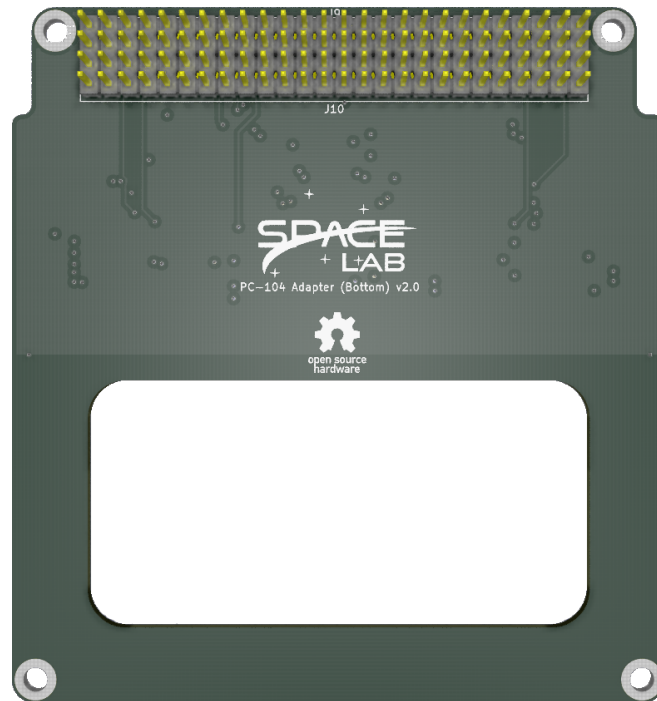


Figure 2.4: Bottom view of the bottom board (real size).

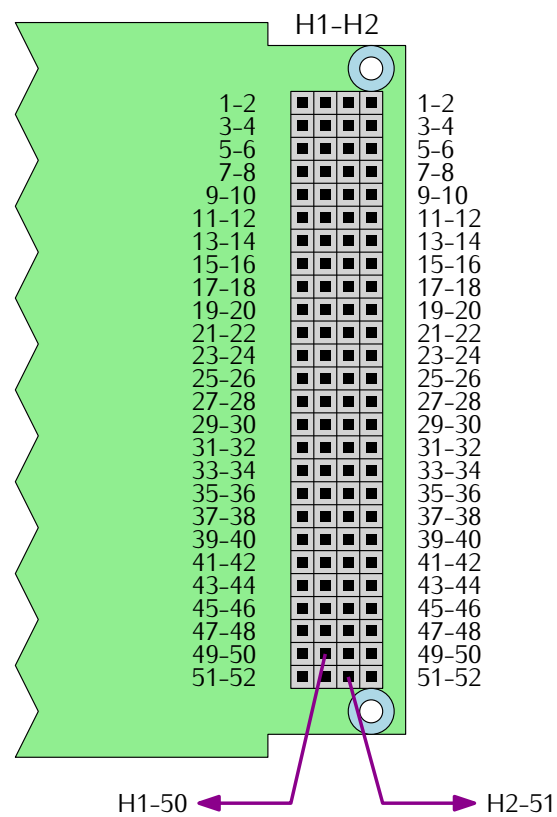


Figure 2.5: PC-104 pinout reference.



Figure 2.6: Pin numbering of the PicoBlade connector.

PicoBlade Pin	PC-104 Pin							
	J1	J2	J3	J4	J5	J6	J7	J8
1	H2-13	H2-26	H2-39	H2-52	H1-13	H1-26	H1-39	H1-52
2	H2-12	H2-25	H2-38	H2-51	H1-12	H1-25	H1-38	H1-51
3	H2-11	H2-24	H2-37	H2-50	H1-11	H1-24	H1-37	H1-50
4	H2-10	H2-23	H2-36	H2-49	H1-10	H1-23	H1-36	H1-49
5	H2-9	H2-22	H2-35	H2-48	H1-9	H1-22	H1-35	H1-48
6	H2-8	H2-21	H2-34	H2-47	H1-8	H1-21	H1-34	H1-47
7	H2-7	H2-20	H2-33	H2-46	H1-7	H1-20	H1-33	H1-46
8	H2-6	H2-19	H2-32	H2-45	H1-6	H1-19	H1-32	H1-45
9	H2-5	H2-18	H2-31	H2-44	H1-5	H1-18	H1-31	H1-44
10	H2-4	H2-17	H2-30	H2-43	H1-4	H1-17	H1-30	H1-43
11	H2-3	H2-16	H2-29	H2-42	H1-3	H1-16	H1-29	H1-42
12	H2-2	H2-15	H2-28	H2-41	H1-2	H1-15	H1-28	H1-41
13	H2-1	H2-14	H2-27	H2-40	H1-1	H1-14	H1-27	H1-40

Table 2.1: Pinout of the PicoBlade connectors of the Top Board.



PicoBlade Pin	PC-104 Pin							
	J1	J2	J3	J4	J5	J6	J7	J8
1	H2-1	H2-14	H2-27	H2-40	H1-1	H1-14	H1-27	H1-40
2	H2-2	H2-15	H2-28	H2-41	H1-2	H1-15	H1-28	H1-41
3	H2-3	H2-16	H2-29	H2-42	H1-3	H1-16	H1-29	H1-42
4	H2-4	H2-17	H2-30	H2-43	H1-4	H1-17	H1-30	H1-43
5	H2-5	H2-18	H2-31	H2-44	H1-5	H1-18	H1-31	H1-44
6	H2-6	H2-19	H2-32	H2-45	H1-6	H1-19	H1-32	H1-45
7	H2-7	H2-20	H2-33	H2-46	H1-7	H1-20	H1-33	H1-46
8	H2-8	H2-21	H2-34	H2-47	H1-8	H1-21	H1-34	H1-47
9	H2-9	H2-22	H2-35	H2-48	H1-9	H1-22	H1-35	H1-48
10	H2-10	H2-23	H2-36	H2-49	H1-10	H1-23	H1-36	H1-49
11	H2-11	H2-24	H2-37	H2-50	H1-11	H1-24	H1-37	H1-50
12	H2-12	H2-25	H2-38	H2-51	H1-12	H1-25	H1-38	H1-51
13	H2-13	H2-26	H2-39	H2-52	H1-13	H1-26	H1-39	H1-52

Table 2.2: Pinout of the PicoBlade connectors of the Bottom Board.

Item	Designator	Partnumber	Quantity
1	J9, J10	SSW-126-01-G-D	2
2	J1, J2, J3, J4, J5, J6, J7, J8	53398-1371	8

Table 2.3: Bill of Materials (BOM) of the top board.

Item	Designator	Partnumber	Quantity
1	J9, J10	TSW-126-07-G-D	2
2	J1, J2, J3, J4, J5, J6, J7, J8	53398-1371	8

Table 2.4: Bill of Materials (BOM) of the bottom board.



## CHAPTER 3

---

### Assembly Instructions

---

This chapter presents the assembly instructions of the two boards and the interconnection cables between the top and bottom boards.

This project does not have sensible components (electrostatic or temperature), and no major care should be taken during the solder process. A recommended temperature of the soldering iron can be 350 °C or lower.

### 3.1 Top Board

1. Solder the PicoBlade connectors (J1, J2, J3, J4, J5, J6, J7 and J8), beginning with the external connectors and moving to the center of the board, as can be seen in Figure 3.1.

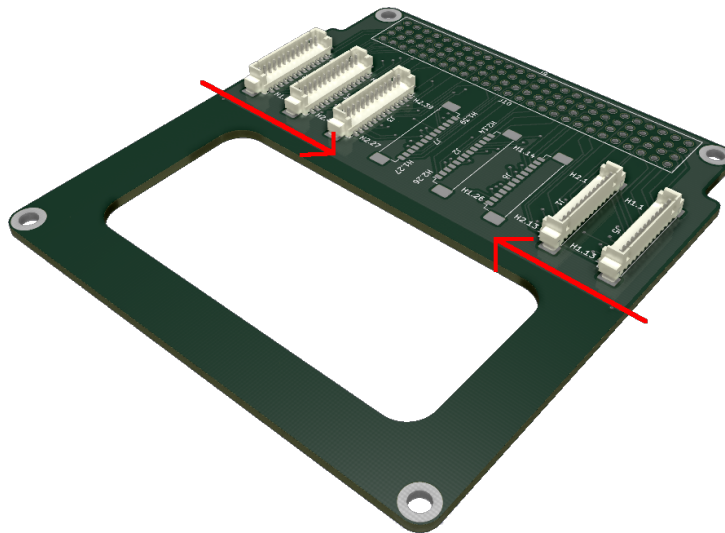


Figure 3.1: Solder sequence of the PicoBlade connectors.

2. Solder the PC-104 connectors (J9 and J10), taking care to keep the alignment of all the pins with the surface of the board, as can be seen in Figure 3.2.

### 3.2 Bottom Board

The same instructions apply to the bottom board:

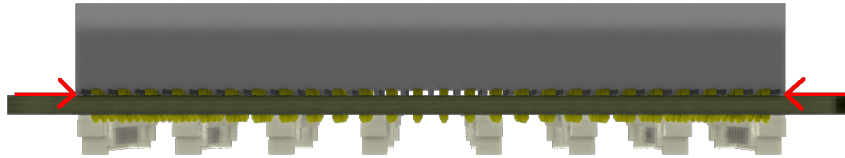


Figure 3.2: Alignment of the PC-104 connectors.

1. Solder the PicoBlade connectors (J1, J2, J3, J4, J5, J6, J7 and J8), beginning with the external connectors and moving to the center of the board, as can be seen in Figure 3.1.
2. Solder the PC-104 connectors (J9 and J10), taking care to keep the alignment of all the pins with the surface of the board, as can be seen in Figure 3.2.

### 3.3 Cables

1. .

---

## Bibliography

---

- [1] Space Technology Research Laboratory (SpaceLab). *PC-104 Adapter*, 2020. Available at <<https://github.com/spacelab-ufsc/pc104-adapter>>.
- [2] KiCad Developers Team. *KiCad EDA*, 2020. Available at <<https://kicad-pcb.org/>>.
- [3] Molex, LLC. *PicoBlade Connector System*, 2020. Available at <<https://www.molex.com/molex/products/family/picoblade>>.