


# SparkFun IoT Node - LoRaWAN

WRL-26060

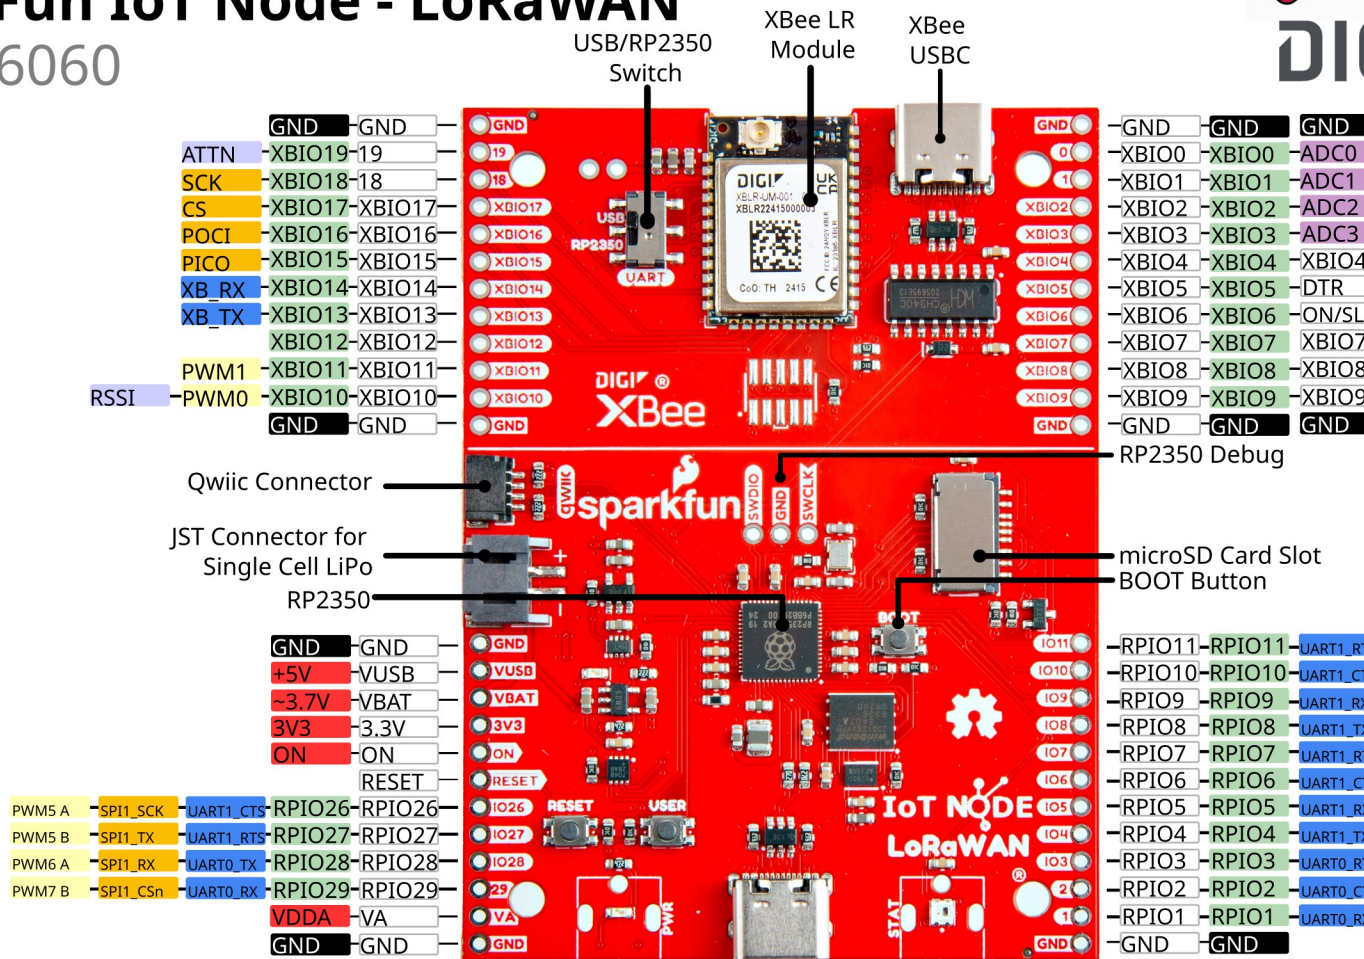

## Power and Logic Levels

**VUSB:** direct to USB (5V)

**VBAT:** direct to LiPo battery (MCP73831 charger, 500mA default charge rate)

**3V3:** Output of RT9080 regulator (5.5V/600mA)

**GPIO logic levels:** 3.3V

## Notes

-

## RP2350

- Dual Cortex-M33 or Hazard3 processors at 150 MHz
- 520 kB on-chip SRAM, in 10 independent banks
- Up to 16 MB of external QSPI flash/PSRAM via dedicated QSPI bus
- Additional 16 MB flash/PSRAM accessible via optional second chip-select

## Digi XBee LR

- LoRaWAN compatibility
- Pre-activated on the Digi X-ON cloud platform
- Modular certifications for FCC, IC, and CE standards
- Frequency Range: SM 902 to 928 MHz, 868 to 870 MHz

## User Interfaces

- RESET Button
- BOOT Button
- USER Button
- UART Switch

## LEDs

- Power LED: Red
- Charge LED: Yellow

## microSD Card