



QURE™ Q-REJUVALIGHT PRO FACEWEAR USER GUIDE AND MANUAL

Includes important safety information.

Read all instructions prior to use.

SCAN THE QR CODE >

Quickstart Guide & Video Instructions





Q-Rejuvalight Pro Facewear Gives You Professional-Grade Results From Home.

For a fraction of the usual in-clinic cost. Bringing the latest, science-backed light therapy technology to your home in a revolutionary, hands-free, portable, wearable design.

Q-Rejuvalight Pro Facewear is a professional-grade LED light therapy mask designed to visibly improve the appearance of your skin with convenient 3-minute sessions, all from the comfort of your home.

Qure's light therapy technology makes healthier-looking skin now achievable, easily accessible, and affordable to everyone.

Skin benefits include visibly reducing breakouts, improving the look of oily skin, reducing the appearance of fine lines and wrinkles, calming visible redness, fading the appearance of dark spots, and improving overall skin tone and texture.

Each session is completely personalized and tailored to your preferences via the Qure Skincare app, where you can unlock all the best features of the world's first customizable light therapy mask.

CONTENTS

1. Recommendations of Use	6
1.1. Warnings	6
1.2. Contraindications	7
1.3. Adverse Reactions	8
1.4. Precautions	8
2. Intended Use	9
3. Product Description	9
3.1. How Qure's Light Therapy Technology Works	10
3.2. Specification	13
3.3. Package List	14
3.4. Description and Features	15
4. How to use Instructions	17
4.1. Check for your skin type and condition before use	17
4.2. Device set up and preparation	19
4.3. Light sensitivity test	19
4.4. Operation Instructions	20
4.5. Qure Skincare App	22
4.6. How to operate the Q-Rejuvalight Pro Facewear with the Qure Skincare App	24



5. Maintenance	25
5.1. Cleaning	25
5.2. Troubleshooting	26
5.3. Disposal of Electrical and Electronic Equipment Waste (E-waste)	27
6. Warranty Information	28
6.1. Warranty Limitations & Disclaimers	29
7. Safety and EMC	30
8. The Symbols and Description	36
9. FCC Statement	37
10. Manufacturer Information	38

1. RECOMMENDATIONS OF USE

Before using the Q-Rejuvalight Pro Facewear, please read the complete instruction manual. This will help you understand how the device works and ensure the best possible user experience.

1.1. Warnings

1. Prior to using this device, carry out a sensitization test (see section 4.3).
2. Do not look directly at the light source during the treatment. Always use the provided goggles for eye protection.
3. Avoid harshly bending, sitting, or standing on the device. Do not bend or abuse the USB charging cord.
4. Do not operate the device near water or allow it to come into contact with liquids. In case of accidental contact, unplug it before handling.
5. Do not attempt to modify, dismantle, or repair the device. Device repairs should only be performed by Light Tree Ventures Europe B.V. Attempting to service the device yourself will void the warranty.
6. Dispose of the device according to local laws for Lithium Ion Batteries.
7. Stop using the device immediately if it overheats, becomes uncomfortably hot, or appears defective, and contact customer support.
8. Always unplug the device after charging is complete and avoid using it while charging.
9. Keep the device away from flammable liquids and aerosol products to prevent potential hazards.



10. Use only the accessories provided to avoid unintended electromagnetic interference.
11. This device has been tested for radiated RF immunity only at specific frequencies. Using it near emitters at other frequencies may cause unexpected treatment results.
12. If you have sunburn within the past two weeks, do not use this device.
13. Ensure skin is clean and free of creams, serums, lotions, or makeup before treatment to prevent light sensitization or reduced effectiveness.

1.2. Contraindications

1. This device is for use by adults only and is not recommended for infants or children.
2. Best suited for Fitzpatrick skin types I-IV. Consult a dermatologist before use if you have skin types V-VI.
3. Do not use the device for conditions other than those listed in the indications for use.
4. Avoid use if you are photosensitive or taking photosensitizing drugs. Consult your healthcare provider if uncertain.
5. Do not use if you are pregnant, breastfeeding, or planning to become pregnant.
6. Avoid use if you have a history of seizures triggered by light.
7. For severe acne or painful, raised, crusting, or bleeding skin, consult a healthcare professional before use.

1.3. Adverse Reactions

If you experience a photosensitive reaction, skin discoloration, or discomfort, discontinue use immediately and consult your physician.

1.4. Precautions

1. Read all instructions carefully before use to ensure your safety and maintain warranty.
2. Use a 5V adapter to charge the device. Fully charge the device before use, as it cannot be used while charging.
3. Stop using the device if you experience adverse reactions and consult a medical professional.
4. Avoid using the device if taking steroids, NSAIDs, or within 6 months of a steroid injection to prevent photosensitive reactions.
5. Ensure optimal performance by avoiding environments with unshielded electromagnetic energy.
6. Avoid scratching or damaging the light-emitting surface to preserve functionality.
7. Always use the goggles provided for eye protection during treatment and do not shine the light directly into the eyes of others.
8. Inspect the device for damage before each use, and store it according to the manual's recommendations to maintain efficacy.
9. If electromagnetic interference occurs, reset the device as instructed in the manual. If issues persist, use the device in another location to ensure uninterrupted operation.



2. INTENDED USE

The Q-Rejuvalight Pro Facewear (Model: P19-0023) is a cosmetic LED device designed to enhance the appearance of the skin, including improving the look of fine lines, wrinkles, and blemish-prone skin.


3. PRODUCT DESCRIPTION

The Q-Rejuvalight Pro Facewear is a cosmetic LED device that delivers light energy to enhance the appearance of the skin. The device features four types of LEDs for Pro-Aging: 605nm, 630nm, 660nm, and 880nm, and two types of LEDs for Anti-Breakout: 415nm and 630nm. Each mode lasts 3 minutes ($\pm 3s$) per session, and the mask automatically turns off at the end of the cycle.

The package components include the Q-Rejuvalight Pro LED mask, head strap, protective eyewear, latch, user manual, storage bag, and USB C charging cord.

The Q-Rejuvalight Pro Facewear sits comfortably on the skin to ensure consistent, even light application during each session. The device does not contain any user-serviceable components.

3.1. How Qure's Light therapy Technology Works

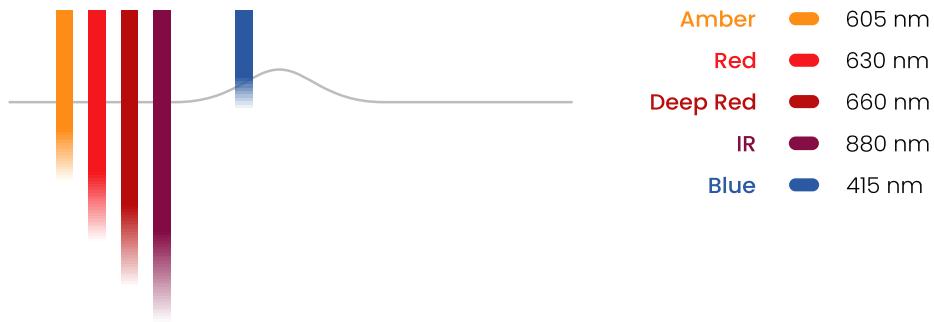

Q-Rejuvalight Pro Facewear delivers safe, concentrated wavelengths of light to the surface of your skin, with no chemicals, UV rays, or excess heat, using professional-grade LEDs to support your skin's natural glow.

Treatment Modes

Q-Rejuvalight Pro Facewear is programmed with a 3-minute automatic shut-off function, offering quick and convenient daily treatments designed to improve the appearance of aging and acne-prone skin, with visible results possible in as little as 12 weeks.

Q-Rejuvalight Pro Facewear offers three (3) different treatment modes:

- Pro-Aging
- Anti-Breakout
- Custom zone selection on five facial areas

Pro-Aging Treatment

The skin naturally loses firmness and elasticity over time, and as a person ages, the outer layer of the skin becomes thinner. As this happens, the skin may show more visible signs of aging.

Qure's Pro-Aging Treatment uses a combination of red, deep red, amber, and infrared light to visibly enhance the skin's firmness and support a smoother, rejuvenated look.

The benefits are numerous:

- Reduces the appearance of wrinkles and fine lines.
- Brightens and evens skin tone.
- Visibly plumps and firms the skin.
- Supports the skin's recovery.
- Calms visible redness.
- Fades the appearance of dark spots.

Anti-Breakout Treatment

Qure's Anti-Breakout treatment combines both Red and Blue Light therapy technology to visibly improve the appearance of acne-prone skin. It targets the look of oily skin and minimizes the appearance of imperfections. The result is skin that looks clearer and less shiny.

It also calms visible redness and supports a more even complexion by fading the look of post-breakout marks.

What To Expect:

Depending on individual skin concerns, users may notice visible improvements within 2 weeks, with optimal results typically observed after 12 weeks of regular use.

3.2. Specification

Specification	
Produce name	Q-Rejuvalight Pro Facewear
Model	P19-0023
Power source	Input: 5Vd.c., 50/60Hz, 1A Li-ion Polymer Battery: 3.7V, 600mAh, 2.22Wh
Weight	200g ± 5g
Dimensions	187.3mm x 185.31mm x 102.58mm ±0.3mm(W x L x H)
Wavelengths	605nm, 630nm, 660nm, 880nm, 415nm
Energy Source	LEDs
Power Density	Single wavelength: 605nm: 15±5mW/cm ² , 630nm: 20±5mW/cm ² , 660nm: 25±5mW/cm ² , 880nm: 10±5mW/cm ² , 415nm: 25±5mW/cm ² Total: 70mW/cm ² (wrinkle) & 45mW/cm ² (acne)
Treatment time	3 minutes per treatment
Charging time	2-3 hours
Location for Use	Face
Environment of Use	OTC
Safety and EMC	IEC 60601-1, IEC 60601-1-2, IEC 60601-1-11, IEC 60601-2-57, IEC 62133-2, IEC 62471
Biocompatibility	ISO 10993-5, ISO 10993-10, ISO 10993-23
Operating Environment	Temperature: 0°C-35°C Humidity: ≤ 85%RH Atmospheric pressure: 700hPa-106hPa
Storage Environment	Temperature: -5°C-60°C Humidity: ≤ 85%RH Atmospheric pressure: 700hPa-106hPa



3.3. Package List

The components and accessories included in all packages are listed below.



Manual



Q-Rejuvalight Pro
Facewear



Protective
eyewear



Latch



Storage bag



Detachable, adjustable
head strap




USB C Charging Cord

3.4. Description and Features

Indicator Light

Lights up when the mask is turned on.

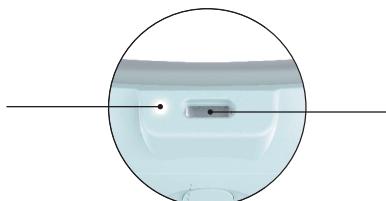

Universal Power Button

Turns the device on/off and selects treatment modes.



Mask

Hands-free, portable, wearable design.
Universally fits all facial shapes and features for both men and women.

Charging Port

Charge once to complete up to 10 treatments.

Side Adjuster

Effortlessly adjust the size of the strap for a comfortable fit.

Strap

Adjustable and removable strap that holds the mask in place.

Clip

Easily remove and re-attach the strap.

Explanation for button

Q-Rejuvalight Pro Facewear has only one power button, and its functions are as follows:

- Turn on/off the device:
 - Turn on the device by pressing the power button for 2–3 seconds. The indicator will illuminate when the device powers on successfully.
 - You can turn off the device in advance by pressing the power button (for 2–3 seconds). Or it will automatically shut down when the treatment time for 3 minutes is over. And the indicator will light off when the device is powered off successfully.
- Select the Mode:
 - After the device powers on successfully, briefly press the power button to activate the Pro-Aging mode, which is designed to enhance the appearance of wrinkles using four wavelengths. To switch to Anti-Breakout mode, press the power button again. This mode is designed to improve the appearance of mild to moderate acne-prone skin using two wavelengths.

Explanation for indicator

- The indicator will illuminate solid during normal operation. When the battery is low, the indicator light will flash.
- During charging, the indicator light will flash. Once the battery is fully charged, the indicator light will turn off.




4. HOW TO USE INSTRUCTIONS

4.1. Check for your skin type and condition before use

1. Please distinguish your skin type according to the below table before use, which will provide more effective instructions for your choice.

The Fitzpatrick Scale

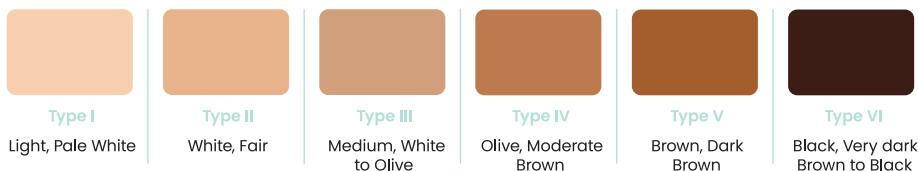

This device is best suited for Fitzpatrick Skin Types I-IV.

It's crucial to note that Fitzpatrick Skin Types V and VI are more sensitive to light therapy as they can absorb more light than other skin types as they have higher levels of melanin in the skin.

For customers with skin types V and VI, we highly recommend consulting with your dermatologist before using the device.

2. Please identify your skin type according to the table below before use, to receive the most suitable usage guidance.

Acne Type	Description	Reference
Mild Acne	One or several spots and visible redness in small areas.	
Moderate Acne	More visible spots and redness across a wider area.	
Severe Acne	Widespread spots and redness with inflamed areas. May include hard lumps under the skin and multiple whiteheads and blackheads.	

Note: Q-Rejuvalight Pro is not intended to treat severe acne. Please don't use the device if you have severe acne!



4.2. Device set up and preparation

1. Unpack the package and check off all the parts described in section 3.3.
2. The device typically arrives pre-charged. To verify its battery level, press and hold the power button (for 2-3 seconds) to turn it on. If the indicator illuminates solid, then use the device until the battery is low.
3. If the indicator light flashes when turning the device on, then proceed to charge it before use.
 - Connect the Type C interface of power cord to the device.
 - Connect the Type C interface of power cord to the adapter.
 - Plug the adapter into the power outlet (Please note the adapter input: 100–240V a.c., 50Hz/60Hz, output: DC 5V, 1A) to power supply the device.
 - During charging, the indicator will flash. When the battery is fully charged, the indicator will turn off.

Note: (Adapters are not provided with this device. The recommended AC adapter should be certified by IEC/EN 60601-1 or IEC/EN 62368-1.

4.3. Light sensitivity test

Before carrying out your first treatment, you must carry out a light sensitization test. Follow the guide below:

1. Apply the Q-Rejuvalight Pro to the inner forearm making sure the light is shining onto the skin.
2. Press the power button until the indicator light is illuminated, then press again to activate LED treatment. Allow the device to run for a full 3-minute treatment. At any time if your skin feels hot or uncomfortable, immediately turn OFF the device and remove from skin.




- After the treatment, wait for 24 hours. If you experience pain or discomfort, or redness that lasts for more than 2 hours, you might be light sensitive. Please consult a doctor for advice prior to use.

4.4. Operation Instructions

- Thoroughly clean your facial skin to remove all traces of dirt, skincare and makeup.
- Insert the protective eyewear and attach the head strap to the device.
 - Align the Q-Rejuvalight Pro so the LED lights face towards you.
 - Insert the protective eyewear into the designated slots in the Q-Rejuvalight Pro Facewear.



- Slide the strap through clip 2. The Qure logos on the strap are facing towards the LED lights.
- Insert the strap through the slide adjuster. The Qure logos on the strap should be facing you.
- Slide the strap through the outside of clip 1, push the latch through the end of the strap, and secure the latch by pulling the strap so it's secure on the inside of the mask clip.

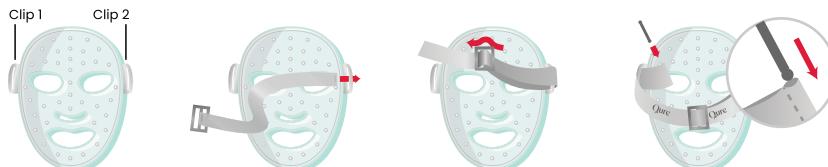

3. Position the Q-Rejuvalight Pro on your face and use the slide adjuster to comfortably fit the strap, ensuring the mask remains in place.
4. To choose/change the treatment, follow the instructions below:
 - a. Power on the device by pressing the power button (approximately 2-3 seconds) until the indicator light illuminates.
 - b. Press the button once for Pro-Aging Treatment.
 - c. Press the button again for Anti-Breakout Treatment.
5. The device will automatically turn off after completion of 3-minute treatment. You can power off the device by pressing the power button (approximately 2-3 seconds) until the indicator light turns off.
6. Remove Q-Rejuvalight Pro Facewear from face and wipe device clean (see Section 5 cleaning instructions).
7. Place Q-Rejuvalight Pro Facewear into the provided luxury bag and store the device flat at room temperature in dry conditions.


You can also use the Q-Rejuvalight Pro Facewear in combination with the Qure Skincare App, see next chapter for detailed instructions.

Note:

- It is recommended to undergo a 3-minute treatment per day; overtreatment is not advised.
- Avoid using makeup during treatment, as cosmetics containing chemical or acidic components may affect light output and result in decreased or ineffective treatment.
- During treatment, please use the straps to secure the device to the face properly.

4.5. Qure Skincare App

The Q-Rejuvalight Pro Facewear, when paired with the Qure Skincare App, unlocks possibilities that were never available before. As the world's first customizable LED mask with a compatible mobile app, Qure empowers you to personalize your skincare journey. If you are light-sensitive, please consult a doctor for advice before use.

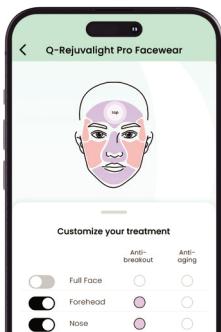


Customize Your Treatments

Choose either Pro-Aging or Anti-Breakout treatment on 5 facial areas (or even full face!) This makes it possible for you to focus only on areas that need treatment.



Plan Your Treatments

Access the Qure planner to effortlessly schedule your at-home clinical treatments and view your treatment history in a monthly calendar.

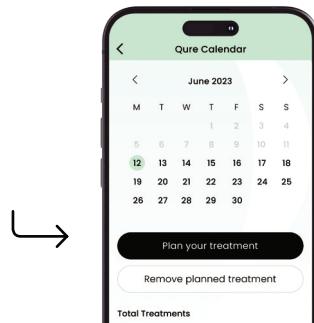

Get Notifications

Get daily treatment reminders straight to your phone so you never miss a treatment!

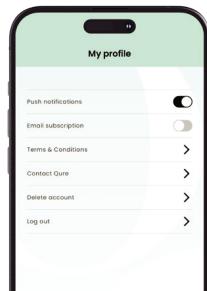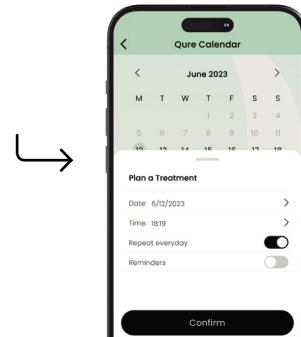


VIP Access

Turn ON notifications so you get exclusive access to sales and offers from inside the app!

Download the app

The Qure Skincare app is compatible with iOS and Android devices. Download it via the Apple App Store or Google Play.

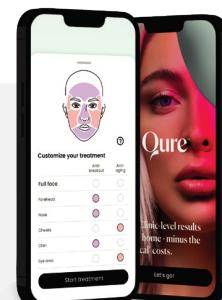

4.6. How to operate the Q-Rejuvalight Pro Facewear with the Qure Skincare App

Phase One:

1. Download the Qure Skincare app.
2. Open the app on your mobile device and follow the instructions to set up your profile.
3. Pair your Q-Rejuvalight Pro Facewear with the app by turning ON your Bluetooth on your phone.
4. Turn ON the Q-Rejuvalight Pro Facewear by holding the power button on the forehead until the indicator light is on.
5. Inside the app the Q-Rejuvalight Pro will appear on the available devices list, click on it to connect.
6. Start treatment will appear in the app when it's paired.

Phase Two:

1. Follow steps 1 to 3 of sections '4.4. Operation Instructions' to prepare yourself and the Q-Rejuvalight Pro Facewear for the treatment session.
2. Follow the instructions in the app to start and customize your treatment. You can choose from three (3) treatment options: Pro-Aging, Anti-Breakout or custom zone.
3. Click 'start' to start your treatment.
4. The device will automatically turn OFF after completion of 3-minute treatment.
5. Remove device from face and wipe device clean (see cleaning instructions).
6. Store Q-Rejuvalight Pro in the provided protective storage bag.
7. After treatment, apply topical skincare.



5. MAINTENANCE

5.1. Cleaning

The device is reusable, and it needs to be cleaned after each use. The cleaning methods of the device are instructed as follows:

1. Turn Q-Rejuvalight Pro Facewear OFF and make sure it unplugs from any power source.
2. Wipe the inside of the mask with a damp cloth (make sure the cloth is not too wet as it might damage the electrical components) to remove any residue from skin oils after each use.

Note: For an enhanced cleaning experience, lightly spray the inside of your device with the Qure Dermal Mist and gently wipe to maintain hygiene and freshness.

3. Clean Q-Rejuvalight Pro Facewear body by using a damp or microfiber cloth. Do not use chemical or alcohol-based cleansers on the exterior.

Note: Check the device whether some visible contaminants still exist. If there are visible contaminants on the device, repeat the above steps.

4. Dry the device in air naturally, and make sure that the device is dry completely prior to use or store in the storage bag.

Note: Do not use any other cleaning products as these may damage the plastics.



5.2. Troubleshooting

In the event that the device fails to perform as intended, the following notes will help to identify potential problems with the device and its setup.

Problem	Solution
The device can't be turned on	<ul style="list-style-type: none">Ensure that the device has been fully charged.If the white indicator light is blinking then please charge the Q-Rejuvalight Pro Facewear.Ensure device is not plugged in. The device will not turn on while plugged in.
The device can't be charged	<ul style="list-style-type: none">Ensure the USB-C power cord is firmly inserted into the Q-Rejuvalight Pro Facewear.Try a different USB-C Power Adapter to ensure it is working properly.Try a different wall outlet to determine if there is power to the outlet.When an adapter greater than 5V is used to charge the controller, the device will automatically turn off the charging function and cannot be charged. Please use 5V adapter to charge the device before it can be charged normally.
The device shuts off abruptly, prior to completion of 3 minutes treatment	<ul style="list-style-type: none">Avoid excessive temperature caused by repeated use.Allow the Q-Rejuvalight Pro Facewear to cool for several minutes and try again.The battery level might be too low, charge the device fully before use.



App related issues	Solution
The Qure Skincare App does not connect to the Q-Rejuvalight Pro Facewear. What should I do?	<ul style="list-style-type: none"> • Make sure that Location Sharing is enabled on your phone. Once confirmed, exit the app, and reopen – then connect to the Q-Rejuvalight Pro Facewear.
Why is a PIN code being asked when I'm trying to connect my Q-Rejuvalight Pro with the Qure app?	<ul style="list-style-type: none"> • You may have been connecting the mask via the Bluetooth menu on your phone hence why this occurred. Please connect directly by opening the Qure app and connect to your phone bluetooth make sure to connect the device directly via the Qure App

For the full troubleshooting list visit www.qureskincare.com.

5.3. Disposal of Electrical and Electronic Equipment Waste (E-waste)

As each city has its regulation of the disposal of e-waste, please learn about recycling or disposal programs in your local area by searching “E-waste recycling or disposal” online. You can also contact the relative department in your city directly to consult the policy.



6. WARRANTY INFORMATION

We strive for the highest quality products to earn your satisfaction. Please see warranty terms set out below:

This twelve months limited warranty covers defects in materials and workmanship in your Q-Rejuvalight Pro Facewear when purchased directly from Qure Skincare. Limited warranty is valid for you alone, the original purchaser, and cannot be transferred.

If the product was a gift then please obtain a copy of the original receipt or have the original purchaser process the warranty claim on your behalf.

This limited warranty does not cover: damage, defects, failure caused by abuse or misuse, improper care, impact or insertion of foreign objects, use with a voltage connector, or loss of device.

The limited warranty begins from the date of purchase and expires after twelve months. The warranty period is not extended if your device is replaced by Qure during the warranty period.

If you discover a defect in your Q-Rejuvalight Pro Facewear covered by the warranty, before the twelve months warranty period expires, contact Qure Skincare customer support for assistance via email support@qureskincare.com or website live chat.

To ensure prompt response, please provide the following information:

Full name, proof of purchase, device serial number, detailed description of issue that you're



experiencing with photo or video evidence.

If we confirm a defect covered by this limited warranty, Qure Skincare will replace your device. If we find that your device is not defective, we will notify you and return the device to you. All Limited Warranty services must be authorized and performed by Qure Skincare.

6.1. Warranty Limitations & Disclaimers

This warranty gives you specific legal rights, and is in addition to your statutory rights. Your remedies for the breach of this limited warranty are limited solely to the repair and replacement of your device as set forth in this warranty statement.

To the maximum extent permitted by applicable law, Qure Skincare disclaims all implied warranties. If applicable law does not permit the disclaimer of implied warranties, then the duration of implied warranties are hereby expressly limited to the duration of the express limited warranty set forth above.

If the applicable law does not allow limits on warranties, or on remedies for breach in certain transactions, the limits in this paragraph and the disclaimer or exceptions from warranty may not apply. This limitation does not apply to claims for death or personal injury caused by a defect in the device or any other liability that cannot be excluded or limited by law.

These warranty terms, conditions, and limitations allocate the risks of product failure between Qure Skincare and you, the purchaser. This allocation is recognized by both parties and is reflected in the price of Qure. By using Q-Rejuvalight Pro Facewear you acknowledge that you have read these terms, conditions, and limitations, understand them and are bound by them.



7. SAFETY AND EMC

This device is internally powered equipment with type BF applied part. It complies with Medical Electrical Safety Standards (IEC 60601-1, IEC 60601-1-11, IEC 60601-2-57, IEC 62133-2, IEC 62471). This device is also compliant with Medical EMC Standard (IEC 60601-1-2).

Guidance and manufacturer's declaration – electromagnetic emissions

The Q-Rejuvalight Pro Facewear is intended to use in the electromagnetic environment specified below. The customer or the user of the Q-Rejuvalight Pro Facewear should assure that it is used in such an environment.

Emissions	Compliance	Electromagnetic environment – guidance
RF emissions CISPR 11	Group 1	The Q-Rejuvalight Pro Facewear uses LED energy only for its internal function. Therefore, its RF emissions are very low and are not likely to cause any interference in nearby electronic equipment.
RF emissions CISPR 11	Class B	The Q-Rejuvalight Pro Facewear is suitable to be used in all establishments, including domestic establishments and those directly connected to the public low-voltage power supply network that supplies buildings used for domestic purposes.
Harmonic emissions IEC 61000-3-2	Not applicable	
Voltage fluctuations/ flicker emissions IEC 61000-3-3	Class B	



Guidance and manufacturer's declaration – electromagnetic immunity

The Q-Rejuvalight Pro Facewear is intended to use in the electromagnetic environment specified below. The customer or the user of the Q-Rejuvalight Pro Facewear should assure that it is used in such an environment.

Immunity test	IEC 60601 test level	Compliance level	Electromagnetic environment – guidance
Electrostatic discharge (ESD) IEC 61000-4-2	±8 kV contact ±2KV, ±4KV, ±8KV, ±15KV air	±8 kV contact ±2KV, ±4KV, ±8KV, ±15KV air	Floors should be wood, concrete or ceramic tile. If floors are covered with synthetic material, the relative humidity should be at least 30 %.
Power frequency (50/60 Hz) magnetic field IEC 61000-4-8	30 A/m	30 A/m	Power frequency magnetic fields should be at levels characteristic of a HOME HEALTHCARE ENVIRONMENT

NOTE UT is the a.c. mains voltage prior to application of the test level

Guidance and manufacturer's declaration – electromagnetic immunity

The Q-Rejuvalight Pro Facewear is intended to use in the electromagnetic environment specified below. The customer or the user of the Q-Rejuvalight Pro Facewear should assure that it is used in such an environment.

Immunity test	IEC 60601 test level	Compliance level	Electromagnetic environment – guidance
Conducted RF IEC 61000-4-6	3 V RMS outside the ISM band 150kHz to 80MHz	3 V RMS outside the ISM band 150kHz to 80MHz	Portable and mobile RF communications equipment should be used no closer to any part of the Q-Rejuvalight Pro Facewear, including cables, than the recommended separation distance calculated from the equation applicable to the frequency of the transmitter.
	6 V RMS in the ISM and amateur radio bands 150kHz to 80MHz	6 V RMS in the ISM and amateur radio bands 150kHz to 80MHz	
Radiated RF IEC 61000-4-3	3 V/m 80 MHz to 2.7GHz 80 % AM at 1 kHz	3 V/m 80 MHz to 2.7GHz 80 % AM at 1 kHz	Recommended separation distance $d = 1,2\sqrt{P}$ $d = 1,2\sqrt{P} \text{ 80MHz to 800 MHz}$ $d = 2,3\sqrt{P} \text{ 800MHz to 2,7 GHz}$ Where P is the maximum output power rating of the transmitter in watts (W) according to the transmitter manufacturer and d is the recommended separation Distance in meters (m). Field strengths from fixed RF transmitters, as determined by an electromagnetic site survey, ^a should be less than the compliance level in each frequency range. ^b Interference may occur in the vicinity of Equipment marked with the following symbol:
	10 V/m 80 MHz to 2.7GHz 80 % AM at 1 kHz	10 V/m 80 MHz to 2.7GHz 80 % AM at 1 kHz	



NOTE 1 At 80 MHz and 800 MHz, the higher frequency range applies.

NOTE 2 These guidelines may not apply in all situations. Electromagnetic propagation is affected by absorption and reflection from structures, objects and people.

- a. Field strengths from fixed transmitters, such as base stations for radio (cellular/cordless) telephones and land mobile radios, amateur radio, AM and FM radio broadcast and TV broadcast cannot be predicted theoretically with accuracy. To assess the electromagnetic environment due to fixed RF transmitters, an electromagnetic site survey should be considered. If the measured field strength in the location in which the Q-Rejuvalight Pro Facewear is used exceeds the applicable RF compliance level above, the Q-Rejuvalight Pro Facewear should be observed to verify normal operation. If abnormal performance is observed, additional measures may be necessary, such as reorienting or relocating the Q-Rejuvalight Pro Facewear.
- b. Over the frequency range 150 kHz to 80 MHz, field strengths should be less than 10 V/m.

Recommended separation distances between portable and mobile RF communications equipment and the Q-Rejuvalight Pro Facewear

The Q-Rejuvalight Pro Facewear is intended to use in an electromagnetic environment in which radiated RF disturbances are control RGB. The customer or the user of the Q-Rejuvalight Pro Facewear can help prevent electromagnetic interference by maintaining a minimum distance between portable and mobile RF communications equipment (transmitters) and the Q-Rejuvalight Pro Facewear as recommended below, according to the maximum output power of the communications equipment.

Rated maximum output power of transmitter (W)	Separation distance according to frequency of transmitter (m)		
	150 kHz to 80 MHz $d = 1,2\sqrt{P}$	80 MHz to 800 MHz $d = 1,2\sqrt{P}$	800 MHz to 2.7 GHz $d = 2,3\sqrt{P}$
0.01	0.12	0.12	0.23
0.1	0.38	0.38	0.73
1	1.2	1.2	2.3
10	3.8	3.8	7.3
100	12	12	23



For transmitters rated at a maximum output power not listed above, the recommended separation distance d in meters (m) can be estimated using the equation applicable to the frequency of the transmitter, where P is the maximum output power rating of the transmitter in watts (W) according to the transmitter manufacturer.

NOTE 1 At 80 MHz and 800 MHz, the separation distance for the higher frequency range applies.

NOTE 2 These guidelines may not apply in all situations. Electromagnetic propagation is affected by absorption and reflection from structures, objects and people.

Table – Test specifications for ENCLOSURE PORT IMMUNITY to RF wireless communications equipment

Test Frequency (MHz)	Band (MHz)	Service	Modulation	Maximum Power (W)	Distance (m)	Immunity Test Level (v/m)
385	380-390	TETRA 400	Pulse modulation 18 Hz	1.8	0.3	27
450	430-470	GMRS 460, FRS 460	FM ±5 KHz deviation 1KHz sine	2	0.3	28
710	704-787	LTE 13, 17 Band	Pulse modulation 217 Hz	0.2	0.3	9
745						
780						
810	800-960	GSM 800/900, TETRA 800, iDEN 820, CDMA 850, LTE Band 5	Pulse modulation 18 Hz	2	0.3	28
870						
930						
1720	1700-1990	GSM 1800, CDMA 1900, GSM 1900, DECT, LTE Band 1, 3, 4, 25, UMTS	Pulse modulation 217 Hz	2	0.3	28
1845						
1970						



2450	2400-2570	Bluetooth, WLAN 802.11 b/g/n, RFID 2450, LTE Band 7	Pulse modulation 217 Hz	2	0.3	28
5240	5100-5800	WLAN 802.11 a/n	Pulse modulation 217 Hz	2	0.3	9
5500						
5785						

8. THE SYMBOLS AND DESCRIPTION

No.	Symbols	Description
1		Manufacturer
2		The symbol indicates that the product should not be discarded as unsorted waste but must be sent to separate collection facilities for recovery and recycling.
3		Consult instructions for use.
4		The date of manufacture
5		Protected against solid foreign objects of 12,5 mm Ø and greater; Protection against vertically falling water drops when ENCLOSURE tilted up to 15°.
6		Type BF Applied Part
7		Batch code
8		Symbol for "SERIAL NUMBER". This symbol shall be accompanied by the manufacturer's serial number.
9		Temperature limit
10		Humidity limitation
11		Indicates the Device is CE Marked and authorized to sell in Europe. (Lower-Voltage-Directive)



12	 RoHS	Restriction of hazardous substances.
13		Indicates that the electromagnetic radiation from the device is below the limits specified by the Federal Communications Commission and the manufacturer has followed the requirements of the Supplier's Declaration of Conformity authorization procedures.
14		This symbol implies conformity to UK Directives on health, safety and environmental protection standards. UKCA stands for UK Conformity Assessed.

9. FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

10. MANUFACTURER INFORMATION



Company Name: Shenzhen Kaiyan Medical Equipment Co, Ltd

Address: Building#3 and Building#5, 40th of Fuxin Street, Huaide Community Fuyong Town, Baoan District, Shenzhen, Guangdong 518103, China

Sponsor:

Company Name: Light Tree Ventures Europe B.V.

Address: Laan van Ypenburg 108, 2497 GC, The Hague, The Netherlands

Contact Person (including title): Alain Dijkstra (Manager)

Distributor:

Company: Qure Skincare Pty Ltd

Address: Level 1, 56 Clarence Street, Sydney NSW 2000, Australia

Manual Version: A3

Issue Date: 2025 - 01 - 10





qureskincare.com