
Bijli Meter Reader - main board  rev B  -  52 × 38 mm

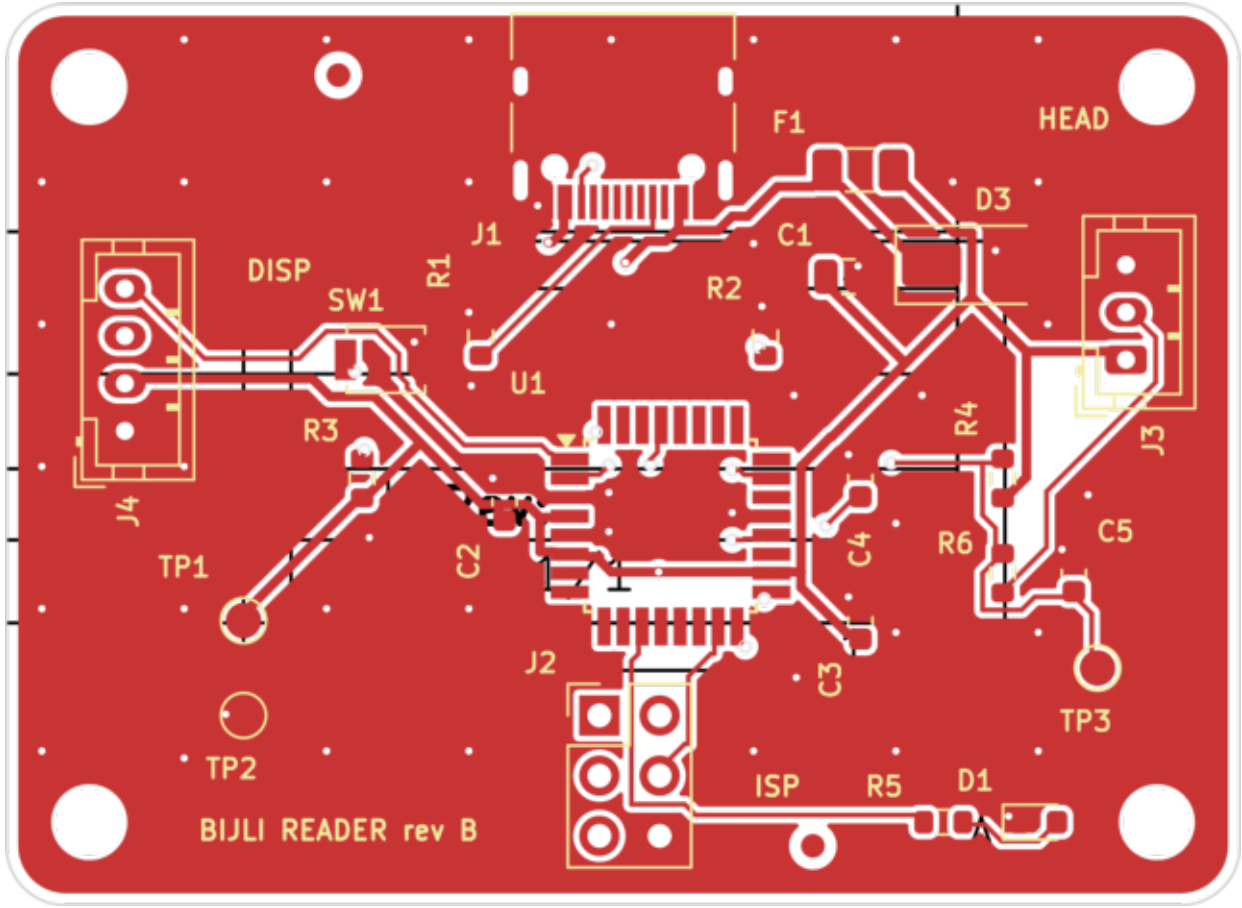


FABRICATION NOTES
1. Material: FR-4 TG135, 2 layers, finished thickness 1.6 mm +-10
2. Copper: 1 oz (35 um) finished, both sides.
3. Finish: HASL lead-free or ENIG.
4. Solder mask: green, both sides.
5. Silkscreen: white, top.
6. Min track/space 0.2/0.2 mm (power 0.4 mm); min via 0.6/0.3 mm;
7. Outline: Edge.Cuts, 2.0-2.5 mm corner radii; tolerance +-0.2 m
8. IPC-6012 class 2; 100 % electrical test (netlist in Gerber job
9. No panelisation specified: add 5 mm rails / V-score if the ass
10. Date code / vendor marking: place in silkscreen area only.

| Tool | Dia (mm) | Count |
|---|---|---|
| PTH:1 | 0.30 | 71 |
| PTH:2 | 0.60 | 4 |
| PTH:3 | 0.75 | 7 |
| PTH:4 | 1.00 | 6 |
| PTH:5 | 0.65 | 2 |
| PTH:6 | 2.70 | 4 |

Files: Gerber X2 (F/B Cu, Mask, Paste, Silk, Edge) + Excellon drill in the zip. Board origin = lower-left of Edge.Cuts after fab import; KiCad origin is top-left, y down.