


Model Description of Amass Products

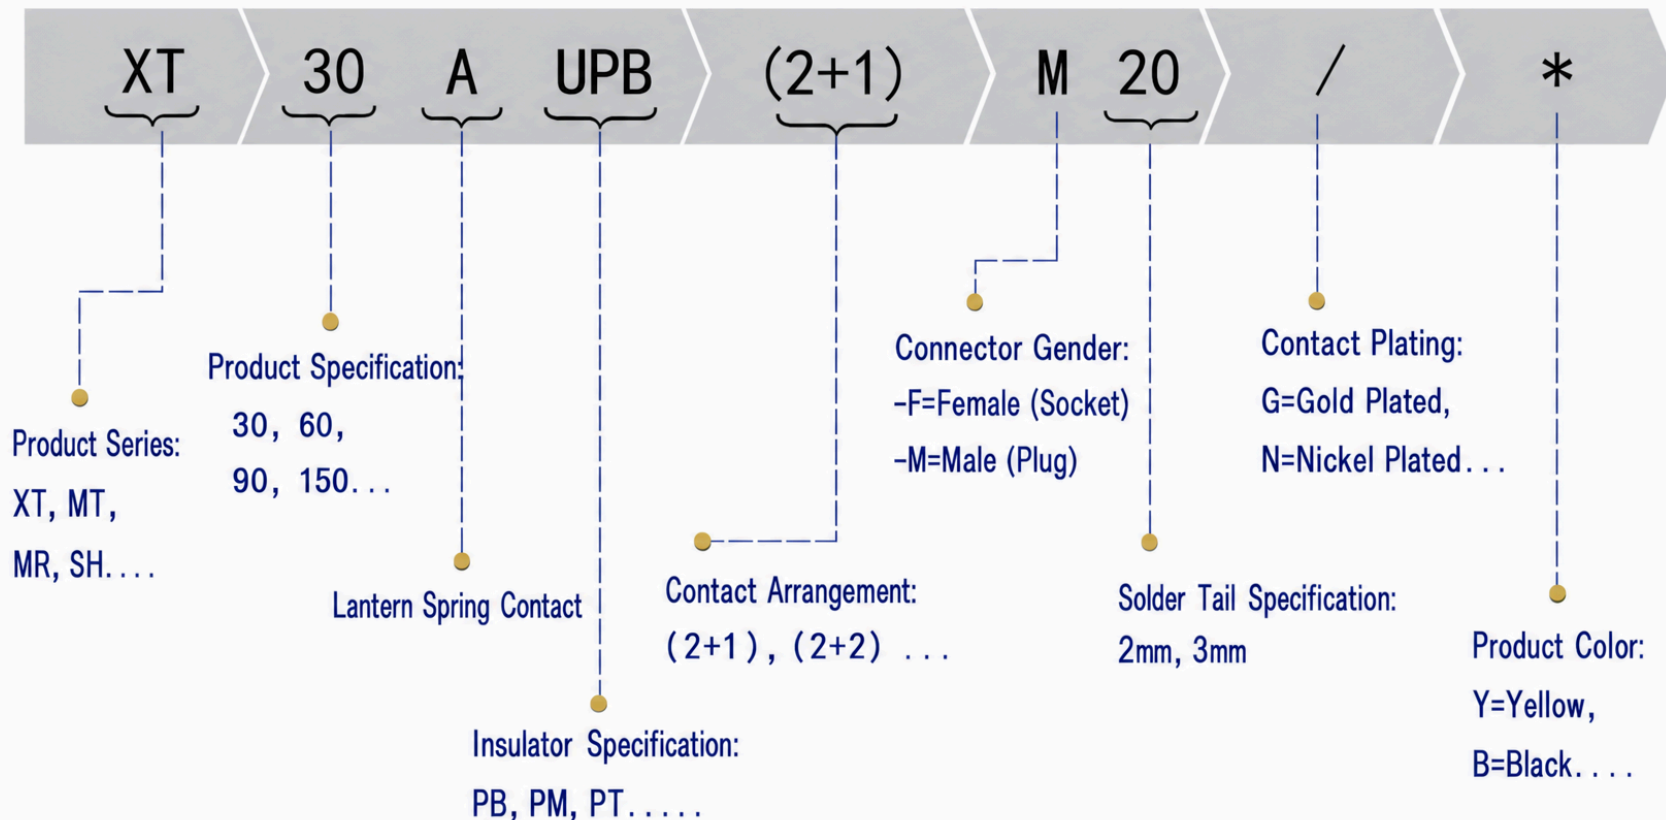

Amass Product Specification


1. Product Description

Vertical 2PIN model, designed to provide optimized integration solutions for PCB boards with directional space. Available with gold-plated or nickel-plated options, and has a compact and robust design.

2. Application

☐ Lithium Battery ☐ Motor ☒ Controller ☐ Charger ☐ Others

3. Product Image

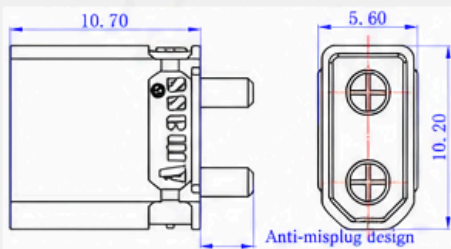Product Photo	Drawing
	
Product Model	Solder Height
XT30UPB30-M. G. *	3.0mm

4. Specification

Material	Specification	Plating	Thickness of Gold Plating
Metal Parts	QSn4-4-4	G2: Gold-Plated (Au)	0.03μm
Material	Specification	Color	Flammability Rating
Plastic Housing	PA66	*: Y=Yellow, B=Black	UL94-V0

5. Performance

Electrical Performance	Test Method	Requirement
Rated Voltage	UL1977	DC 500V
Rated Current	UL1977	15A
Contact Resistance	GB/T5095.2	1.20mΩ
Insulation Resistance	GB/T5095.2	2000MΩ
Instantaneous Current	&A 1min <80℃	30A
Temperature Rise	UL1977	15A 4h <60℃
Dielectric Withstanding Voltage	GB/T2900.18	4.31mm
Mechanical Performance	Standard	Requirement
Insertion Force	GB/T5095.8	1.2 kg~3.5kg
Withdrawal Force	GB/T5095.8	1.2 kg~3.5kg
Durability	GB/T5095.1	100 times
Protection Level	GB/T4208	IP40
Environmental Performance	Standard	Requirement
Temperature Range	GB/T 2423.3	-20℃ to 120℃
Salt Spray	GB/T 2423.17	48h

6. Recommended Wire Gauge

mm ²	Temperature Rise 60℃	Temperature Rise 85℃
16#	20A	25A
18#	15A	20A
20#	10A	15A



7. Configuration Description

☐ With Cover ☐ With Latch ☐ Waterproof ☐ Fireproof

8. Qualification Certification

☒ UL ☐ CE ☒ RoHS 2.0 ☐ Reach

9. Installation Recommendation

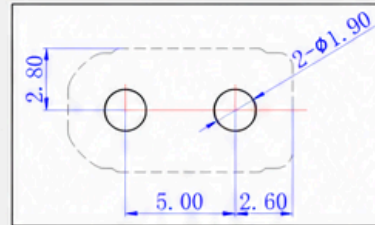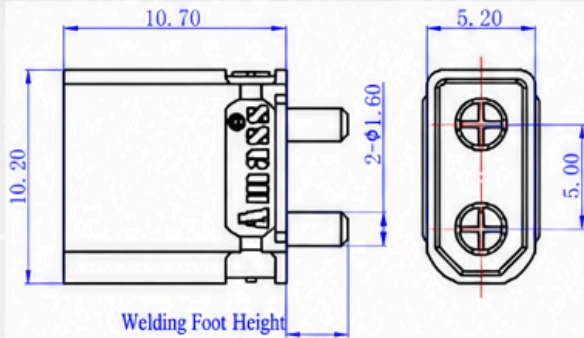

Installation Hole Diagram



Important Notes:

When in use, do not exceed the specified current and voltage.



- Excessive current or voltage may cause failure or accidents.
- If the connector is used while not fully mated, inserting the plug connector may cause failure or accidents; therefore, please use it only in the connected state.

Do not use in a state where external force is applied to the connector



- Do not energize the connector or wiring while external force is applied. Excessive external force may cause failure or accidents. Therefore, do not use in such conditions.
- Since the connector is designed considering the connections as part of the enclosure, do not use the connector as a part of the housing.

Confirm the operating environment



- Do not use in environments with high temperature or high humidity.
- Do not use in environments that do not meet the specifications, as this may cause failure or accidents. Therefore, do not use under such conditions.

Use with caution



- Precision components; handle with care during use.
- Please open the packaging carefully. If opened carelessly, this packaged product may be subjected to strong impact, which may cause deformation, bending, breakage, and other phenomena.

Prepared by:

Reviewed by:

Approved by: