

Hub Jeweller


Security system control panel.
Has two independent
communication channels:
Ethernet and a 2G SIM card.




2
GRADE
EN 50131

PD 6662
2017


Key features




Free software updates



Connection to security company CMS




Tampering alarm




Remote control and setup via the app




Informing users with push
notifications, calls, and SMS



Communication with wireless Ajax
devices at a distance of up to 2,000 m



Frequency hopping



Connecting to Ajax apps via QR code

Always online

To guarantee prompt alarm transmission to the monitoring station and users, Hub can be connected to two Internet providers at a time via **Ethernet** and **SIM card (2G)**. Channels work in parallel, and automatic switching between them takes seconds.

Hub is connected to the apps, security companies and users through the Ajax Cloud server with an availability of 99.995% in 2021. For more excellent reliability, the servers are located in several data centres. We use the proprietary binary protocol and automatic load balancing for the uninterrupted processing of millions of data packets and the stable operation of security systems.


Hub reduces the security system dependence on the conditions at the facility. The control panel is equipped with a backup battery, providing **up to 16 hours of autonomous operation** in case of a blackout. The system will report a power-down and a power restoration to the CMS and all users.



Jeweller radio protocol provides two-way communication between a hub and devices at a distance of **up to 2,000 m**. Jeweller uses time frames to synchronize communication with connected devices, authentication to eliminate forgery, and encryption to protect against data theft.

To expand the radio coverage area, a **range extender** can be connected to Hub, increasing the range **to 1,800 m** more.

Controlled with apps

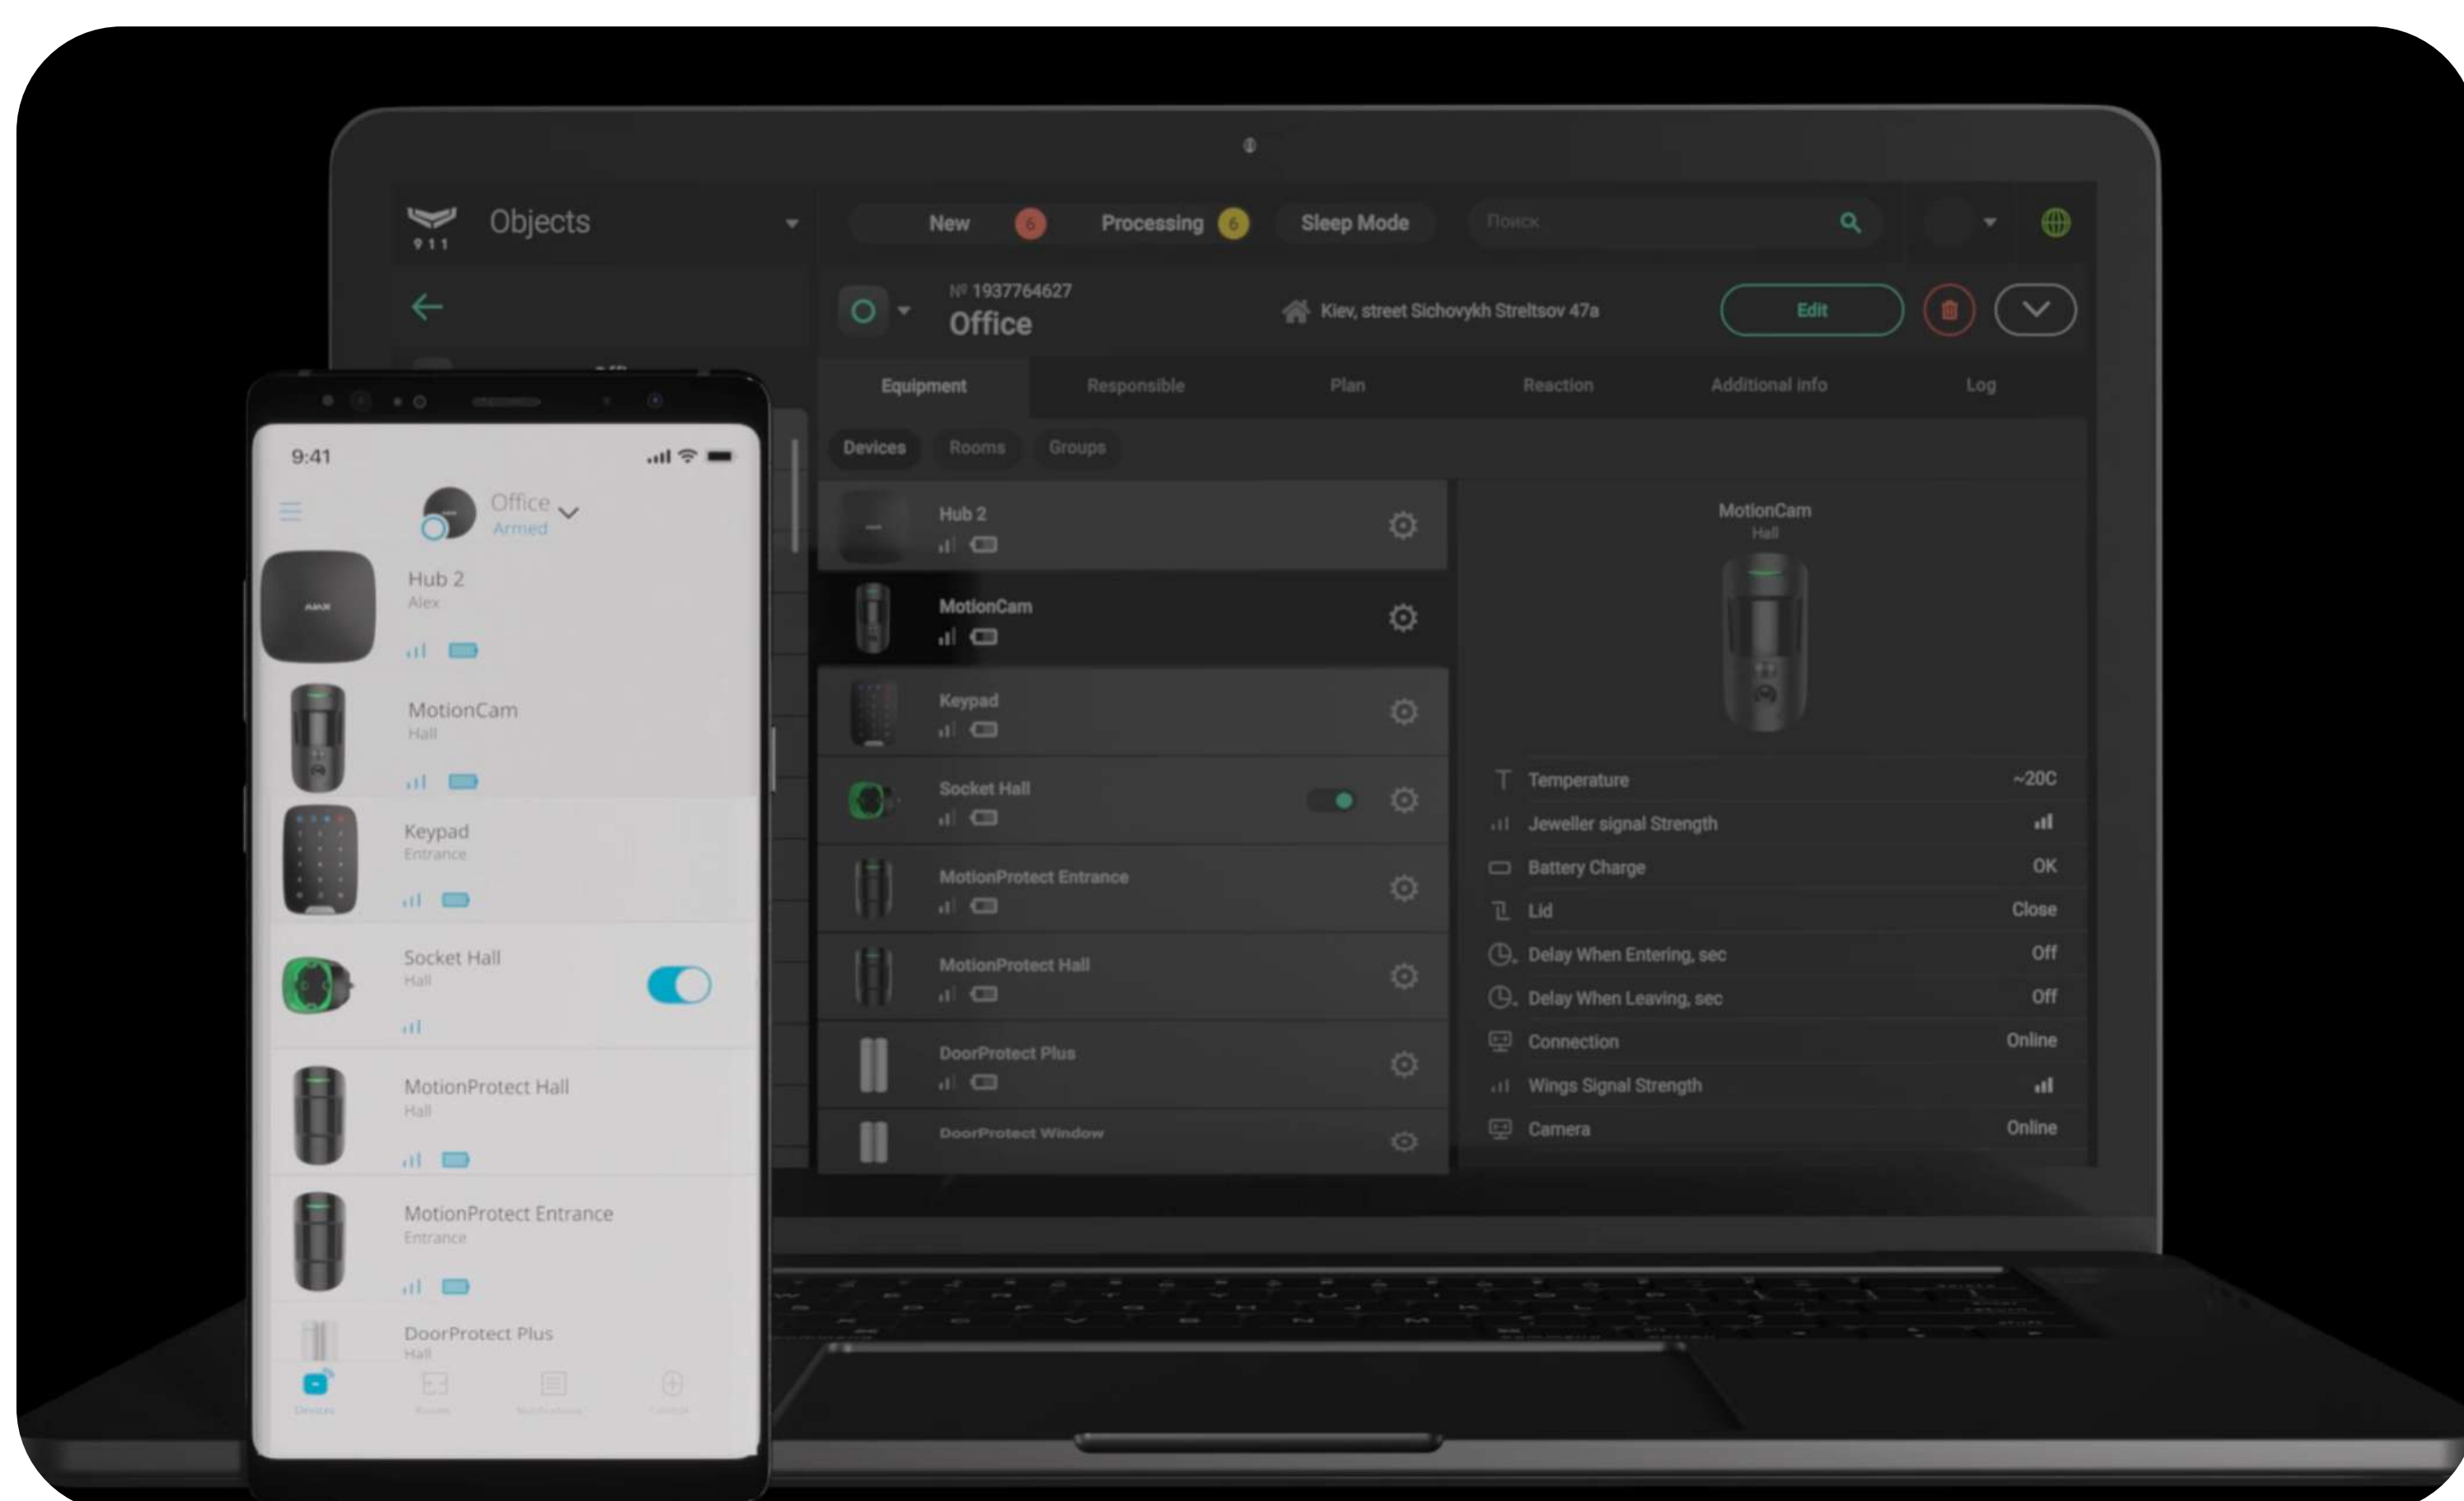

We've developed two types of applications: for users and PRO. Users' apps are designed for monitoring alarms and managing security via smartphone. Apps for PRO are designed to manage system settings via PC or smartphone.

All types of Ajax apps connect to a hub using a secure channel with Ajax Cloud — our server solution located at several AWS data centres. All security system settings are always available in the app.

The keyboard also allows you to create passcodes for those who are not added to the hub users or use the system from time to time. In this case, the users and the monitoring company operator also know exactly who and when changed the security mode. It is convenient, for example, to create a passcode for a cleaning company.

Fast connection and installation

Hub is ready to work right out of the box. It comes with pre-installed communication modules, a power supply unit, and a backup battery. To begin the system setup, an installer needs to plug the device into a power socket, connect it to the Internet, insert a SIM card, and scan the app's QR code. Thanks to SmartBracket, installers don't need to disassemble the enclosure to mount the hub.

Technical specifications

Compliance with standards	EN 50131 (Grade 2) PD 6662:2017	Connection to CMS	SurGard (Contact ID) SIA (DC-09) ADEMCO 685 Other proprietary protocols
Connected devices	up to 100 wireless devices Including 1 range extender and up to 10 sirens.	Features	50 users 10 cameras or DVRs 5 automation scenarios 9 security groups
Communication channels with Ajax devices	 Jeweller communication technology Frequency bands 866.0–866.5 MHz 868.0–868.6 MHz 868.7–869.2 MHz 905.0–926.5 MHz 915.85–926.5 MHz 921.0–922.0 MHz Depends on the sales region. Maximum effective radiated power (ERP) ≤25 mW Communication range up to 2,000 m In an open space.	External communication channels	Ethernet 8P8C slot Up to 100 Mb/s. Cellular network 1 slot for micro-SIM 2G (GSM900/DCS1800 (B3/B8))
Power supply	Main power supply 100–240 V~, 50/60 Hz Backup power supply Li-Ion battery with 2 A·h capacity Up to 16 hours of autonomous operation.	Installation	Operating temperature range from -10°C to +40°C Operating humidity up to 75% Protection class IP20

Enclosure	Colour white black Dimensions 163 × 163 × 36 mm Weight 350 g Tampering alarm	Complete set	Hub Jeweller Power cable Ethernet cable SIM card Depends on the region of sale. Installation kit Quick Start Guide
-----------	---	--------------	--