


J2
Conn_01x04
PWR_FLAG
D1
SS14
+5V
PWR_FLAG
VSYS
C3
10uF
GND
GND
+3.3V
C1
100nF
GND
+3.3V
U2
74LVC541A
SEL0_B
SEL1_B
MTR_B
DIR_B
STEP_B
WDATA_B
WGATE_B
SIDE_B
A0
A1
A2
A3
A4
A5
A6
A7
VCC
GND
G1
G2
Y0
Y1
Y2
Y3
Y4
Y5
Y6
Y7
SEL0
SEL1
MTR
DIR
STEP
WDATA
WGATE
SIDE
GND
GND
J1
Conn_02x17_Odd_Even
CHNG_B
INDEX_B
SEL0_B
SEL1_B
MTR_B
DIR_B
STEP_B
WDATA_B
WGATE_B
TRK0_B
WPROT_B
RDATA_B
SIDE_B
RDY_B
GND
PIM726's parts: nets cross by global label
MCU
File: mcu.kicad_sch
Support
File: support.kicad_sch
+5V
R12
22
BZ1
Buzzer
Q8
BSS138
Q7
BSS138
R11
1k
R10
10k
BUZZER
GND
+5V
R2
1k
WGATE_B
+5V
R3
1k
WDATA_B
+5V
R6
1k
MTR_B
+5V
R5
1k
DIR_B
+5V
R4
1k
STEP_B
+5V
R1
1k
SIDE_B
+5V
R8
1k
SEL0_B
+5V
R7
1k
SEL1_B
D2
LED
R9
1k
ACT_LED
GND
CHNG_B
Q1
BSS138
CHNG
GND
INDEX_B
Q2
BSS138
INDEX
GND
TRK0_B
Q3
BSS138
TRK0
GND
WPROT_B
Q4
BSS138
WPROT
GND
RDATA_B
Q5
BSS138
RDATA
GND
RDY_B
Q6
BSS138
RDY
GND
+3.3V
NFC
J4
Conn_01x04
OLED_SDA
OLED_SCL
GND
+3.3V
J3
Conn_01x04
OLED_SDA
OLED_SCL
GND
Floppy side as rev B; the module's parts on two sheets
Sheet: /
File: rev-c.kicad_sch
Title: WiFi Floppy rev C
Size: A4
Date:
Rev: C draft
KiCad E.D.A. 10.0.4
Id: 1/3


IOVDD, QSPI_IOVDD, USB_OTP_VDD: one 100 nF per IOVDD pin

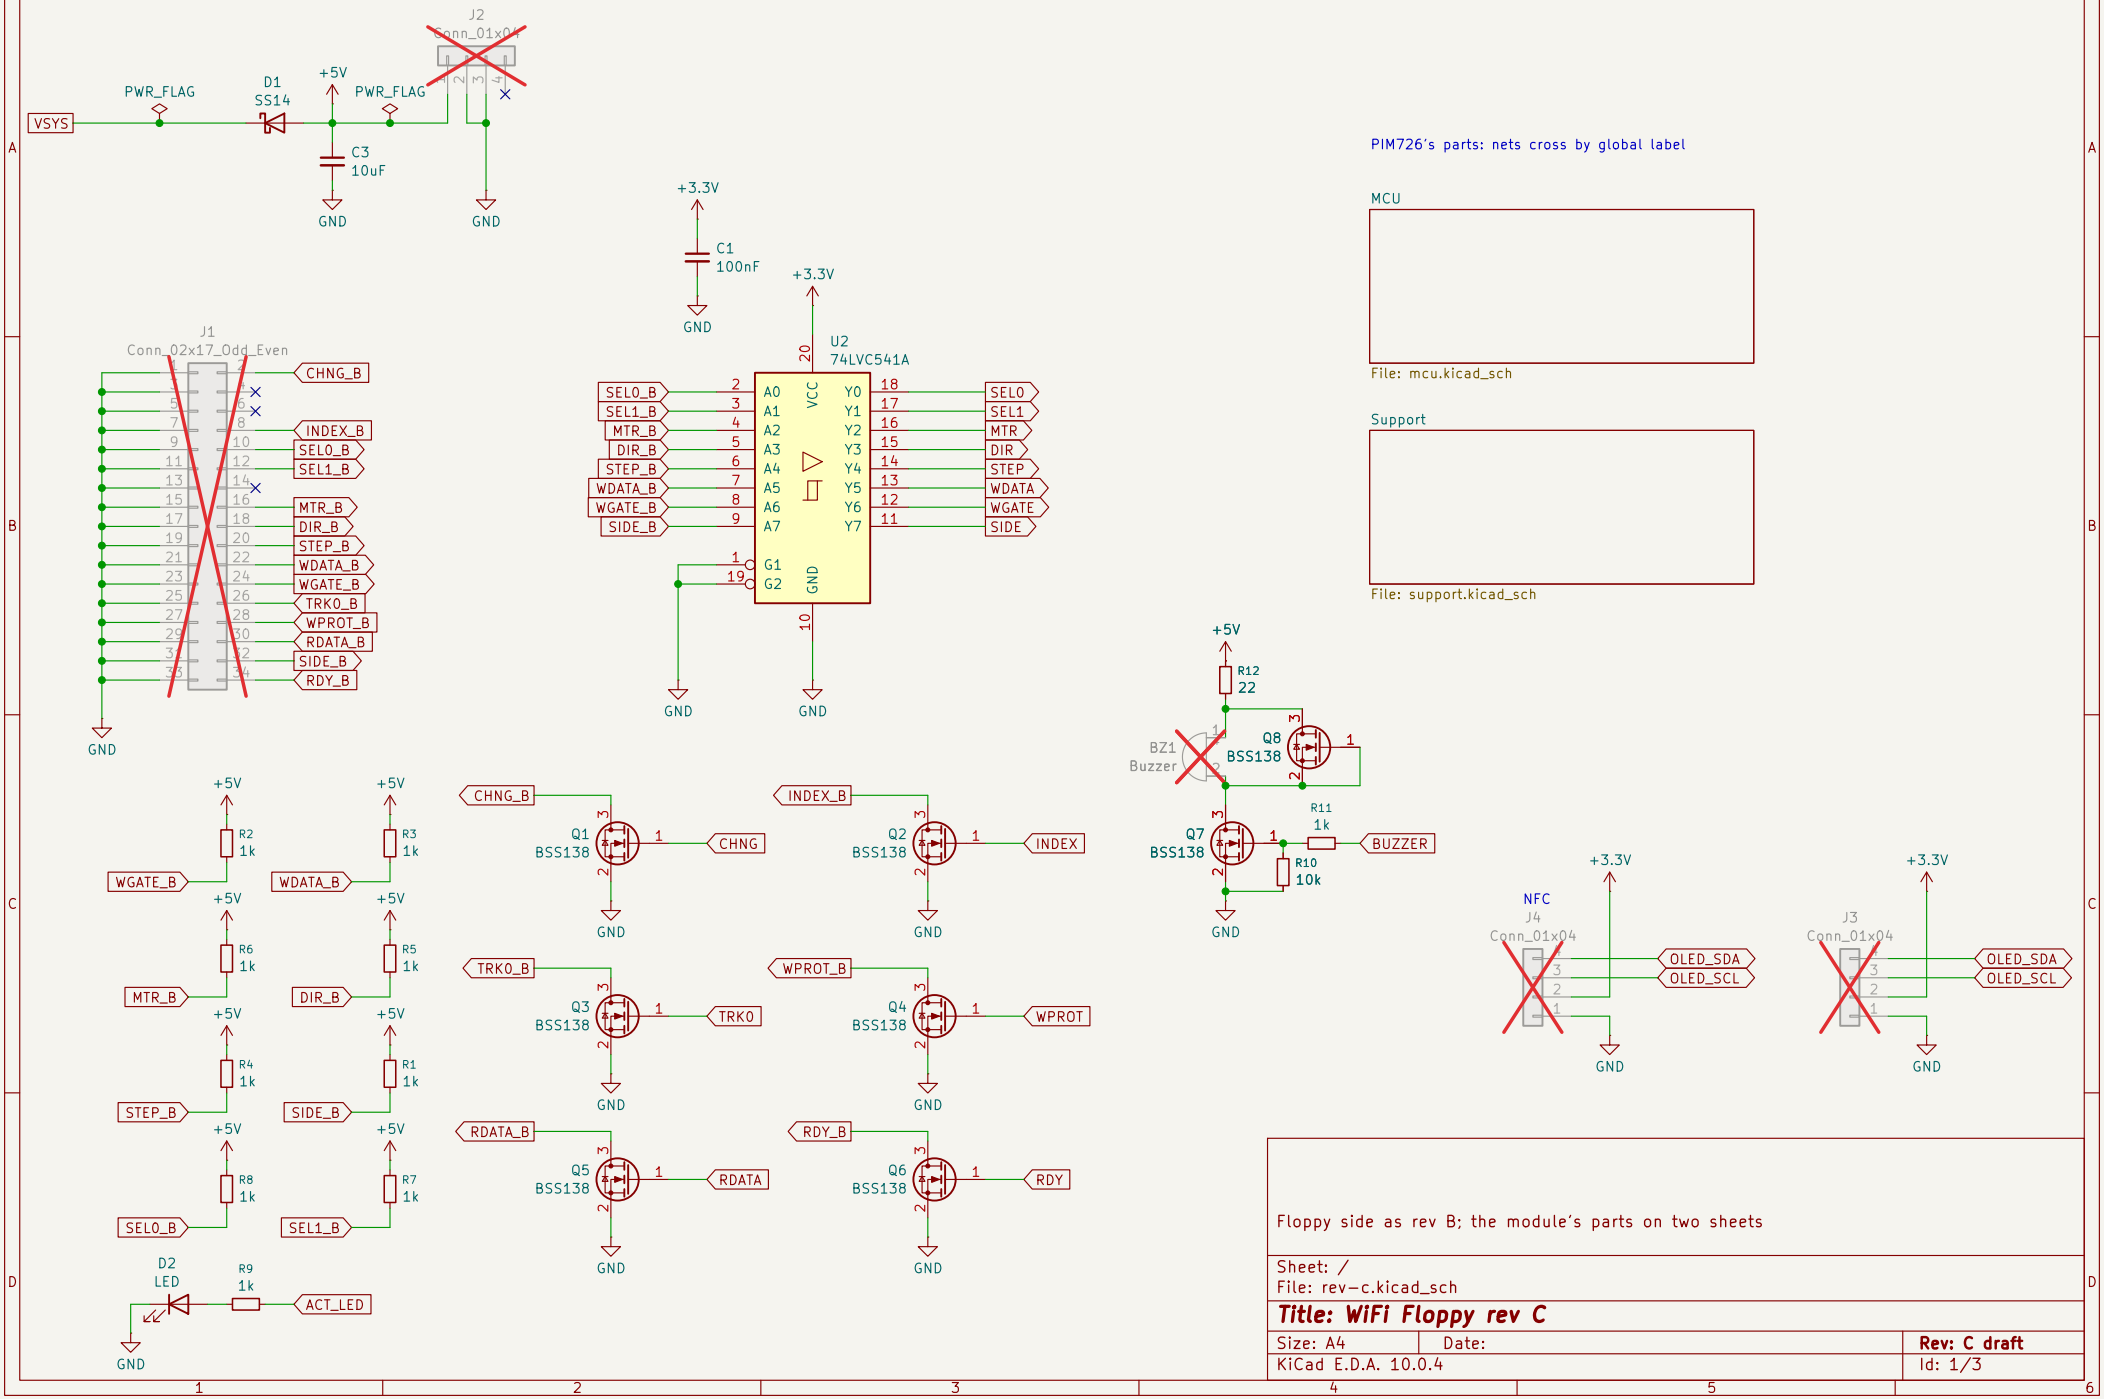

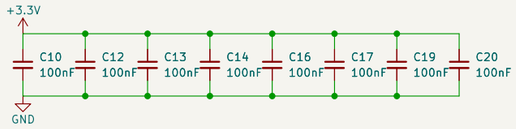


RP2350B GND flag: no part on this board drives GND as a power output


Core: on-chip switcher, DVDD 1.1 V. Lay out as Raspberry Pi do

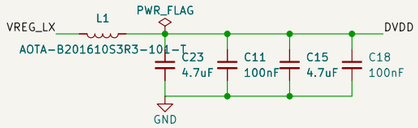


VREG supplies




ADC supply




Crystal 12 MHz

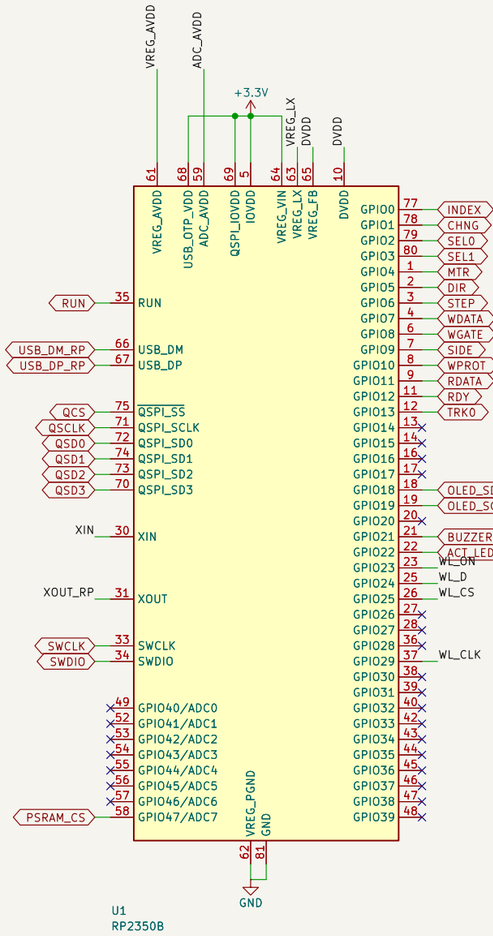

RM2 radio module

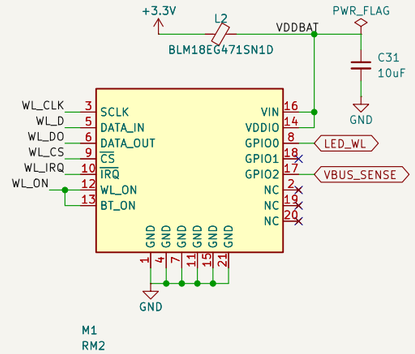

gSPI data: one GPIO, two resistors




After Pimoroni PIM726; differences in README.md

Sheet: /MCU/
File: mcu.kicad_sch


Title: Rev C: RP2350B and RM2

Size: A3	Date:	Rev: C draft
KiCad E.D.A. 10.0.4		Id: 2/3


USB-C

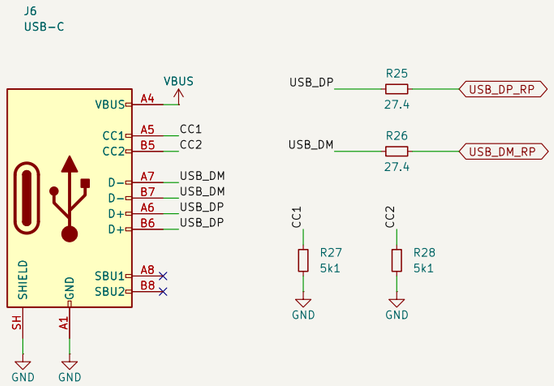


Flash, 16 MB, on QSPI CS0

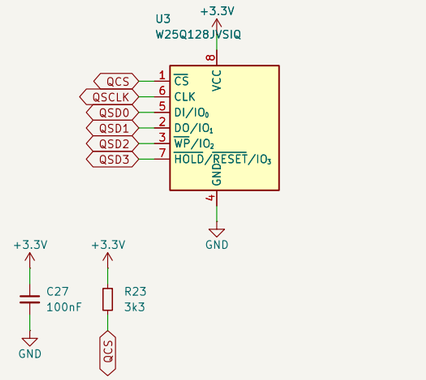

PSRAM, 16 MB, GP47: not the APS6404 of the PIM726

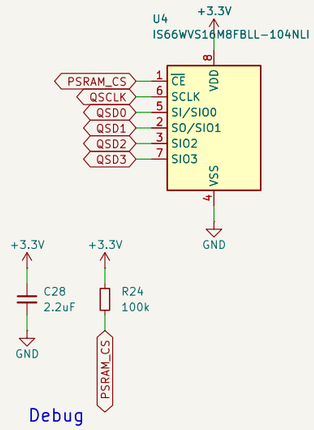


VBUS sense, read by RM2 GPIO2




VBUS to VSYS



BOOTSEL: hold while plugging in USB




Debug




RUN: no button (operator, 2026-11-05). Internal pull-up; pad for tweezers



3.3 V: NCP1117, not the AP7366 of the PIM726

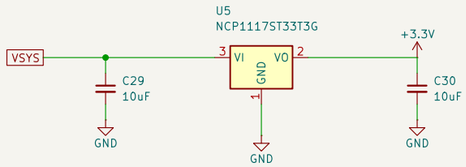

Wi-Fi LED, driven by RM2 GPIO0



After Pimoroni PIM726; differences in README.md

Sheet: /Support/
File: support.kicad_sch

Title: Rev C: USB, power, flash, PSRAM, boot

Size: A3	Date:	**Rev: C draft**
KiCad E.D.A. 10.0.4		Id: 3/3