



L4S implementation validation: Linux DualPI2 vs P4/BMv2
3 Mbit/s bottleneck; median and IQR over 5 Linux and 5 P4 runs


(a) Per-flow goodput

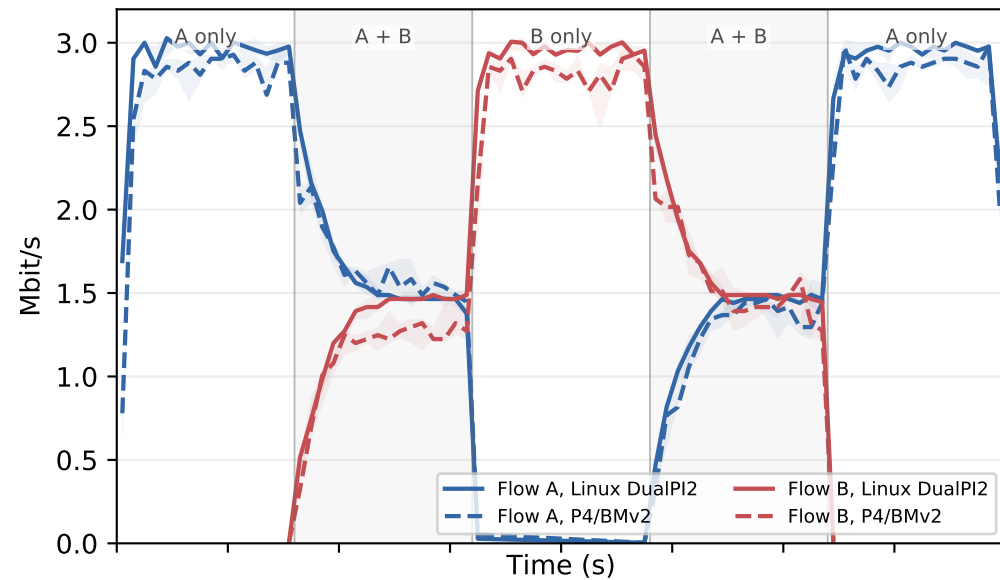

(b) AQM queue delay

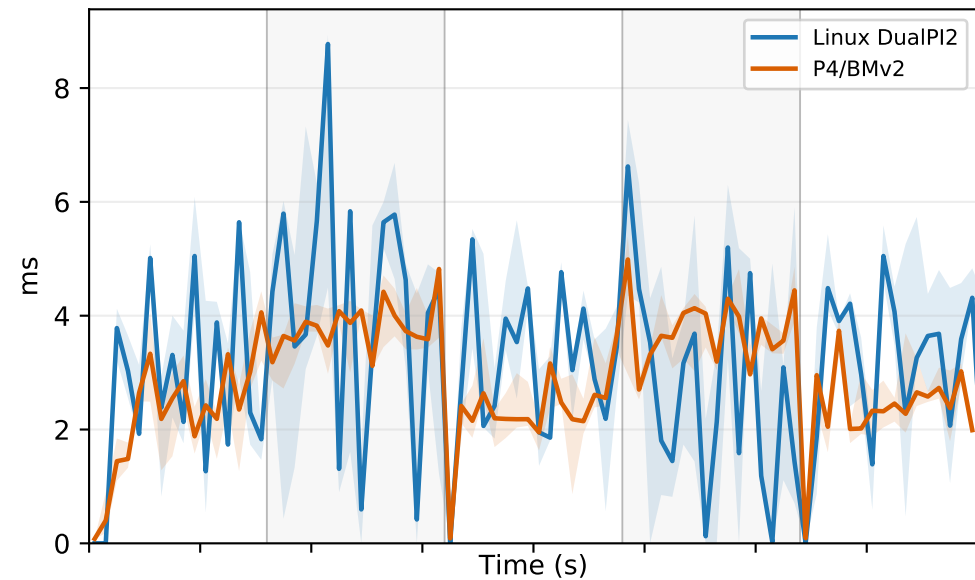

(c) New CE-mark fraction

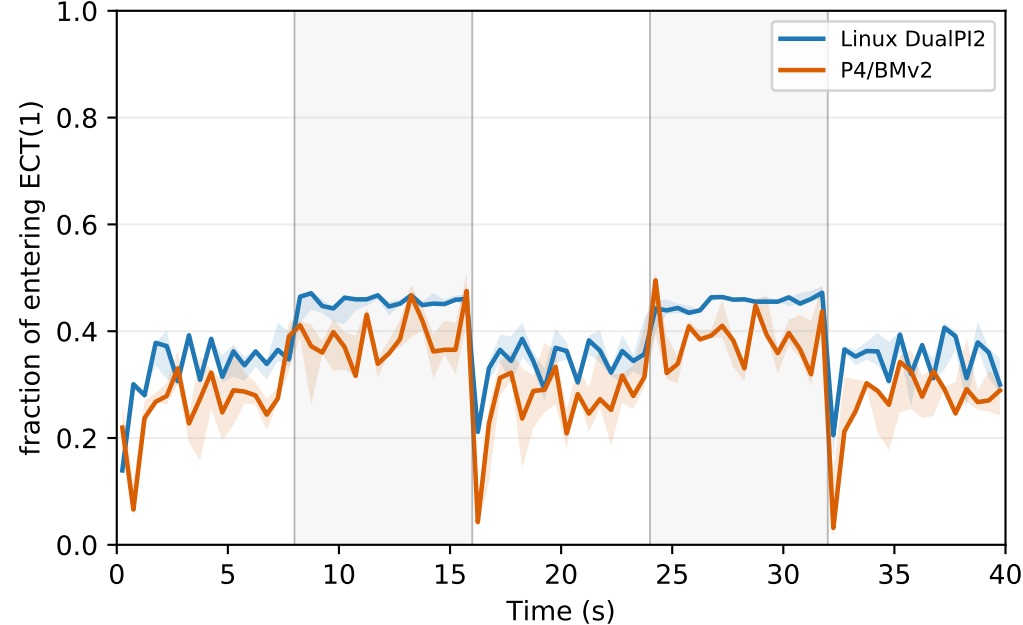

(d) Prague data-socket congestion window

