



**SUPRIYA WATER
TECHNOLOGY**

GREENSAND

High Performance Water Filter Media **KT**[®]

Greensand KT[®] is effective at higher operating temperatures and higher differential pressures than ordinary manganese greensand.

Greensand KT[®] is a black filter media used for removing soluble iron, manganese, hydrogen sulfide, arsenic, and radium from water supplies.

The manganese dioxide coated surface of Greensand KT[®] acts as a catalyst in the oxidation reduction reaction of iron and manganese.

Systems may be designed using either vertical or horizontal pressure filters, as well as open gravity filters.





Greensand KT[®] is a proven technology for iron, manganese, arsenic, radium, and hydrogen sulfide removal. Unlike in-situ treated media, there is no need for extensive preconditioning of filter media or lengthy startup periods, during which required water quality may not be met.

PHYSICAL PROPERTIES:

○	Physical Form	Black Granular
○	Apparent Density	1425 Kg/M ³
○	Specific Gravity	2.4 approx.
○	Porosity	0.46 approx.
○	Particle Size	US Mesh 18 x 50
○	Effective Size	0.30 to 0.38 mm

AVERAGE ULTIMATE ANALYSIS (MOISTURE & ASH-FREE BASIS)

Hydrogen	2.1%
Carbon	94.7%
Nitrogen	0.8%
Oxygen	1.6%
Sulfur	0.8%

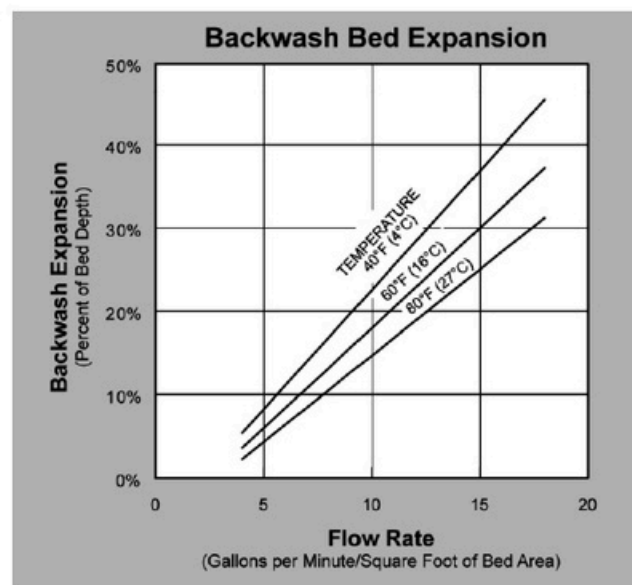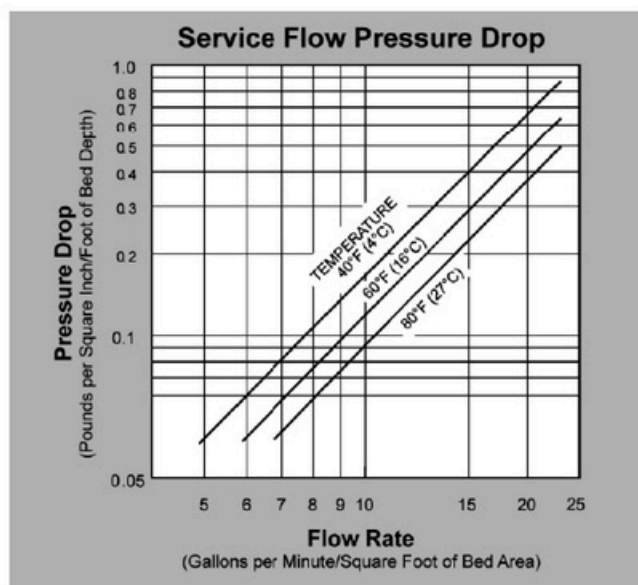

ADVANTAGES

- △ The shape of particles allows suspended particles to be retained over the depth of the filter bed
- △ It complements mixed filters very well, particularly Green and Manganese Sand filter media
- △ Allows for higher flow rate compared to sand
- △ Smaller pressure drop compared to sand
- △ Faster backwash rate compared to sand
- △ High resistance to a variety of chemicals
- △ Greater physical strength for use in industrial water purification.
- △ Prevents filtration blockage and more.
- △ Prevention of mad ball forming at the surface of the sand layer.
- △ Can easily transform from Single Media Filtration to Dual Media Filtration (sand)

WARNING :

For safety and handling purposes, we recommend appropriate protective measures when entering a wet vessel containing granular anthracite, because wet anthracite depletes oxygen from air and therefore, dangerously low levels of oxygen may be encountered. In such a case, the oxygen level inside the vessel shall be determined before entering and appropriate protective equipment should be worn when entering, or leave the vessel open until the oxygen level in the vessel is normal.

This information has been gathered from standard materials and or test data that is believed to be accurate and reliable. Nothing herein shall be determined to be a warranty or representation expressed or implied with respect to the use of such information or the use of the goods described for any particular purpose alone or in combination with other goods or processes, or that their use does not conflict with existing patent rights. No license is granted to practice any patented invention. It is solely for your consideration, investigation and verification.



SUPRIYA WATER TECHNOLOGY PVT LTD

☎ Phone: 01-5387801, 9851055247

✉ Mail: marketing.supriyawater@gmail.com

📍 Shalik Chowk, Tankeshwor Marg, Kalimati 13, KTM, Nepal

⚙ We Provide: All Kind of water purification system, Installation of Domestic and industrial RO, 6th Stage of Water Tank Cleaning Service, Media Replacement. Wide range of lighting musical fountains. Official Distributor Of Flavia Alkaline Water Purification System.