
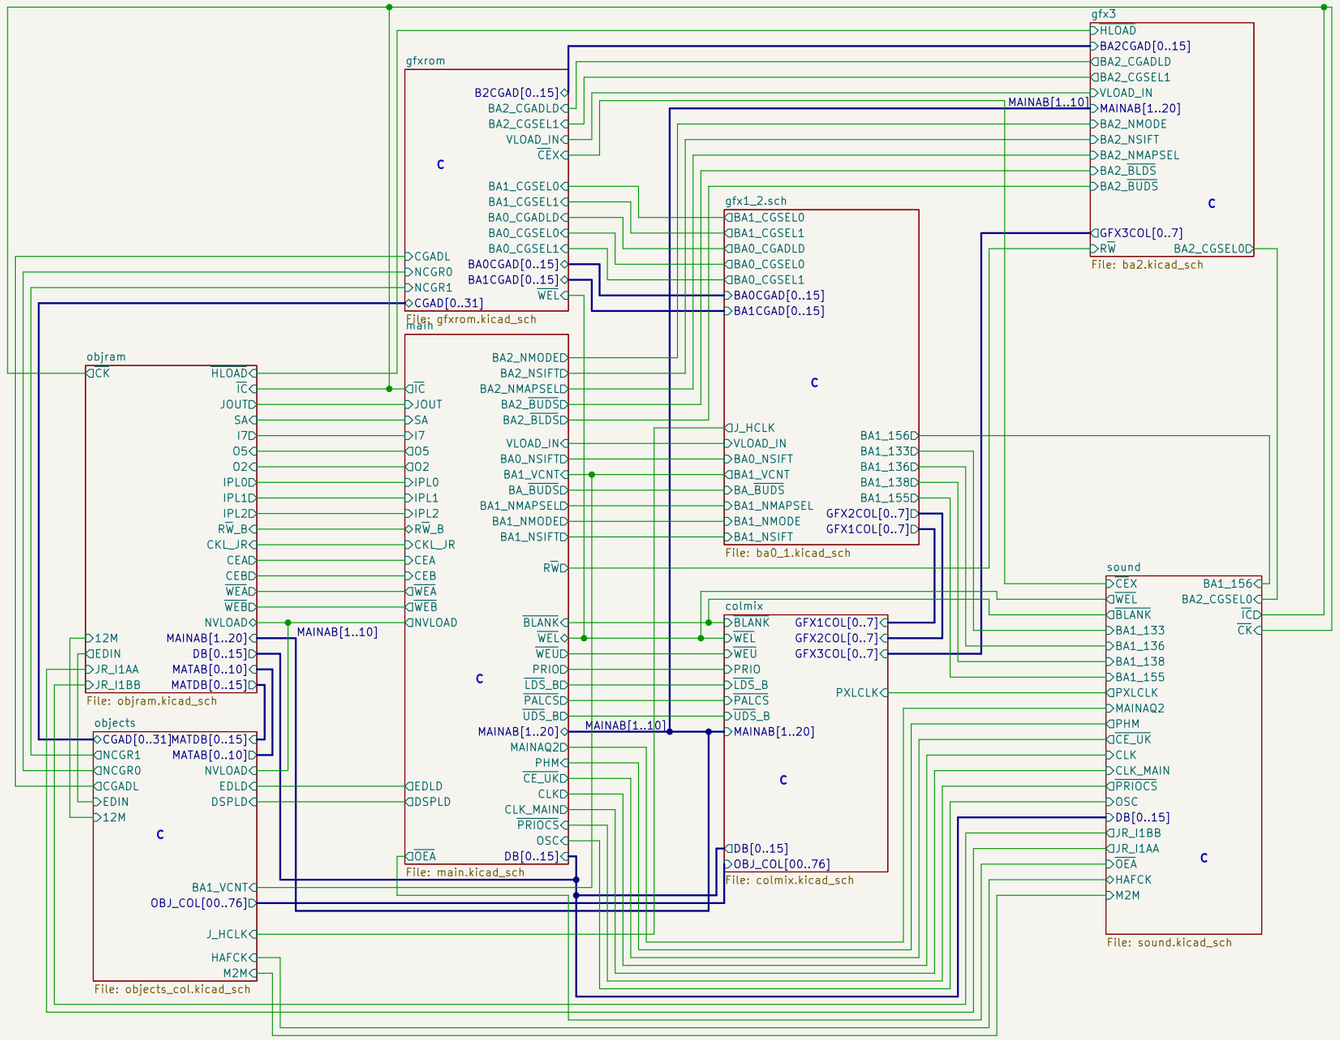


https://www.patreon.com/topapate
https://www.paypal.com/paypalme/topapate
JOTEGO
PCB donated by DJHardRich
JOTEGO

Sheet: /
File: slyspy.kicad_sch

Title: Sly Spy – DE-0322-3

Size: A3	Date: 2022-03-10	**Rev: José Tejada**
KiCad E.D.A. 10.0.4		Id: 1/10

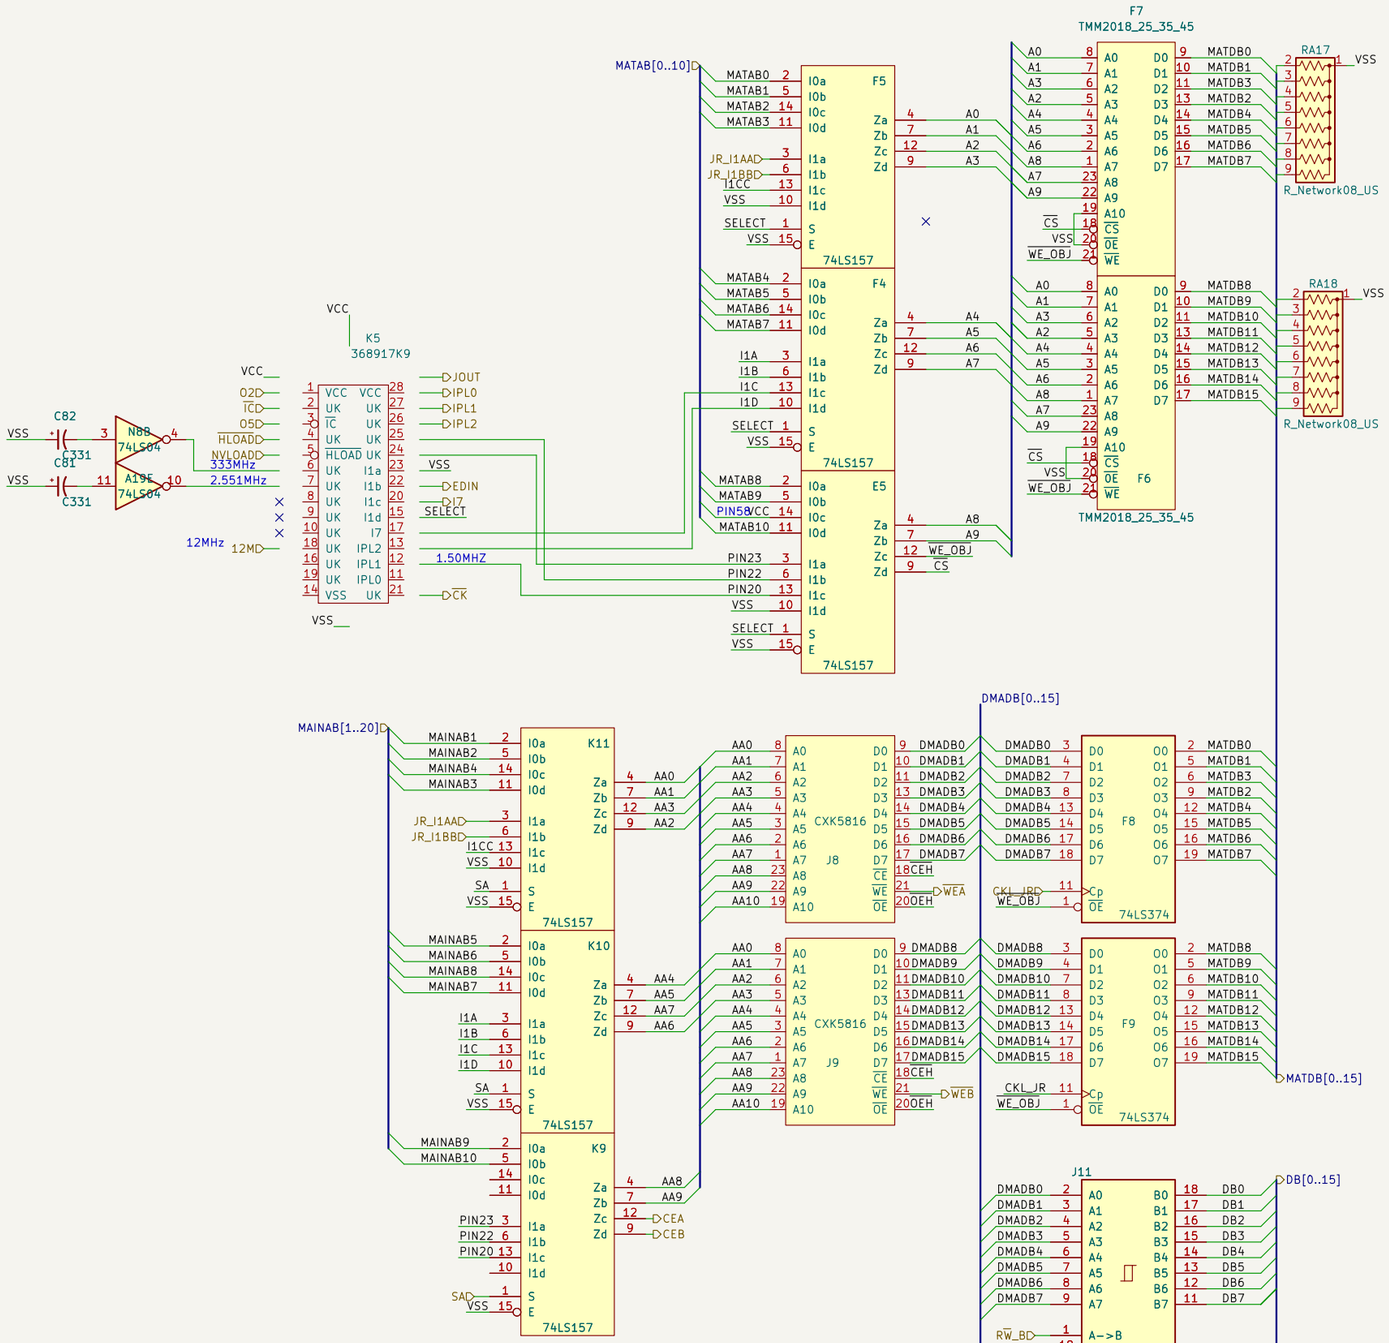


https://www.patreon.com/topapate
https://www.paypal.com/paypalme/topapate
JOTEGO
PCB donated by DJHardRich
JOTEGO

Sheet: /objram/
File: objram.kicad_sch

Title: Object Data RAM

Size: A3	Date: 2022-03-10	**Rev: José Tejada**
KiCad E.D.A. 10.0.4		Id: 2/10

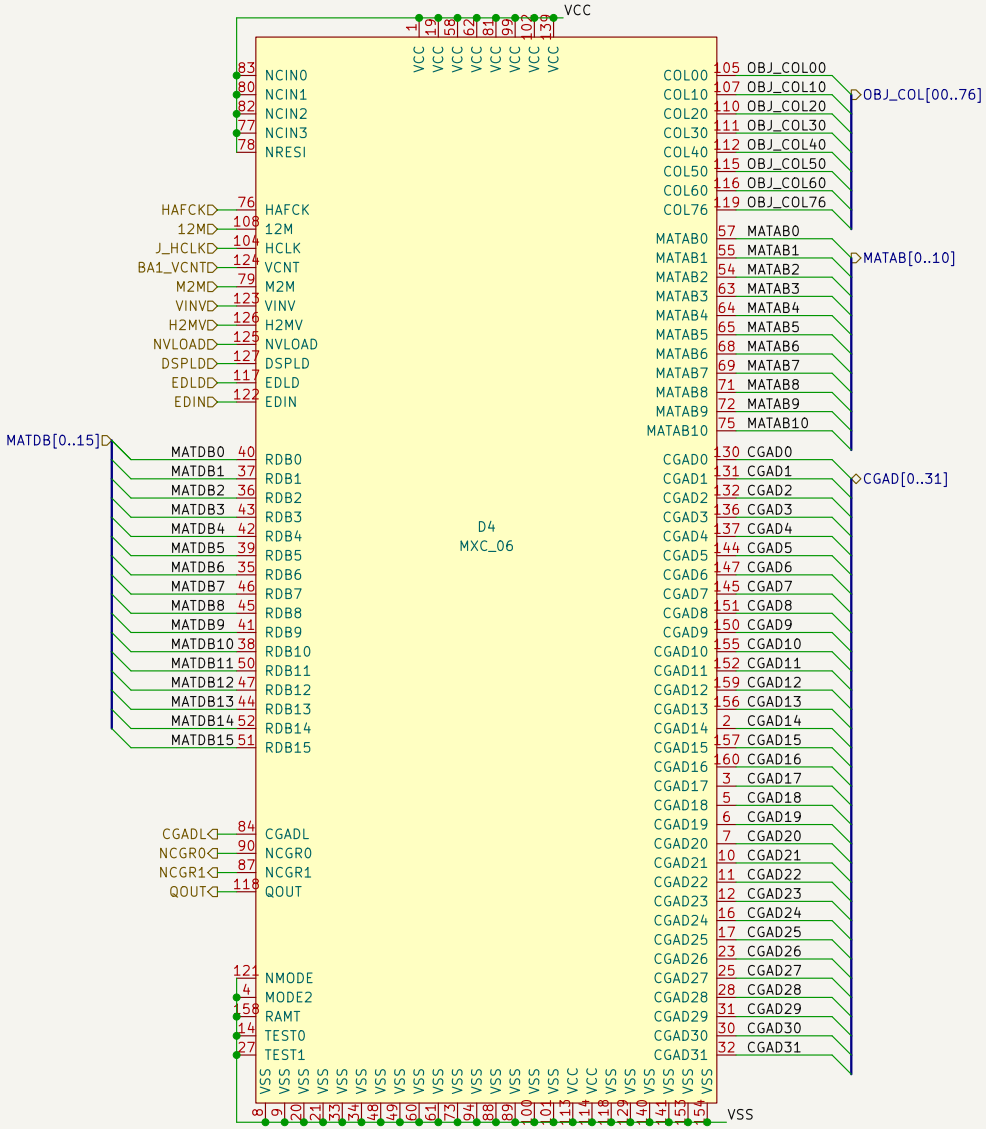

https://www.patreon.com/topapate
https://www.paypal.com/paypalme/topapate
JOTEGO
PCB donated by DJHardRich
JOTEGO

Sheet: /objects/
File: objects_col.kicad_sch

Title:

Size: A4	Date: 2022-03-10	**Rev: José Tejada**
KiCad E.D.A. 10.0.4		Id: 3/10

GFX ROMs

GFX1

GFX2

GFX3

D7 C7 A2 A4 A5 A7 — TC541001P

C11 C12 — 74LS273

A9 A11 — 27256

A15 A17 — 27512

C17 C18 — 74LS273

C22 C23 — 74LS273

A21 A22 — TC541001P

74LS373 74LS08 74LS04

https://www.patreon.com/topapate
https://www.paypal.com/paypalme/topapate
JOTEGO
PCB donated by DJHardRich
JOTEGO

Sheet: /gfxrom/
File: gfxrom.kicad_sch

Title: GFX ROMs

Size: A3	Date: 2022-03-10	**Rev: José Tejada**
KiCad E.D.A. 10.0.4		Id: 4/10

F10
68000D
10MHz CLK
IPL0
IPL1
IPL2
BGACK
BG
BR
FC0
FC1
FC2
VMA
E
VPA
BERR
DTACK
HALT
RESET
D[0..15]
VCC
VSS

J15
74LS244
A21
A17
A18
A19
A20
MAINAB21
MAINAB17
MAINAB18
MAINAB19
MAINAB20

J14
74LS244
A16
A15
A14
A13
A9
A10
A11
A12
MAINAB16
MAINAB15
MAINAB14
MAINAB13
MAINAB9
MAINAB10
MAINAB11
MAINAB12

J13
74LS244
A1
A8
A7
A2
A3
A6
A5
A4
MAINAB1
MAINAB8
MAINAB7
MAINAB2
MAINAB3
MAINAB6
MAINAB5
MAINAB4

MAINAB[1..20]

M11
PAL16L8
MAINAB14
MAINAB15
MAINAB16
L_R
DEC2
I7
BA1_VCNT
DEC4
DEC5
CS1
PALCS
CE_UK
DSPLD
EDLD

M21F
74LS04
CS1_B

DEC4 = DEC2 && MAINAB[16:14]==3'b101
DEC5 = DEC2 && MAINAB[16:14]==3'b000 && ~(L_R
CS1 = DEC2 && MAINAB[16:14]==3'b001
CE_UK = DEC2 && MAINAB[16:14]==3'b111

N9
74xx74
VCC
BA1_VCNT
VLOAD_IND
NVLOAD

K17
PAL16L8
DEC1
DEC0
DEC3
OSCQ
AS_B
RW_B
DB1
UDS_B
L_R
RW
DTACK
WEL
WEU
OEA
OEB
BA_BUDS

K15
PAL16L8
MAINAB17
MAINAB18
MAINAB19
MAINAB20
MAINAB21
RW_B
LDS_B
UDS_B
CEB
CEC
CEA
CED
CEF
CEG
OEA
OEF

OEA = LDS
OEF = UDS
CED = AB[21:17]==5'b00010 && RW == CEA
CEG = AB[21:17]==5'b00001 && RW == CEC
CEF = AB[21:17]==5'b00000 && RW == CEB

K16
PAL16R4ACN
CLK
AS_B
ASI
MAIN0
MAINAB20
MAINAB21
L_R
DEC0
RF16
DEC1
DEC2
DEC3
VSS

RF16 = AS && ASI && (AB[21:20]==2 || (AB[21:20]==3 && MAIN0))

J19
74LS367
AS
UDS
RW
LDS
AS_B
UDS_B
RW_B
LDS_B

K14A
74LS74
JOUT
OEA
AS_B
OE_UK
AS
OSCD
OSCQ
K14B
PHMD
M9B
M9A
CKI_JRD

M21A
M21C
74LS04

M15
M16
M17
M18
74LS244
DB[0..15]
RW_O
MAINAQ1
VSS

ENCONTRAR
CONEXIÓN
DE CADA B
CON SW

RW_B
DEC4
MAINAB1
MAINAB2
RW_O
MAINAQ1
MAINAQ2
CLK
PRIOCS
74LS155
MAINAB13
MAINAB14
MAINAB15
BA1_NMODE
BA1_NSIFT
O2
BA1_NMAPSEL
BA2_NMODE
MAINAB18
MAINAB19
O5
BA0_NSIFT
BA2_NMAPSEL
74LS138
H5A
H5B
74LS139
MAINAB12
MAINAB11
DEC5
MAINGFX0
BA2_NSIFT
BA2_NMAPSEL
MAINAB14
MAINAB16
MAINAB13
MAIN0
AB[16:13]==0?00

MAINAB1
MAINAB2
MAINAB3
MAINAB4
MAINAB5
MAINAB6
MAINAB7
MAINAB8
MAINAB9
MAINAB10
MAINAB11
MAINAB12
MAINAB13
MAINAB14
MAINAB15
MAINAB16
10MHz CLK_MAIND
WELD
C?

DB0
DB1
DB2
DB3
DB7
DB6
DB5
DB4
DB[0..15]
IC
CE_UK
OE_UK

R_Network08_US
RA19
RW_B
CEC
DB7
DB6
DB5
DB4
DB3
DB2
DB1
DB0
D7
D6
D5
D4
D3
D2
D1
D0

IC6
PST518A
R11
10K
VSS_VCC
CTR
74LS05
H21C
X2
20MHz
OCXO-14
Vcontrol
CLK_X
J20A
74LS74
CLK_MAIN

H22A
H22B
H21A
RESET
HALT
R9
1K
R10
1K
H18A
DB7
PRIOCS
PRIO

DEC5
UDS_B
CS1_B
DB1
LDS_B
MAINGFX0
WEU
SA
WEL
SAD
AS_B
74LS32
K18A
K18B
K18C
K18D
K13A
K13B
K13C
K13D
BA2_BUDS
CED
CEC
BA2_BLDS
BA2_NMODE
WEB
WEA
VPA

FC2
FC1
FC0
74LS10
M13B

mainmem
MAINAB[1..16]
DB[0..15]
D[0..15]
CS1
OEA
MEMORIES
File: mainmem.kicad_sch

https://www.patreon.com/topapate
https://www.paypal.com/paypalme/topapate
JOTEGO
PCB donated by DJHardRich
JOTEGO


Sheet: /main/
File: main.kicad_sch

Title: Main CPU

Size: A3	Date: 2022-03-10	**Rev: José Tejada**
KiCad E.D.A. 10.0.4		Id: 5/10

ROM

RAM

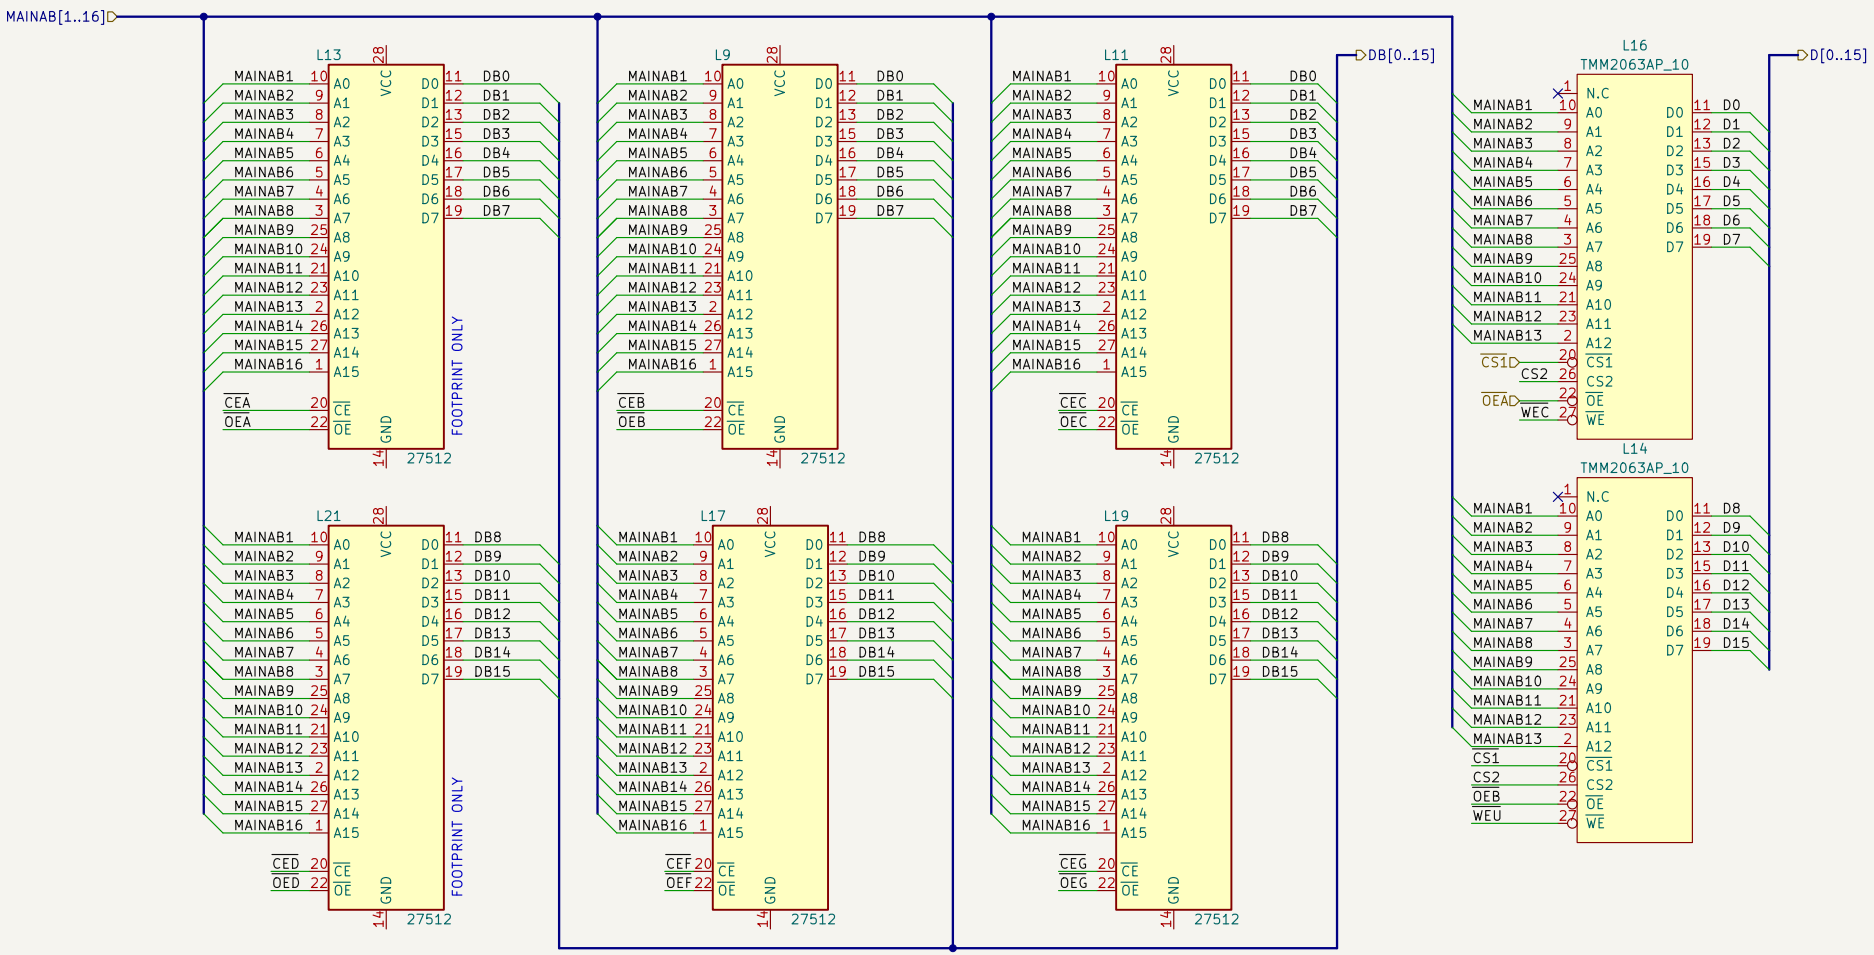



https://www.patreon.com/topapate
https://www.paypal.com/paypalme/topapate
JOTEGO
PCB donated by DJHardRich
JOTEGO

Sheet: /main/mainmem/
File: mainmem.kicad_sch

Title: Main CPU ROM & RAM

Size: A4	Date: 2022-03-10	**Rev: José Tejada**
KiCad E.D.A. 10.0.4		Id: 6/10

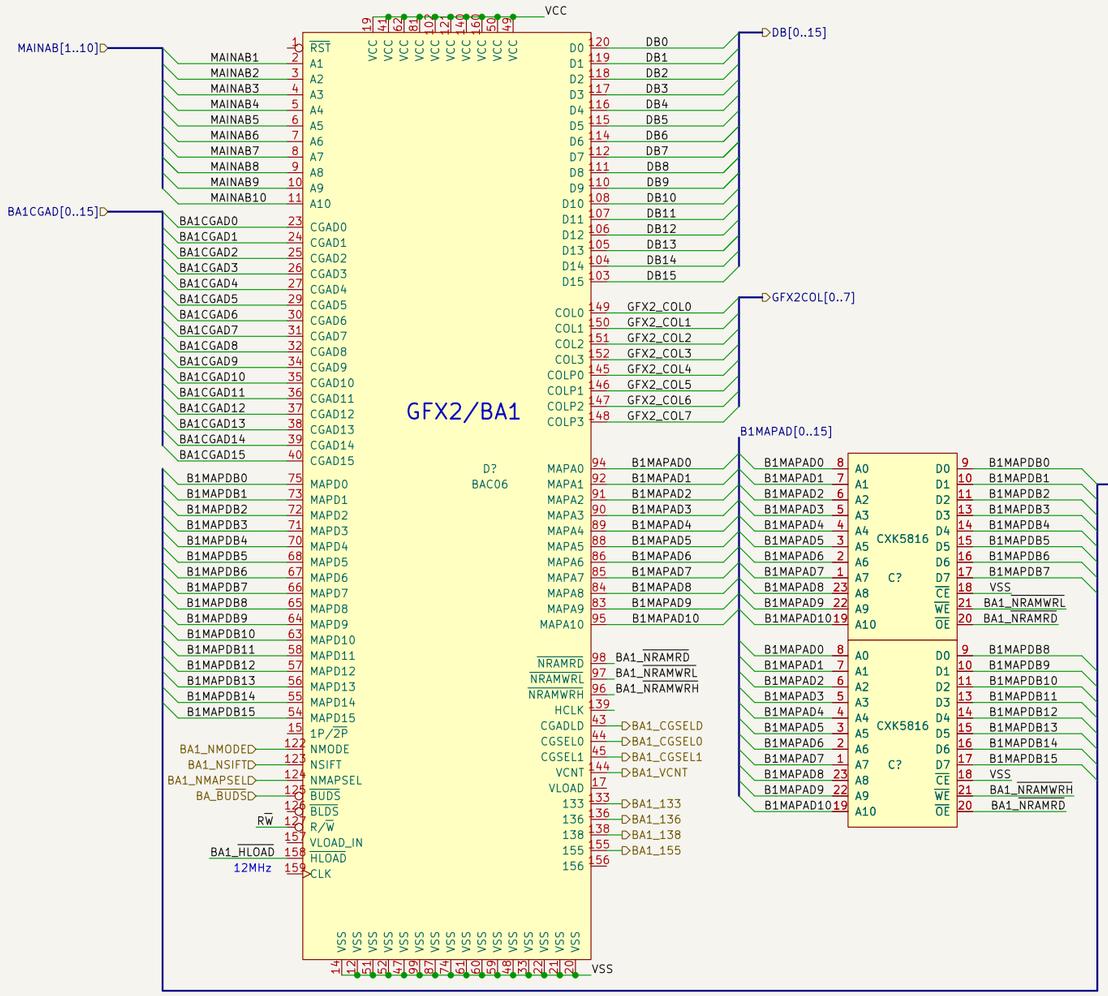

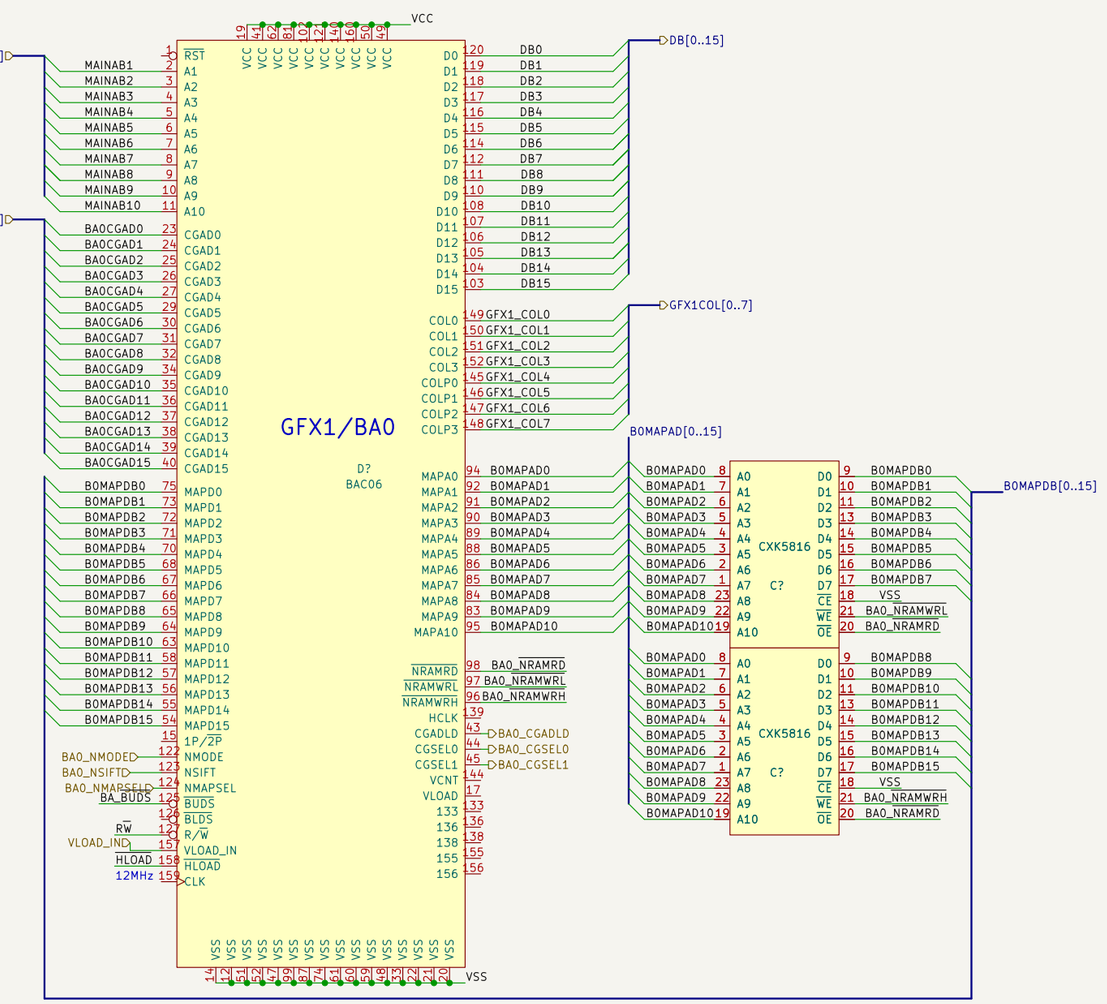


https://www.patreon.com/topapate
https://www.paypal.com/paypalme/topapate
JOTEGO
PCB donated by DJHardRich
JOTEGO

Sheet: /gfx1_2.sch/
File: ba0_1.kicad_sch

Title:

Size: A3	Date: 2022-03-10	**Rev: José Tejada**
KiCad E.D.A. 10.0.4		Id: 7/10

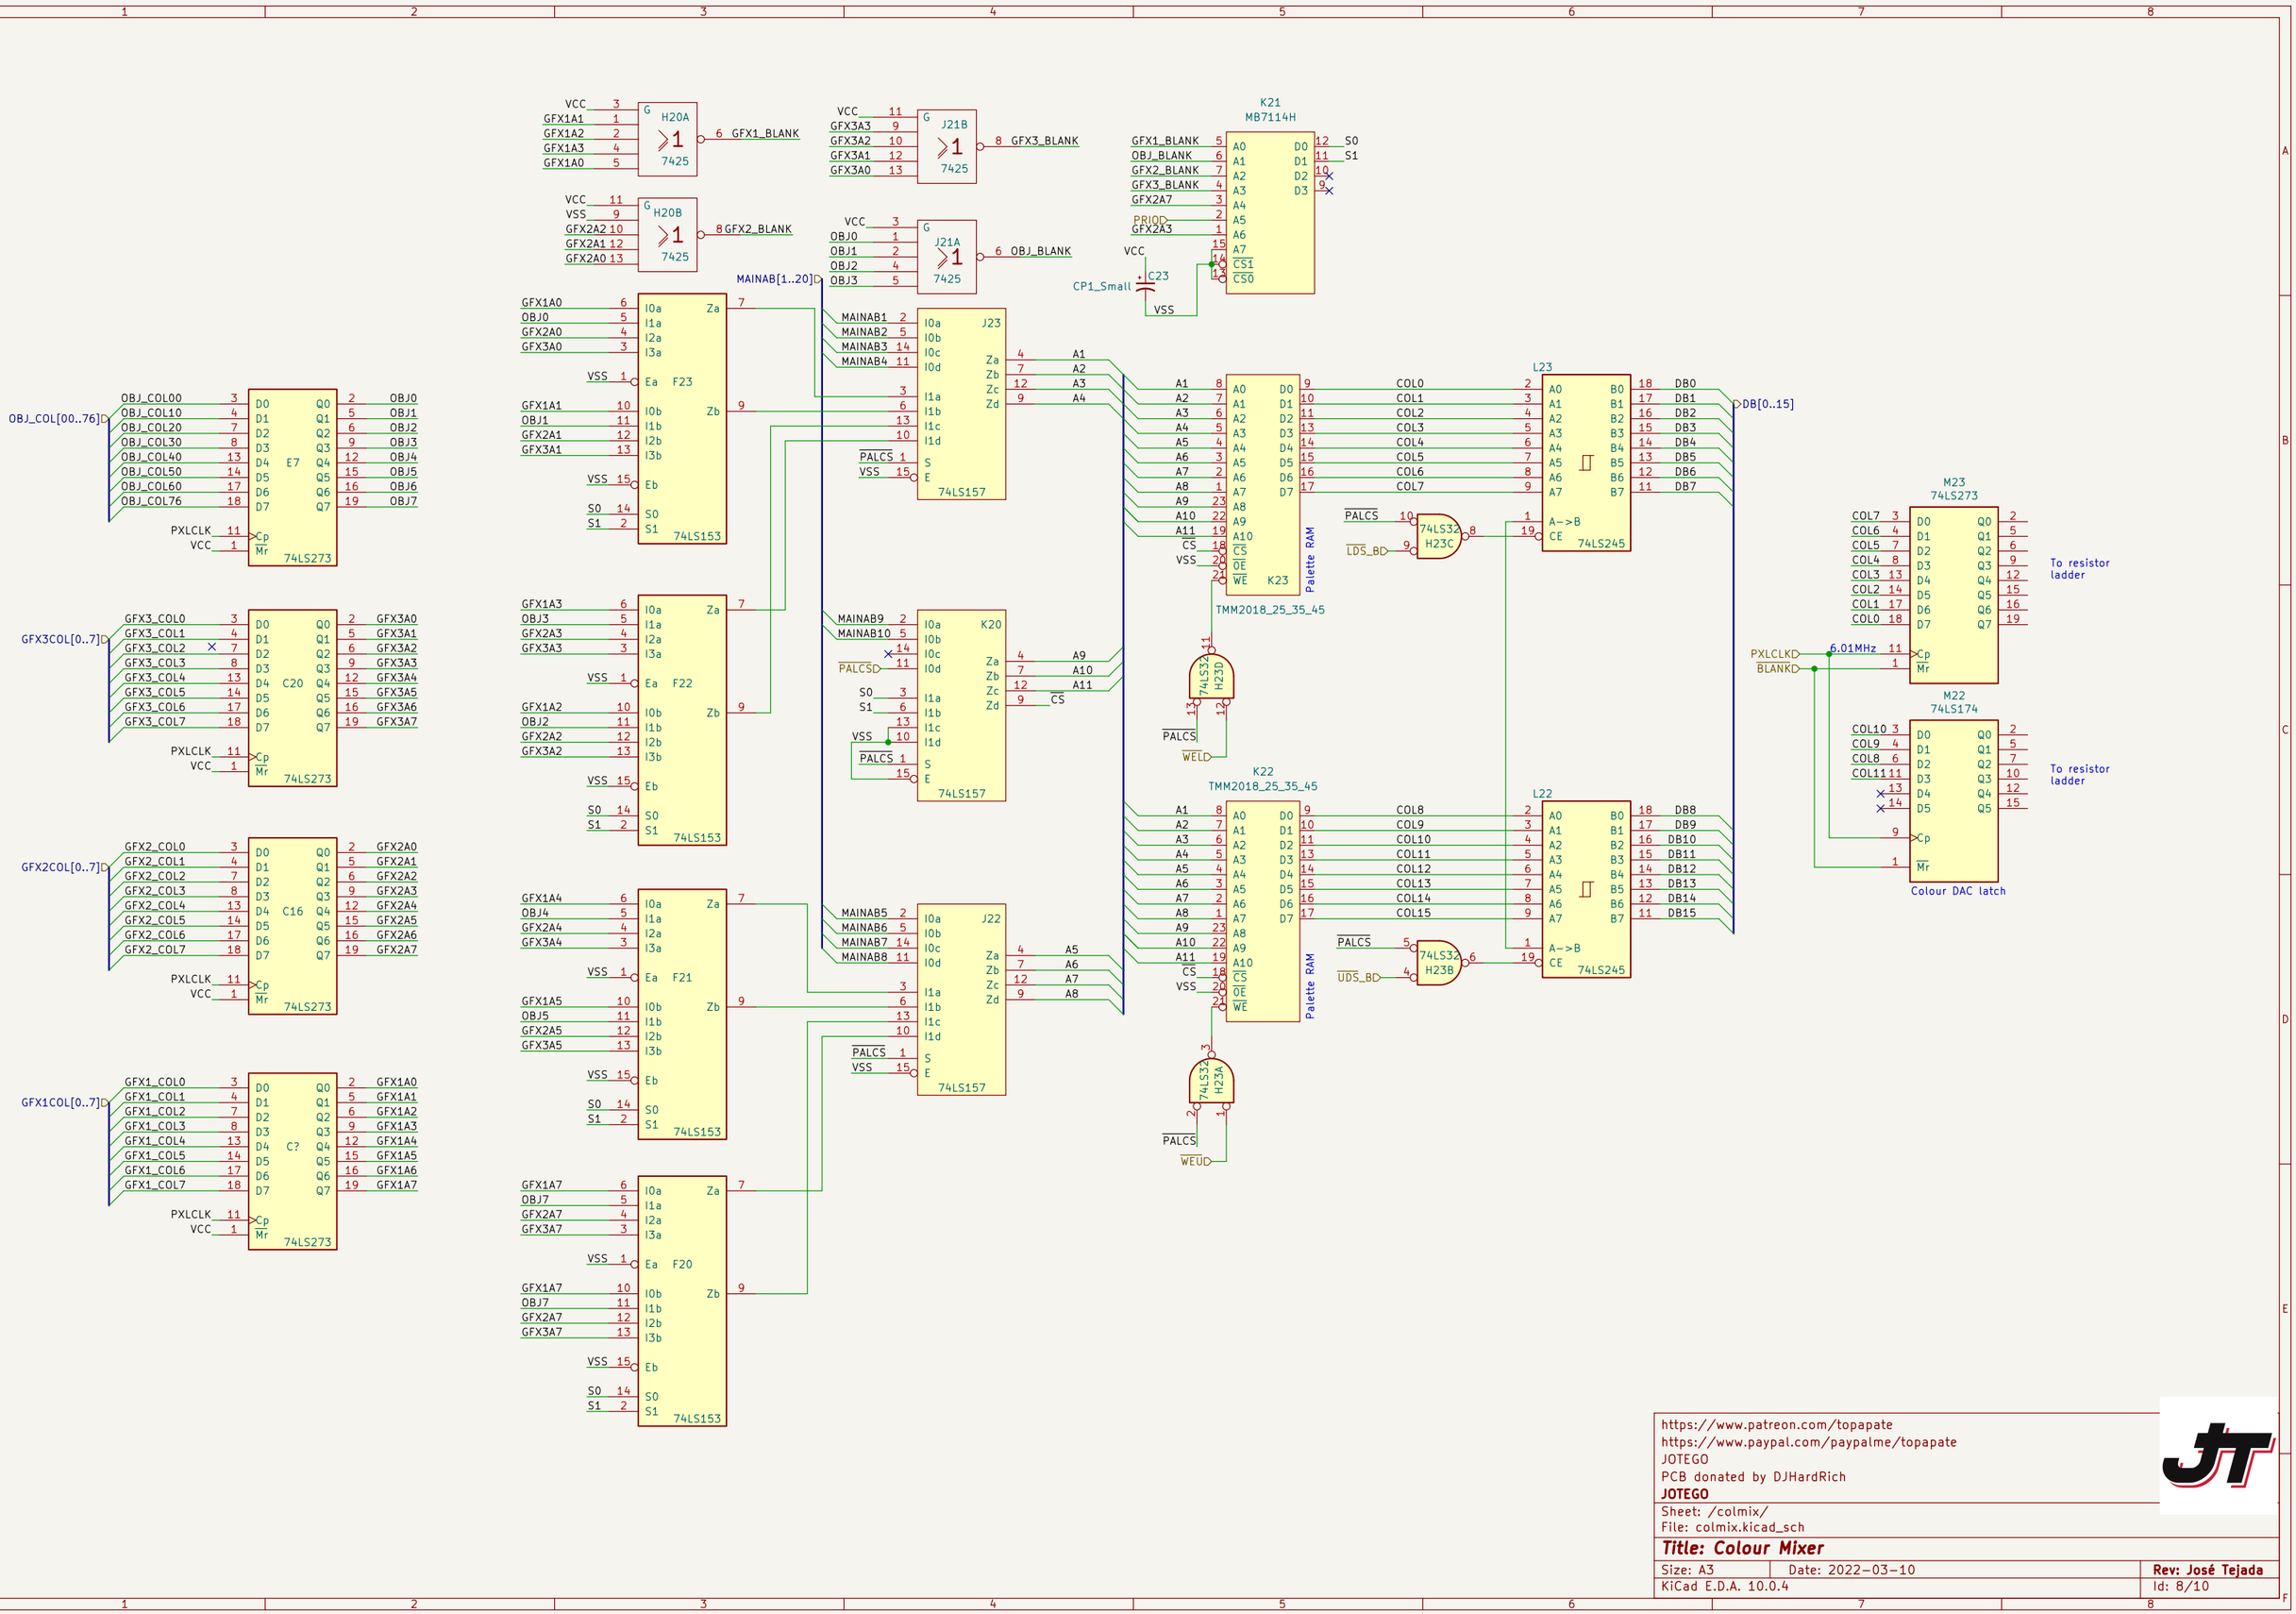



https://www.patreon.com/topapate
https://www.paypal.com/paypalme/topapate
JOTEGO
PCB donated by DJHardRich
JOTEGO

Sheet: /colmix/
File: colmix.kicad_sch

Title: Colour Mixer

Size: A3	Date: 2022-03-10	**Rev: José Tejada**
KiCad E.D.A. 10.0.4		Id: 8/10

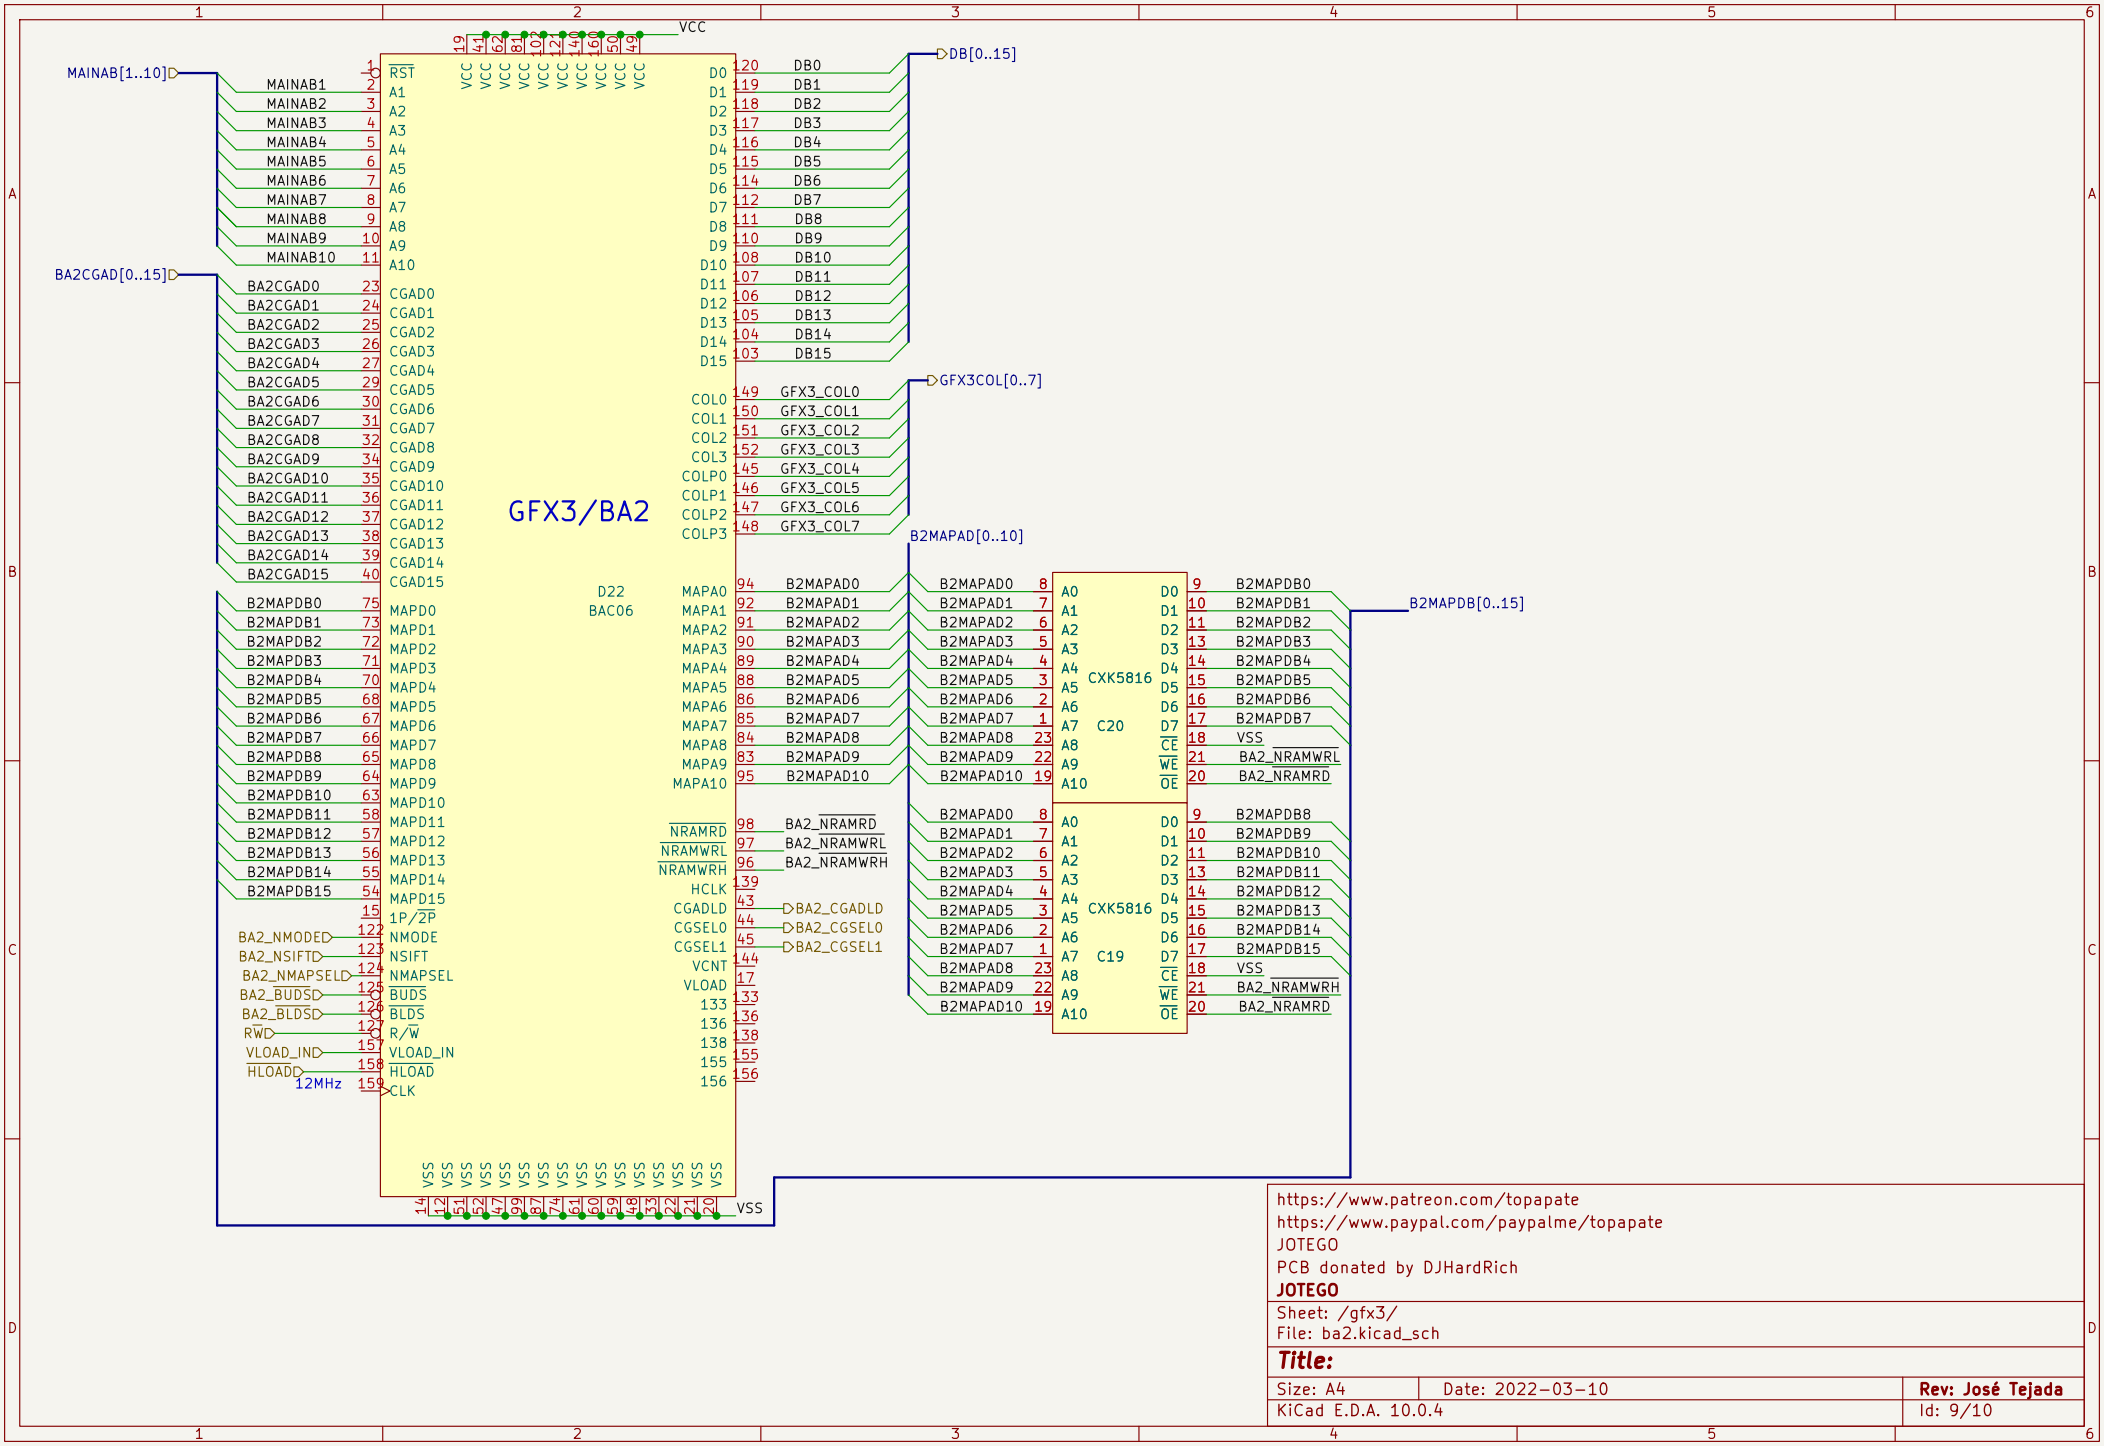
GFX3/BA2
D22
BAC06
MAINAB[1..10]
BA2CGAD[0..15]
B2MAPDB[0..15]
B2MAPAD[0..10]
DB[0..15]
GFX3COL[0..7]
CXK5816
C20
C19
12MHz
VCC
VSS
https://www.patreon.com/topapate
https://www.paypal.com/paypalme/topapate
JOTEGO
PCB donated by DJHardRich
JOTEGO
Sheet: /gfx3/
File: ba2.kicad_sch
Title:
Size: A4
Date: 2022-03-10
Rev: José Tejada
KiCad E.D.A. 10.0.4
Id: 9/10

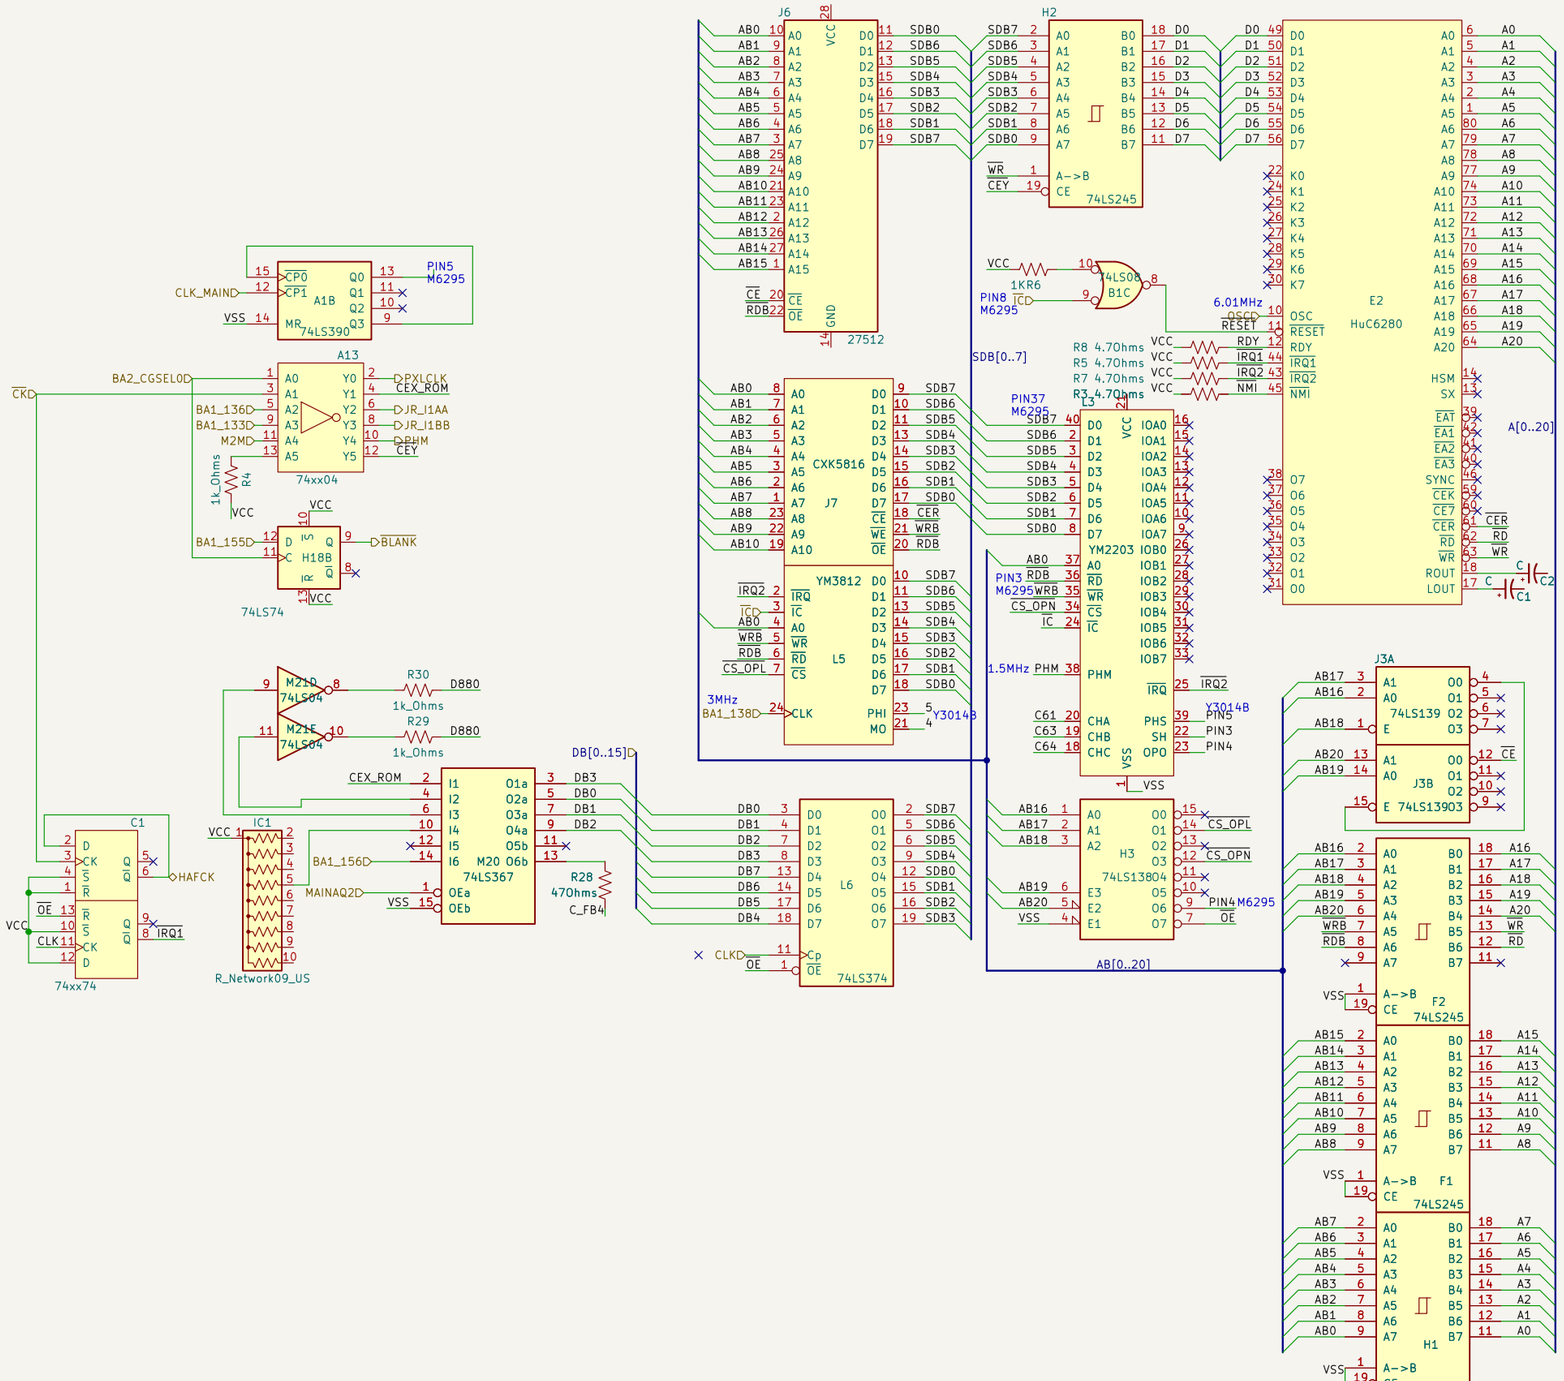

https://www.patreon.com/topapate
https://www.paypal.com/paypalme/topapate
JOTEGO
PCB donated by DJHardRich
JOTEGO

Sheet: /sound/
File: sound.kicad_sch

Title: Sound Subsystem

Size: A3	Date: 2022-03-10	**Rev: José Tejada**
KiCad E.D.A. 10.0.4		Id: 10/10