


CAHIER DE CHARGE : MISE EN PRATIQUE DU VTP

1. Topologie

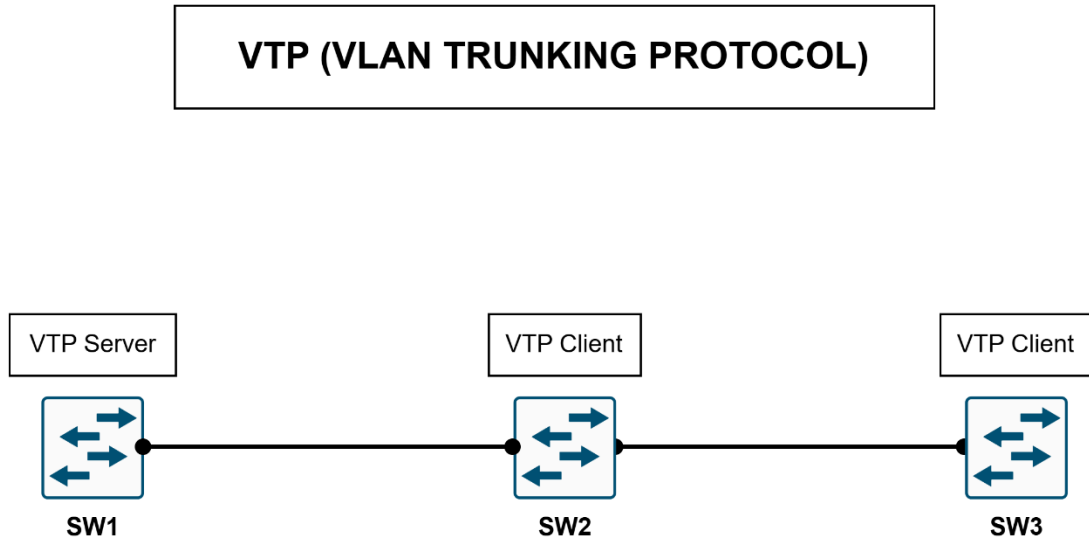


By Armand DONJANG

2. Objectifs

- Concevoir une topologie réseau sous Cisco Packet Tracer.
- Créer plusieurs VLANs (10, 20, 30, 40, 50).
- Réaliser des liens trunk entre plusieurs switches.
- Vérifier la bonne configuration des VLANs.
- Vérifier la bonne configuration des VTP.

3. Configuration des équipements

- Représentation de la topologie sur packet tracer

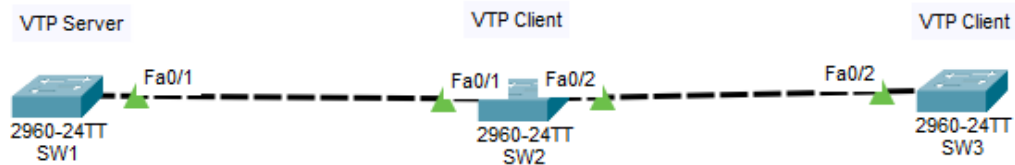

- Création des VLANs sur SW1 :

```
SW1(config)#vlan 10
SW1(config-vlan)#exit
```

```
SW1(config)#vlan 20
SW1(config-vlan)#exit
```

```
SW1(config)#vlan 30
SW1(config-vlan)#exit
```

```
SW1(config)#vlan 40
SW1(config-vlan)#exit
```

```
SW1(config)#vlan 50
SW1(config-vlan)#exit
```

- Création des liaisons trunk

```
SW1(config)#interface range f0/1
SW1(config-if-range)#switchport mode trunk
```

```
SW2(config)#interface range f0/1-2
SW2(config-if-range)#switchport mode trunk
```

```
SW3(config)#interface f0/2
SW3(config-if)#switchport mode trunk
```

- Création des VTP

```
SW1(config)#vtp mode server
SW1(config)#vtp domain CCNA
SW1(config)#vtp password ccn@123
```

```
SW2(config)#vtp mode client
SW2(config)#vtp domain CCNA
SW2(config)#vtp password ccn@123
```

```
SW3(config)#vtp mode client
SW3(config)#vtp domain CCNA
SW3(config)#vtp password ccn@123
```

4. Vérifications

- Vérification des VTP sur les Switches
show vtp status

```
SW1(config)#do show vtp status
VTP Version capable      : 1 to 2
VTP version running      : 1
VTP Domain Name          : CCNA
VTP Pruning Mode         : Disabled
VTP Traps Generation     : Disabled
Device ID                 : 0060.2F86.5900
Configuration last modified by 0.0.0.0 at 3-1-93 00:18:29
Local updater ID is 0.0.0.0 (no valid interface found)

Feature VLAN :
-----
VTP Operating Mode       : Server
Maximum VLANs supported locally : 255
Number of existing VLANs : 10
Configuration Revision    : 0
MD5 digest                : 0x65 0x28 0x27 0xA5 0xAA 0x89 0x87 0xAE
                          : 0x36 0xA9 0x3E 0x01 0x66 0xF2 0x5D 0xD1

SW2(config)#do show vtp status
VTP Version capable      : 1 to 2
VTP version running      : 1
VTP Domain Name          : CCNA
VTP Pruning Mode         : Disabled
VTP Traps Generation     : Disabled
Device ID                 : 0001.4335.6400
Configuration last modified by 0.0.0.0 at 3-1-93 00:18:29

Feature VLAN :
-----
VTP Operating Mode       : Client
Maximum VLANs supported locally : 255
Number of existing VLANs : 10
Configuration Revision    : 0
MD5 digest                : 0x65 0x28 0x27 0xA5 0xAA 0x89 0x87 0xAE
                          : 0x36 0xA9 0x3E 0x01 0x66 0xF2 0x5D 0xD1
```

```
SW3#show vtp status
VTP Version capable      : 1 to 2
VTP version running      : 1
VTP Domain Name          : CCNA
VTP Pruning Mode         : Disabled
VTP Traps Generation     : Disabled
Device ID                 : 0010.1113.9600
Configuration last modified by 0.0.0.0 at 3-1-93 00:18:29
```

Feature VLAN :

```
-----
VTP Operating Mode       : Client
Maximum VLANs supported locally : 255
Number of existing VLANs   : 10
Configuration Revision    : 0
MD5 digest               : 0x65 0x28 0x27 0xA5 0xAA 0x89 0x87 0xAE
                          0x36 0xA9 0x3E 0x01 0x66 0xF2 0x5D 0xD1
```

- Vérification des VLANs sur les Switches
- show vlan brief

```
SW1(config-vlan)#do show vlan brief
```

VLAN	Name	Status	Ports
1	default	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4 Fa0/5, Fa0/6, Fa0/7, Fa0/8 Fa0/9, Fa0/10, Fa0/11, Fa0/12 Fa0/13, Fa0/14, Fa0/15, Fa0/16 Fa0/17, Fa0/18, Fa0/19, Fa0/20 Fa0/21, Fa0/22, Fa0/23, Fa0/24 Gig0/1, Gig0/2
10	VLAN0010	active	
20	VLAN0020	active	
30	VLAN0030	active	
40	VLAN0040	active	
50	VLAN0050	active	
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

```
SW2(config)#do show vlan brief
```

VLAN	Name	Status	Ports
1	default	active	Fa0/3, Fa0/4, Fa0/5, Fa0/6 Fa0/7, Fa0/8, Fa0/9, Fa0/10 Fa0/11, Fa0/12, Fa0/13, Fa0/14 Fa0/15, Fa0/16, Fa0/17, Fa0/18 Fa0/19, Fa0/20, Fa0/21, Fa0/22 Fa0/23, Fa0/24, Gig0/1, Gig0/2
10	VLAN0010	active	
20	VLAN0020	active	
30	VLAN0030	active	
40	VLAN0040	active	
50	VLAN0050	active	
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

```
SW3(config)#do show vlan brief
```

VLAN	Name	Status	Ports
1	default	active	Fa0/1, Fa0/3, Fa0/4, Fa0/5 Fa0/6, Fa0/7, Fa0/8, Fa0/9 Fa0/10, Fa0/11, Fa0/12, Fa0/13 Fa0/14, Fa0/15, Fa0/16, Fa0/17 Fa0/18, Fa0/19, Fa0/20, Fa0/21 Fa0/22, Fa0/23, Fa0/24, Gig0/1 Gig0/2
10	VLAN0010	active	
20	VLAN0020	active	
30	VLAN0030	active	
40	VLAN0040	active	
50	VLAN0050	active	
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

- Vérification des liaisons trunk
- show interface trunk

```
SW1#show interface trunk
```

Port	Mode	Encapsulation	Status	Native vlan
Fa0/1	on	802.1q	trunking	1
Port	Vlans allowed on trunk			
Fa0/1	1-1005			
Port	Vlans allowed and active in management domain			
Fa0/1	1,10,20,30,40,50			
Port	Vlans in spanning tree forwarding state and not pruned			
Fa0/1	1,10,20,30,40,50			

```
SW2(config)#do show interfaces trunk
```

Port	Mode	Encapsulation	Status	Native vlan
Fa0/1	on	802.1q	trunking	1
Fa0/2	on	802.1q	trunking	1
Port	Vlans allowed on trunk			
Fa0/1	1-1005			
Fa0/2	1-1005			
Port	Vlans allowed and active in management domain			
Fa0/1	1,10,20,30,40,50			
Fa0/2	1,10,20,30,40,50			
Port	Vlans in spanning tree forwarding state and not pruned			
Fa0/1	1,10,20,30,40,50			
Fa0/2	1,10,20,30,40,50			

```
SW3(config)#do show interfaces trunk
```

Port	Mode	Encapsulation	Status	Native vlan
Fa0/2	on	802.1q	trunking	1
Port	Vlans allowed on trunk			
Fa0/2	1-1005			
Port	Vlans allowed and active in management domain			
Fa0/2	1,10,20,30,40,50			
Port	Vlans in spanning tree forwarding state and not pruned			
Fa0/2	1,10,20,30,40,50			