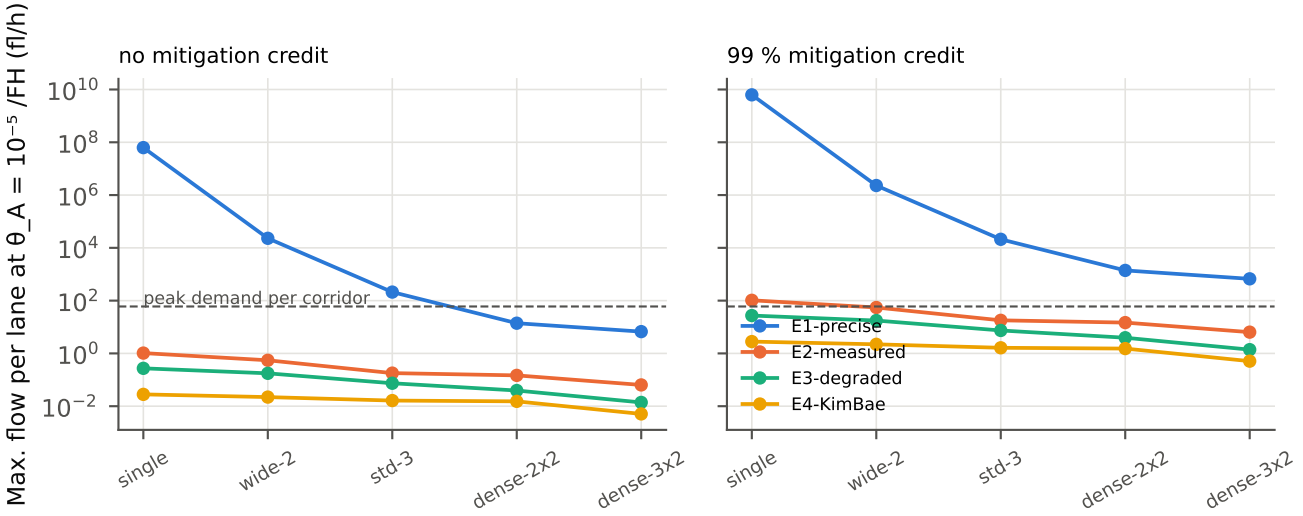
Max. flow per lane at θ_A = 10⁻⁵ /FH (fl/h)
no mitigation credit
99 % mitigation credit
10^10
10^8
10^6
10^4
10^2
10^0
10^-2
peak demand per corridor
E1-precise
E2-measured
E3-degraded
E4-KimBae
single
wide-2
std-3
dense-2x2
dense-3x2