



PowerWatch™



用户手册

系列 2

按键	2
初始设置	4
关机和恢复出厂设置	6
主屏幕导航	8
阅读通知	9
状态APP	10
开始一项活动	12
热电电源	15
电池充电	16
监管声明	18
电子标签	21

按键

按键功能

 向上

向上滚动状态APP、数据
屏幕、选项和设置。

 选择

选中选项。

 向下

向下滚动状态APP、数据
屏幕、选项和设置。

 返回

返回上一屏幕。



备用键功能



从主屏幕进入通知模式。



从主屏幕进入状态APP模式。

从菜单中启动和关闭手表。



从主屏幕进入活动模式。



按住3秒可打开和关闭背光



第一次启动手表时要同时按住两个键7秒钟。

状态图标



通知



免打扰模式



飞行模式开/蓝牙模式关闭



GPS信号强度

初始设置

启动手表




按住“向下”键和“返回”键7秒钟，启动手表。仅在首次启动手表时执行此操作。

手表启动时，将显示徽标启动画面。

出现启动画面时请松开按键。

与智能手机配对

仅适用于初始设置。如果手表之前已完成过配对，则自动跳过此步骤。

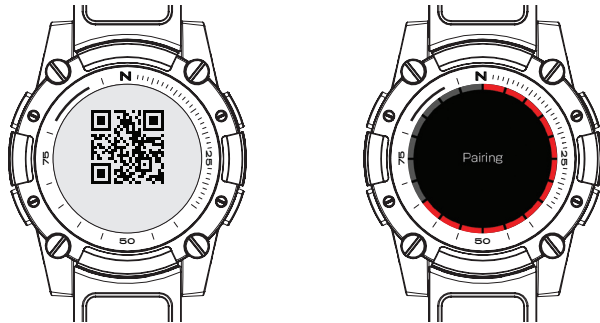

手表启动后，屏幕上将显示一个二维码。

使用智能手机扫描该二维码，然后将出现配对屏幕。

关机

可通过两种方式关闭手表：

软关机

- 1.使用“向上”键和“向下”键滚动状态APP到设置菜单。
- 2.按下“选择”键进入设置菜单。
- 3.使用“向下”键滚动到“关机”选项。
- 4.按下“选择”键关机。



硬（强制）关机


在任何状态下按住“向下”键和“返回”键7秒钟即可关闭手表。



恢复出厂设置

恢复出厂设置会删除所有已安装的应用、清除自定义设置，并将手表恢复为出厂默认设置。

- 1.使用“向下”键滚动状态APP到设置菜单。
- 2.按下“选择”键进入设置菜单。
- 3.使用“向下”键滚动到“重置”选项。
- 4.按下“选择”键重置。





向上

阅读通知

例如回复邮件或提醒。



选择

开始活动

步行、跑步、骑车等



向下

状态APP

例如步数、心率、睡眠、
卡路里和设置。



返回

返回上一屏幕。




按“向上”键进入通知模式。



按“向上”键或“向下”键浏览各个通知。

按“选择”键对每个通知执行操作。

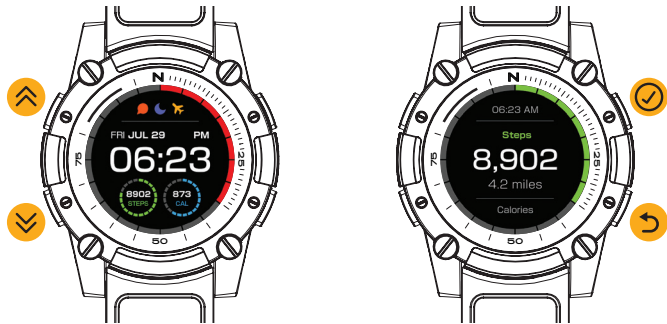

按“向下”键开始检查用户状态。

按“向上”键或“向下”键浏览状态APP。

按“返回”键返回主屏幕。

按“选择”键查看详细统计数据。



时间



步数



卡路里



心率



睡眠跟踪



设置

开始活动

进入并选择一种活动模式



按“选择”键进入和退出一种活动模式。



按“向上”键或“向下”键浏览活动模式。



按“选择”键进入某种活动。

活动模式内的设置



按“选择”键开始和暂停活动。



按“返回”键返回上一模式。




按“向上”键或“向下”键浏览参数。

按“返回”键返回上一屏幕。

PowerWatch利用皮肤与空气的温差来为内部电池充电。当气温较低且皮肤由于活动而变得更热时，就会产生更多的电量。下图显示了PowerWatch在不同气温下的充电速度。

当您在活动（步行或跑步）时且空气温度低于80° F (26° C)时，PowerWatch的电池充电速度最快。空气温度高于90° F (32° C)时，PowerWatch无法为内部电池充电。

	气温		
	60°	70°	80°
静坐	快	慢	否
步行	非常快	快	慢
跑步	非常快	非常快	快

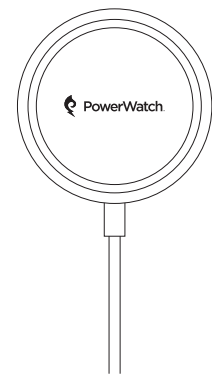

PowerWatch 提供一块热充电板作为备用解决方案。充电板的使用：

- 1.将充电板放在平坦的表面上。
- 2.接入电源适配器。
- 3.将适配器接入电源插座。
- 4.无线充电板内含磁性元件，放在正确位置时可自动与手表对准。

LED指示灯

黄灯闪烁三次	初始化
绿灯常亮	正在充电
黄灯常亮	已充满电
红灯闪烁	未充电

警告：仅使用经PowerWatch认可的充电器、电池和电线。未经认可的充电器或电线可能导致电池损坏或电池爆炸

使用随附提供的无线充电底座和充电器。使用第三方充电器无法正常为PowerWatch充电。

未正确连接充电器可能严重损坏设备。由于不当使用造成的任何损坏均不在保修范围之内。

GPS每天的使用时间不应超过30分钟；否则，它会慢慢耗尽电池电量。

电池可以将一天中未使用的GPS时间留给第二天使用（例如，如果第一天根本没有使用GPS，那么第二天最多可以使用GPS一小时）。

太阳能

与昏暗的室内光线相比，阳光直射下的太阳能电池可产生1000倍的电量。

REGULATORY STATEMENTS

US

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

CANADA

IC STATEMENT

Model Name/Product Market Name: PowerWatch Series 2

This device complies with Industry Canada license-exempt RSS standard(s): Operation is subject to the following Two conditions:(1) this device may not cause interference, and
(2) this device must accept any interference, including interference that may cause undesired operation of the device.

Nom du modèle / Nom du produit du marché :
PowerWatch Series 2
Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:
(1) l'appareil ne doit pas produire de brouillage, et
(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

CHINA


- a) Manufacturer's name: Matrix Industries Inc.
- b) Manufacturer's name & address: Matrix Industries Inc. 1455 Adams Drive, Suite 1190 Menlo Park, CA 94025 USA
- c) Model Name/Product Market Name: PowerWatch Series 2



EU

- 1. Safety
- a) Product Type: Short range device
- b) Software version: PowerWatch 2 Android App v3.00.00; PowerWatch 2 IOS App v3.00.00
- c) Number of equipment and key component in the DOC is 2: PowerWatch Series 2 and TC03 (Wireless Thermal Charger)
- d) Rated Voltage: 3.85V DC, Battery Type: Lithium-ion Polymer (3.85V, 350mAh)
- e) Model Name/Product Market Name: PowerWatch Series 2
- f) Made in China
- g) Operation Temperature: -10° C to 45° C max
- h) 20 ATM
- i) Manufacturer's name: Matrix Industries Inc.
- j) Manufacturer's name & address: Matrix Industries Inc. 1455 Adams Drive, Suite 1190 Menlo Park, CA 94025 USA
- k) Importer Name: Matrix Industries Inc. Address is: Nijverheidsweg 27, 3274 KJ Heinenoord 0186-612267,

The Netherlands .VAT number is NL825573026B01.
2. RF & EMC



CE-RED Requirement

- 1) Accessory: wireless charging pad model name: TC03. Operation freq.: 150KHz. Operation power: 2.5W. Operation voltage: 5V
Maximum transmit power of WPT is -5dBuA/m@10m.
- 2) Frequency band(s) = 2402-2480MHz
- 3) Maximum radio frequency power transmitted in the frequency band(s) = 4dBm or 2.5mW
- 5) Declaration of Conformity Inserts:
Hereby, Matrix Industries Inc, declares that the radio equipment type [designation of type of radio equipment] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: www.powerwatch.com/declaration.pdf
- 7) This equipment may be operated in:

BE	BG	CZ	DK	DE	EE	IE	EL	ES	FR
HR	IT	CY	LV	LT	LU	HU	MT	NL	AT
PL	PT	RO	SI	SK	FI	SE	UK		

TAIWAN

- a) Manufacturer's name: Matrix Industries Inc.
- b) Manufacturer's name & address: Matrix Industries Inc. 1455 Adams Drive, Suite 1190 Menlo Park, CA 94025 USA
- c) Model Name/Product Market Name: PowerWatch

Series 2

低功率電波輻射性電機管理辦法

第十二條

經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計特性及功能。

第十四條

低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

Low power radio wave radiating motor management method.

Article 12

A low-power RF motor that has passed the type approval shall not change the frequency, increase the power or change the original design features and functions without permission.

Article 14

The use of low-power RF motors shall not affect flight safety and interfere with legal communications; if interference is found, it shall be immediately deactivated and improved until no interference is required. Legal communication in the preceding paragraph refers to radio communication operating in accordance with the provisions of the Telecommunications Act. Low-power RF motors must withstand interference from legitimate communications or radiological electrical equipment for industrial, scientific, and medical use.

JAPAN



INDONESIA

RUSSIA



VIETNAM



THAILAND

"This telecom device and equipment is conformed to requirement to NTC"

"เครื่องโทรคมนาคมและอุปกรณ์นี้ มีความสอดคล้องตามข้อกำหนดของ กทช."

MALAYSIA

PHILIPPINES

INDIA

电子标签

要查看电子标签屏幕，请进入设备上的设置菜单。

