



PowerWatch™



用戶手冊

系列 2

目錄

按鍵	2
初始設置	4
關機和恢復出廠設置	6
主螢幕導航	8
閱讀通知	9
狀態APP	10
開始一項活動	12
熱電電源	15
電池充電	16
監管聲明	18
電子標籤	21

按鍵

按鍵功能



向上

向上滾動狀態APP、資料螢幕、選項和設置。



選擇

選中選項。



向下

向下滾動狀態APP、資料螢幕、選項和設置。



返回

返回上一螢幕。



備用鍵功能



從主螢幕進入通知模式。



從主螢幕進入狀態APP模式。
從功能表中啟動和關閉手錶。



從主螢幕進入活動模式。



按住3秒可打開和關閉背光。



第一次啟動手錶時要同時按住兩個鍵7秒鐘。

狀態圖示



通知



免打擾模式



飛行模式開/藍牙模式關



GPS信號強度

初始設置

啟動手錶




按住“向下”鍵和“返回”鍵7秒鐘，啟動手錶。僅在首次啟動手錶時執行此操作。

手錶啟動時，將顯示徽標啟動畫面。

出現啟動畫面時請鬆開按鍵。

與智慧手機配對

僅適用於初始設置。如果手錶之前已完成過配對，則自動跳過此步驟。



手錶啟動後，螢幕上將顯示一個二維碼。

使用智慧手機掃描該二維碼，然後將出現配對螢幕。

關機

可通過兩種方式關閉手錶：

軟關機

- 1.使用“向上”鍵和“向下”鍵滾動狀態APP到設置功能表。
- 2.按下“選擇”鍵進入設置功能表。
- 3.使用“向下”鍵滾動到“關機”選項。
- 4.按下“選擇”鍵關機。



硬（強制）關機


在任何狀態下按住“向下”鍵和“返回”鍵7秒鐘即可關閉手錶。



恢復出廠設置

恢復出廠設置會刪除所有已安裝的應用、清除自訂設置，並將手錶恢復為出廠默認設置。

- 1.使用“向下”鍵滾動狀態APP到設置功能表。
- 2.按下“選擇”鍵進入設置功能表。
- 3.使用“向下”鍵滾動到“重置”選項。
- 4.按下“選擇”鍵重置。

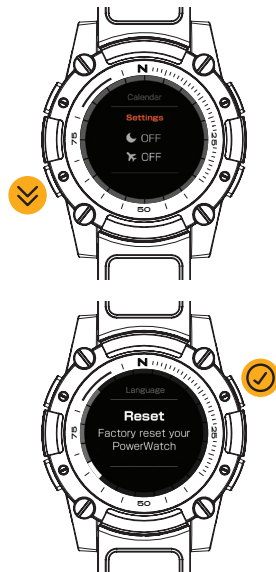



向上

閱讀通知

例如回復郵件或提醒。



選擇

開始活動

步行、跑步、騎車等



向下

狀態APP

例如步數、心率、睡眠、
卡路里和設置。



返回

返回上一螢幕。




按“向上”鍵進入通知模式。



按“向上”鍵或“向下”鍵瀏覽各個通知。

按“選擇”鍵對每個通知執行操作。

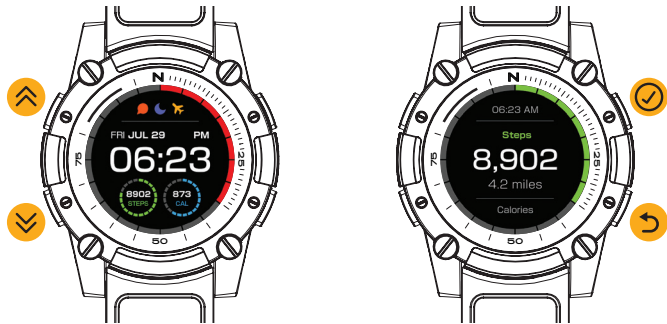


按“向下”鍵開始檢查使用者狀態。

按“向上”鍵或“向下”鍵瀏覽狀態APP。

按“返回”鍵返回主螢幕。

按“選擇”鍵查看詳細統計資料。

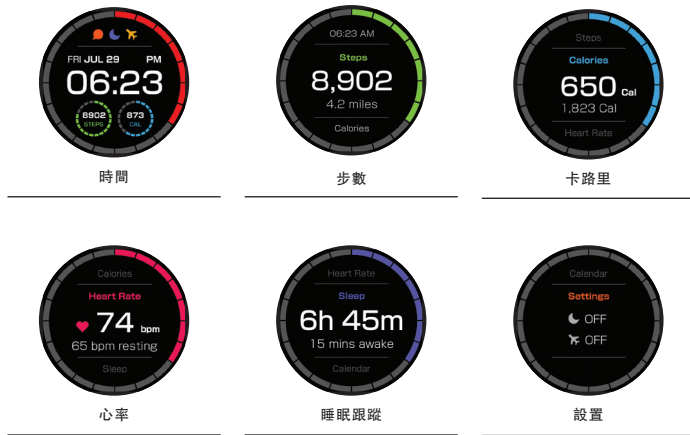

時間

步數

卡路里

心率

睡眠跟蹤

設置

開始活動

進入並選擇一種活動模式



按“選擇”鍵進入和退出一種活動模式。

按“向上”鍵或“向下”鍵瀏覽活動模式。

按“選擇”鍵進入某種活動。

活動模式內的設置



按“選擇”鍵開始和暫停活動。

按“返回”鍵返回上一模式。




按“向上”鍵或“向下”鍵瀏覽參數。

按“返回”鍵返回上一螢幕。

PowerWatch利用與環境空氣的溫度差來為內部電池充電。當氣溫較低且皮膚由於活動而變得更熱時，就會生成更多的電量。下圖顯示了PowerWatch在不同氣溫下的內部電池充電速度。

當您在活動（步行或跑步）中且環境溫度低於80° F(26° C)時，PowerWatch的電池充電速度最快。高於90° F(32° C)時，PowerWatch無法為內部電池充電。

	氣溫		
	60°	70°	80°
靜坐	快	慢	否
步行	非常快	快	慢
跑步	非常快	非常快	快

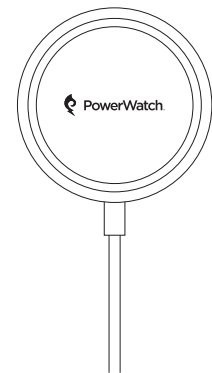

PowerWatch 提供一塊熱充電板作為備用解決方案。充電板的使用：

- 1.將充電板放在平坦的表面上。
- 2.接入電源適配器。
- 3.將適配器接入電源插座。
- 4.無線充電板內含磁性元件，放在正確位置時可自動與手錶對準。


LED指示燈

黃燈閃爍三次	初始化
綠燈常亮	正在充電
黃燈常亮	已充滿電
紅燈閃爍	未充電

警告：僅使用經PowerWatch認可的充電器、電池和電線。未經認可的充電器或電線可能導致電池損壞或電池爆炸。

使用隨附提供的無線充電底座和充電器。使用第三方充電器無法正常為PowerWatch充電。

未正確連接充電器可能嚴重損壞設備。由於不當使用造成的任何損壞均不在保修範圍之內。



GPS每天的使用時間不應超過30分鐘；否則，它會慢慢耗盡電池電量。

電池可以將一天中未使用的GPS時間留給第二天使用（例如，如果第一天根本沒有使用GPS，那麼第二天最多可以使用GPS一小時。

太陽能

與昏暗的室內光線相比，陽光直射下的太陽能電池可產生1000倍的電量。

REGULATORY STATEMENTS

US

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

CANADA

IC STATEMENT

Model Name/Product Market Name: PowerWatch Series 2

This device complies with Industry Canada license-exempt RSS standard(s): Operation is subject to the following Two conditions:(1) this device may not cause interference, and
(2) this device must accept any interference, including interference that may cause undesired operation of the device.

Nom du modèle / Nom du produit du marché :
PowerWatch Series 2
Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:
(1) l'appareil ne doit pas produire de brouillage, et
(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

CHINA


- a) Manufacturer's name: Matrix Industries Inc.
- b) Manufacturer's name & address: Matrix Industries Inc. 1455 Adams Drive, Suite 1190 Menlo Park, CA 94025 USA
- c) Model Name/Product Market Name: PowerWatch Series 2



EU

- 1. Safety
- a) Product Type: Short range device
- b) Software version: PowerWatch 2 Android App v3.00.00; PowerWatch 2 IOS App v3.00.00
- c) Number of equipment and key component in the DOC is 2: PowerWatch Series 2 and TC03 (Wireless Thermal Charger)
- d) Rated Voltage: 3.85V DC, Battery Type: Lithium-ion Polymer (3.85V, 350mAh)
- e) Model Name/Product Market Name: PowerWatch Series 2
- f) Made in China
- g) Operation Temperature: -10° C to 45° C max
- h) 20 ATM
- i) Manufacturer's name: Matrix Industries Inc.
- j) Manufacturer's name & address: Matrix Industries Inc. 1455 Adams Drive, Suite 1190 Menlo Park, CA 94025 USA
- k) Importer Name: Matrix Industries Inc. Address is: Nijverheidsweg 27, 3274 KJ Heinenoord 0186-612267,

The Netherlands .VAT number is NL825573026B01.
2. RF & EMC



CE-RED Requirement

- 1) Accessory: wireless charging pad model name: TC03. Operation freq.: 150KHz. Operation power: 2.5W. Operation voltage: 5V
Maximum transmit power of WPT is -5dBuA/m@10m.
- 2) Frequency band(s) = 2402-2480MHz
- 3) Maximum radio frequency power transmitted in the frequency band(s) = 4dBm or 2.5mW
- 5) Declaration of Conformity Inserts:
Hereby, Matrix Industries Inc, declares that the radio equipment type [designation of type of radio equipment] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: www.powerwatch.com/declaration.pdf
- 7) This equipment may be operated in:

BE	BG	CZ	DK	DE	EE	IE	EL	ES	FR
HR	IT	CY	LV	LT	LU	HU	MT	NL	AT
PL	PT	RO	SI	SK	FI	SE	UK		

TAIWAN

- a) Manufacturer's name: Matrix Industries Inc.
- b) Manufacturer's name & address: Matrix Industries Inc. 1455 Adams Drive, Suite 1190 Menlo Park, CA 94025 USA
- c) Model Name/Product Market Name: PowerWatch

Series 2

低功率電波輻射性電機管理辦法

第十二條

經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計特性及功能。

第十四條

低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

Low power radio wave radiating motor management method.

Article 12

A low-power RF motor that has passed the type approval shall not change the frequency, increase the power or change the original design features and functions without permission.

Article 14

The use of low-power RF motors shall not affect flight safety and interfere with legal communications; if interference is found, it shall be immediately deactivated and improved until no interference is required. Legal communication in the preceding paragraph refers to radio communication operating in accordance with the provisions of the Telecommunications Act. Low-power RF motors must withstand interference from legitimate communications or radiological electrical equipment for industrial, scientific, and medical use.

JAPAN



INDONESIA

RUSSIA



VIETNAM



THAILAND

“This telecom device and equipment is conformed to requirement to NTC”

“เครื่องโทรคมนาคมและอุปกรณ์นี้ มีความสอดคล้องตามข้อกำหนดของ กทช.”

MALAYSIA

PHILIPPINES

INDIA

電子標籤

要查看電子標籤螢幕，請進入設備上的設置功能表。

