
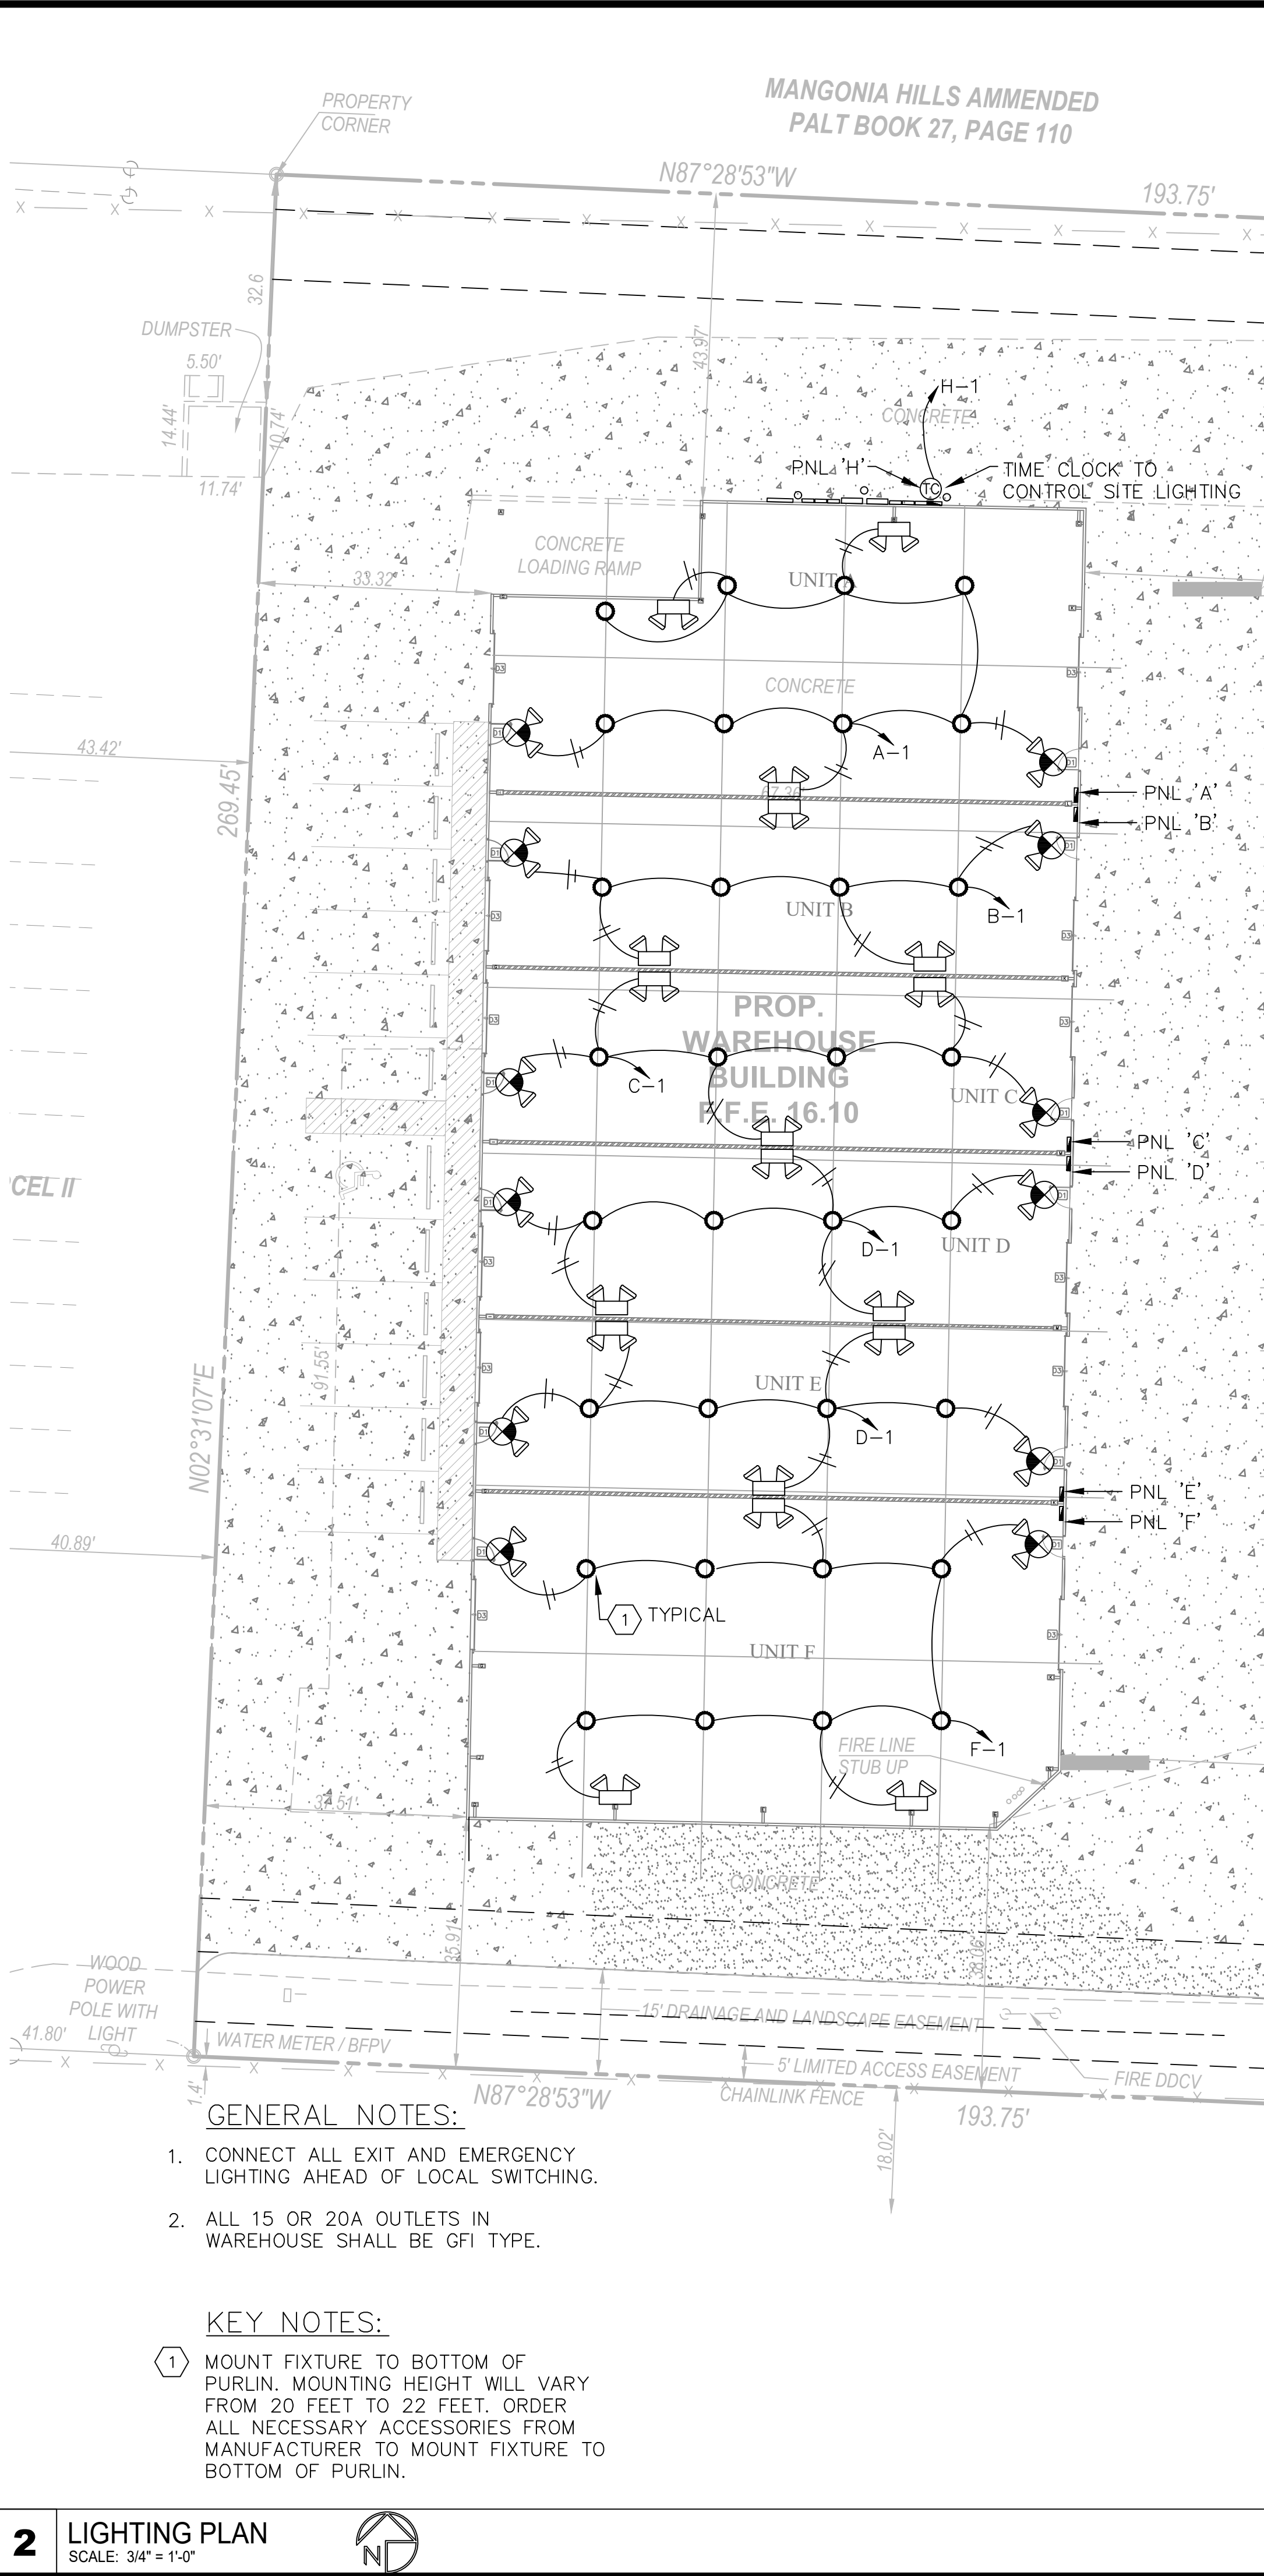


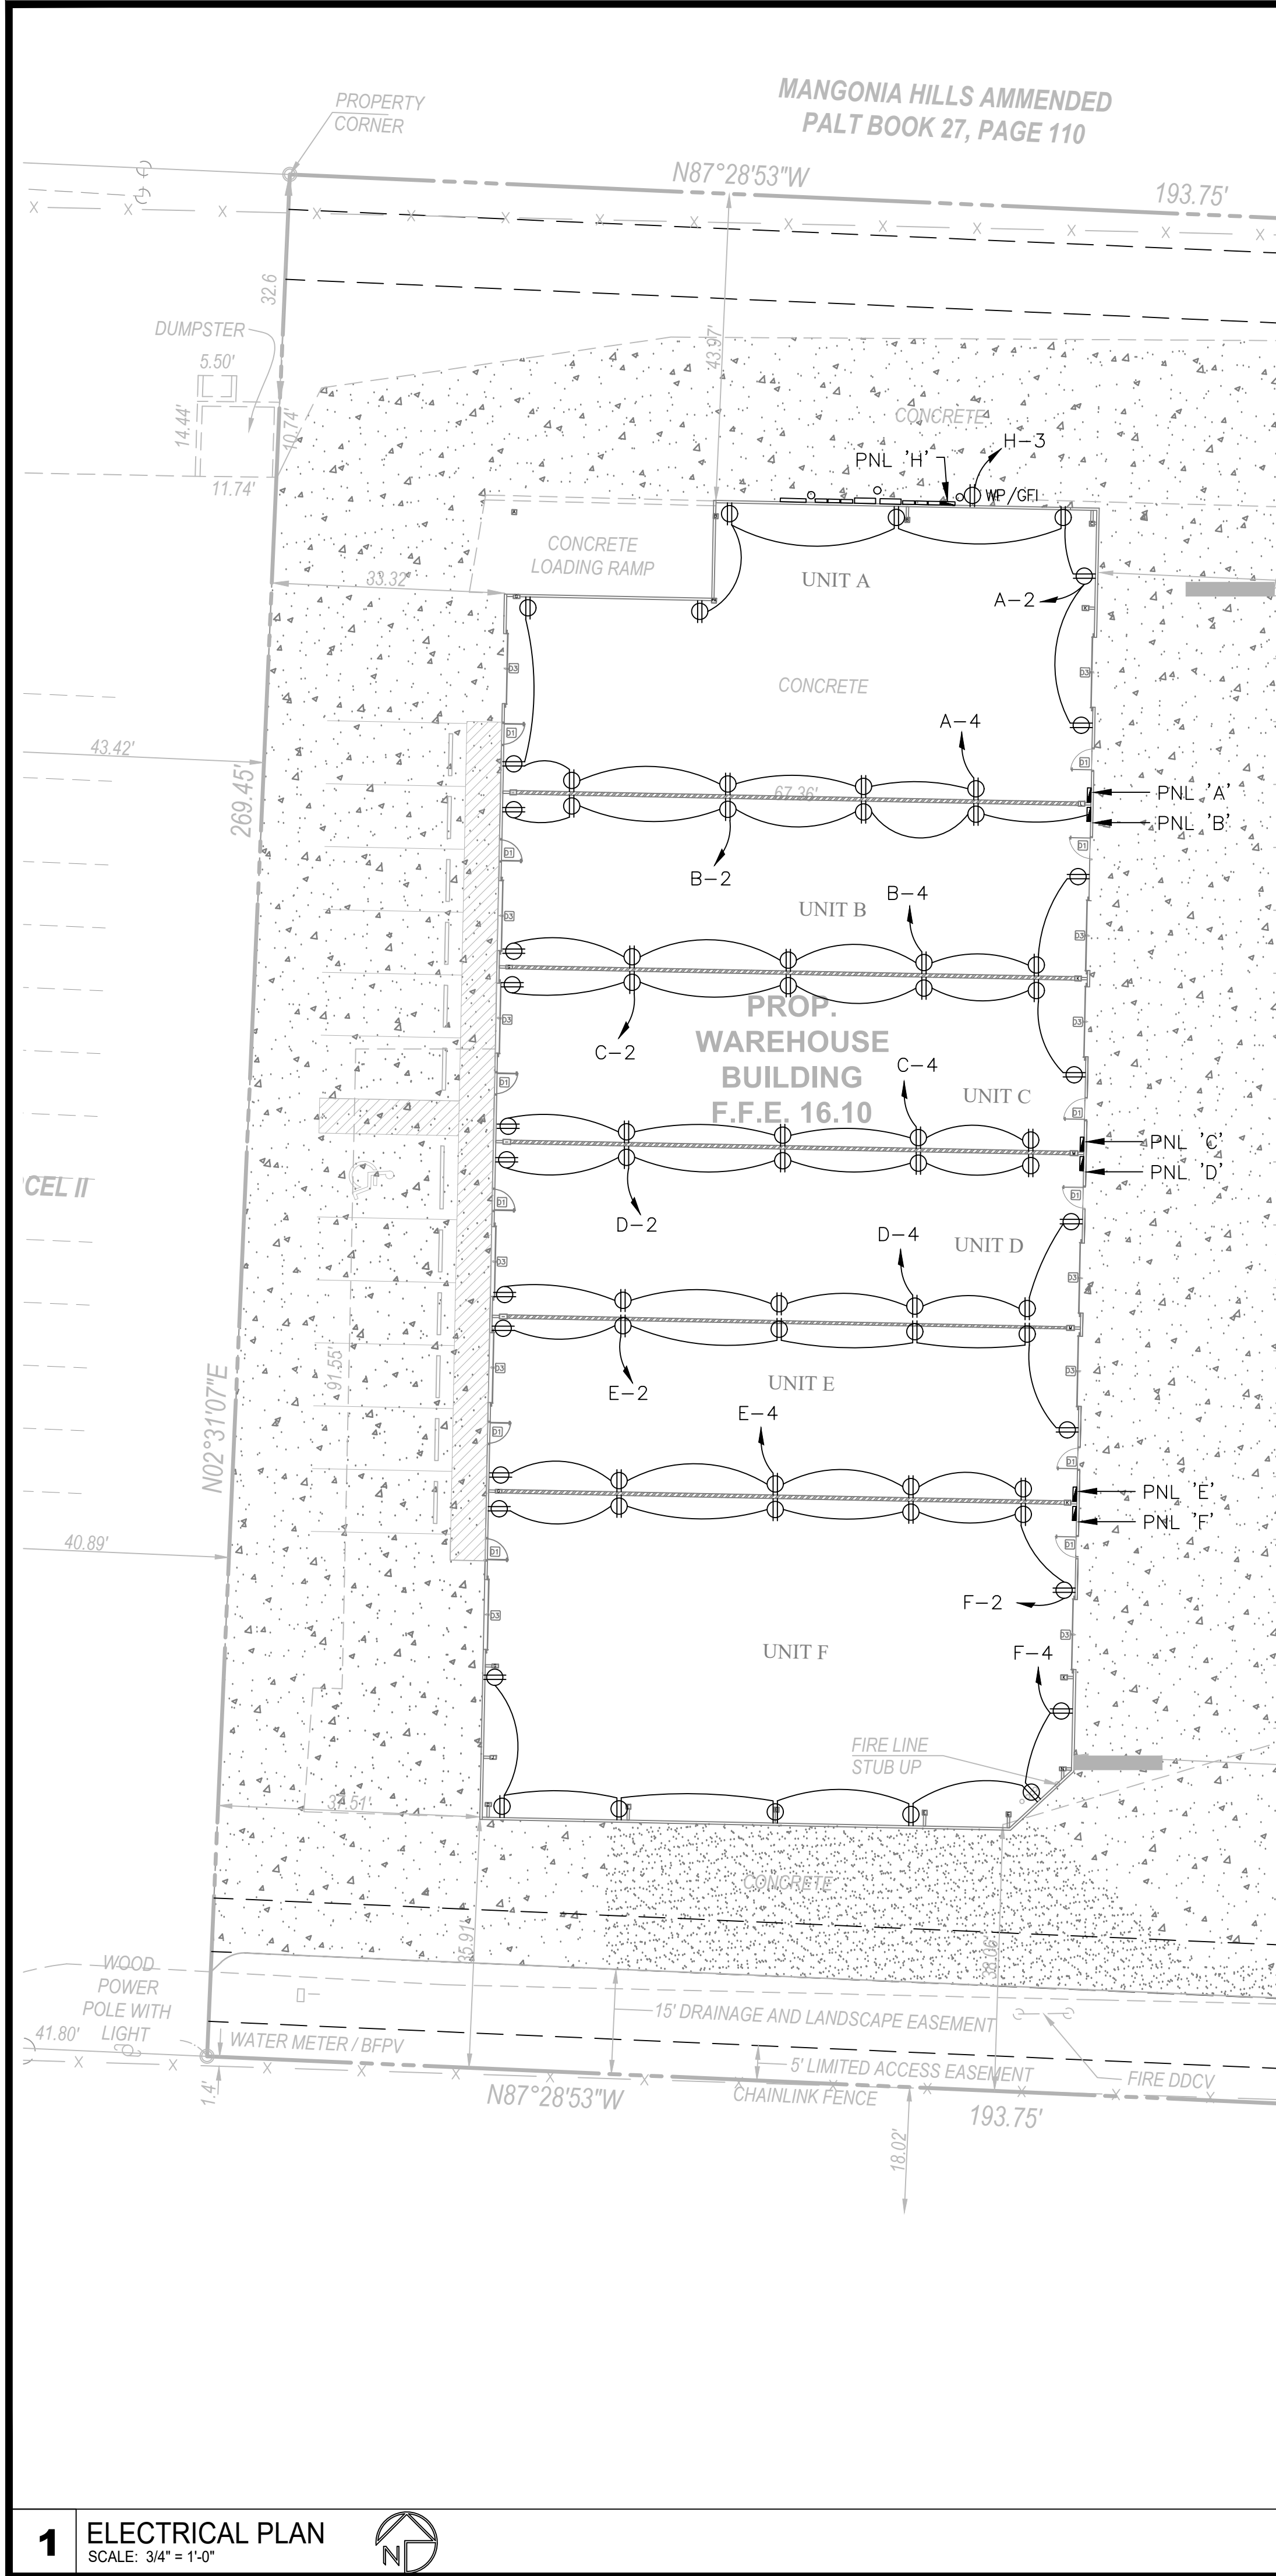

PANELBOARD H SCHEDULE

VOLTAGE: 208Y/120V, 3PHASE, 4W
BUS (AMPS): 60
MAINS: MCB
A/C RATING: 42,000

MOUNTING: SURFACE
ENCLOSURE: NEMA 3R
BUS TYPE: COPPER
LOCATION: EXTERIOR

CKT NO.	CODE	BREAKER TRIP	POLE	LOAD DESCRIPTION	LOAD			PHASE	LOAD VA	LOAD DESCRIPTION	BREAKER TRIP	POLE	CKT NO.
					A	B	C						
1	1	20	1	SITE LTG	1200	1400	---	---	200	N. WHSE RCPTS	20	1	3
3				SPACE	---	---	0	---		SPACE			4
5				SPACE	---	---	0	---		SPACE			6
7				SPACE	---	0	---	---		SPACE			8
9				SPACE	---	---	0	---		SPACE			10
11				SPACE	---	---	0	---		SPACE			12

NOTES: *- ARC FAULT TYPE BREAKER

15-20A CKT - #12AWG - 1/2°C
25-30A CKT - #10AWG - 3/4°C
35-50A CKT - #8AWG - 1°C
55-65A CKT - #6AWG - 1°C

70-85A CKT - #4AWG - 1°C
90-100A CKT - #3AWG - 1 1/4°C
110-115A CKT - #2AWG - 1 1/4°C
120-130A CKT - #1AWG - 1 1/2°C

CONNECTED KVA
CODE 1 KVA
CODE 2 KVA
CODE 3 KVA
CODE 4 KVA
CODE 5 KVA
DEMAND LOAD (KVA)
DEMAND LOAD (A)

1.4
1.2
0.0
0.2
0.0
0.0
1.7
4.7

PANELBOARD A SCHEDULE (TYPICAL ALL TENANTS)

VOLTAGE: 208Y/120V, 3PHASE, 4W
BUS (AMPS): 200
MAINS: MLO
A/C RATING: 22,000

MOUNTING: SURFACE
ENCLOSURE: NEMA 1
BUS TYPE: COPPER
LOCATION: TENANT REAR

CKT NO.	CODE	TRIP	POLE	LOAD DESCRIPTION	LOAD			PHASE	LOAD VA	LOAD DESCRIPTION	BREAKER TRIP	POLE	CKT NO.
					A	B	C						
1	1	20	1	GENERAL LTG	1400	2600	---	---	1200	N. WHSE RCPTS	20	1	3
3	2	30	2	WHSE EXHAUST FAN	2500	---	3700	---	1200	S. WHSE RCPTS	20	1	3
5	2			WHSE EXHAUST FAN	2500	---	---	2500		SPACE			4
7				SPACE	---	---	0	---		SPACE			6
9				SPACE	---	---	0	---		SPACE			8
11				SPACE	---	---	0	---		SPACE			10
13				SPACE	---	---	0	---		SPACE			12
15				SPACE	---	---	0	---		SPACE			14
17				SPACE	---	---	0	---		SPACE			16
19				SPACE	---	---	0	---		SPACE			18
21				SPACE	---	---	0	---		SPACE			20
23				SPACE	---	---	0	---		SPACE			22
25				SPACE	---	---	0	---		SPACE			24
27				SPACE	---	---	0	---		SPACE			26
29				SPACE	---	---	0	---		SPACE			28
31				SPACE	---	---	0	---		SPACE			30
33				SPACE	---	---	0	---		SPACE			32
35				SPACE	---	---	0	---		SPACE			34
37				SPACE	---	---	0	---		SPACE			36
39				SPACE	---	---	0	---		SPACE			38
41				SPACE	---	---	0	---		SPACE			40

NOTES: *- ARC FAULT TYPE BREAKER

15-20A CKT - #12AWG - 1/2°C
25-30A CKT - #10AWG - 3/4°C
35-50A CKT - #8AWG - 1°C
55-65A CKT - #6AWG - 1°C

70-85A CKT - #4AWG - 1°C
90-100A CKT - #3AWG - 1 1/4°C
110-115A CKT - #2AWG - 1 1/4°C
120-130A CKT - #1AWG - 1 1/2°C

CONNECTED KVA
CODE 1 KVA
CODE 2 KVA
CODE 3 KVA
CODE 4 KVA
CODE 5 KVA
DEMAND LOAD (KVA)
DEMAND LOAD (A)

8.8
1.4
5.0
2.4
0.0
0.0
9.2
25.4

GENERAL NOTES:

- CONNECT ALL EXIT AND EMERGENCY LIGHTING AHEAD OF LOCAL SWITCHING.
- ALL 15 OR 20A OUTLETS IN WAREHOUSE SHALL BE GFI TYPE.

KEY NOTES:

- MOUNT FIXTURE TO BOTTOM OF PURLIN. MOUNTING HEIGHT WILL VARY FROM 20 FEET TO 22 FEET. ORDER ALL NECESSARY ACCESSORIES FROM MANUFACTURER TO MOUNT FIXTURE TO BOTTOM OF PURLIN.

3 PANEL SCHEDULES

SCALE: NONE



REVISION	BY

MANGONIA PARK WAREHOUSE FOR:

1319 MANGONIA, LLC

1319 53rd STREET

MANGONIA PARK, FL 33407

ELECTRICAL FLOOR PLANS

DRAWN	JIP
CHECKED	DP
DATE	07/24/24
SCALE	AS NOTED
PROJECT NO.	240509
SHEET	E-2
OF 4 SHEETS	