
KRT

01 DEFAULT LAYOUT

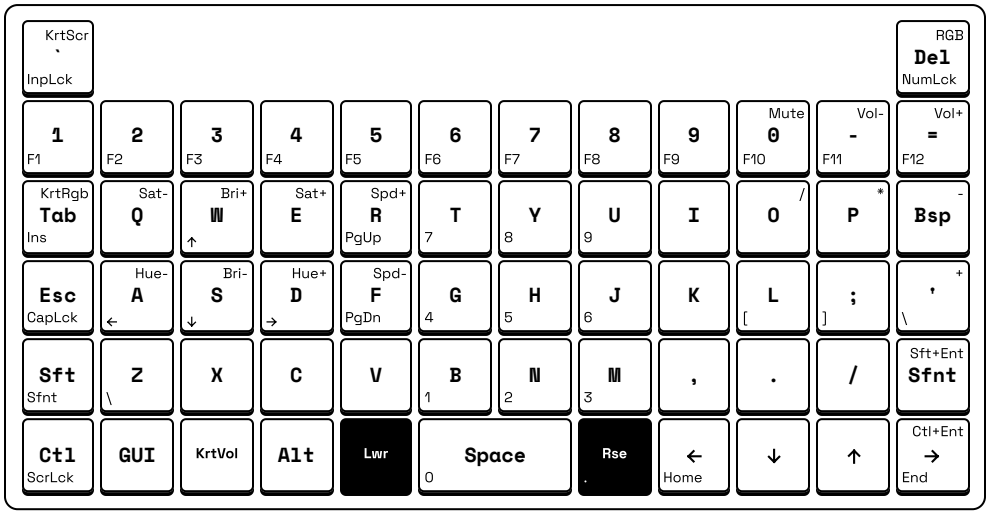

LABEL	KEY	ACTION
Sfnt	Space cadet enter	Tap for Enter, hold for Shift
InpLck	Input lock	Disables typing for cleaning
KrtScr	Krteq Screen	Combined screen control
KrtRgb	Krteq RGB	Combined RGB control
KrtVol	Krteq Volume	Combined volume control

02 CONNECT TO VIA

VIA allows you to easily change the keyboard layout or settings. However a custom design file must be uploaded to make it work.

[1] Get **krteq_via.json** from **github.com/swift502/Krteq/production**

[2] Visit **usevia.app**

[3] In the **Settings** tab, enable **Show Design tab**

[4] In the **Design** tab, click **Load** and select the JSON file

[5] In the **Configure** tab, click **Authorize device** and select Krteq

KRT

03 KRT KEYCODES

Krteq keycodes are available in VIA under the **Custom** keycodes section. This table lists their exact behavior.

KEY	PRESS	SHIFT + PRESS	CTRL + PRESS
KrtScr	Next OLED screen	Previous screen	Default screen
KrtRgb	Next RGB effect	Previous effect	Default effect
KrtVol	Volume down	Volume up	Mute

04 SYSTEM SHORTCUTS

Low-level shortcuts baked into the firmware.

SHORTCUT	ACTION
Sft + Ent + B	Bootloader mode, for flashing new firmware.
Sft + Ent + C	Factory reset. Wipes your VIA keymap back to default.

05 CUSTOMIZATION

Add interactive OLED screens or customize the built-in behaviors by compiling your own QMK user keymap!

Advanced documentation and examples are available in the GitHub repository's README.

