
01 DEFAULT LAYOUT

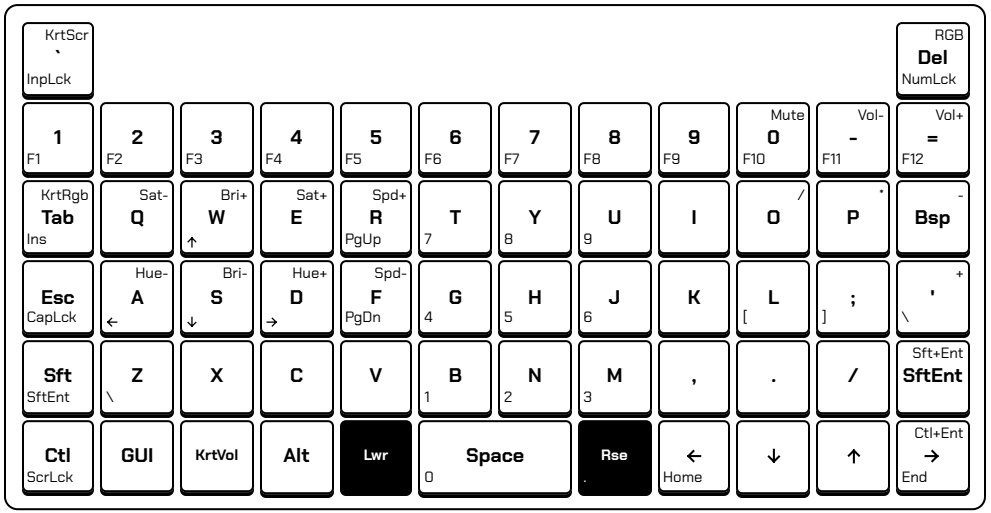

ALIASES

ALIAS	FUNCTION	ACTION
SftEnt	Space cadet enter	Tap for Enter, hold for Shift
InpLck	Input lock	Disables typing (for cleaning and switch testing)

KRT KEYCODES

KEYCODE	PRESS	SHIFT + PRESS	CTRL + PRESS
KrtScr	Next OLED screen	Previous screen	Default screen
KrtRgb	Next RGB effect	Previous effect	Default effect
KrtVol	Volume down	Volume up	Mute

SYSTEM SHORTCUTS

SHORTCUT	ACTION
LShift + RShift + B	Trigger bootloader mode for flashing new firmware
LShift + RShift + C	Factory reset, wipes your VIA keymap back to default

02 CONNECT TO VIA

VIA allows you to easily change the keyboard layout or settings. Follow the steps below to complete the VIA interface setup.

[1] Get **krteq_via.json** from **github.com/swift502/Krteq/production**

[2] Visit **usevia.app**

[3] In the **Settings** tab, enable **Show Design tab**

[4] In the **Design** tab, click **Load** and select the JSON file

[5] In the **Configure** tab, click **Authorize device** and select Krteq

03 CUSTOMIZATION

You can add custom interactive OLED screens or customize the built-in behaviors by compiling your own QMK user keymap.

Documentation and examples are available at: **github.com/swift502/Krteq**

