


Counter Instructions Summery

Studio 5000 COUNTERS

Counter Up (CTU)

The **Counter Up (CTU)** is an output instruction that will turn **on** a controlled output when the accumulated value is greater than or equal to the preset value.

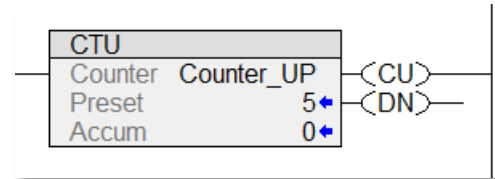


The greater than or equal to value will result in the **Done** bit being **set**. The Done bit may be used to control other logic.

When the rung transitions from false to true, the counter accumulated value increments by one.

Counter Reset (RES)

When the rung is **TRUE**, the **Reset (RES)** instruction returns the **Counter Up (CTU)** with the same Tag **Accumulated** value to zero.



Status Bits

Counter Up (CTU)	
Counter Up Enable Bit .CU	TRUE when counter rung True
Done Bit .DN	TRUE when Accumulated (ACC) value is greater than or equal the Preset (PRE) value

Siemens COUNTERS


Counter Up (CTU)

The **Counter Up (CTU)** is an instruction that will turn **on** a controlled output when the **Count Value (CV)** is greater than or equal to the **Preset Value (PV)**.

The equal values will result in the **Output Bit (QU)** being **set**. The **Output Bit** is used to control other logic.

When the rung transitions from false to true, the counter increments.

The **Reset (R)** returns the Count Value to zero.

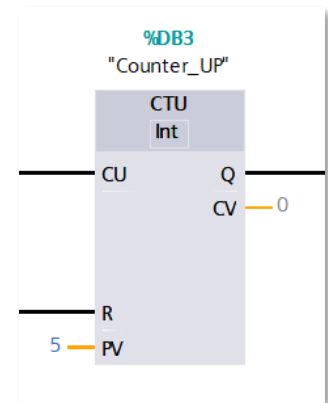

Status Bits

Counter Up (CTU)	
Counter Up Input Bit .CU	TRUE when counter rung True
Count Status Bit .QU	TRUE when the Count Value (CV) is greater than or equal to the Preset Value (PV).