
STUDIO 5000 LOGIX EMULATE FAULTS

If the **Processor Module is missing** go to **Page 3** and use the steps to create a module.

Two faults may occur with the Emulator:

Major Fault (problem with PLC program or process)

Software Error (computer software problem)

Major Fault has a red indicator.

Software Error has a red "X" over processor.


The red around the module just shows the module is selected.



Software Error starts on **Page 2**


MAJOR FAULT

Display the Emulator software, the OK indicator is **RED**.

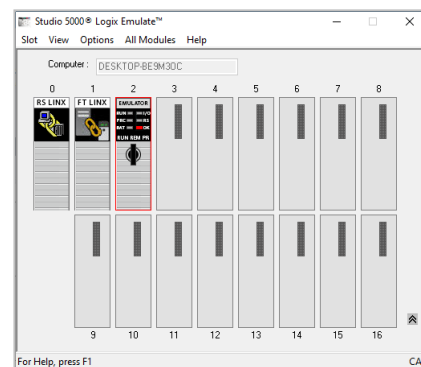


Right click on the processor and select.

If **Clear Major Faults** is grayed out use the next section **SOFTWARE ERROR** to correct the

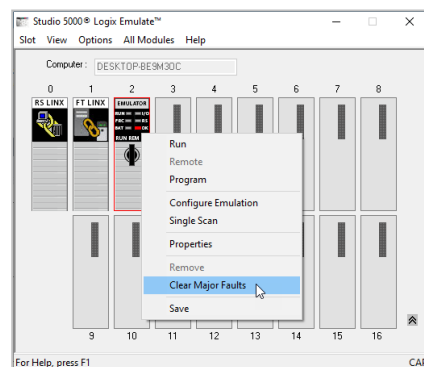

Processor defaults to PROG mode.

Right click on the processor and select **Remote**.

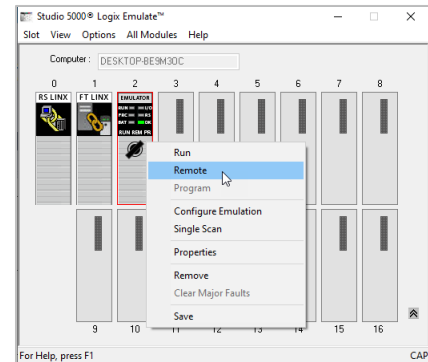


If fault persists:

1. Check the PLC program for syntax errors. If no errors, do step 2.
2. See next section, SOFTWARE ERROR, on removing and creating the processor.



SOFTWARE ERROR

Right click on the processor and select **Remove**.

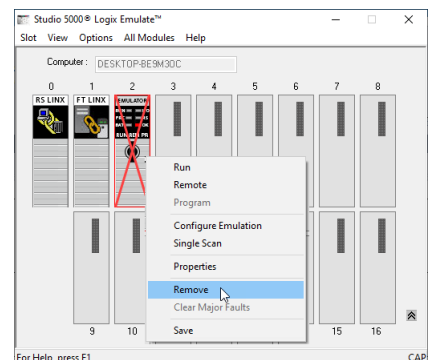

Check **Clear module configuration**.


Select the **OK** button.

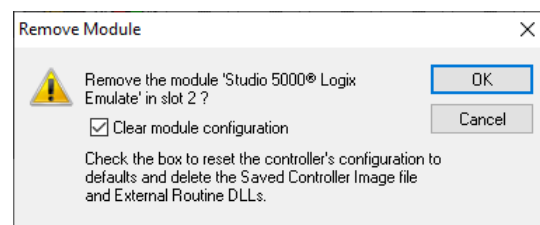

continue



If the Processor Module is missing follow the steps on this page and the next page.

Right click on the empty Slot 2 and select **Create**.

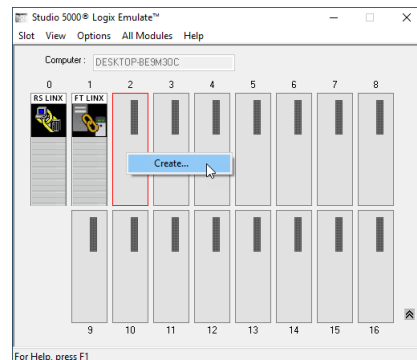



Select the **Emulator 5570 Controller**.

Select the **OK** button.

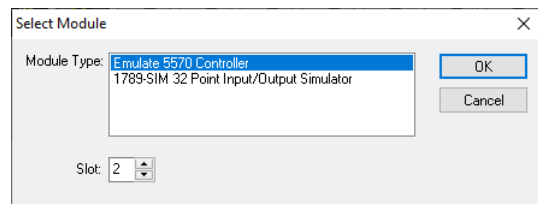



Keep default values.

Select the **Next** button.

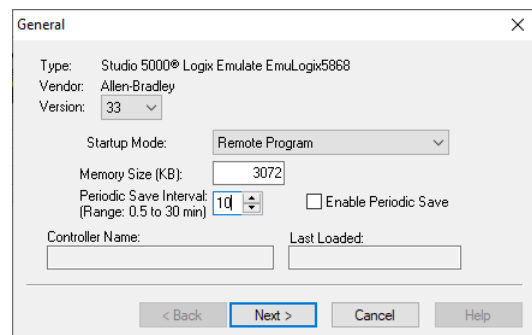

Keep default values.

Select the **Finish** button.

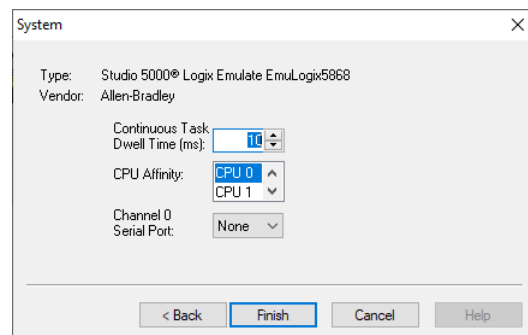

continue

The Processor Module is created.

