



제품을 사용하기 전에

 주의 Caution	지시사항을 위반하였을 때, 경미한 상해나 제품 손상이 발생할 가능성이 있는 경우
 경고 Warning	지시사항을 위반하였을 때, 심각한 상해나 사망이 발생할 수 있는 경우

 주의
Caution

- 1) 각 제품의 정격 전압 및 단자 배열을 확인할 후 정확하게 배선하여 주십시오.
- 2) 배선 시 단자의 나사를 규정 토크로 단단히하여 주십시오.
- 3) 배선 작업 중 모듈 내부 배선 피커기 등의 이물질이 들어가지 않도록 하여 주십시오.
- 4) 모듈의 커넥터로부터 PCB를 분리하거나 제품을 개조하지 마십시오.
- 5) PLC는 사용설명서 또는 데이터 시트의 일반 규격에 명시된 환경에서만 사용해 주십시오.
- 6) 출력모듈에 정격 이상의 부하를 연결하거나 출력 회로가 단락되지 않도록 하여 주십시오.
- 7) 제품 및 배터리를 폐기할 경우, 산인 폐기물로 처리하여 주십시오.

 경고


- 1) 전원이 인가된 상태에서 단자대를 만지지 마십시오.
- 2) 제품 안으로 금속성 이물질이 들어가지 않도록 하여 주십시오.
- 3) 배터리는 충전, 분해, 가열, Short, 납땜 등을 하지 마십시오.

이 기기는 업무용 (A급)으로 전자파 적합 등록을 한 기기이오니 판매자 또는 사용자는 이 점을 주의하시기 바라며, 가정 외의 지역에서 사용하는 것을 목적으로 합니다.

사용 환경 및 사용 버전 안내

항 목	규 격	관련 규격
사용 온도	-10℃~65℃	-
보관 온도	-25℃~80℃	-
사용 습도	5~95% RH, 이슬이 맺히지 않을 것	-
보관 습도	5~95% RH, 이슬이 맺히지 않을 것	-
내 진동	단속적인 진동이 있는 경우	
	주 파 수	가 속 도
	5<f<9Hz	-
	9<f<150Hz	9.8m/s ² (1G)
	연속적인 진동이 있는 경우	
	주 파 수	가 속 도
	5<f<9Hz	-
	9<f<150Hz	4.9m/s ² (0.5G)
		진 폭
		3.5mm
		-
		횟 수
		X,Y,Z 각 방향 10 회
		-
		X,Y,Z 각 방향 10 회
		-


각 부 명칭 및 외형치수 (mm)

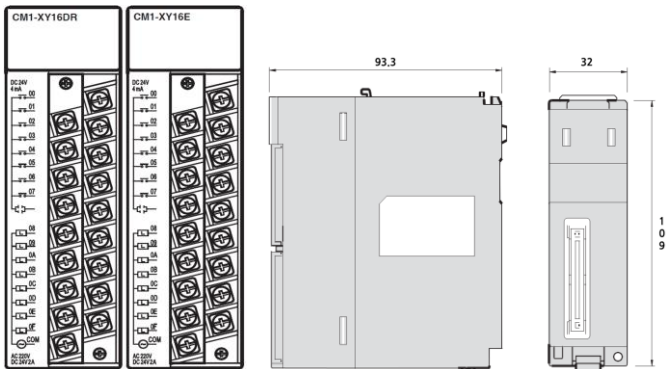


▶ 나사조임 규정 토크 : 6.99 lbs

▶ 동(구리) 또는 동복 알루미늄 전도체를 사용할 것

모듈 분리 및 교체

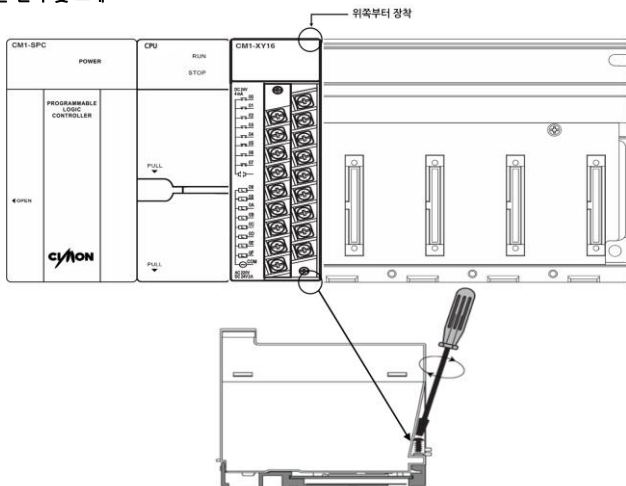

결선도

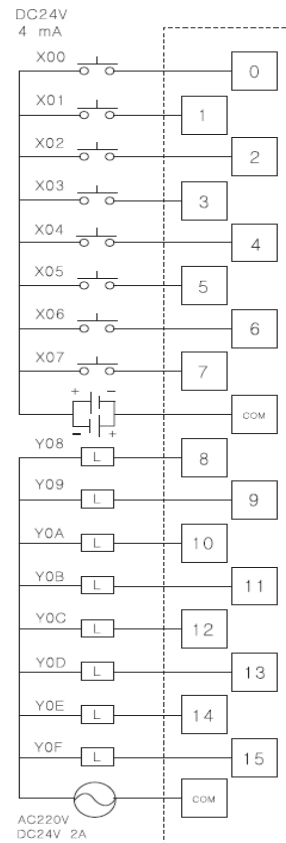

성능 규격

형명		CM1-XY16DR / E	
		입력	출력
입 · 출력 준수		8 점	8 점
		SINK/ SRC 겸용	릴레이
정격 입 · 출력 전압		DC24V	DC12/24V / AC250V
정격 입 · 출력 전류		4mA	2A
On 전압 / On 전류		DC 19V / 4mA	
Off 전압 / Off 전류		DC 11V / 1mA	
응답 시간	Off → On	5ms 이하	10ms 이하
	On → Off	5ms 이하	5ms 이하
Common 방식		8 점 / 1Com	8 점
동작표시		입/출력 On 시 LED 점등	
절연방식		포토티플러 절연	릴레이 절연

보증 내용

본 제품은 (주)싸이몬에서 보증하며, 고장 발생 시 아래의 규정에 의거하여 서비스를 받으실 수 있습니다.

- 1) 하드웨어, 소프트웨어 및 판매어를 포함한 모든 싸임 제품 (이하 '제품'으로 표기)의 보증기간은 출하일로부터 20개월입니다. 이 기간에 발생된 제품 하자의 모든 제조 결함에 대해 당사는 해당 제품을 교환 또는 수리하여 드립니다. 구매 후 30 일 이내 반송된 제품의 경우 당사의 보증 규정에 따라 리퍼 또는 새 제품으로 교환할 수 있습니다. 수리 또는 교환된 제품에 대해서는 6개월 또는 원래 주어진 보증기간의 잔여 기간 중 더 긴 기간을 보증 적용합니다.
- 2) 다음 경우에는 제품 보증이 적용되지 않습니다.
- 천재지변 또는 당사 출하 시 과학, 기술 수준에서 예상이 불가능한 원인에 의한 고장 및 손상
 - 미허가 인력에 의한 제품 개조, 수리, 변경, 개조 등의 경우
 - 설명서 미준수 등, 사용자의 과실로 인한 제품 고장 또는 손상 (제조일자, 일련번호 포함)

고객 서비스 정보

- 회사명: ㈜싸이몬 CIMON CO.,Ltd
- 홈페이지: www.cimon.co.kr
- A/S: 경기도 용인시 수지구 포은대로59번길 37 시그니차광과1차 지하2층 B213
- 전화: 1899-1891
- 팩스: 031-216-4789
- 담당: 품질보증팀 팀장
- 이메일: cs@cimon.com



Before you start


	Caution	Caution describes situations that may cause minor injury or damage to the device.
	Warning	Warning describes situations that could cause major or fatal injury to the user.

	Caution
1) Make sure to check the device's rated voltage and circuit arrangement before wiring. 2) Make sure to tighten the screws with standard torque. 3) When wiring, make sure that wiring debris does not enter the module. 4) Do not dissociate the PCB from the module's casing or modify the device. 5) Use the PLC in an environment that meets the general specifications given in this manual. 6) A greater than normal current passed through the PLC for an extended period of time, or a short-circuited load flowing through the output module may cause a fire. 7) When the product is disposed of, it should be done according to your country's regulations for similar types of industrial waste.	
	Warning
1) Please do not touch the terminals when the power is on. 2) Make sure that metal debris do not enter the PLC. 3) Do not charge, disassemble, heat up, short or solder the battery.	

General Specifications

Items	Specification			Standards
Operating Temp.	-10℃-65℃			-
Storage Temp.	-25℃-80℃			-
Operating Humidity	5-95%RH, Non-condensing			-
Storage Humidity	5-95%RH, Non-condensing			-
Vibration Protection	For discontinuous vibration			
	Frequency	Acceleration	Amplitude	Times
	5≤f<9 Hz	-	3.5 mm	X,Y,Z Each direction, 10times
	9≤f≤150 Hz	9.8m/s ² (1G)	-	
	Continuous vibration			
	Frequency	Acceleration	Amplitude	Times
	5≤f<9 Hz	-	1.75 mm	X,Y,Z Each direction, 10times
	9≤f≤150 Hz	4.9m/s ² (0.5G)	-	


Appearance and Dimensions (mm)

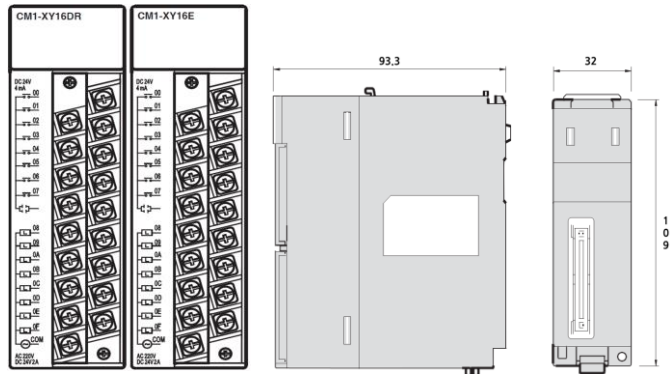


► The tightening Torque is 6.99 Lb-In.

► USE Copper or Copper-Clad Aluminum Conductors

Module Replacement

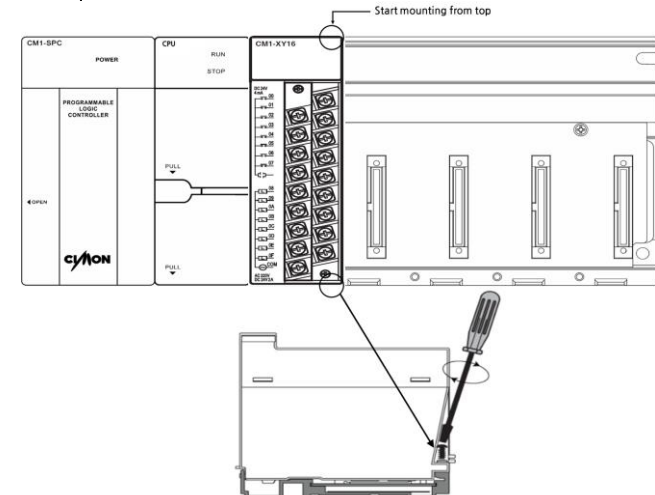

Wiring Diagram

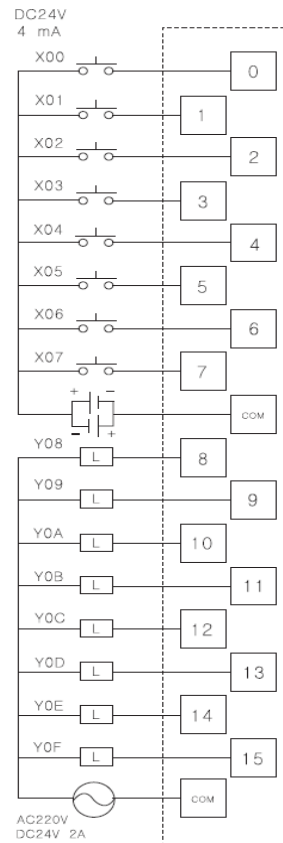

Performance Specification

Items	CM1-XY16DR / E	
	Input	Output
I/O points	8 Points	8 Points
Rated I/O Voltage	24 VDC	12/24 VDC / 250 VAC
Rated I/O Current	4 mA	2 A
On Voltage / On Current	19 VDC / 4 mA	
Off Voltage / Off Current	11 VDC / 1 mA	
Response Time	Off → On	Less than 5 ms
	On → Off	Less than 5 ms
Common Type	8 Points / 1 Com	8 Points
Operation Delay	LED is on when Input / Output is on	
Insulation	Photocoupler	Relay

Product Warranty

All CIMON products, including hardware, software, and firmware (collectively called "Products"), carry a **three-year warranty** against defects in materials and workmanship beginning from the date of product shipment from CIMON to its appointed distributor.

YOUR USE OF ANY CIMON PRODUCTS AND CONTENT ACCESSIBLE THROUGH THE PRODUCTS IS ENTIRELY AT YOUR OWN RISK. CIMON, ITS AFFILIATES, AND SUPPLIERS DO NOT WARRANT THAT THE PRODUCTS ARE SECURE AND FREE FROM BUGS, VIRUSES, INTERRUPTION, ERRORS, THEFT, OR DESTRUCTION. THE PARTIES FURTHER AGREE THAT THE APPLICABLE LAW AND VENUE FOR ANY DISPUTE ARE THE LAWS OF NEVADA. TO THE EXTENT ALLOWED BY APPLICABLE LAW, ANY CLAIMS SHALL BE BROUGHT IN HENDERSON, NEVADA, AND NEVADA LAW SHALL APPLY.

CIMON CO., LTD

Korea Address:

#1008 Office Bld., Signature Gwang-gyo
37, Poen-daero 59beon-gil, Suji-gu, Yonging-si, Gyeonggi-do, Republic of Korea 16864
Tel. +82-31-780-1039

USA Address:

CIMON Inc. 2435 W. Horizon Ridge Pkwy, #100, Henderson, NV 89052
Tel. +1-702-820-1060
Homepage : www.cimon.com