



제품을 사용하기 전에

주의 Caution	지시사항을 위반하였을 때, 경미한 손해나 제품 손상이 발생할 가능성이 있는 경우
경고 Warning	지시사항을 위반하였을 때, 심각한 손해나 사망이 발생할 수 있는 경우

주의 Caution	1) 각 제품의 정격 전압 및 단자 배열을 확인한 후 정확하게 배선하여 주십시오. 2) 배선 시 단자의 나사는 규정 토크로 단단하게 조여 주십시오. 3) 배선 작업 중 모듈 내로 배선 찌꺼기 등의 이물질이 들어가지 않도록 하여 주십시오. 4) 모듈의 케이스로부터 PCB를 분리하거나 제품을 개조하지 마십시오. 5) PLC는 사용설명서 또는 데이터 시트의 일반 규격에 명시된 환경에서만 사용해 주십시오. 6) 출력모듈에 정격 이상의 부하를 연결하거나 출력 회로가 단락되지 않도록 하여 주십시오. 7) 제품 및 배터리를 폐기할 경우, 산업 폐기물로 처리하여 주십시오.
경고 Warning	1) 전원이 인가된 상태에서 단자대를 만지지 마십시오. 2) 제품 안으로 금속성 이물질이 들어가지 않도록 하여 주십시오. 3) 배터리는 충전, 분해, 가열, Short, 납땜 등을 하지 마십시오.

이 기기는 업무용 (A급)으로 전자파 적합 등록을 한 기기이오니 판매자 또는 사용자는 이 점을 주의하시기 바라며, 가정 외의 지역에서 사용하는 것을 목적으로 합니다.


사용 환경 및 사용 버전 안내

항 목	규 격				관련 규격
사용 온도	-10℃~65℃				-
보관 온도	-25℃~80℃				-
사용 습도	5~95%RH, 이슬이 맺히지 않을 것				-
보관 습도	5~95%RH, 이슬이 맺히지 않을 것				-
내 진동	단속적인 진동이 있는 경우				IEC 61131-2
	주 파 수	가 속 도	진 폭	횟 수	
	5<f<9Hz	-	3.5mm	X,Y,Z 각 방향 10 회	
	9<f<150Hz	9.8m/s ² (1G)	-		
	연속적인 진동이 있는 경우				
	주 파 수	가 속 도	진 폭	횟 수	
	5<f<9Hz	-	1.75mm	X,Y,Z 각 방향 10 회	
9<f<150Hz	4.9m/s ² (0.5G)	-			


시스템 사용 시 다음과 같은 버전을 사용해야 정상 동작이 가능합니다.

- PLC-S CPU: FW V6.19
- CIMON Software: V8.10

각 부 명칭 및 외형치수(mm)

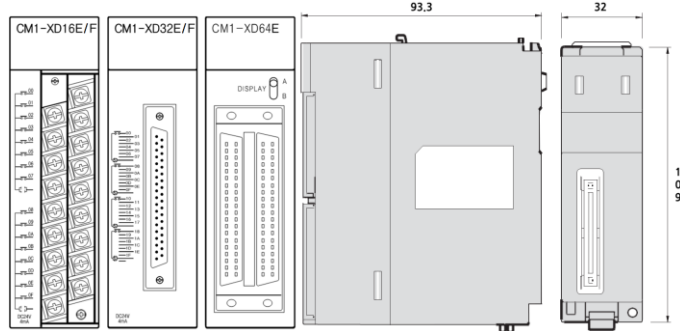


모듈 분리 및 교체

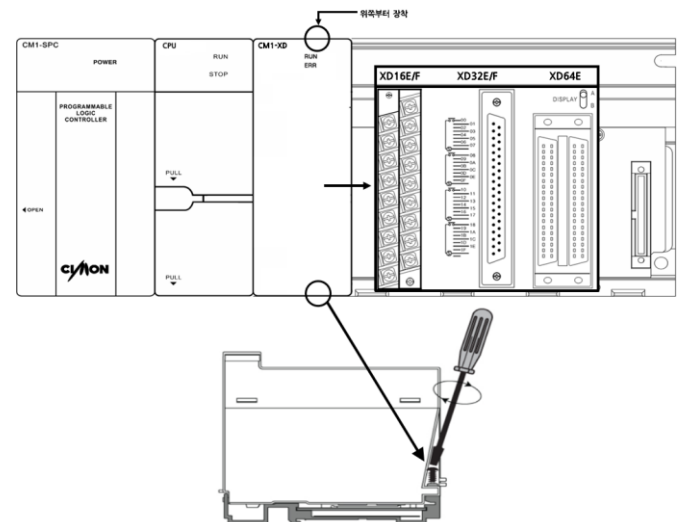


결선도

XD16E/F XD32E/F

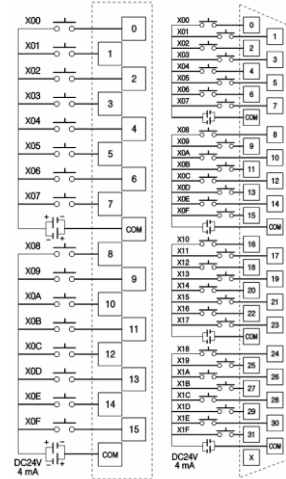

XD64E

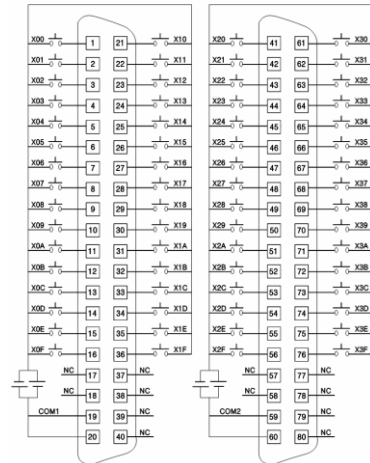

성능 규격

형명	DC 입력				
	XD16E	XD32E	XD64E	XD16F	XD32F
입력 타입	SINK/ SRC 겸용				
정격 입력 전압	DC24V				
정격 입력 전류	4mA				
On 전압 / On 전류	DC 19V / 4mA			DC 15V / 4mA	
Off 전압 / Off 전류	DC 11V / 1mA			DC 9V / 1mA	
응답 시간	Off → On	5ms 이하			
	On → Off				
검류점수	16 점	32 점	64 점	16 점	32 점
Common 방식	8 점 / 1Com		32 점 / 1Com	8 점 / 1Com	
내부 소비전류	60mA	100mA	220mA	60mA	100mA
동작표시	입/출력 On 시 LED 점등				
절연방식	포토커플러 절연				

보증 내용

본 제품은 ㈜싸이온에서 보증하며, 고장 발생 시 아래의 규정에 의거하여 서비스를 받으실 수 있습니다.

- 하드웨어, 소프트웨어 및 펌웨어를 포함한 모든 싸이온 제품 (이하 '제품'으로 표기)의 보증기간은 출하일로부터 20개월입니다. 이 기간에 발생한 제품 하자 또는 제조 결함에 대해 당사는 해당 제품을 교환 또는 수리하여 드립니다. 구매 후 30일 이내 반송된 제품의 경우 당사의 보증 규정에 따라 리퍼 또는 새 제품으로 교환될 수 있습니다. 수리 또는 교환된 제품에 대해서는 6개월 또는 원래 주어진 보증기간의 잔여 기간 중 더 긴 기간을 보증 적용합니다.
- 다음 경우에는 제품 보증이 적용되지 않습니다.
 - 천재지변 또는 당사 출하 시 과학, 기술 수준에서 예상이 불가능한 원인에 의한 고장 및 손상
 - 미허가 인력에 의한 제품 개봉, 수리, 변경, 개조 등의 경우
 - 설명서 미준수 등, 사용자의 과실로 인한 제품 고장 또는 손상 (제조일자, 일련번호 포함)

고객 서비스 정보

- 회사명: ㈜싸이온 CIMON CO.,Ltd
- 홈페이지: www.cimon.co.kr
- A/S: 경기도 용인시 수지구 포은대로 59번길 40 (상현동 1187) 시그니처광고 2차 지식산업센터 805호
- 전화: 1899-1891
- 팩스: 031-216-4789
- 담당: 품질보증팀 팀장
- 이메일: cs@cimon.com



Full manual

Before you start

	Caution	Caution describes situations that may cause minor injury or damage to the device.
	Warning	Warning describes situations that could cause major or fatal injury to the user.

	Caution
1) Make sure to check the device's rated voltage and circuit arrangement before wiring. 2) Make sure to tighten the screws with standard torque. 3) When wiring, make sure that wiring debris does not enter the module. 4) Do not dissociate the PCB from the module's casing or modify the device. 5) Use the PLC in an environment that meets the general specifications given in this manual. 6) A greater than normal current passed through the PLC for an extended period of time, or a short-circuited load flowing through the output module may cause a fire. 7) When the product is disposed of, it should be done according to your country's regulations for similar types of industrial waste.	
	Warning
1) Please do not touch the terminals when the power is on. 2) Make sure that metal debris do not enter the PLC. 3) Do not charge, disassemble, heat up, short or solder the battery.	


General Specifications

Items	Specification				Standards
Operating Temp.	-10℃~65℃				-
Storage Temp.	-25℃~80℃				-
Operating Humidity	5~95%RH, Non-condensing				-
Storage Humidity	5~95%RH, Non-condensing				-
Vibration	For discontinuous vibration				IEC 61131-2
	Frequency	Acceleration	Amplitude	Times	
	5≤f<9 Hz	-	3.5 mm	X,Y,Z Each direction, 10times	
	9≤f≤150 Hz	9.8m/s ² (1G)	-		
	Continuous vibration				
	Frequency	Acceleration	Amplitude	Times	
	5≤f<9 Hz	-	1.75 mm	X,Y,Z Each direction, 10times	
	9≤f≤150 Hz	4.9m/s ² (0.5G)	-		


Following version is recommended for the system configuration.

- CPlE/F CPU: FW V6.17
- CIMON Software: V8.20

Appearance and Dimensions (mm)

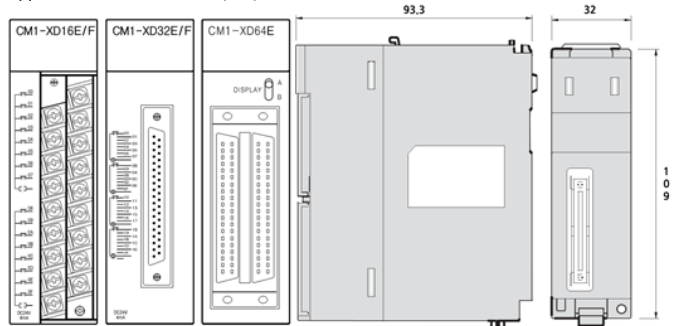


Module Replacement

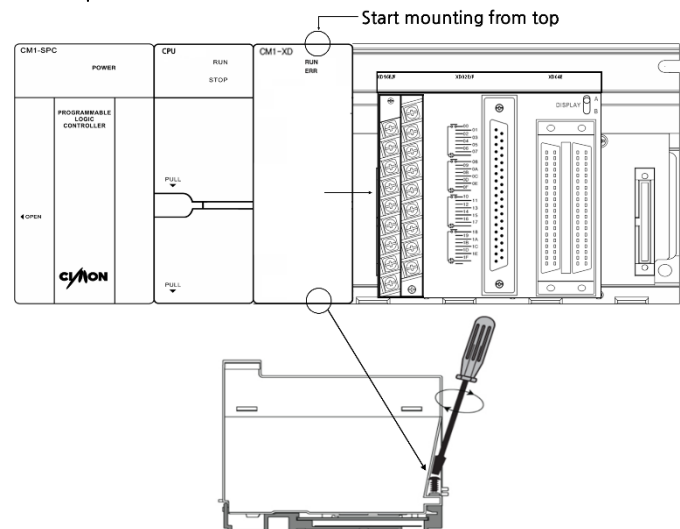


Wiring Diagram

XD16E/F XD32E/F

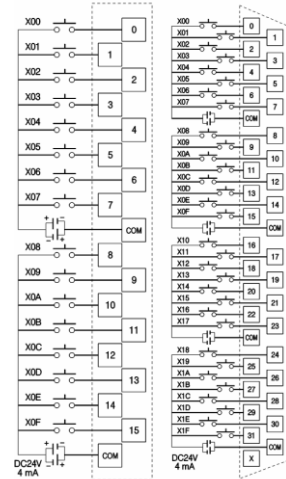

XD64E

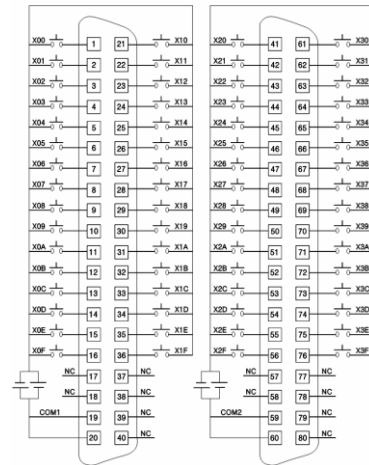

Performance Specifications

Items		DC Input				
		XD16E	XD32E	XD64E	XD16F	XD32F
Input Type		SINK and SRC				
Rated I/O Voltage		DC 24V				
Rated I/O Current		4mA				
On Voltage / On Current		DC 19V / 4mA			DC 15V / 4mA	
Off Voltage / Off Current		DC 11V / 1mA			DC 9V / 1mA	
Response Time	Off → On	Less than 5ms				
	On → Off					
No. of Occupied Points		16 Points	32 Points	64 Points	16 Points	32 Points
Common type		8 Points / 1Com		32 Points / 1Com	8 Points / 1Com	
Internal Current Consumption		60mA	100mA	220mA	60mA	100mA
Operation Display		LED is on when input/output is on				
Insulation		Photocoupler				

Product Warranty

All CIMON products, including hardware, software, and firmware (collectively called "Products"), carry a **three-year warranty** against defects in materials and workmanship beginning from the date of product shipment from CIMON to its appointed distributor.

YOUR USE OF ANY CIMON PRODUCTS AND CONTENT ACCESSIBLE THROUGH THE PRODUCTS IS ENTIRELY AT YOUR OWN RISK. CIMON, ITS AFFILIATES, AND SUPPLIERS DO NOT WARRANT THAT THE PRODUCTS ARE SECURE AND FREE FROM BUGS, VIRUSES, INTERRUPTION, ERRORS, THEFT, OR DESTRUCTION. THE PARTIES FURTHER AGREE THAT THE APPLICABLE LAW AND VENUE FOR ANY DISPUTE ARE THE LAWS OF NEVADA. TO THE EXTENT ALLOWED BY APPLICABLE LAW, ANY CLAIMS SHALL BE BROUGHT IN HENDERSON, NEVADA, AND NEVADA LAW SHALL APPLY.

CIMON CO., LTD

Korea Address:

#805 Office Bld., Signature Gwang-gyo2, 40, Poeun-daero 59beon-gil,
Suji-gu, Yongin-si, Gyeonggi-do, Republic of Korea, 16864
Tel. +82-31-780-1039

USA Address:

CIMON Inc. 2435 W. Horizon Ridge Pkwy, #100, Henderson, NV 89052
Tel. +1-702-820-1060
Homepage : www.cimon.com