

제품을 사용하기 전에

	주의	지시사항을 위반하였을 때, 경미한 손해나 제품 손상이 발생할 가능성이 있는 경우
	경고	지시사항을 위반하였을 때, 심각한 손해나 사망이 발생할 수 있는 경우

	주의
1) 각 제품의 정격 전압 및 단자 배열을 확인한 후 정확하게 배선하여 주십시오. 2) 배선 시 단자의 나사는 규정 토크로 단단하게 조여 주십시오. 3) 배선 작업 중 모듈 내로 배선 찌꺼기 등의 이물질이 들어가지 않도록 하여 주십시오. 4) 모듈의 케이스로부터 PCB를 분리하거나 제품을 개조하지 마십시오. 5) PLC는 사용설명서 또는 데이터 시트의 일반 규격에 명시된 환경에서만 사용해주십시오. 6) 출력모듈에 정격 이상의 부하를 연결하거나 출력 회로가 단락되지 않도록 하여 주십시오. 7) 제품 및 배터리를 폐기할 경우, 산업 폐기물로 처리하여 주십시오.	
	경고
1) 전원이 인가된 상태에서 단자대를 만지지 마십시오. 2) 제품 안으로 금속성 이물질이 들어가지 않도록 하여 주십시오. 3) 배터리는 충전, 분해, 가열, Short, 납땜 등을 하지 마십시오.	


이 기기는 업무용 (A급)으로 전자파 적합 등록을 한 기기이오니 판매자 또는 사용자는 이 점을 주의하시기 바라며, 가정 외의 지역에서 사용하는 것을 목적으로 합니다.

사용 환경 및 사용 버전 안내

항 목	규 격			관련 규격	
사용 온도	-10℃~65℃			-	
보관 온도	-25℃~80℃			-	
사용 습도	5~95%RH, 이슬이 맺히지 않을 것			-	
보관 습도	5~95%RH, 이슬이 맺히지 않을 것			-	
내 진동	단속적인 진동이 있는 경우				IEC 61131-2
	주 파 수	가 속 도	진 폭	횟 수	
	5≤f<9Hz	-	3.5mm	X,Y,Z 각 방향 10 회	
	9≤f<150Hz	9.8m/s ² (1G)	-		
	연속적인 진동이 있는 경우				
	주 파 수	가 속 도	진 폭	횟 수	
	5≤f<9Hz	-	1.75mm	X,Y,Z 각 방향 10 회	
	9≤f<150Hz	4.9m/s ² (0.5G)	-		


IEC 61131-2

각 부 명칭 및 외형치수 (mm)

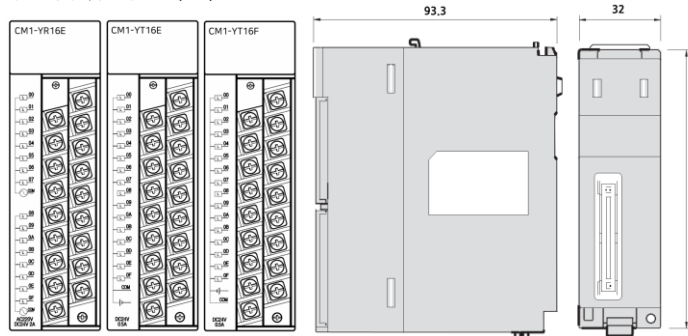


* YR16E 모델과 YR16A 모델 외형 동일

모듈 분리 및 교체

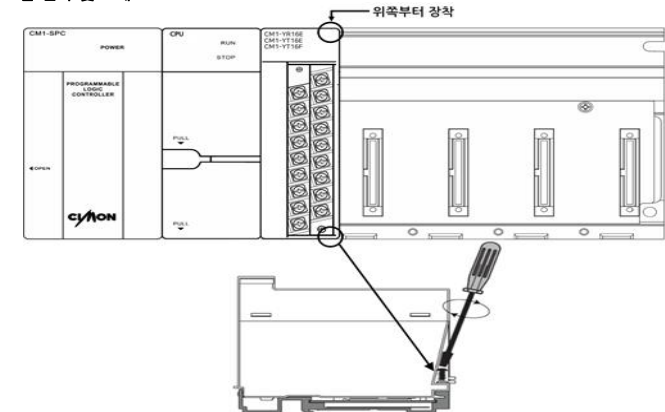


결선도


▶ YR16A/E

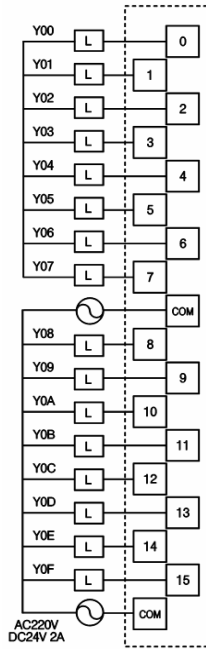


▶ YT16E

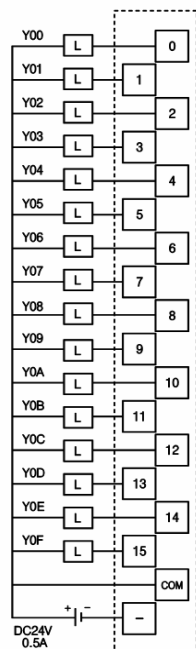

▶ YT16F

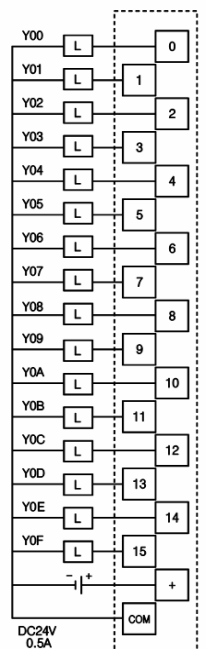

출력 타입

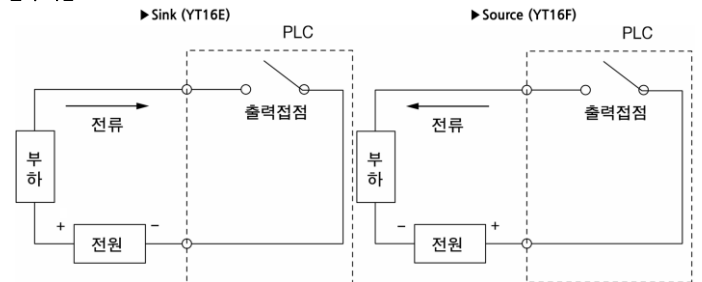

성능 규격

형명	트랜지스터 출력		릴레이 출력
	YT16E	YT16F	YR16A/E
출력 점수	16 점 SINK	16 점 SRC	16 점
정격 부하 전압	DC12 ~ 24V		DC12 ~ 24V / AC250V
정격 전류	1 점	0.5A	2A
	1Com	4A	5A
응답 시간	Off → On	1ms 이하	10ms 이하
	On → Off	1ms 이하	5ms 이하
Common 방식	16 점 / 1 Com	16 점 / 1 Com	8 점 / 1 Com
내부 소비전류	110mA		370mA
동작표시	출력 On 시 LED 점등		
결연방식	포토크플러 결연		릴레이 결연

보증 내용

본 제품은 ㈜사이몬에서 보증하며, 고장 발생 시 아래의 규정에 의거하여 서비스를 받으실 수 있습니다.

- 하드웨어, 소프트웨어 및 펌웨어를 포함한 모든 사이몬 제품 (이하 '제품'으로 표기)의 보증기간은 출하일로부터 20 개월 입니다. 이 기간에 발생된 제품 하자 또는 제조 결함에 대해 당사는 해당 제품을 교환 또는 수리하여 드립니다. 구매 후 30 일 이내 반송된 제품의 경우 당사의 보증 규정에 따라 리퍼 또는 새 제품으로 교환될 수 있습니다. 수리 또는 교환된 제품에 대해서는 6 개월 또는 원래 주어진 보증기간의 잔여 기간 중 더 긴 기간을 보증 적용합니다.
- 다음 경우에는 제품 보증이 적용되지 않습니다.
 - 전체지번 또는 당사 출하 시 과학, 기술 수준에서 예상이 불가능한 원인에 의한 고장 및 손상
 - 미허가 인력에 의한 제품 개봉, 수리, 변경, 개조 등의 경우
 - 설명서 미준수 등, 사용자의 과실로 인한 제품 고장 또는 손상 (제조일차, 일련번호 포함)

고객 서비스 정보

- 회사명: ㈜사이몬 CIMON CO.,Ltd
- 홈페이지: www.cimon.co.kr
- A/S: 경기도 용인시 수지구 포은대로 59번길 40 (상현동 1187) 시그니처광고 2차 지식산업센터 805호
- 전화: 1899-1891
- 팩스: 031-216-4789
- 담당: 품질보증팀 팀장
- 이메일: cs@cimon.com



Before you start


	Caution	Caution describes situations that may cause minor injury or damage to the device.
	Warning	Warning describes situations that could cause major or fatal injury to the user.

Caution	
1) Make sure to check the device's rated voltage and circuit arrangement before wiring. 2) Make sure to tighten the screws with standard torque. 3) When wiring, make sure that wiring debris does not enter the module. 4) Do not dissociate the PCB from the module's casing or modify the device. 5) Use the PLC in an environment that meets the general specifications given in this manual. 6) A greater than normal current passed through the PLC for an extended period of time, or a short-circuited load flowing through the output module may cause a fire. 7) When the product is disposed of, it should be done according to your country's regulations for similar types of industrial waste.	
Warning	
1) Please do not touch the terminals when the power is on. 2) Make sure that metal debris do not enter the PLC. 3) Do not charge, disassemble, heat up, short or solder the battery.	


General Specifications

Items	Specification				Standards
Operating Temp.	-10℃-65℃				-
Storage Temp.	-25℃-80℃				-
Operating Humidity	5-95%RH, Non-condensing				-
Storage Humidity	5-95%RH, Non-condensing				-
Vibration Protection	For discontinuous vibration				IEC 61131-2
	Frequency	Acceleration	Amplitude	Times	
	5≤f<9 Hz	-	3.5 mm	X,Y,Z Each direction, 10times	
	9≤f≤150 Hz	9.8m/s²(1G)	-		
	Continuous vibration				
	Frequency	Acceleration	Amplitude	Times	
	5≤f<9 Hz	-	1.75 mm	X,Y,Z Each direction, 10times	
	9≤f≤150 Hz	4.9m/s²(0.5G)	-		

Appearance and Dimensions (mm)

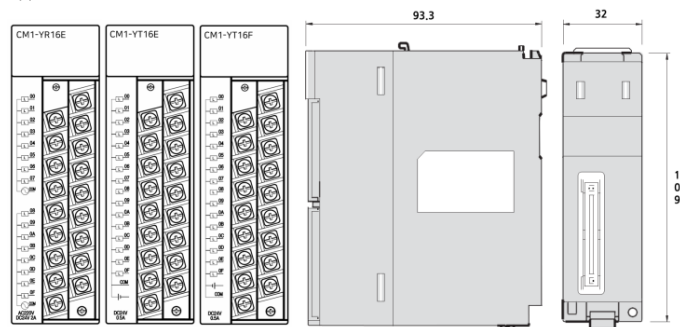


Module Replacement

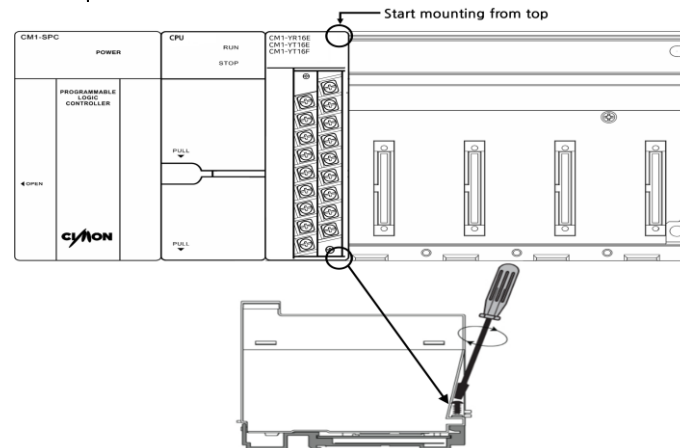


Wiring Diagram


►YR16A/E

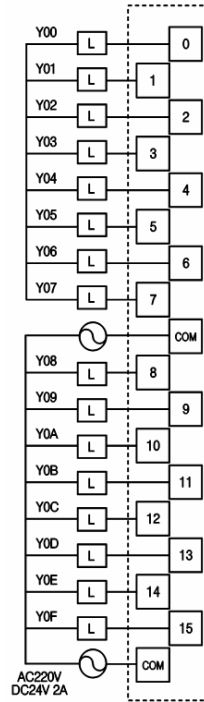


►YT16E

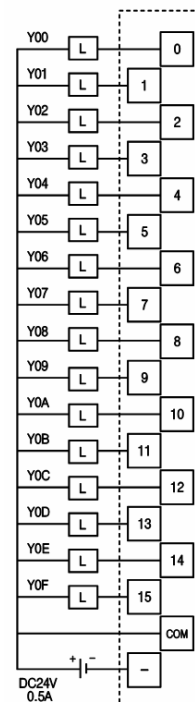

►YT16F

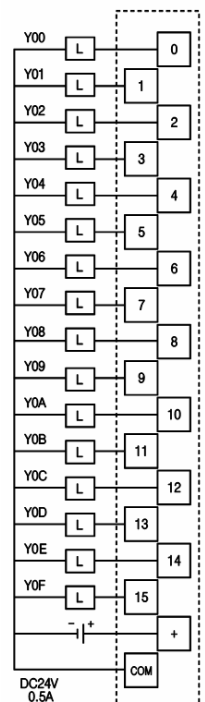

Output Type

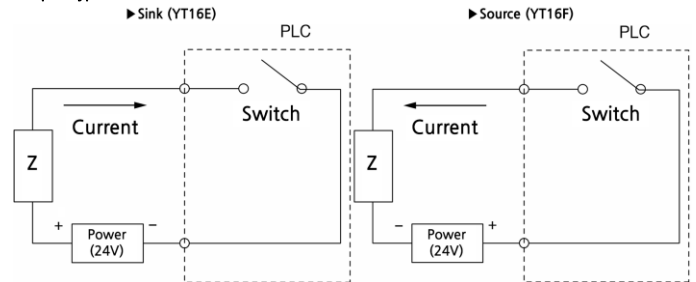

Performance Specifications

Module	TR Output		RELAY OUTPUT
	YT16E	YT16F	YR16A/E
Output Type	16 Points SINK	16 Points SRC	16 Points
Rated Input Voltage	12-24 VDC		12-24 VDC / 250 VAC
Rated Input	1 Point	0.5 A	2 A
	1 COM	4 A	5 A
Response Time	Off → On	less than 1 ms	less than 10 ms
	On → Off	less than 1 ms	less than 5 ms
Common Type	16 Points / 1 Com	16 Points / 1 Com	8 Points / 1 Com
Current Consumption	110 mA		370 mA
Operation Display	LED is on when output is on		
Insulation	Photocoupler insulation		Relay insulation

Product Warranty

All CIMON products, including hardware, software, and firmware (collectively called "Products"), carry a **three-year warranty** against defects in materials and workmanship beginning from the date of product shipment from CIMON to its appointed distributor.

YOUR USE OF ANY CIMON PRODUCTS AND CONTENT ACCESSIBLE THROUGH THE PRODUCTS IS ENTIRELY AT YOUR OWN RISK. CIMON, ITS AFFILIATES, AND SUPPLIERS DO NOT WARRANT THAT THE PRODUCTS ARE SECURE AND FREE FROM BUGS, VIRUSES, INTERRUPTION, ERRORS, THEFT, OR DESTRUCTION. THE PARTIES FURTHER AGREE THAT THE APPLICABLE LAW AND VENUE FOR ANY DISPUTE ARE THE LAWS OF NEVADA. TO THE EXTENT ALLOWED BY APPLICABLE LAW, ANY CLAIMS SHALL BE BROUGHT IN HENDERSON, NEVADA, AND NEVADA LAW SHALL APPLY.

CIMON CO., LTD

Korea Address:

#805 Office Bld., Signature Gwang-gyo2, 40, Poeun-daero 59beon-gil, Suji-gu, Yongin-si, Gyeonggi-do, Republic of Korea, 16864
Tel. +82-31-780-1039

USA Address:

CIMON Inc. 2435 W. Horizon Ridge Pkwy, #100, Henderson, NV 89052
Tel. +1-702-820-1060
Homepage : www.cimon.com