


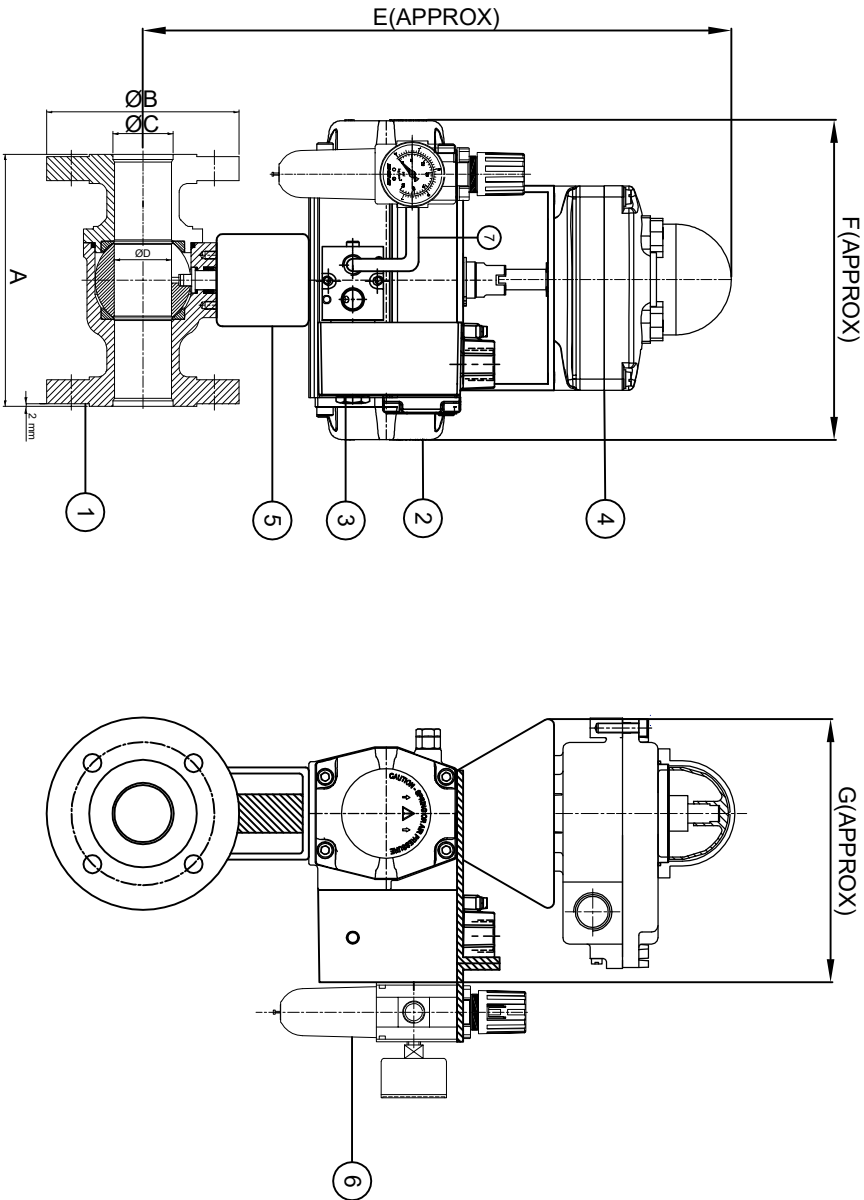

Raudeep Item Code		BV1124P-A1025-TF0025-CL00
Bare Valve Sub Code	BV1124	
Model	L-1RF-IC-040mm	
Make	L&T	
Valve Type	Ball Valve	
Design Standard	ISO 17292	
Face to Face	ASME B16.10	
Valve Size	40	
Body Style	2Way, 1pc, Regular Bore, Floating	
Flow Direction	Bi-Directional	
Body & Bonnet Material	ASTM A 216 Gr. WCB	
Type Of Bonnet	Standard	
Stem Material	ASTM A479 Type 316	
Ball Material	ASTM A351 Gr. CF8M / ASTM A182 Gr. F316	
Seat Material	PTFE	
End Connections	Flanged to ASME B16.5 #150	
Flange Dimensions	ASME B16.5 #150	
Drilling	ASME B16.5 #150	
Bonnet Packing	Graphite and Carbon-filled PTFE	
Body Packing	Graphite	
Pressure Rating	ASME Class 150	
Min Temp Rating Deg C	-20°C	
Max Temp Rating Deg C	180°C	
Testing Standard	ISO 5208	
Body Hydro Test Pressure	30	
Body Hydro Test Fluid	Water	
Seat Leakage Test Pressure	6	
Seat Leakage Test Fluid	Air	
Certification	None	
Bare Actuator Sub Code	PA1025	
Model	RNP80SR40CA1GD	
Make	Neles (Valmet)	
Actuator Type	Pneumatic Rack & Pinion	
Action	Spring Return - 90°	
Pneumatic Supply Minimum	4 barg	
Pneumatic Supply Maximum	6.5 barg	
Pneumatic Connection	1/2" NPT	
Material	Aluminium + anodized (Only end caps are Powder coated)	
Actuator Orientation	Parallel to Pipe Line Axis	
Temperature Rating Deg C	0 to 80	
Certification	None	
SP Sub Code	CL00	
Fail Safe Condition	Fail to Close	
3) Solenoid Valve		
Make	SV1007	
Model number	30318-5-2G+124VDC-37	
Size	1/2" BSP	
Body Material	Aluminium	
Internals	Aluminium, Brass & SS 316	
Seat, Seals	NBR	
Solenoid Valve Type	3/2 Way	
Internal Type	Poppet	
Mounting	Namur	
Operating Press. Range	0 - 10 barg	
Operating Temp. Range	0°C to 75°C	
Coil Class	F	
Coil power rating	8 Watt	
Coil terminals	Screwed	
Coil enclosure	Flameproof	
Cable Entry	1/2" NPT	
Coil Voltage	24VDC	
Additional Requirement 1	Without Gland	
Additional Requirement 2	NI	
4) Limit Switch Box		
LSB Sub Code	LB1002	
Make	Neles (Valmet)	
Model number	KS2V/A2NGRNN-BKT	
Action Type	Rotary	
No. of Limit Switch	2 X SPDT	
Make & Model of Switches	Honeywell - V15S05-CZ100A05-01	
Contact Rating	5A for 12A or 250 VAC, 100mA for 48 VDC 30mA for 250 VDC	
Cable Entry	2 X 1/2" NPT	
Cable Gland	NI	
Housing Material	Die Cast Aluminium	
Enclosure	Standard Enclosure, Exd capable	
Additional information 1	Temperature Range : -20°C to +80°C	
Additional information 2	Indicator : Red & Yellow	
Additional information 3	M5 Bracket	
Approval to Enclosure	NI	
5) Others 1		
Others 1 Sub Code	BK1001	
Other Accessories Name	Bracket and Coupling	
Material	M5 Powder Coated	
Specification 1	with MS galvanized Hardware	
6) Others 2		
Others 2 Sub Code	FR1001	
Make	Shavo	
Model	SB10-2CM27TRGK-NB	
Other Accessories Name	Air Filter Regulator	
Material	Polycarbonate Bowl	
Connectors	1/2" BSP	
Specification 1	Manual Drain	
Specification 2	25 micron porous plastic	
Specification 3	M5 Pressure Gauge w/o approval	
Specification 4	0.7 to 7 bar Pressure Range	
7) Others 3		
Others 3 Sub Code	TB1001	
Other Accessories Name	Tubing & Fittings	
Material	SS 304	
Connectors	1/2"	
Specification 1	Single Tubing	

ALLIANCE THERMAL

PO NO.-PO/067/2026-27/71, DATED:- 15-05-2026

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE IN MM
ALL PROJECTIONS ARE IN THIRD
ANGLE.



RAUDEEP INDUSTRIAL PRODUCTS PVT LTD,
S NO. 143, SINHAGAD ROAD OPP. LOKMAT PRESS,WADGAON DHAYRI, PUNE

THIS DRAWING AND DESIGN IS THE PROPERTY OF RAUDEEP INDUSTRIAL PRODUCT PVT LTD,
WHICH MUST NEITHER BE COPIED NOR USED IN ANY MANNER DETRIMENTAL TO THEIR INTERESTS.

DRAWN	S.P	TITLE : L-1RF-IC-015mm+RNP80SR40-L-SW/P+S.O.V 24VDC(W/P+AFR+ B+A+S S TUBING+M.O.R	
CHECKED	S.R	SIZE: REFER TABLE CLASS :150	
APPROVED	S.R	DRAWING NO:- BV1124+PA1019+TF0191-CL00	
DATE	19-05-2026	REV 0	
SCALE	NTS	SHEET 1 OF 1	

SR NO	VALVE SIZE	ACTUATOR MODEL NO	QTY	A	B	C	D	E	F	G
1	40MM	RNP80SR40CA1GD	01	165	125	38	37	382	208	159