


ITEM SL NO: 400

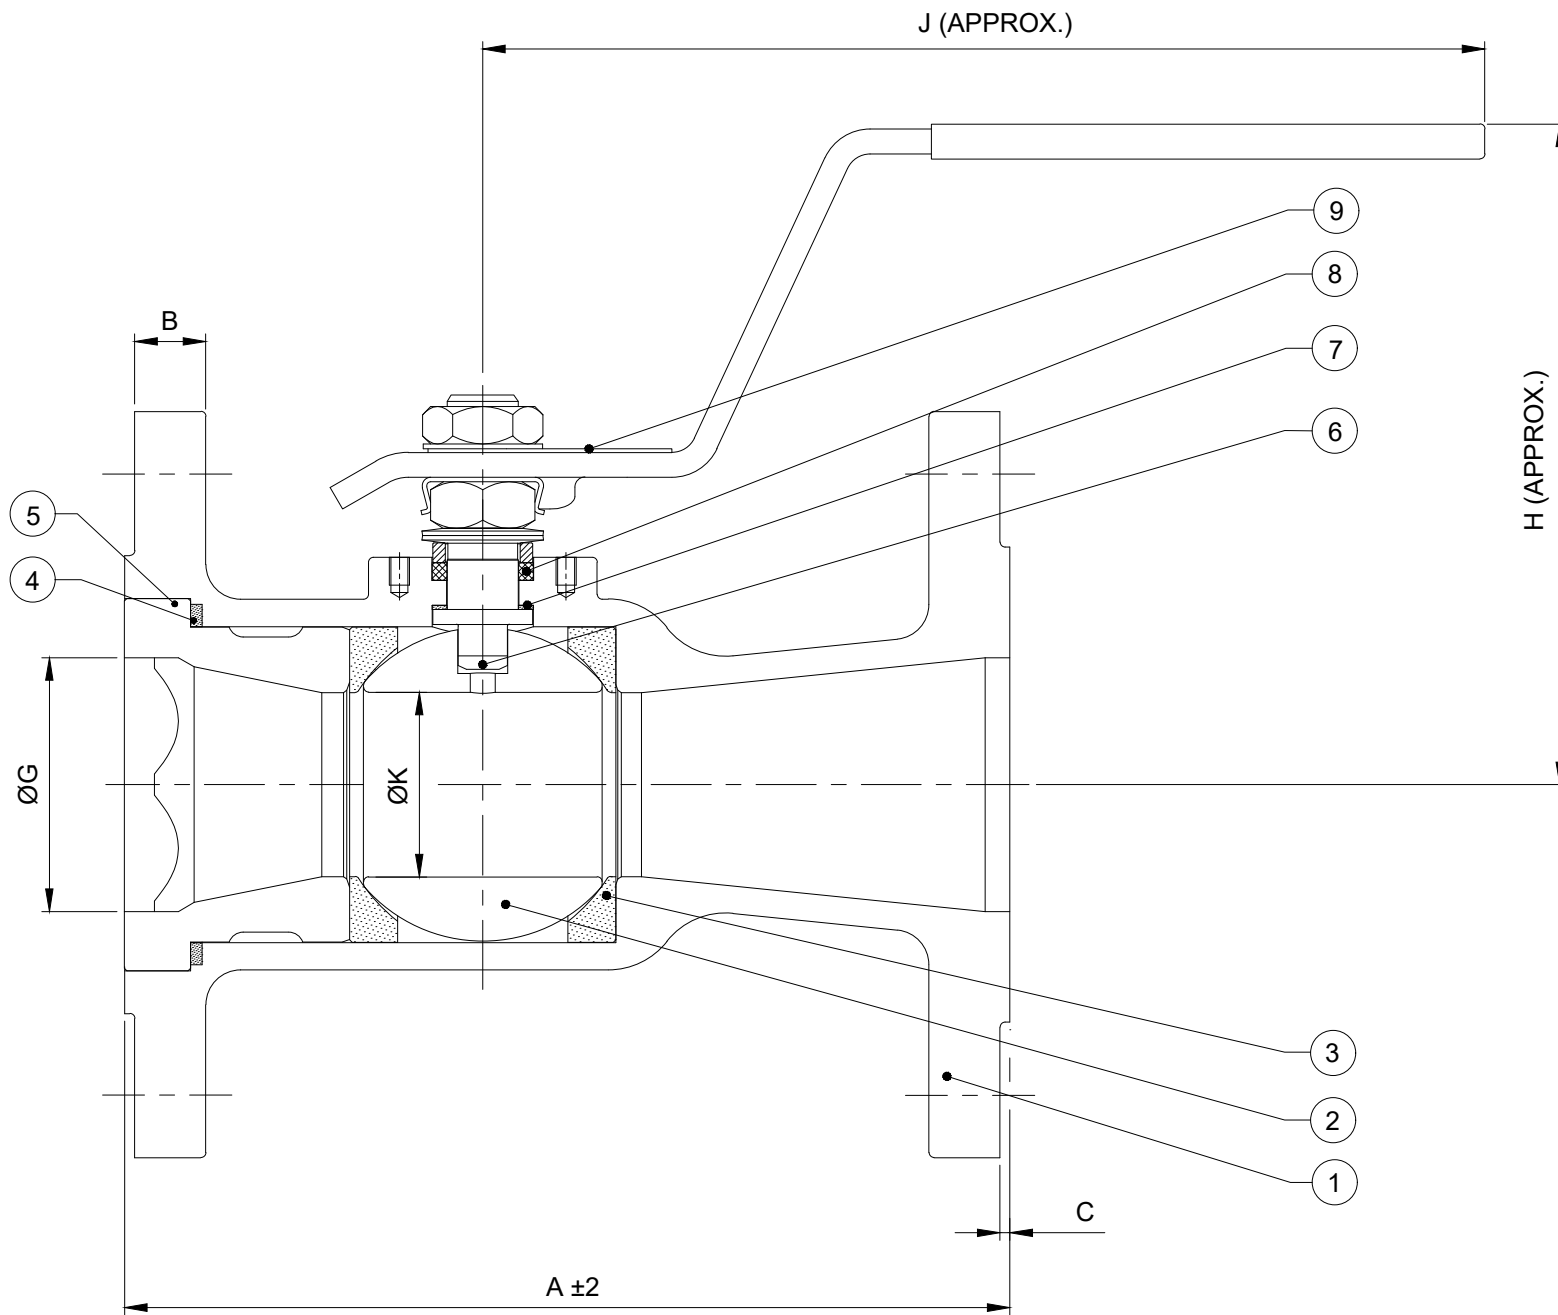

ITEM NO	DESCRIPTION	MATERIAL
1	BODY	ASTM A351 GR CF8M
2	BALL	ASTM A351 GR CF8M/ ASTM A182 GR F316
3	SEAT	PTFE
4	INSERT SEAL	GRAPHITE
5	INSERT	ASTM A351 GR CF8M
6	STEM	ASTM A479 TYPE 316
7	STEM THRUST SEAL	CARBON FILLED PTFE
8	STEM PACKING	GRAPHITE
9	IDENTIFICATION PLATE	SS 304
REFERENCE STANDARD		
DESIGN		ISO 17292
FACE TO FACE		ASME B16.10
END FLANGE DIMENSIONS		ASME B16.5 RF
TEST METHOD		ISO 5208
TEST PRESSURE		psigbar
SHELL	HYDROSTATIC	42529
SEAT	AIR	805.5

- NOTES :
- END FLANGE RAISED FACE FINISH : 3.2 TO 6.3 µm (125 to 250 µin) Ra.
 - VALVES ARE FIRE SAFE TO ISO 10497.
 - VALVES ARE PROVIDED WITH ANTI BLOWOUT DESIGN.

PROJECT NAME							PUNE																
PURCHASER'S NAME							RAJDEEP INDUSTRIAL PRODUCTS PVT LTD																
PURCHASE ORDER No							192002213																
							UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN mm. ALL PROJECTIONS ARE IN THIRD ANGLE.				 L&T Valves Limited						THIS DRAWING AND DESIGN IS THE PROPERTY OF L&T VALVES LIMITED. IT IS A CONFIDENTIAL DISCLOSURE WHICH MUST NEITHER BE COPIED NOR USED IN ANY MANNER DETRIMENTAL TO THEIR INTERESTS.						
						DRAWN		TSV		TITLE : FLOATING BALL VALVE SINGLE PIECE GENERAL ASSEMBLY													
						CHECKED		VNK															
						APPROVED		PSS		SIZE : REFER TABLE				CLASS : 150				BORE : REGULAR					
						DATE		23.01.2020		DRG No :						110018922-FBV-010				REV 0		SHEET 1 OF 1	
REV	ECM No	DATE	PRD	CHKD	APPD	SCALE		NTS															

SIZE (DN)	A	B	C	ØG	H	J	ØK	WEIGHT kg (APPROX)	QTY	PO. ITEM NO
50	178	14.8	2	51	122	210	37	6.5	20	40