


SERIES : 32D

3/2 DIRECT ACTING NAMUR SOLENOID VALVE

TYPE	PRESSURE

TYPE	PRESSURE

TYPE	PRESSURE
30318	0 - 10 bar




FEATURES

- Ideally suited for Spring Return Actuator
- Exhaust purged into spring chamber
- Higher flow for faster operation
- Air and power fail to return
- Non return plug fitted on the exhaust port

WETTED PARTS

Code	※	B1	B5
Body	Anodized Aluminium	Anodized Aluminium	SS 316
Internals	Aluminium, Brass and SS 316	SS 316	SS 316
Guide Assembly	SS 304		
Shadow-Ring	None		
Plunger, Insert	SS 430		
Spring	SS 302		
Fasteners	SS 304		
Seat, Seals	NBR, Viton, Viton GLT, F. Silicon		



AMBIENT AND FLUID TEMPERATURE

-20 °C to 80 °C

SPECIAL VERSION AND SUFFIX

Suffix : (Valve) AM, WO
Special version : (Solenoid) CO, FR, SS, LC, III

MEDIA

Air, Inert Gases, Water

APPLICATION

Operation of single acting actuator

PORT CONNECTION

INLET	OUTLET	OUTLET	EXHAUST
1		4	2

3

SPARES

(Refer page 25 for ordering code)

SPARE KIT	CODE
Seal Kit O-ring Set and Plunger Assembly	g
Repair Kit O-ring Set, Plunger Assembly, Fastener, Springs, Manual Override	99
Solenoid Kit Solenoid, Gasket and Nut 34	

APPROVAL

(* applied for)

Approval	Nema 4X	IP67	Ex d IIC or T4 or T5 or IP66	Ex ia IIC IP67	DGMS	CCOE
UL		✓	✓	✓	✓	✓
CE		✓	✓	✓		
UL	✓		*			
CEM			✓	✓		
PG			✓	✓		
IECEx			✓	✓		

Contact Rotex for

- Any other ambient, fluid temperature, media and application
- UL listed, Listed general purpose Valve
- SIL4 approved valve



For Valve type 30318 operated with AC voltage suitable for rectified

special version of solenoid with option

3/2 DIRECT ACTING NAMUR SOLENOID VALVE

SPECIFICATION

PORT CONNECTION			PRE-SSURE bar		ORIFICE (mm)	FLOW FACTOR @ 1 bar (LPM OF WATER @ 1 bar)	VALVE TYPE	PILOT PRESSURE	BODY AND INTERNALS		SEALS				MANUAL OVERRIDE	SOLENOID ENCLOSURE		EXPLOSION PROOF	OUTLET PORT	POWER VA		CONSTRUCTION REFERENCE NUMBER								
SIZE	BSP(F)	NPT(F)	MINIMUM	MAXIMUM					ALUMINIUM	ALUMINIUM + SS	BRASS (STD. PORT NPT)	SS 316/ CF8M (STD. PORT NPT)	NBR	Viton	EPDM	Viton GLT	F. Silicon			NIL	STAYPUT CUM MOMENTARY		MOMENTARY	FLYING LEAD	PLUG IN IP67	SQ. PLUG IN, IP67	TERMINAL BOX IP67	FPJB Ex d IIC, T4 OR T6	LARGE ENCLOSURE	SOLENOID SIZE
3/2 ON/ OFF APPLICATION																														
1/4"	2G	2R	0	10	5	9	30318			×	B1	B5	×	S2	S2G	S19	M0	×	M8	22	25	T	E	III	14	2	8	8	8	N5

Cable Entry	T	E	* = Do not specify when opted for											
M20 x 1.5	19	39												
1/2" NPT	16	37												


ORDERING CODE, EXAMPL VALVE + SOLENOID

TYPE-SUFFIX-ORIFICE-PORT CONNECTION- BODY AND INTERNALS MANUAL OVERRIDE- SEAL + SIZE -VOLTAGE- CURRENT- SOLENOID ENCLOSURE- APPROVAL- INSULATION- SPECIAL VERSION
e.g. 30318-5-2R-B5+220V AC-37-FR


DIMENSIONS

All Dimensions are in mm


CONSTRUCTION REFERENCE N

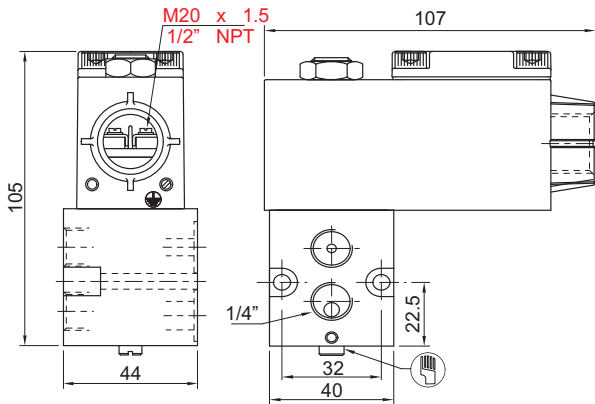

TERMINAL BOX/ Ex d TYPE 16, 19, 37, 39

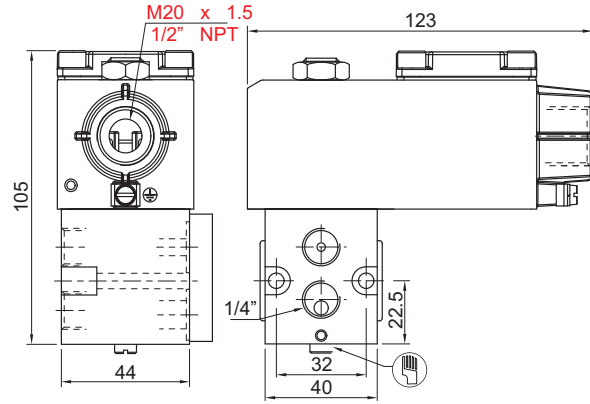

TERMINAL BOX/ Ex d LARGE ENCLOSURE, TYPE 16, 19, 37, 39

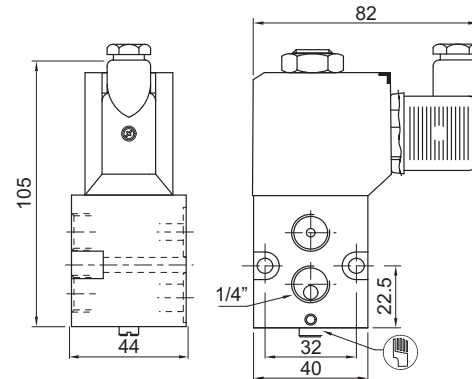

PLUG IN SOLENOID TYPE 22/ 25