GATE EC 2001 - Q.16

Tanmay Goyal - AI20BTECH11021

Question

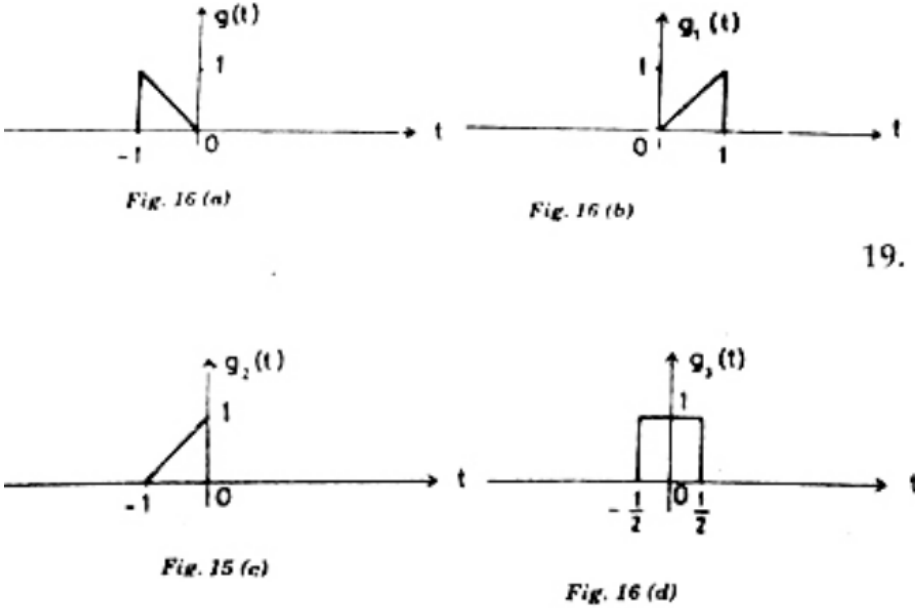

Fig. 16 (a) Fig. 16 (b) Fig. 15 (c) Fig. 16 (d)

The Fourier Transform $G(\omega)$ of the signal $g(t)$ is given by

$$G(\omega) = \frac{1}{\omega^2}(e^{j\omega} - j\omega e^{j\omega} - 1) \quad (1)$$

Using this information, find the Fourier Transforms of the signals $g_1(t)$, $g_2(t)$ and $g_3(t)$.

Note: We replace ω by $2\pi f$. Then,

$$G(f) = \frac{1}{4\pi^2 f^2}(e^{2\pi jf} - 2\pi jfe^{2\pi jf} - 1) \quad (2)$$

Result of Time Shifting on Fourier Transform

Lemma

If

$$g(t) \overset{\mathcal{F}}{\rightleftharpoons} G(f) \tag{3}$$

then,

$$g(t \pm t_0) \overset{\mathcal{F}}{\rightleftharpoons} G(f)e^{\pm 2\pi j f t_0} \tag{4}$$

Proof.

We know,

$$G(f) = \int_{-\infty}^{\infty} g(t)e^{-2\pi j f t}\, dt \tag{5}$$

□

Proof continued

Proof.

Let

$$g(t + t_0) \overset{\mathcal{F}}{\rightleftharpoons} G'(f) \tag{6}$$

Then,

$$G'(f) = \int_{-\infty}^{\infty} g(t + t_0) e^{-2\pi jft} \, dt \tag{7}$$

Substituting $t + t_0 = T$, we get:

$$G'(f) = \int_{-\infty}^{\infty} g(T) e^{-2\pi jf(T - t_0)} \, dT \tag{8}$$

$$= e^{2\pi jft_0} \int_{-\infty}^{\infty} g(T) e^{2\pi jfT} \, dT \tag{9}$$

$$= e^{-2\pi jft_0} G(f) \tag{10}$$

Result of Time scaling on Fourier Transform

Lemma

If

$$g(t) \overset{\mathcal{F}}{\rightleftharpoons} G(f) \tag{11}$$

then,

$$g(\alpha t) \overset{\mathcal{F}}{\rightleftharpoons} \frac{1}{|\alpha|} G\left(\frac{f}{\alpha}\right) \tag{12}$$

Proof.

Consider $\alpha > 0$. Then, we know,

$$G(f) = \int_{-\infty}^{\infty} g(t) e^{-2\pi jft} \, dt \tag{13}$$

Proof Continued

Proof.

Let

$$g(\alpha t) \overset{\mathcal{F}}{\rightleftharpoons} G'(f) \tag{14}$$

Then,

$$G'(f) = \int_{-\infty}^{\infty} g(\alpha t) e^{-2\pi j f t}\, dt \tag{15}$$

Making the substitution $T = \alpha t$, we get:

$$G'(f) = \frac{1}{\alpha} \int_{-\infty}^{\infty} g(T) e^{-2\pi j \frac{fT}{\alpha}}\, dT \tag{16}$$

$$= \frac{1}{\alpha} G\left(\frac{f}{\alpha}\right) \tag{17}$$

□

Effect of Time Reversal on Fourier Transform

Lemma

If

$$g(t) \overset{\mathcal{F}}{\rightleftharpoons} G(f) \tag{18}$$

then,

$$g(-t) \overset{\mathcal{F}}{\rightleftharpoons} G(-f) \tag{19}$$

Proof.

Put $\alpha = -1$ in (2) to obtain the result.

$$g(-t) \overset{\mathcal{F}}{\rightleftharpoons} \frac{1}{|-1|} G\left(\frac{f}{-1}\right) \implies g(-t) \overset{\mathcal{F}}{\rightleftharpoons} G(-f) \tag{20}$$

$\square$

The Various Signals

Now, from the figure:

$$g(t) = \begin{cases} -t & -1 \leq t \leq 0 \\ 0 & otherwise \end{cases} \tag{21}$$

$$g_1(t) = \begin{cases} t & 0 \leq t \leq 1 \\ 0 & otherwise \end{cases} \tag{22}$$

$$g_2(t) = \begin{cases} 1 + t & -1 \leq t \leq 0 \\ 0 & otherwise \end{cases} \tag{23}$$

$$g_3(t) = \begin{cases} 1 & -\frac{1}{2} \leq t \leq \frac{1}{2} \\ 0 & otherwise \end{cases} \tag{24}$$

$g(t)$

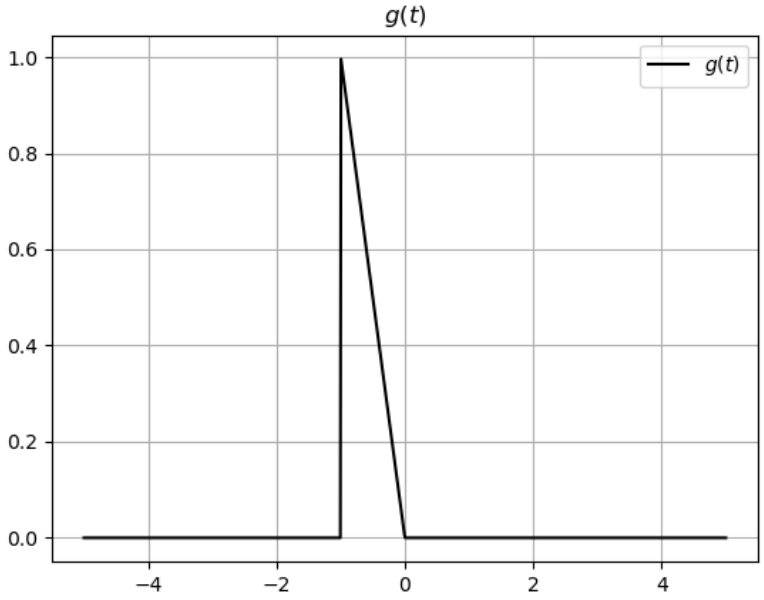

g(t)
1.0
0.8
0.6
0.4
0.2
0.0
−4
−2
0
2
4
g(t)

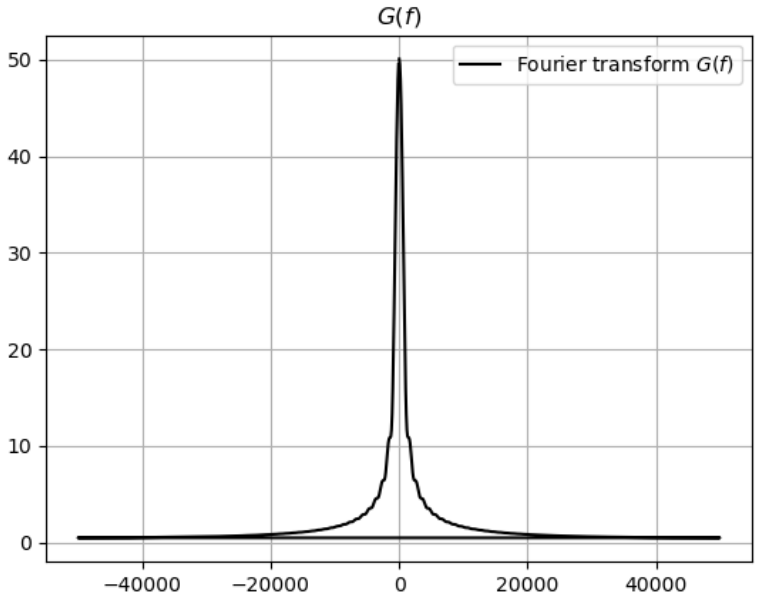

G(f)
50
40
30
20
10
0
−40000
−20000
0
20000
40000
Fourier transform G(f)

$G_1(\omega)$

Clearly, $g_1(t) = g(-t)$, and using (3), we get:

$$G_1(f) = G(-f) = \frac{1}{4\pi^2 f^2}(e^{-2\pi jf} + 2\pi jfe^{-2\pi jf} - 1) \tag{25}$$

$g_1(t)$

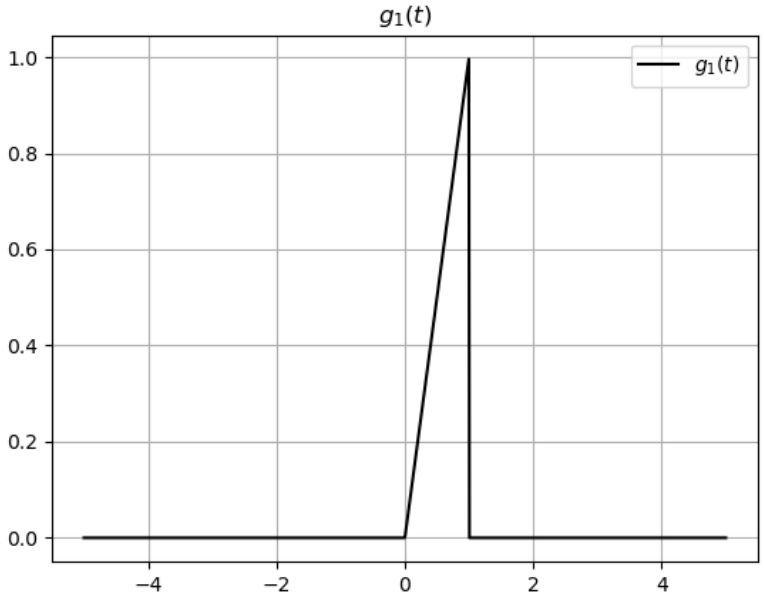

$g_1(t)$
1.0
0.8
0.6
0.4
0.2
0.0
−4
−2
0
2
4
$g_1(t)$

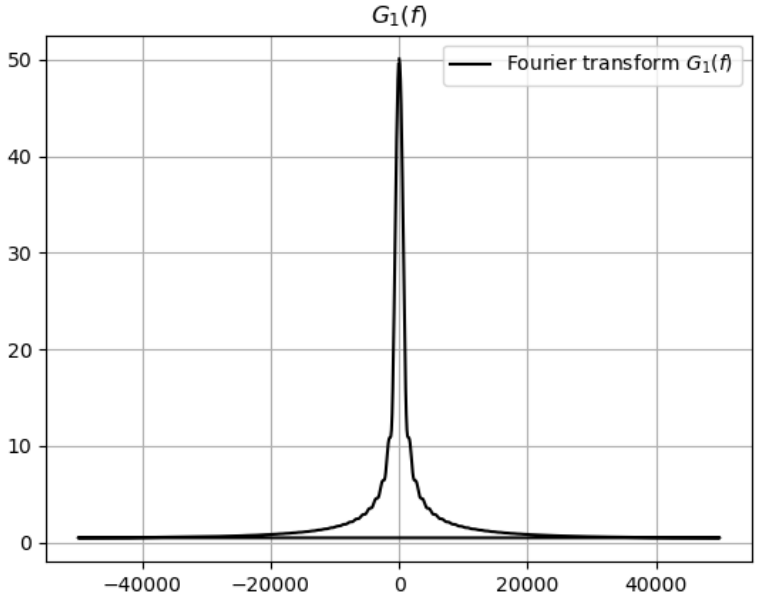

$G_1(f)$
50
40
30
20
10
0
−40000
−20000
0
20000
40000
Fourier transform $G_1(f)$

$G_2(\omega)$

Also, $g_2(t) = g(-t-1)$. Thus, from (1) and (3), we get:

$$g_2(t) \overset{\mathcal{F}}{\rightleftharpoons} e^{-2\pi jf} G(-f) \tag{26}$$

$$g_2(t) \overset{\mathcal{F}}{\rightleftharpoons} \frac{1}{4\pi^2 f^2}(e^{-4\pi jf} + 2\pi jfe^{-4\pi jf} - e^{-2\pi jf}) \tag{27}$$

$$\implies G_2(\omega) = \frac{1}{4\pi^2 f^2}(e^{-4\pi jf} + 2\pi jfe^{-4\pi jf} - e^{-2\pi jf}) \tag{28}$$

$g_2(t)$

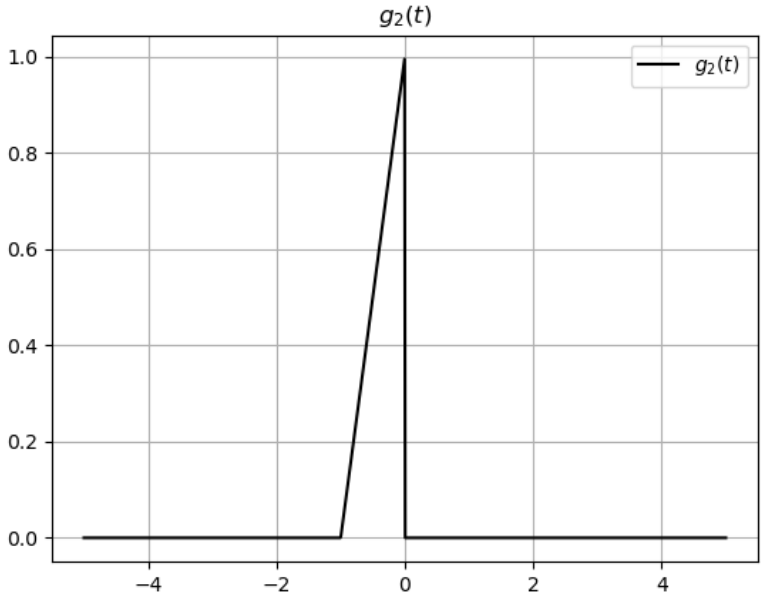

$g_2(t)$
$g_2(t)$
1.0
0.8
0.6
0.4
0.2
0.0
−4
−2
0
2
4

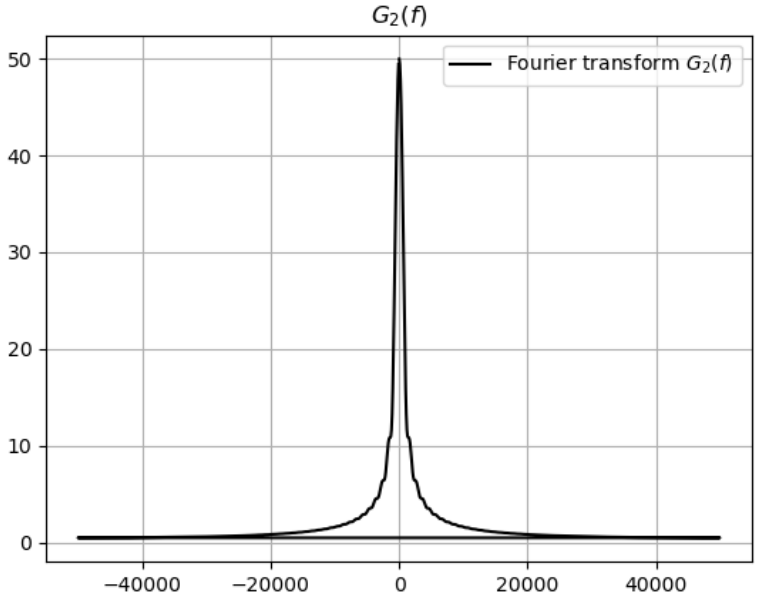

$G_2(f)$
Fourier transform $G_2(f)$
50
40
30
20
10
0
−40000
−20000
0
20000
40000

$G_3(\omega)$

Also, $g_3(t) = g\left(t - \frac{1}{2}\right) + g\left(-t - \frac{1}{2}\right)$. Thus,

$$g_3(t) \overset{\mathcal{F}}{\rightleftharpoons} e^{-j\pi f}\left[G(f) + G(-f)\right] \quad (29)$$

$$G_3(f) = \frac{e^{-j\pi f}}{4\pi^2 f^2}\left[e^{2\pi jf} - 2\pi jfe^{2\pi jf} - 1 + e^{-2\pi jf} + 2\pi jfe^{-2\pi jf} - 1\right] \quad (30)$$

$$G_3(f) = \frac{e^{-j\pi f}}{4\pi^2 f^2}\left[e^{2\pi jf} - 2\pi jfe^{2\pi jf} + e^{-2\pi jf} + 2\pi jfe^{-2\pi jf} - 2\right] \quad (31)$$

$g_2(t)$

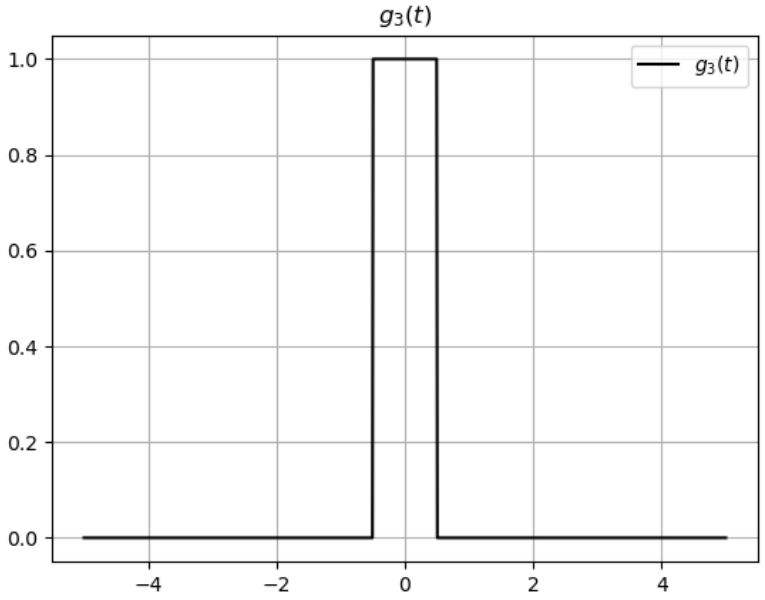

$g_3(t)$
1.0
0.8
0.6
0.4
0.2
0.0
−4
−2
0
2
4
$g_3(t)$

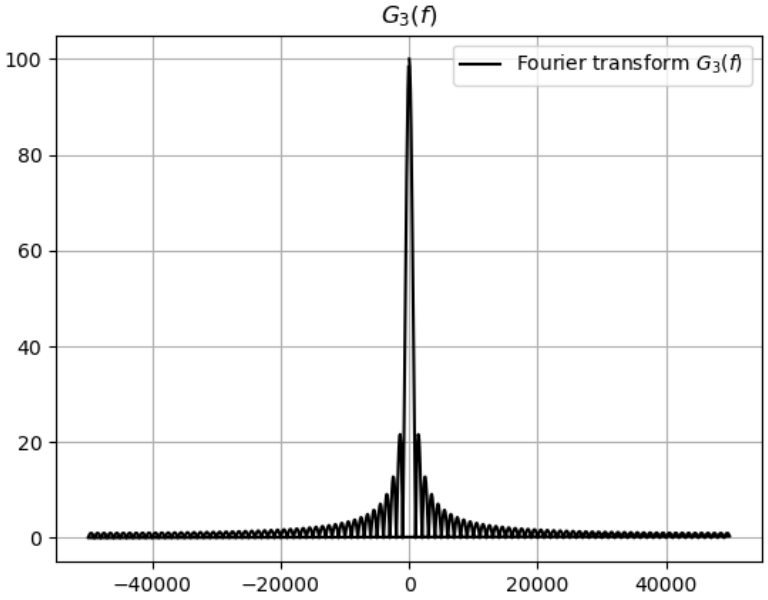

$G_3(f)$
100
80
60
40
20
0
−40000
−20000
0
20000
40000
Fourier transform $G_3(f)$