

Universitat Politècnica de Catalunya
Facultat de Matemàtiques i Estadística

Master in Advanced Mathematics and Mathematical Engineering
Master's thesis

A Remotely-driven Hoverboard With Platform Leaning Control

Esteve Tarragó

Supervised by Advisor: Enric Celaya, Tutor: Mercè Ollé

September, 2019

I would first like to thank my thesis advisor Prof. Enric Celaya. Enric was always open whenever I ran into a trouble spot or had a question about my research or writing. He consistently allowed this thesis to be my own work, but steered me in the right the direction whenever he thought I needed it.

I would also like to thank Prof. Lluís Ros who was also advising me through the first steps of the design and always gave constructive feedback.

Also this project wouldn't have been possible without my lab co-workers. I would like to highlight three of them: Iñigo Moreno, Sergi Hernandez and Patrick Grosch. They taught me all kind of stuff and I am very grateful for their time.

This research opportunity was possible thanks to IRI (Institut de Robtica i Informtica Industrial). They facilitated my a workstation, material and a fantastic workshop where to build my robot.

Abstract

This thesis is centered around the design, construction and control of a remote controlled hoverboard. The main challenge of this project is the study of the leaning control of the hoverboard platform and the restrictions it induce.

Nowadays segways are a popular way of human transportation and there also exist segway robots. Both, human-driven and autonomous segway robots have their speed determined by their inclination. (e.i. If you wish to go forward in a segway you should put your weight in the same direction). So in this systems the inclination is not a degree of freedom but a compulsory consequence from moving. Unblocking this degree of freedom may help two-wheel robots perform new task as measurements, taking images or samples from other inclinations, avoiding obstacles, etc.

We have studied different mechanisms to control the leaning while allowing the movement of the robot. Then we studied the dynamics of our system to determine it's dimensions and create an optimal design accordingly. We have also run simulations with different policies to see how our system would evolve.

Finally we build and programmed our robot so it can be remotely operated from anywhere.

Keywords

Dynamic, System, Control, Design

Contents

1	Introduction	4
2	Initial design considerations	6
2.1	Flywheel design	6
3	Optimization Setup	10
3.1	Restrictions	10
3.2	Requirements	11
3.3	Cost function	11
4	Mechanical analysis	12
4.1	Inclination control	12
4.2	Wheels torque	12
4.3	Flywheel torque	13
4.4	Maximum speed, acceleration and inclination	14
4.4.1	No terrain inclination ($\alpha = 0$)	15
4.4.2	No acceleration, just inclination ($\alpha > 0$)	18
5	Optimization Results	19
6	Rectilinear movement dynamics with $r_{flywheel}$ fixed	23
6.1	Simulations	24
6.1.1	Controlling the platform inclination	25
6.1.2	Letting the platform turn	28
6.2	Rectilinear movement with $r_{flywheel}$ free	30
7	Flywheel brake study	33
7.1	System of differential equations	33
7.2	Results	34
8	Components	37
8.1	Mechanical components	37
8.1.1	Central Body	37
8.1.2	Lateral Body	37
8.1.3	Wheels	38
8.1.4	Flywheel	38
8.1.5	Bearings	38
8.2	Electronic components	38

8.2.1	Raspberry Pi	38
8.2.2	Batteries	39
8.2.3	Breadboard	39
8.2.4	DC Motor	39
8.2.5	H Bridge	40
8.2.6	Rotatory Encoder	40
8.2.7	Accelerometer	40
9	Control	41
9.1	Position control	41
9.2	Speed control	41
9.3	Inclination control	41
10	Software Design	42
10.1	User Interface	42
10.2	Planner	42
10.3	Controller	42
11	Conclusion	43



Figure 1: Picture of Tibi and Dabo, *two segway robots*

1. Introduction

In the IRI lab we have two segway robots, Tibi and Dabo show in figure 1. Both of them move the same way. They must incline their body to compensate the wheel reaction torque. We will get deeper in why this phenomena happens in section ??.

This movement restriction may cause some problems when trying to avoid obstacles, as for example going through low roof path. Another limitation is the acceleration that the robot can achieve which is directly related with the inclination that it's limited to 90 degrees in the best case. Also the amount of uphill is limited with an additional problem: the safety system stops the robot if it detects something near it (in this case the ground).

So we decided to build a prototype of segway robot that could solve this problem by controlling it's inclination independently. The chosen robot is inspired in a *segway hover-board*, similar to the one appearing in Figure 2. The two wheels are controlled with classic control algorithms and the inclination of the central body is controlled with a flywheel mechanism that we will discuss in section 2.1.



Figure 2: Picture of a commercial *segway hover-board*

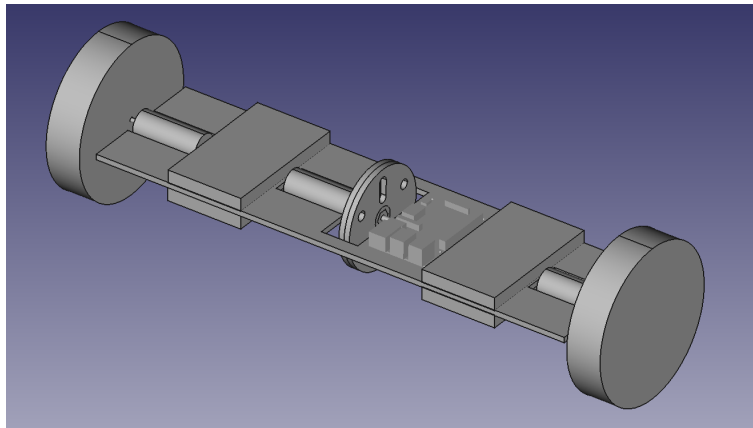


Figure 3: Isometric render view

2. Initial design considerations

The first thing we decided was the number of actuators. Most of segway robot include two motors for the motion control but we added a third on in order to control the inclination. So we ended up with three motors in total because we want to control three degrees of freedom (inclination and speed of both wheels).

In order to control the inclination of the platform we needed to produce an external torque to the platform. We considered three methods: accelerating a flywheel, holding a pendulum in a non-vertical position and air friction with a fan. We discarded the last one due to the high speeds we needed to obtain a reasonable torque on the platform.

Both methods have strengths in different situations so we decided to build a mixed piece that could combine both. The flywheel mode allows to deliver the maximum torque from the beginning but fails to deliver a continuous torque due to the motor achieving max speed. In the other hand the pendulum allows the system to apply an amount of torque over time.

We took two more restriction in our design. The first one symmetry along the motors/inclination axis in order to have an equilibrium in all possible inclinations without the need of external forces. We also took in consideration that some experiments may start clumsy so none of the configurations should touch the ground to avoid crashes. Figure 6 illustrates this last restriction.

The design of the robot was done with the 3D design software Free-cad and most of parts were 3D printed. 3D printing has also it's own restrictions, for example not being able to print parts bigger than 25 cm. All part files are uploaded to the GitHub repository <https://github.com/tarragoesteve/TFM> under the hardware folder. So anyone can build this robot.

You can see the main views of an initial design on Figure 3, 4, 5 and 6.

2.1 Flywheel design

To control the inclination of the body two strategies are taken in to account. Creating torque by a pendulum or accelerating the flywheel. In order to experiment with both of them we designed a part to allow both configuration by placing weights in different spots, see figure 7.

In order to create a configuration with maximum pendulum torque we have done the following compu-

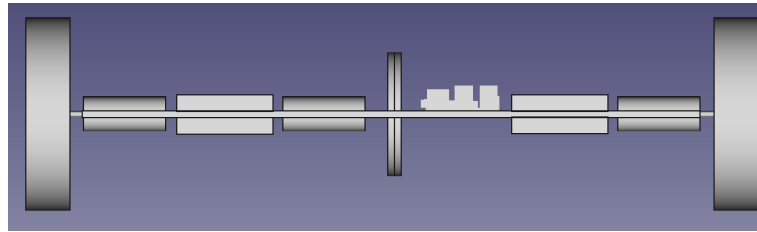


Figure 4: Front render view

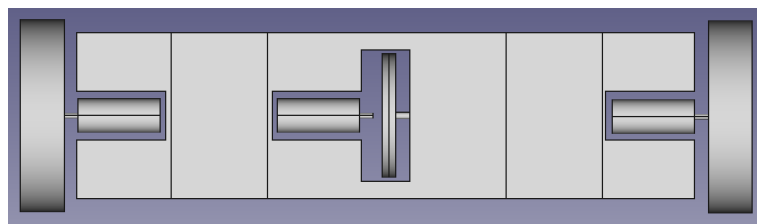


Figure 5: Top render view

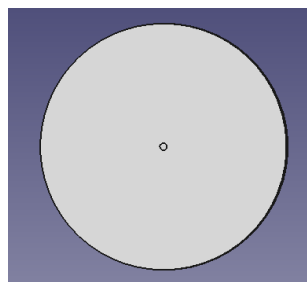


Figure 6: Side render view

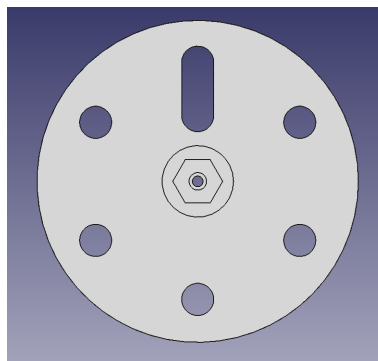


Figure 7: Fly wheel side render view

tation. We denote the torque pendulum torque by τ , consider the masses are cylinders of mass $m_{cylinder}$ with radius $r_{cylinder}$ and width w and the radius of the flywheel is $r_{flywheel}$. We want to place all N masses at the same distance of the center of the flywheel (r_{max}) in a regular polygon except for one mass that will be at r_{min} . See figure ??.

Each mass weights:

$$m_{cylinder} = \rho \cdot w \cdot \pi \cdot r_{cylinder}^2$$

We neglect the mass of the flywheel structure versus the mass of the cylinders. All the gravitational torque is created by the cylinder masses and all of them are compensated with the opposite weight except for the two masses with different radius.

One of the weight can be placed along a rail. The distance to the center will vary from $r_{min} = r_{cylinder} + r_{motor-axis} \approx r_{cylinder}$ to $r_{max} = r_{flywheel} - r_{cylinder}$.

The maximum torque takes place when these two masses are aligned horizontal with respect the ground and the movable weight is at distance r_{min} from the center.

$$\tau_{max}(r_{cylinder}) = m_{cylinder} \cdot g \cdot r_{max} - m_{cylinder} \cdot g \cdot r_{min} = m_{cylinder} \cdot g \cdot (r_{flywheel} - 2 \cdot r_{cylinder})$$

In order to maximize τ it we first compute the derivative:

$$\frac{\partial \tau_{max}(r_{cylinder})}{\partial r_c} = g \cdot \left(\frac{\partial m}{\partial r_c} \cdot (r_f - 2 \cdot r_c) - m_{cylinder} \cdot 2 \right)$$

$$\frac{\partial m_{cylinder}}{\partial r_{cylinder}} = 2 \cdot \rho \cdot w \cdot \pi \cdot r_{cylinder}$$

An make it zero to find the maximum:

$$\frac{\partial \tau_{max}(r_{cylinder})}{\partial r_{cylinder}} = 0$$


Substituting and simplifying we get:

$$\frac{\partial m}{\partial r_{cylinder}} \cdot (r_{flywheel} - 2 \cdot r_{cylinder}) = m_{cylinder} \cdot 2 \Rightarrow 2 \cdot \rho \cdot w \cdot \pi \cdot r_{cylinder} \cdot (r_{flywheel} - 2 \cdot r_{cylinder}) = \rho \cdot w \cdot \pi \cdot r_c^2 \cdot 2$$

$$\Rightarrow r_c \cdot (r_{flywheel} - 2 \cdot r_{cylinder}) = r_{cylinder}^2 \Rightarrow (r_{flywheel} - 2 \cdot r_{cylinder}) = r_{cylinder} \Rightarrow \boxed{r_f = 3 \cdot r_{cylinder}}$$

The circumradius R from the center of a regular polygon to one of the vertices is related to the side length s by:

$$R = \frac{s}{2 \cdot \sin \frac{\pi}{n}}$$




In our case:

$$R = r_{\text{flywheel}} - r_{\text{cylinder}};$$

$$s = 2 \cdot r_{\text{cylinder}}$$

Substituting in the circumradius equation we get $n = 6$, so we will use up 6 masses in our flywheel. We will have a variable number of masses N that we will be able to add to the flywheel as shown in the following table:

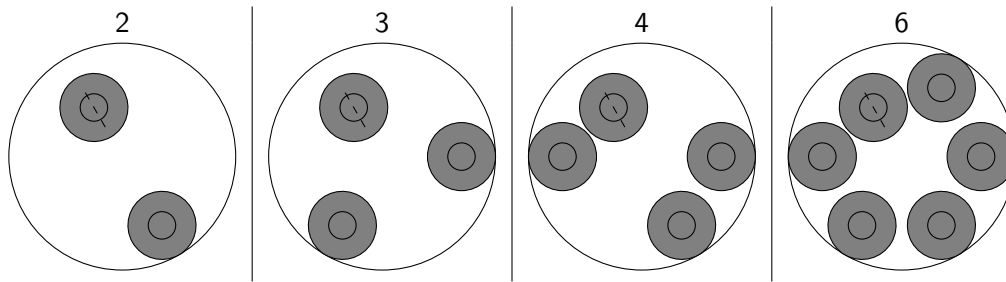

3. Optimization Setup

In this section we will set up the requirements and the cost function we want to optimize.

3.1 Restrictions

The first restrictions is due to the initial design requirements. The other three are somehow arbitrary but will help us to reduce the size of the robot.

1. We wil place our flywheel in a hole on our robot. We don't want to touch the ground in any configuration so:

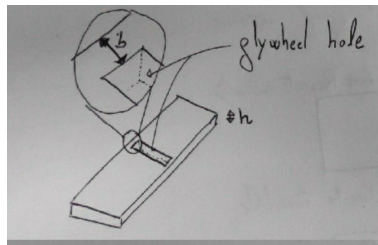


Figure 8: Flywheel hole diagram

$$r_{wheel} > \sqrt{(r_{flywheel} + b)^2 + \left(\frac{h}{2}\right)^2}$$

2. Being able to insert the robot in to a wheel of diameter 0.5m so:

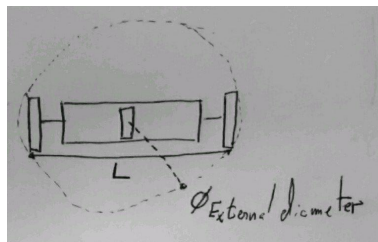


Figure 9: External diameter diagram

$$0.25m > \sqrt{r_{wheel}^2 + L^2/4}$$

3. We can place all electronic the devices:

$$L > 0.3m + w$$

4. Maximum weight of the robot: 5kg

3.2 Requirements

We would like our robot to fulfill some requirements. These specifications are related to mechanical equations that we will develop in the next section.

Flywheel mode

1. \dot{y}_{max} (equation 10) $> 0.1m/s$
2. \ddot{y}_{max} (equation 9) $> 1m/s^2$
3. $\sin(\alpha_{max})$ (equation 13) > 0.2

Pendulum mode

1. \dot{y}_{max} (equation 12) $> 1m/s$
2. \ddot{y}_{max} (equation 11) $> 0.1m/s^2$
3. $\sin(\alpha_{max})$ (equation 14) > 0.02

3.3 Cost function

In addition to fulfilling the requirements we will try to minimize a cost function.

We will maximize the maximum sinus in the pendulum mode (equation 14) because it gives the robot the capacity to deliver force in a permanent state.

We will also maximize the square of the max speed the robot can achieve in flywheel mode (equation 10) because it is proportional to the energy the robot can deliver using the flywheel at a certain moment.

$$cost(r_{flywheel}, r_{wheel}, w, N) = -\sin(\alpha_{max})_{pendulum} - \dot{y}_{max-flywheel}^2 \quad (1)$$

$$m_{cylinder} = \rho * w * \pi * \left(\frac{r_{flywheel}}{3}\right)^2$$

$$\sin(\alpha_{max})_{pendulum} = \frac{m_{cylinder} \cdot (r_{max} - r_{min})}{m_{total} \cdot r_{wheel}} = \frac{m_{cylinder} \cdot \left(\frac{r_{flywheel}}{3}\right)}{(m_{rest} + N \cdot m_{cylinder}) \cdot r_{wheel}}$$

$$\dot{y}_{max} = r_{wheel} \cdot R \cdot \dot{\theta}_{max} = r_{wheel} \cdot \frac{N \cdot m_{cylinder} \cdot \left(\frac{2 \cdot r_{flywheel}}{3}\right)^2}{r_{wheel}^2 \cdot (m_{rest} + N \cdot m_{cylinder}) + 2 \cdot I_{wheel}} \cdot \dot{\theta}_{max}$$

4. Mechanical analysis

In this section we will analyze and understand the key dynamics of our robot so we can choose the design parameters based on performance indicators. As parameters we have the with of the flywheel masses w , the number of masses N , the radius of the flywheel $r_{flywheel}$, and the radius of the wheels r_{wheel}

4.1 Inclination control

In order to keep the inclination of the platform at a certain angle ϕ we must be able to compensate all the torque being applied to the platform.

$$\ddot{\phi} \cdot I_{platform} = \tau_{platform}$$

Assuming that the platform is well balanced (the center of masses is located at the rotation axis by our design restriction) and neglecting the torque generated by the friction with air, the sum of all the torques in the motor axis applied to the platform is equal to the sum of the torque applied by the motors:

$$\tau_{platform} = \sum \tau_{motors}$$

The torque that the motors deliver to the wheels and to the flywheel create a reaction in the platform in the opposite direction.

$$\tau_{platform} = -\tau_{motor-right-wheel} - \tau_{motor-left-wheel} - \tau_{motor-flywheel}$$

If we want keep the inclination ϕ , we must be able to cancel $\tau_{platform}$. Observe that the angular acceleration $\ddot{\phi}$ of the platform is linearly dependent with the torque it receives.

$$\begin{aligned} 0 &= -\tau_{motor-right-wheel} - \tau_{motor-left-wheel} - \tau_{motor-flywheel} \Rightarrow \\ \tau_{motor-right-wheel} + \tau_{motor-left-wheel} &= -\tau_{motor-flywheel} \end{aligned} \quad (2)$$

In other words, we must overpass the torque of the wheels with the torque of the flywheel if we want to control the inclination.

4.2 Wheels torque

The wheel torque we can induce is limited by the motor specifications. Note that the maximum torque of the motor is a function of velocity and in particular at max speed the torque is zero.

$$\tau_{motor-wheel}(\omega_{wheel})$$

We assume that the wheels just roll and do no slip. The robot is pushed by the wheels that make a force $F_{friction}$ against the ground in the contact point. See figure 11.

We can express the torque at the center of the of the wheel as:

$$\tau_{motor-wheel} + F_{friction} \cdot r_{wheel} = I_{wheel} \cdot \dot{\omega}_{wheel}$$

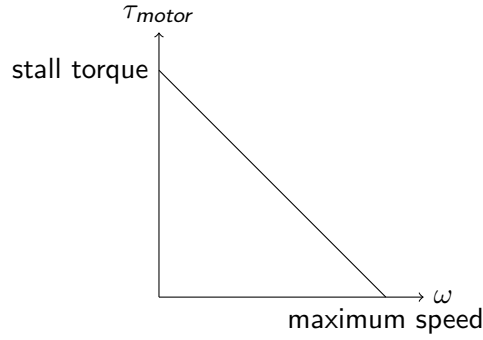


Figure 10: Motor torque

$$\tau_{motor-wheel} = I_{wheel} \cdot \dot{\omega}_{wheel} - F_{friction} \cdot r_{wheel} \quad (3)$$

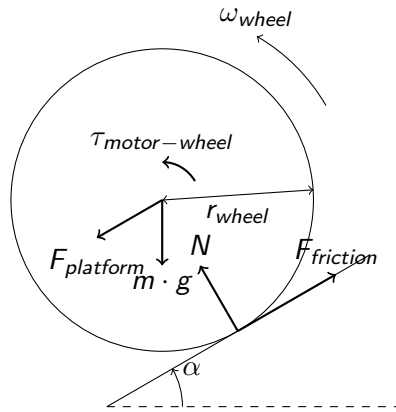


Figure 11: Wheel force diagram

4.3 Flywheel torque

The flywheel torque we can induce is also limited by the motor specifications.

Assuming a general configuration of the flywheel where the moving mass is at distance r from the axis and angle θ , see figure 12. We formulate its torque the following way:

$$\tau_{motor-flywheel} + m_{cylinder} \cdot g \cdot (r - r_{max}) \cdot \sin \theta = \ddot{\theta} \cdot I_{flywheel}(r)$$

$$\tau_{motor-flywheel} = \ddot{\theta} \cdot I_{flywheel}(r) + m_{cylinder} \cdot g \cdot (r_{max} - r) \cdot \sin \theta \quad (4)$$

Note that in equation 4 the two terms correspond to the two methods: accelerating and non vertical position.

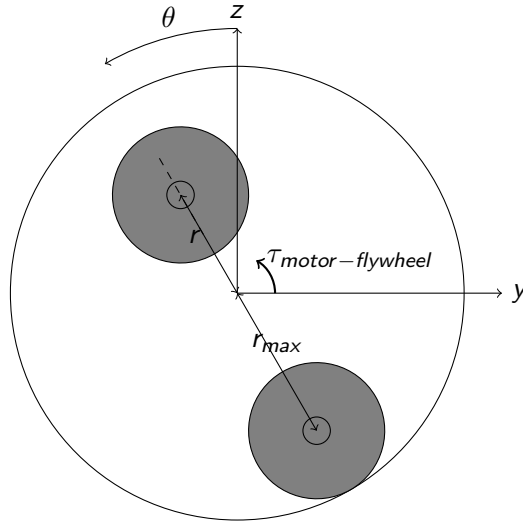
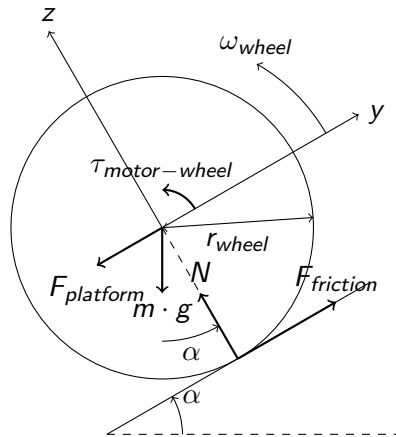

 Figure 12: Flywheel diagram for $N = 2$


Figure 13: Wheel forward force diagram

4.4 Maximum speed, acceleration and inclination

In this subsection we would like to study the maximum speed and acceleration the robot may obtain in straight direction facing and inclination α .

We will assume both wheels turn at the same speed, have the same $F_{friction}$ and the same T_{wheel} :

$$\omega_{wheel-left} = \omega_{wheel-right} = \omega_{wheel}$$

Applying Newton's first law in the y axis of figure 13:

$$\ddot{y} \cdot m_{total} = 2 \cdot F_{friction} - m_{total} \cdot g \cdot \sin(\alpha)$$

Substituting $F_{friction}$ taking in to account equation 3:

$$\ddot{y} \cdot m_{total} = 2 \cdot \frac{I_{wheel} \cdot \dot{\omega}_{wheel} - T_{motor-wheel}}{r_{wheel}} - m_{total} \cdot g \cdot \sin(\alpha)$$

Using equation 2:

$$\Rightarrow \ddot{y} \cdot m_{total} = \frac{2 \cdot I_{wheel} \cdot \dot{\omega}_{wheel}}{r_{wheel}} + \frac{\tau_{motor-flywheel}}{r_{wheel}} - m_{total} \cdot g \cdot \sin(\alpha) \quad (5)$$

We will now study different cases to better understand this equation.

4.4.1 No terrain inclination ($\alpha = 0$)

The objective here is to obtain the maximum speed and acceleration we can get starting from rest in a plain surface.

The equation we get by substituting $\alpha = 0$ in equation 5:

$$\ddot{y} \cdot m_{total} = \frac{\tau_{motor-flywheel}}{r_{wheel}} + \frac{2 \cdot I_{wheel} \cdot \dot{\omega}_{wheel}}{r_{wheel}}$$

Substituting equation 4:

$$\ddot{y} \cdot m_{total} = \frac{\ddot{\theta} \cdot I_{flywheel}(r) + m_{cylinder} \cdot g \cdot (r_{max} - r) \cdot \sin \theta}{r_{wheel}} + \frac{2 \cdot I_{wheel} \cdot \dot{\omega}_{wheel}}{r_{wheel}} \quad (6)$$

We will now split the study in two cases:

1. Flywheel case: r is fixed to $r = r_{max}$

Then:

$$\ddot{y} \cdot m_{total} = -\frac{\ddot{\theta} \cdot I_{flywheel}(r_{max})}{r_{wheel}} + \frac{2 \cdot I_{wheel} \cdot \dot{\omega}_{wheel}}{r_{wheel}}$$

Taking in to account the following relation:

$$-\omega_{wheel} \cdot r_{wheel} = \dot{y} \Rightarrow -\dot{\omega}_{wheel} \cdot r_{wheel} = \ddot{y} \quad (7)$$

Substituting in equation 6:

$$\begin{aligned} -\dot{\omega}_{wheel} \cdot r_{wheel} \cdot m_{total} &= \frac{\ddot{\theta} \cdot I_{flywheel}}{r_{wheel}} + \frac{2 \cdot I_{wheel} \cdot \dot{\omega}_{wheel}}{r_{wheel}} \\ -\dot{\omega}_{wheel} \cdot \left(r_{wheel} \cdot m_{total} + \frac{2 \cdot I_{wheel}}{r_{wheel}} \right) &= \frac{\ddot{\theta} \cdot I_{flywheel}}{r_{wheel}} \end{aligned}$$

We now define R as a non dimensional constant being the the quotient between $\dot{\omega}_{wheel}$ and $-\ddot{\theta}$.

$$R = \frac{\dot{\omega}_{wheel}}{-\ddot{\theta}} = \frac{I_{flywheel}}{r_{wheel}^2 \cdot m_{total} + 2 \cdot I_{wheel}} \quad (8)$$

The moments of inertia are:

$$I_{wheel} \approx \frac{1}{2} \cdot m_{wheel} \cdot r_{wheel}^2$$

$$I_{flywheel} \approx N \cdot m_{cylinder} \cdot r_{max}^2$$

Substituting those in equation 8 we get:

$$R \approx \frac{N \cdot m_{cylinder} \cdot r_{max}^2}{r_{wheel}^2 \cdot m_{total} + 2 \cdot I_{wheel}} < 1$$

We can see that R will always be smaller than 1 because $N \cdot m_{cylinder} < m_{total}$ and $r_{max} < r_{wheel}$.

This means that we will the maximum acceleration of the wheels will be limited by the acceleration of the flywheel. The same is true for the speed.

In order to get the forward acceleration we can use equation 7

$$\ddot{y} = -\dot{\omega}_{wheel} \cdot r_{wheel} = R \cdot \ddot{\theta} \cdot r_{wheel}$$

And using equation 4 we get that the maximum is:

$$\begin{aligned} \tau_{motor}(\omega) &= \ddot{\theta} \cdot I_{flywheel}(r) \Rightarrow \ddot{\theta} = \frac{\tau_{motor}(\dot{\theta})}{I_{flywheel}(r)} \\ \ddot{y}_{max} &= R \cdot \frac{\tau_{motor}(\dot{\theta})}{I_{flywheel}(r)} \cdot r_{wheel} \\ \Rightarrow \ddot{y}_{max} &= \frac{I_{flywheel}}{r_{wheel}^2 \cdot m_{total} + 2 \cdot I_{wheel}} \cdot \frac{\tau_{motor}(\dot{\theta})}{I_{flywheel}(r)} \cdot r_{wheel} \\ \boxed{\ddot{y}_{max} = \frac{\tau_{motor}(\dot{\theta}) \cdot r_{wheel}}{r_{wheel}^2 \cdot m_{total} + 2 \cdot I_{wheel}}} \end{aligned} \quad (9)$$

In order to compute the maximum speed we assume that the initial conditions are $\dot{\theta} = 0$ and $\omega_{wheel} = 0$

$$\omega_{wheel-max} = \int_{t=0}^{t=t_{max}} \dot{\omega}_{wheel} \cdot dt$$

Now we will proceed to do a change of variables in the integral.

$$\begin{aligned} \frac{\partial \dot{\theta}}{\partial t} &= \ddot{\theta} \Rightarrow dt = \frac{d\dot{\theta}}{\ddot{\theta}} \\ \omega_{wheel-max} &= \int_{\dot{\theta}=0}^{\dot{\theta}=\dot{\theta}_{max}} \frac{\dot{\omega}_{wheel}}{\ddot{\theta}} \cdot d\dot{\theta} = \int_{\dot{\theta}=0}^{\dot{\theta}=\dot{\theta}_{max}} -R \cdot d\dot{\theta} = -R \cdot \dot{\theta}_{max} \\ \boxed{\dot{y}_{max} = r_{wheel} \cdot R \cdot \dot{\theta}_{max}} \end{aligned} \quad (10)$$

And $\dot{\theta}_{max}$ is a limitation imposed by the motor specifications. Note that this is the maximum speed we can get using the flywheel system starting from rest.

2. Pendulum: $\dot{\theta} = 0$, and r is fixed to $r = r_{min}$

Using equation 6 and $\ddot{\theta} = 0$

$$\ddot{y} \cdot m_{total} = \frac{m_{cylinder} \cdot g \cdot (r_{max} - r_{min}) \cdot \sin \theta}{r_{wheel}} + \frac{2 \cdot I_{wheel} \cdot \dot{\omega}_{wheel}}{r_{wheel}}$$

Multiplying by r_{wheel} both sides of the equation we get:

$$\ddot{y} \cdot m_{total} \cdot r_{wheel} = m_{cylinder} \cdot g \cdot (r_{max} - r_{min}) \cdot \sin \theta + 2 \cdot I_{wheel} \cdot \dot{\omega}_{wheel}$$

And using $\dot{\omega}_{wheel} = -\frac{\ddot{y}}{r_{wheel}}$

$$\ddot{y} \cdot m_{total} \cdot r_{wheel} + 2 \cdot I_{wheel} \cdot \frac{\ddot{y}}{r_{wheel}} = m_{cylinder} \cdot g \cdot (r_{max} - r) \cdot \sin \theta$$

With some manipulation:

$$\ddot{y} = \frac{m_{cylinder} \cdot g \cdot (r_{max} - r_{min}) \cdot \sin \theta}{m_{total} \cdot r_{wheel} + \frac{2 \cdot I_{wheel}}{r_{wheel}}}$$

Which is maximum when $\sin \theta = 1$

$$\ddot{y}_{max} = \frac{m_{cylinder} \cdot g \cdot (r_{max} - r_{min}) \cdot \sin \theta}{m_{total} \cdot r_{wheel} + \frac{2 \cdot I_{wheel}}{r_{wheel}}} \quad (11)$$

We need to take into consideration air friction to see the speed limitation in the pendulum case.

$$F_{drag} = \frac{1}{2} \cdot \rho \cdot C_D \cdot A \cdot \dot{y}^2$$

Adding this term to equation 5 we get:

$$\ddot{y} \cdot m_{total} = \frac{2 \cdot I_{wheel} \cdot \dot{\omega}_{wheel}}{r_{wheel}} + \frac{\tau_{motor-flywheel}}{r_{wheel}} - m_{total} \cdot g \cdot \sin(\alpha) - F_{drag}$$

And making $\ddot{y} = 0$ and $\alpha = 0$.

$$F_{drag} = \frac{\tau_{motor-flywheel}}{r_{wheel}}$$

$$\frac{1}{2} \cdot \rho \cdot C_D \cdot A \cdot \dot{y}^2 = m_{cylinder} \cdot g \cdot (r_{max} - r_{min}) \cdot \sin(\theta) / r_{wheel}$$

The maximum \dot{y} is then obtained when $\theta = \frac{\pi}{2}$:

$$\dot{y}_{max} = \sqrt{\frac{2 \cdot m_{cylinder} \cdot g \cdot (r_{max} - r_{min})}{\rho \cdot C_D \cdot A \cdot r_{wheel}}}$$

We will pick $C_D = 1$, $\rho = 1.2 \text{ kg/m}^3$ and $A = 0.01 \text{ m}^2$ for our computations.

Also note that the speed is also limited by maximum speed a motor can get $\dot{\theta}_{max}$.

$$\dot{y}_{max} = \min(\dot{\theta}_{max} \cdot r_{wheel}, \sqrt{\frac{2 \cdot m_{cylinder} \cdot g \cdot (r_{max} - r_{min})}{\rho \cdot C_D \cdot A \cdot r_{wheel}}}) \quad (12)$$

4.4.2 No acceleration, just inclination ($\alpha > 0$)

The goal of this subsection is to study which is the maximum inclination α_{max} the robot can overpass.

Substituting $\ddot{y} = 0$ and $\dot{\omega}_{wheel} = 0$ in equation 5

$$0 = \frac{\tau_{motor-flywheel}}{r_{wheel}} - m_{total} \cdot g \cdot \sin(\alpha)$$

$$m_{total} \cdot g \cdot \sin(\alpha) = \frac{\tau_{motor-flywheel}}{r_{wheel}}$$

$$\sin(\alpha) = \min(1, \frac{\tau_{motor-flywheel}}{m_{total} \cdot g \cdot r_{wheel}})$$

Substituting equation 4

$$\sin(\alpha) = \min(1, \frac{\ddot{\theta} \cdot I_{flywheel}(r) + m_{cylinder} \cdot g \cdot (r_{max} - r) \cdot \sin \theta}{m_{total} \cdot g \cdot r_{wheel}})$$

We are going to distinguish the same two cases as in the previous section:

1. Flywheel case: r is fixed to $r = r_{max}$ The maximum inclination at a certain moment:

$$\sin(\alpha_{max}) = \min(1, \frac{\ddot{\theta} \cdot I_{flywheel}}{m_{total} \cdot g \cdot r_{wheel}}) = \min(1, \frac{\tau_{motor-flywheel}(\dot{\theta})}{m_{total} \cdot g \cdot r_{wheel}}) \quad (13)$$

This angle doesn't give us a lot of information because it may not be fulfilled in a permanent state. That's why in addition we would like to compute the maximum height our robot can achieve start from rest position.

2. Pendulum: $\dot{\theta} = 0$, and r is fixed to $r = r_{min}$

$$\sin(\alpha) = \frac{\min(\tau_{motor-flywheel}, m_{cylinder} \cdot g \cdot (r_{max} - r_{min}) \cdot \sin \theta)}{m_{total} \cdot g \cdot r_{wheel}}$$

Which is maximum when $\sin \theta = 1$

$$\sin(\alpha_{max}) = \frac{\min(\tau_{motor-flywheel}, m_{cylinder} \cdot g \cdot (r_{max} - r_{min}))}{m_{total} \cdot g \cdot r_{wheel}} \quad (14)$$

Note that the $\sin(\alpha_{max})$ will not be more than 1.

5. Optimization Results

Our procedure has been making a grid with the four parameters of the robot design: w (width of the cylinders), N (number of cylinders), r_{wheel} and $r_{flywheel}$. We have fixed $r_{flywheel}$, iterated over the other three variables and kept the best parameters to reduce our cost function ??.

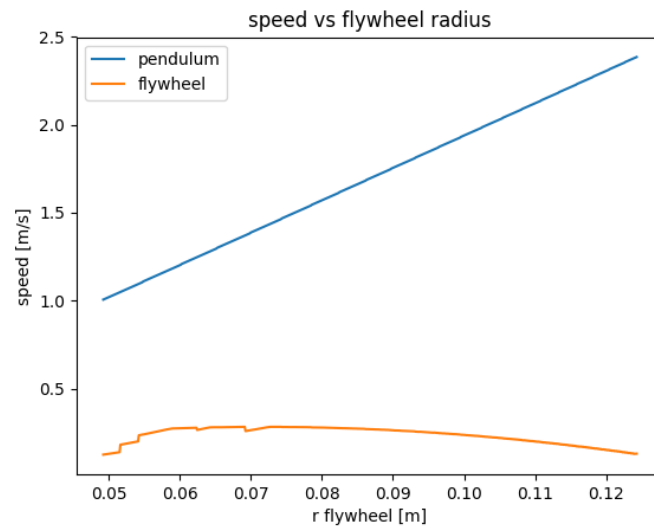


Figure 14: Plot of the equations 10 and 12 at the parameters that minimize the cost function and fulfill the requirements and restrictions

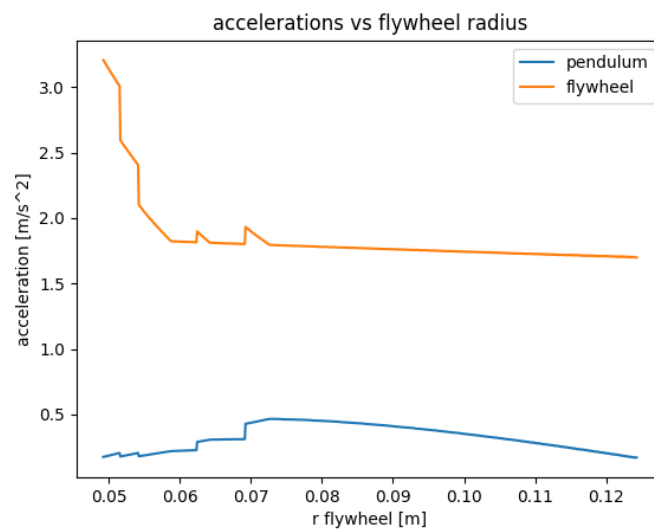


Figure 15: Plot of the equations 9 and 11 at the parameters that minimize the cost and fulfill the requirements and restrictions

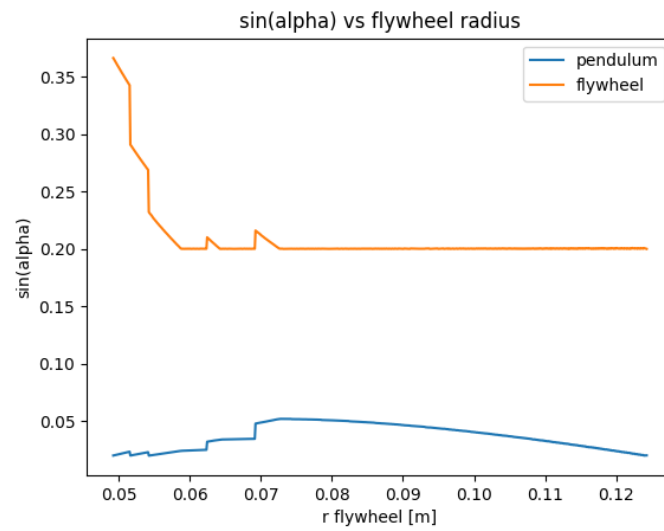


Figure 16: Plot of the equations 13 and 14 at the parameters that minimize the cost and fullfil the requirements and restrictions

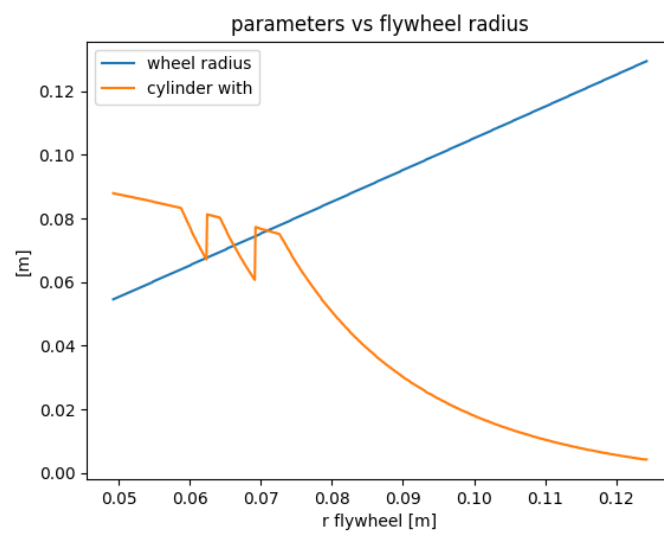


Figure 17: Plot of the parameters that minimize the cost function.

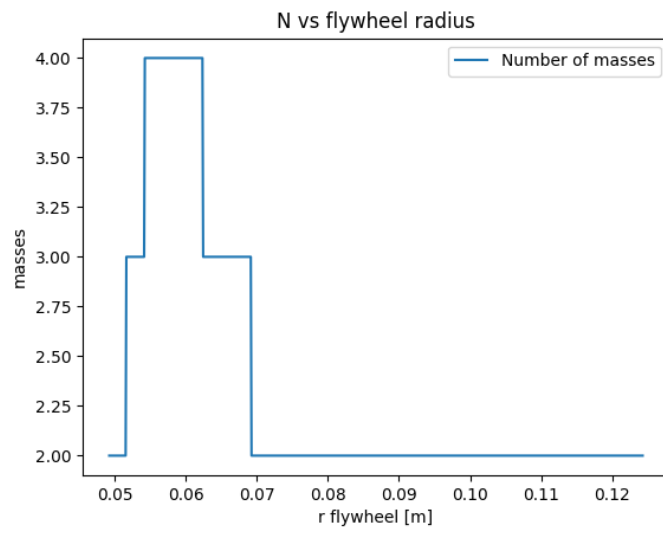


Figure 18: Plot of the N that minimize the cost function.

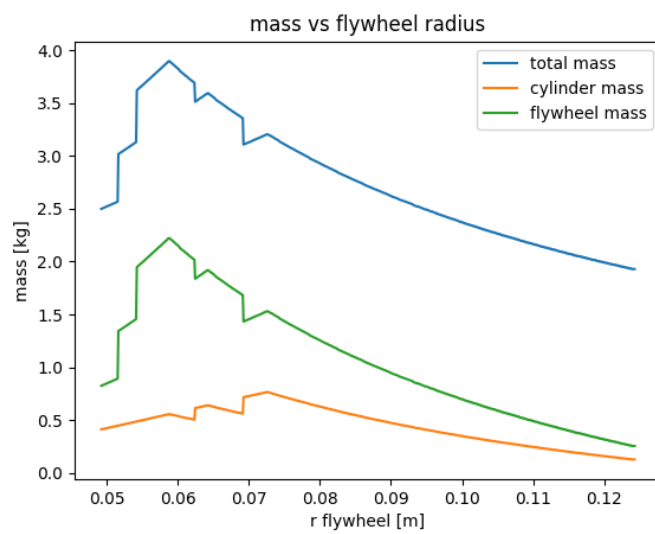


Figure 19: Plot of the mass for each configuration.

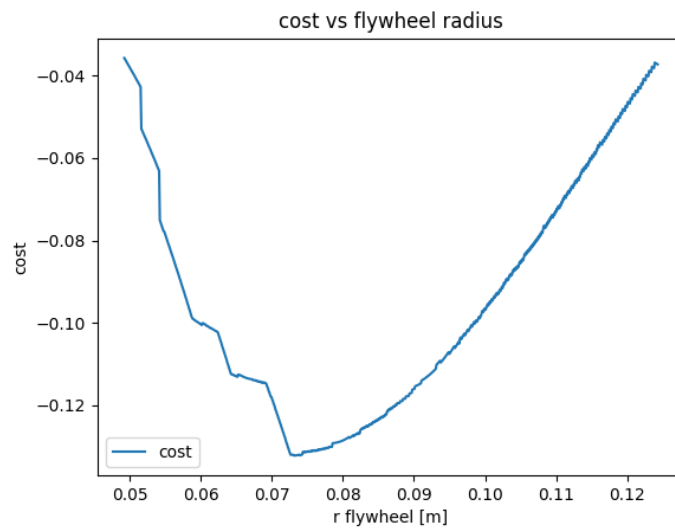


Figure 20: Plot of the equation 1 for each configuration.

Our selected parameters are:

$r_{flywheel}$	r_{wheel}	w	N
8cm	10cm	5cm	2

With this parameters we get the following specifications:

Total mass	2,91kg
Pendulum	
Maximum sinus	0,042
Maximum speed horizontal	1,84 m/s
Maximum acceleration horizontal	0,38 m/s^2
Flywheel	
Maximum sinus	0,171
Maximum speed horizontal	0,24 m/s
Maximum acceleration horizontal	1.52 m/s^2

6. Rectilinear movement dynamics with $r_{flywheel}$ fixed

In order to study the dynamics of the robot we will use Lagrange mechanics. To reduce the number of variables we will study the case of rectilinear movement by imposing that both wheels turn at the same speed. We will also set the radius of the free weight to $r_{flywheel}$.

The generalized coordinates (q) will be:

1. $\phi_{ground-wheel}$: rotation of the wheel respect the ground.
2. $\phi_{wheel-platform}$: rotation of the platform respect the wheel.
3. $\phi_{platform-flywheel}$: rotation of the flywheel respect the platform.

We will use two auxiliary variables:

1. $\phi_{ground-platform} = \phi_{ground-wheel} + \phi_{wheel-platform}$: rotation of the platform respect the ground.
2. $\phi_{ground-flywheel} = \phi_{ground-platform} + \phi_{platform-flywheel}$: rotation of the flywheel respect the ground.

The total potential energy:

$$V = m_{cylinder} \cdot (r_{flywheel} - r_{flywheel-max}) \cdot \cos(\phi_{ground-flywheel}) \cdot g \quad (15)$$

The total kinetic energy:

$$T = \frac{1}{2} \cdot [\dot{\phi}_{ground-wheel}^2 \cdot I_{wheel} + \dot{\phi}_{ground-platform}^2 \cdot I_{platform} + \dot{\phi}_{ground-flywheel}^2 \cdot I_{flywheel} + \dot{\phi}_{ground-wheel}^2 \cdot r_{wheel}^2 \cdot m_{total}] \quad (16)$$

The Lagrangian is defined as:

$$L = T - V \quad (17)$$

Lagrange's equation is:

$$\frac{d}{dt} \left(\frac{\partial L}{\partial \dot{q}_j} \right) = \frac{\partial L}{\partial q_j} + F_j \quad (18)$$

So in our case:

$$\frac{\partial L}{\partial \dot{\phi}_{ground-wheel}} = \dot{\phi}_{ground-wheel} \cdot I_{wheel} + \dot{\phi}_{ground-platform} \cdot I_{platform} + \dot{\phi}_{ground-flywheel} \cdot I_{flywheel} + \dot{\phi}_{ground-wheel} \cdot r_{wheel}^2 \cdot m_{total} \quad (19)$$

$$\frac{\partial L}{\partial \dot{\phi}_{wheel-platform}} = \dot{\phi}_{ground-platform} \cdot I_{platform} + \dot{\phi}_{ground-flywheel} \cdot I_{flywheel} \quad (20)$$

$$\frac{\partial L}{\partial \dot{\phi}_{platform-flywheel}} = \dot{\phi}_{ground-flywheel} \cdot I_{flywheel} \quad (21)$$

We define M as the following matrix:

$$\begin{pmatrix} I_{wheel} + I_{platform} + I_{flywheel} + r_{wheel}^2 \cdot m_{total} & I_{platform} + I_{flywheel} & I_{flywheel} \\ I_{platform} + I_{flywheel} & I_{platform} + I_{flywheel} & I_{flywheel} \\ I_{flywheel} & I_{flywheel} & I_{flywheel} \end{pmatrix} \quad (22)$$

In matrix form and with our generalized coordinates:

$$\frac{\partial L}{\partial \dot{q}} = M \cdot \dot{q} \quad (23)$$

$$\frac{d}{dt} \left(\frac{\partial L}{\partial \dot{q}} \right) = M \cdot \ddot{q} \quad (24)$$

Let a be a constant:

$$a = m_{cylinder} \cdot (r_{flywheel} - r_{flywheel-max}) \cdot g \quad (25)$$

$$\frac{\partial L}{\partial q} = a \cdot \sin(\phi_{ground-flywheel}) \cdot \begin{pmatrix} 1 \\ 1 \\ 1 \end{pmatrix} \quad (26)$$

So using Lagrange's equation we get:

$$M \cdot \ddot{q} = a \cdot \sin(\phi_{ground-flywheel}) \cdot \begin{pmatrix} 1 \\ 1 \\ 1 \end{pmatrix} + F \quad (27)$$

6.1 Simulations

In this subsection we study different policies for the external forces (F) applied to the robot in rectilinear movement case.

The robot has 2 actuators, the motors between the wheel and the platform and the motor between the flywheel and the platform. All motors in the systems have a limited torque related with the speed as you may see in Figure 10.

$$F = \begin{pmatrix} 0 \\ \tau_{wheel-platform} \\ \tau_{platform-flywheel} \end{pmatrix} \quad (28)$$

In order to compare the different policies all of them have the same target. The robot must travel 30 radians (3 meters) and stop at the end. All the parameters from the simulation are set equal to the values found in section 5. Keep in mind that the wheel radius is 10 cm.

Here you can see a table that summarize the results:

Experiment	Total time(s)	Time to max speed(s)	Max speed(rad/s)	Time to brake(s)
Controlling inclination				
Flywheel	12,45	0,7	2,45	0,15
Pendulum	5,59	2,69	10,36	2,90
Waitress	8,24	4,12	5,49	4,12
Free inclination				
Double flywheel	3,9	1	8,51	0.27
Compose mechanism	3,82	2,3	10,2	2,04

6.1.1 Controlling the platform inclination

In the first two experiments we want to keep the platform in an horizontal position. That's the reason why we force the $\tau_{wheel-platform}$ equal to $\tau_{platform-flywheel}$ in the experiments flywheel and pendulum.

1. Flywheel

The movable weight is fixed at r_{max} . In this experiment we consign the platform-flywheel motor to output the maximum possible torque. Then the platform-wheels motors deliver the same torque. The platform-flywheel motor reaches in less than one second the maximum speed. This then limits the wheel-platform speed because no more torque can be applied one that point is reached.

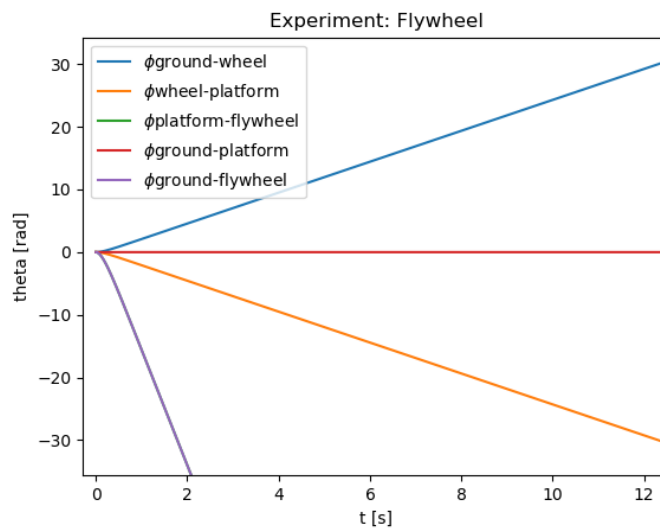


Figure 21: Plot of the angles for the flywheel experiment.

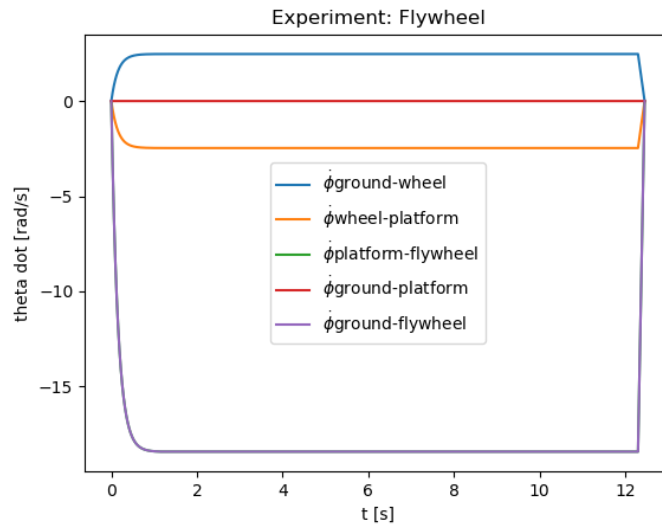


Figure 22: Plot of the angular velocities for the flywheel experiment.

2. Pendulum

The movable weight is fixed at r_{min} . In this experiment we consign the platform-flywheel motor to get to 90 with a PID controller. Then the platform-wheels motors deliver the same torque. The robot does not accelerate as fast as in the flywheel experiment but reaches a higher speed that allows it to travel the distance in less time. Note that the robot could have kept accelerating but had to brake before reaching the maximum speed.

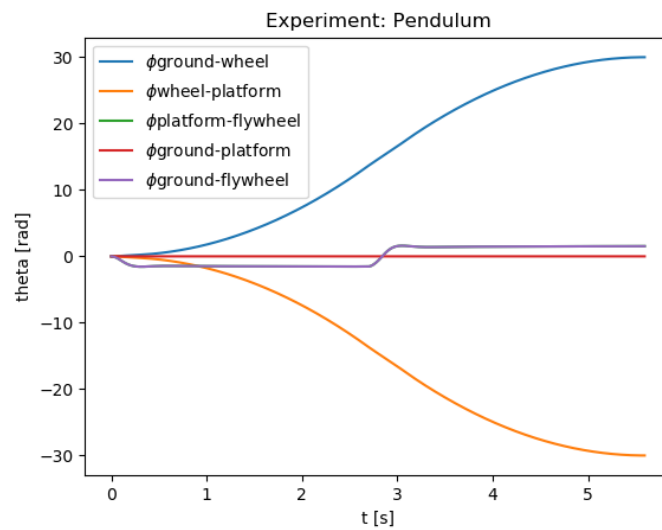


Figure 23: Plot of the angles for the pendulum experiment.

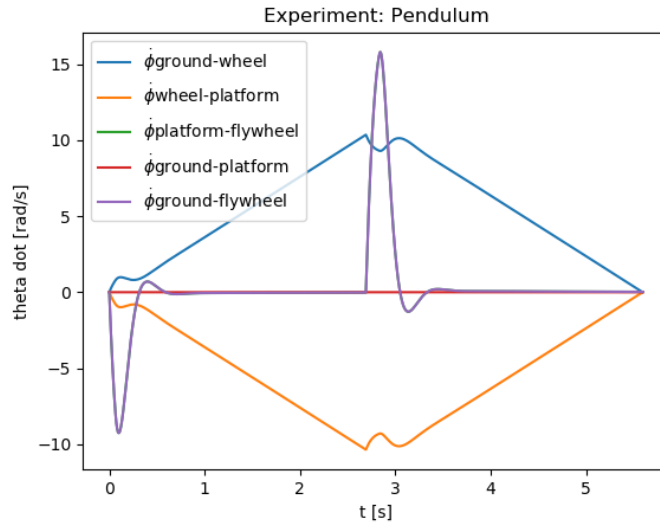


Figure 24: Plot of the angular velocities for the pendulum experiment.

3. Waitress

The movable weight is fixed at r_{min} . This experiment is different than the previous two and its aim is to illustrate how the robot could follow and inclination consign. The experiment is designed the following way. A consign torque is given to the wheel-platform and the flywheel-motor PID has an inclination consign too. The inclination consign is such that the sum of accelerations received from the object in the platform is perpendicular to the platform.

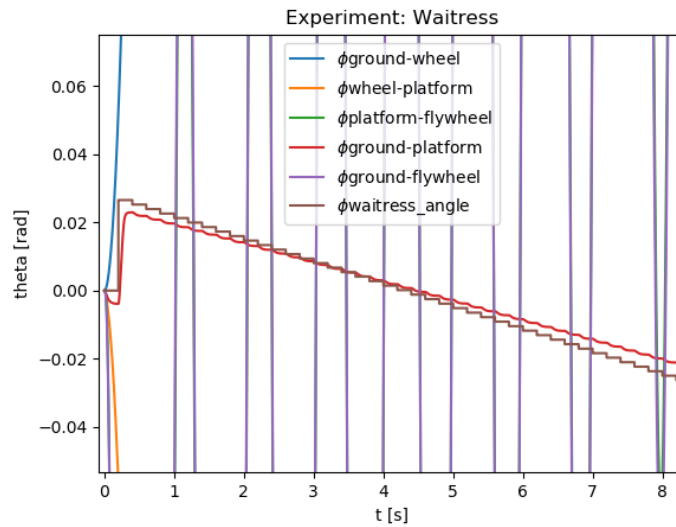


Figure 25: Plot of the angles for the waitress experiment.

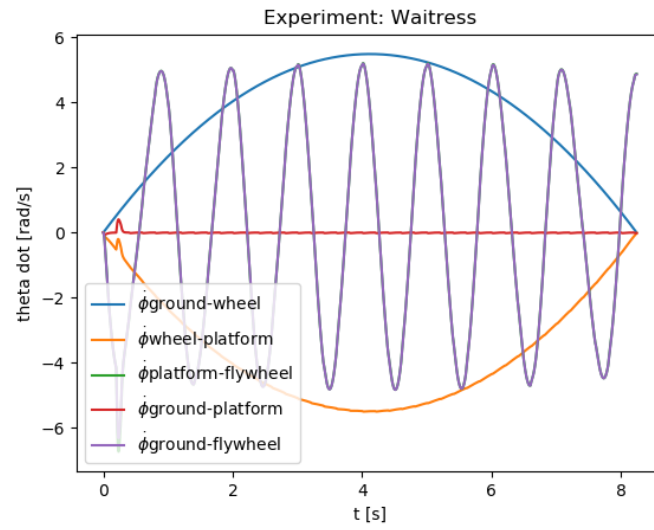


Figure 26: Plot of the angular velocities for the waitress experiment.

6.1.2 Letting the platform turn

In this experiment we take advantage of the fact that the platform may not be needed to stay horizontal in some displacement. The robot uses the platform as an additional flywheel to help the robot accelerate and brake.

1. Double Flywheel

The movable weight is fixed at r_{max} . In this experiment we add the flywheel turn over the platform turn to create more torque to accelerate our wheels. We always do the maximum possible torque with all the motors.

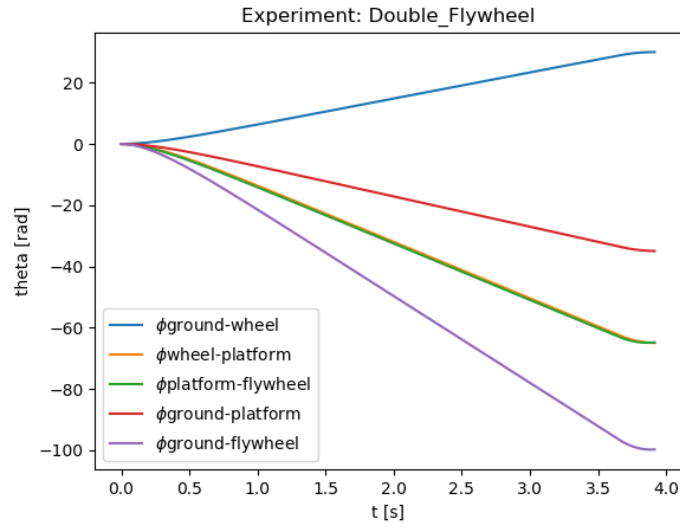


Figure 27: Plot of the angles for the double flywheel experiment.

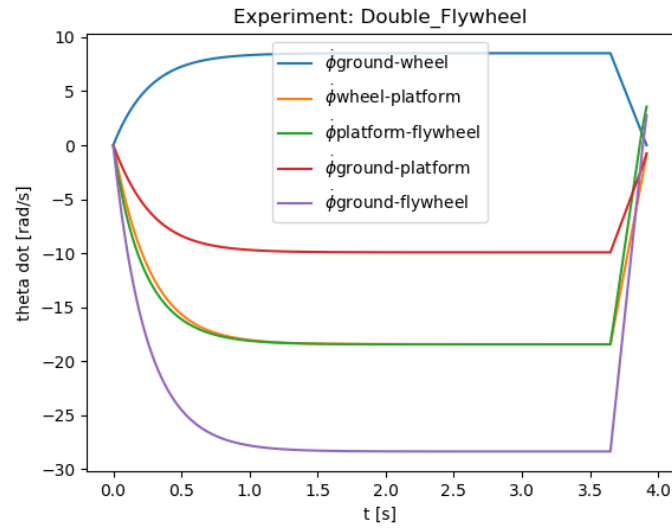


Figure 28: Plot of the angular velocities for the double flywheel experiment.

2. Compose

The movable weight is fixed at r_{min} . In this experiment we add the pendulum effect to the flywheel effect produced by the flywheel. We do so with a PID controller for the angle ground-flywheel and making the maximum possible torque with the platform-wheel motors.

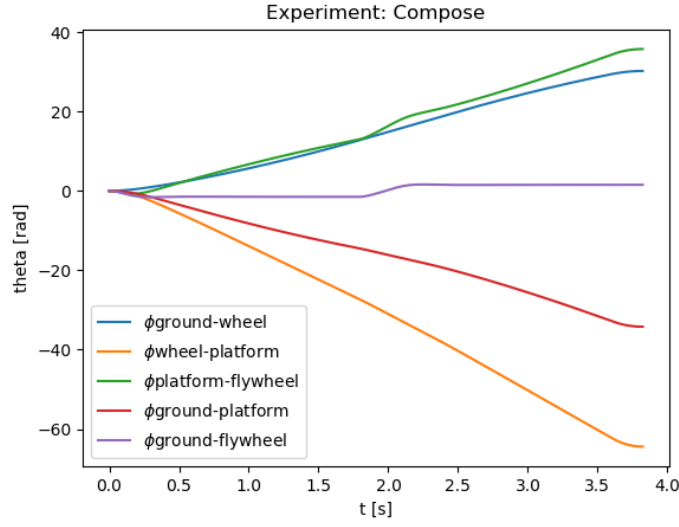


Figure 29: Plot of the angles for the compose experiment.

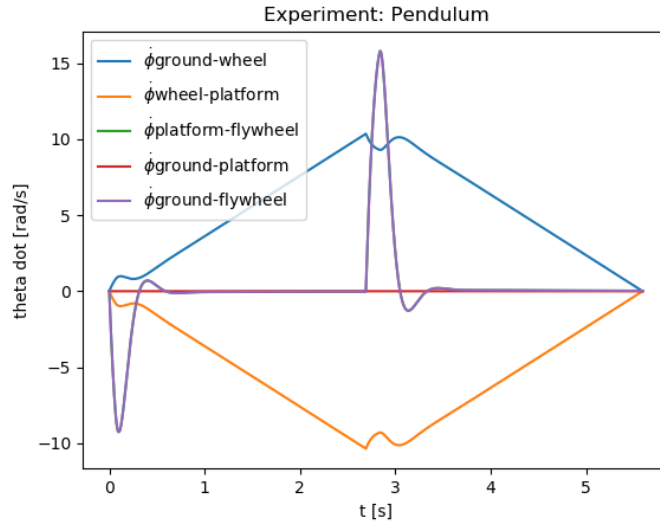


Figure 30: Plot of the angular velocities for the pendulum experiment.

6.2 Rectilinear movement with r_{flywheel} free

The generalized coordinates (q) will be:

1. $\phi_{\text{ground-wheel}}$: rotation of the wheel respect the ground.
2. $\phi_{\text{wheel-platform}}$: rotation of the platform respect the wheel.
3. $\phi_{\text{platform-flywheel}}$: rotation of the flywheel respect the platform.

4. r : distance from the center of the flywheel of the free cylinder.

We will use two auxiliary variables:

1. $\phi_{\text{ground-platform}} = \phi_{\text{ground-wheel}} + \phi_{\text{wheel-platform}}$: rotation of the platform respect the ground.
2. $\phi_{\text{ground-flywheel}} = \phi_{\text{ground-platform}} + \phi_{\text{platform-flywheel}}$: rotation of the flywheel respect the ground.

The total potential energy:

$$V = m_{\text{cylinder}} \cdot (r - r_{\text{flywheel-max}}) \cdot \cos(\phi_{\text{ground-flywheel}}) \cdot g \quad (29)$$

The total kinetic energy:

$$T = \frac{1}{2} \cdot [\dot{\phi}_{\text{ground-wheel}}^2 \cdot I_{\text{wheel}} + \dot{\phi}_{\text{ground-platform}}^2 \cdot I_{\text{platform}} + \dot{\phi}_{\text{ground-flywheel}}^2 \cdot I_{\text{flywheel}}(r) + \dot{\phi}_{\text{ground-wheel}}^2 \cdot r_{\text{wheel}}^2 \cdot m_{\text{total}} + \dot{r}^2 \cdot m_{\text{cylinder}}] \quad (30)$$

The Lagrangian is defined as:

$$L = T - V \quad (31)$$

Lagrange's equation is:

$$\frac{d}{dt} \left(\frac{\partial L}{\partial \dot{q}_j} \right) = \frac{\partial L}{\partial q_j} + F_j \quad (32)$$

So in our case:

$$\begin{aligned} \frac{\partial L}{\partial \dot{\phi}_{\text{ground-wheel}}} &= \dot{\phi}_{\text{ground-wheel}} \cdot I_{\text{wheel}} + \dot{\phi}_{\text{ground-platform}} \cdot I_{\text{platform}} \\ &\quad + \dot{\phi}_{\text{ground-flywheel}} \cdot I_{\text{flywheel}}(r) + \dot{\phi}_{\text{ground-wheel}} \cdot r_{\text{wheel}}^2 \cdot m_{\text{total}} \end{aligned} \quad (33)$$

$$\frac{\partial L}{\partial \dot{\phi}_{\text{wheel-platform}}} = \dot{\phi}_{\text{ground-platform}} \cdot I_{\text{platform}} + \dot{\phi}_{\text{ground-flywheel}} \cdot I_{\text{flywheel}}(r) \quad (34)$$

$$\frac{\partial L}{\partial \dot{\phi}_{\text{platform-flywheel}}} = \dot{\phi}_{\text{ground-flywheel}} \cdot I_{\text{flywheel}}(r) \quad (35)$$

$$\frac{\partial L}{\partial \dot{r}} = \dot{r} \cdot m_{\text{cylinder}} \quad (36)$$

We define M as the following matrix:

$$\begin{pmatrix} I_{\text{wheel}} + I_{\text{platform}} + I_{\text{flywheel}}(r) + r_{\text{wheel}}^2 \cdot m_{\text{total}} & I_{\text{platform}} + I_{\text{flywheel}}(r) & I_{\text{flywheel}}(r) & 0 \\ I_{\text{platform}} + I_{\text{flywheel}}(r) & I_{\text{platform}} + I_{\text{flywheel}}(r) & I_{\text{flywheel}}(r) & 0 \\ I_{\text{flywheel}}(r) & I_{\text{flywheel}}(r) & I_{\text{flywheel}}(r) & 0 \\ 0 & 0 & 0 & m_{\text{cylinder}} \end{pmatrix} \quad (37)$$

In matrix form and with our generalized coordinates:

$$\frac{\partial L}{\partial \dot{q}} = M \cdot \dot{q} \quad (38)$$

$$\frac{d}{dt}\left(\frac{\partial L}{\partial \dot{q}}\right) = M \cdot \ddot{q} + \dot{M} \cdot \dot{q} \quad (39)$$

Let's recall the definition of $I_{flywheel}(r)$

$$I_{flywheel}(r) = m_{cylinder} \cdot r^2 + C \quad (40)$$

Compute the derivative

$$\dot{I}_{flywheel}(r) = 2 \cdot m_{cylinder} \cdot r \cdot \dot{r} \quad (41)$$

We compute \dot{M} as the following matrix:

$$\dot{M} = \dot{I}_{flywheel}(r) \cdot \begin{pmatrix} 1 & 1 & 1 & 0 \\ 1 & 1 & 1 & 0 \\ 1 & 1 & 1 & 0 \\ 0 & 0 & 0 & 0 \end{pmatrix} \quad (42)$$

Let a be::

$$\frac{\partial L}{\partial q_{1..3}} = a = m_{cylinder} \cdot (r - r_{flywheel-max}) \cdot g \cdot \sin(\phi_{ground-flywheel}) \quad (43)$$

Let b be:

$$\frac{\partial L}{\partial r} = b = m_{cylinder} \cdot r \cdot \dot{\phi}_{ground-flywheel}^2 - m_{cylinder} \cdot g \cdot \cos(\phi_{ground-flywheel}) \quad (44)$$

$$\frac{\partial L}{\partial q} = \begin{pmatrix} a \\ a \\ a \\ b \end{pmatrix} \quad (45)$$

So using Lagrange's equation we get:

$$\boxed{M \cdot \ddot{q} + \dot{M} \cdot \dot{q} = \begin{pmatrix} a \\ a \\ a \\ b \end{pmatrix} + F} \quad (46)$$

7. Flywheel brake study

This section aims to study a possible way to break the flywheel without applying torque to the platform. The idea is the following: we will leave the moving weight free.

This way, when the weight is going upward will have a larger radius than when is going downward and will produce an average moment against the movement of the flywheel.

From an energetic point of view we are transforming the rotation energy of the flywheel in to translation of the free cylinder and then realising it trough collisions.

7.1 System of differential equations

As described in figure 12 we will use two variables to describe the flywheel position: r, θ

Using equation 4:

$$\tau_{motor-flywheel} = \ddot{\theta} * I_{flywheel}(r) + m_{cylinder} * g * (r_{max} - r) * \sin(\theta)$$

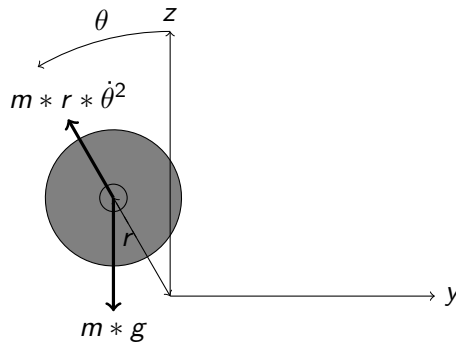


Figure 31: Cylinder force diagram

As seen in figure 31, we can deduce newtons equation for the distance from the cylinder to the center r . Note that we are adding the centrifugal force term due to the non-inertial frame.

$$\ddot{r} * m = -m * g * \cos(\theta) + m * r * \dot{\theta}^2$$

$$\ddot{r} = -g * \cos(\theta) + r * \dot{\theta}^2$$

The variables we will be using for our ODE system are: $r, \dot{r}, \theta, \dot{\theta}$

Note that we impose $\tau_{flywheel} = 0$ so the motor is not applying any torque.

$$\begin{cases} \dot{r} = \dot{r} \\ \ddot{r} = -g * \cos(\theta) + r * \dot{\theta}^2 \\ \dot{\theta} = \dot{\theta} \\ \ddot{\theta} = \frac{m_{cylinder} * g * (r - r_{max}) * \sin \theta}{I_{flywheel}(r)} \end{cases}$$

Our initial conditions will be the free cylinder mass lying on the bottom of the flywheel and the flywheel turning at a speed θ_0 :

$$\begin{cases} r = r_{max} \\ \dot{r} = 0 \\ \theta = \pi \\ \dot{\theta} = \theta_0 \end{cases}$$

We will use a poincare map to simulate the bounce with the end of the guides at $r = r_{min}$ and $r = r_{max}$. At each bounce we will reduce its kinetic energy by a percentage *bounce_percentage* .

7.2 Results

The parameters of the simulation where:

$$\begin{cases} r_{flywheel} = 8cm \\ r_{wheel} = 9cm \\ w = 7cm \\ \dot{\theta}_0 = 4.2\pi rad/s \\ bounce_percentage = 0.0(totallyinelastic) \end{cases}$$

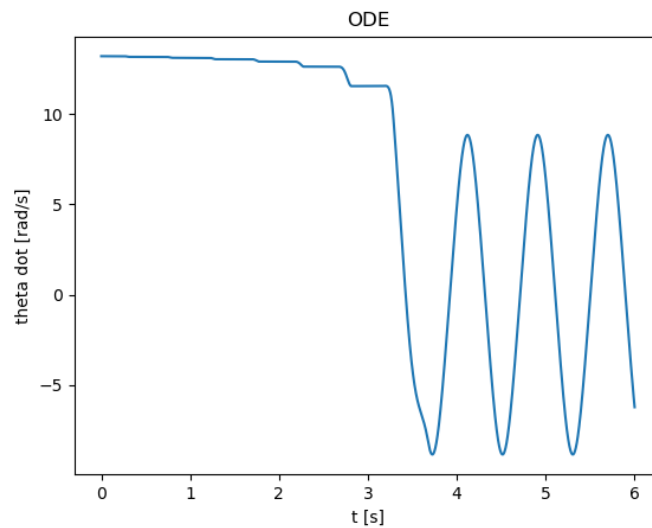


Figure 32: How the variable $\dot{\theta}$ evolve over time

As we can see in figure 32 the flywheel is braking until it becomes a pendulum and starts oscillating.

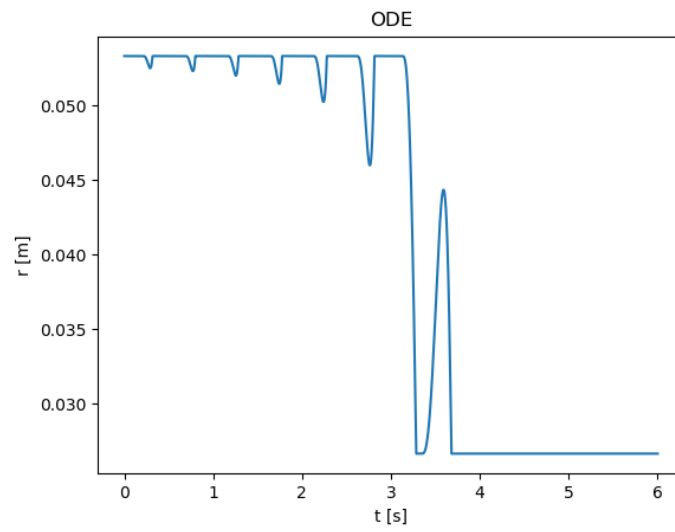


Figure 33: How the variable r evolves over time

In the first laps the cylinder is almost always at the maximum value of r , but as the speed decrease each lap the minimum r decrease until it hits the r_{min} .

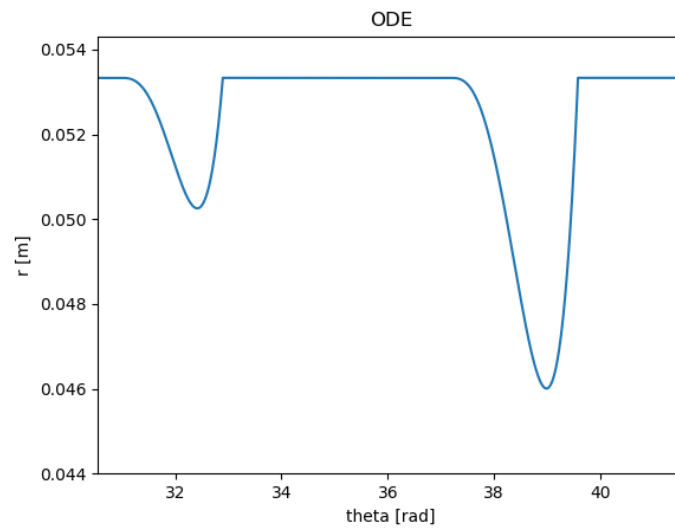


Figure 34: How the variable r evolve over θ zoomed

In image 34 we can appreciate that the r decrease slower than what it increase.

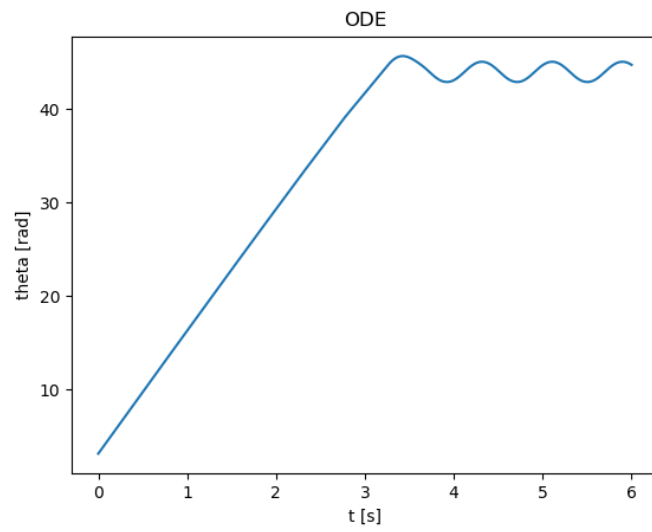


Figure 35: How the variable θ evolves over time

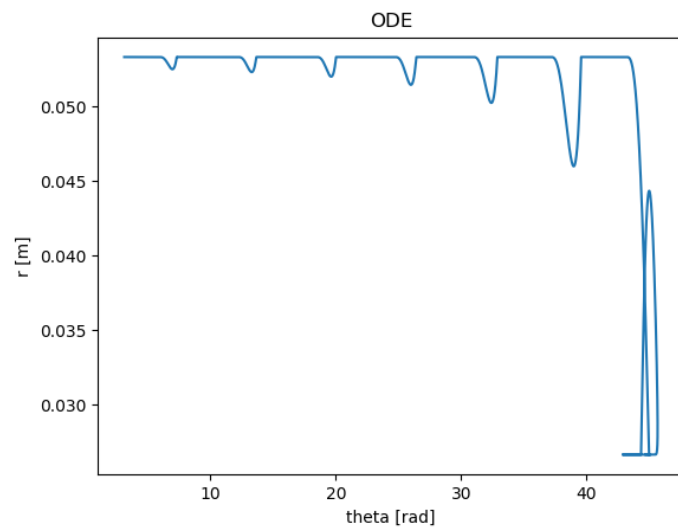


Figure 36: How the variable r evolves over θ

8. Components

8.1 Mechanical components

8.1.1 Central Body

Used to host the flywheel, a motor and a bearing.

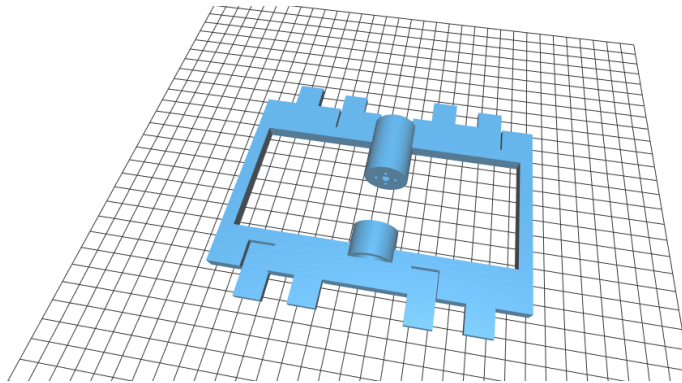


Figure 37: 3D Model of the central body.

8.1.2 Lateral Body

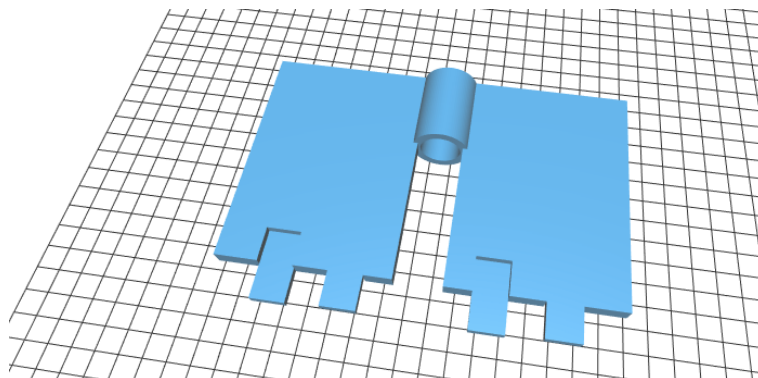


Figure 38: 3D Model of lateral body.

8.1.3 Wheels

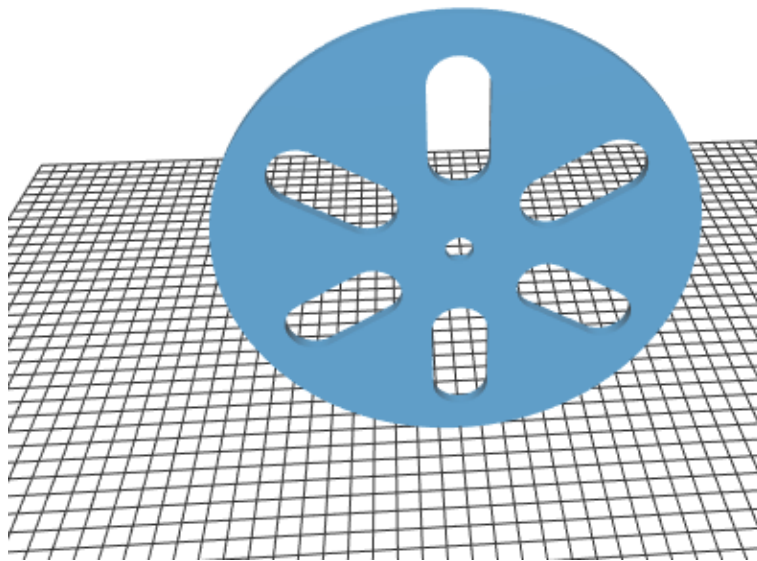


Figure 39: 3D Model of a wheel.

8.1.4 Flywheel

8.1.5 Bearings

8.2 Electronic components

8.2.1 Raspberry Pi

The Raspberry Pi is a small single-board computer. We are using Raspberry Pi 3 Model B. It has GPIO pins.

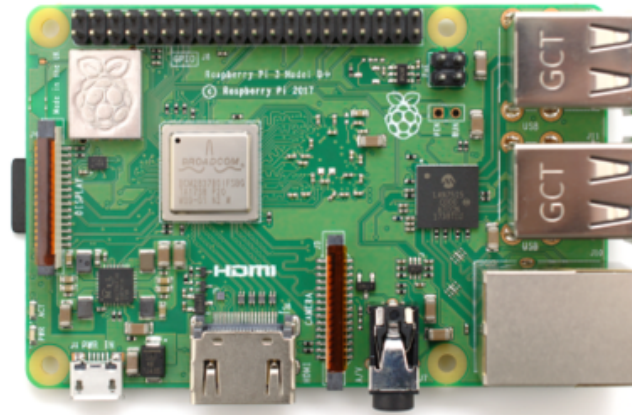


Figure 40: Raspberry Pi picture

Weight	42 g
Price per unit	35 euros
Number of units	1

8.2.2 Batteries

Provide power to our motors and to the Raspberry Pi.

8.2.3 Breadboard

A breadboard is a construction base for prototyping of electronics.

8.2.4 DC Motor

A DC motor is a class of rotary electrical machines that converts direct current electrical energy into mechanical energy. The most common types rely on the forces produced by magnetic fields.

Operating voltage	between 3 V and 9 V
Free-run speed at 6 V	176 RPM
Free-run current at 6 V	80 mA
Stall current at 6V	900 mA
Stall current at 6V	5 kgcm
Gear ratio	1:35
Reductor size	21 mm
Weight	85 g
Price per unit	10 euros
Number of units	3

8.2.5 H Bridge

An H bridge is an electronic circuit that switches the polarity of a voltage applied to a load. These circuits are often used in robotics and other applications to allow DC motors to run forwards or backwards.

8.2.6 Rotatory Encoder

A rotary encoder, also called a shaft encoder, is an electro-mechanical device that converts the angular position or motion of a shaft or axle to analog or digital output signals.

8.2.7 Accelerometer

An accelerometer is a device that measures proper acceleration. Proper acceleration, being the acceleration (or rate of change of velocity) of a body in its own instantaneous rest frame, is not the same as coordinate acceleration, being the acceleration in a fixed coordinate system. For example, an accelerometer at rest on the surface of the Earth will measure an acceleration due to Earth's gravity, straight upwards (by definition) of $g \approx 9.81 \text{ m/s}^2$.

9. Control

9.1 Position control

9.2 Speed control

9.3 Inclination control

10. Software Design

10.1 User Interface

10.2 Planner

10.3 Controller

11. Conclusion