


tb_mpdda_noise: output noise of d2s_mpdda, tt 27 C, load 1 kOhm to vref || 100 pF

DUT and bias from the schematics in this directory; code block = the deck's .lib/.param/.save lines and its .control section

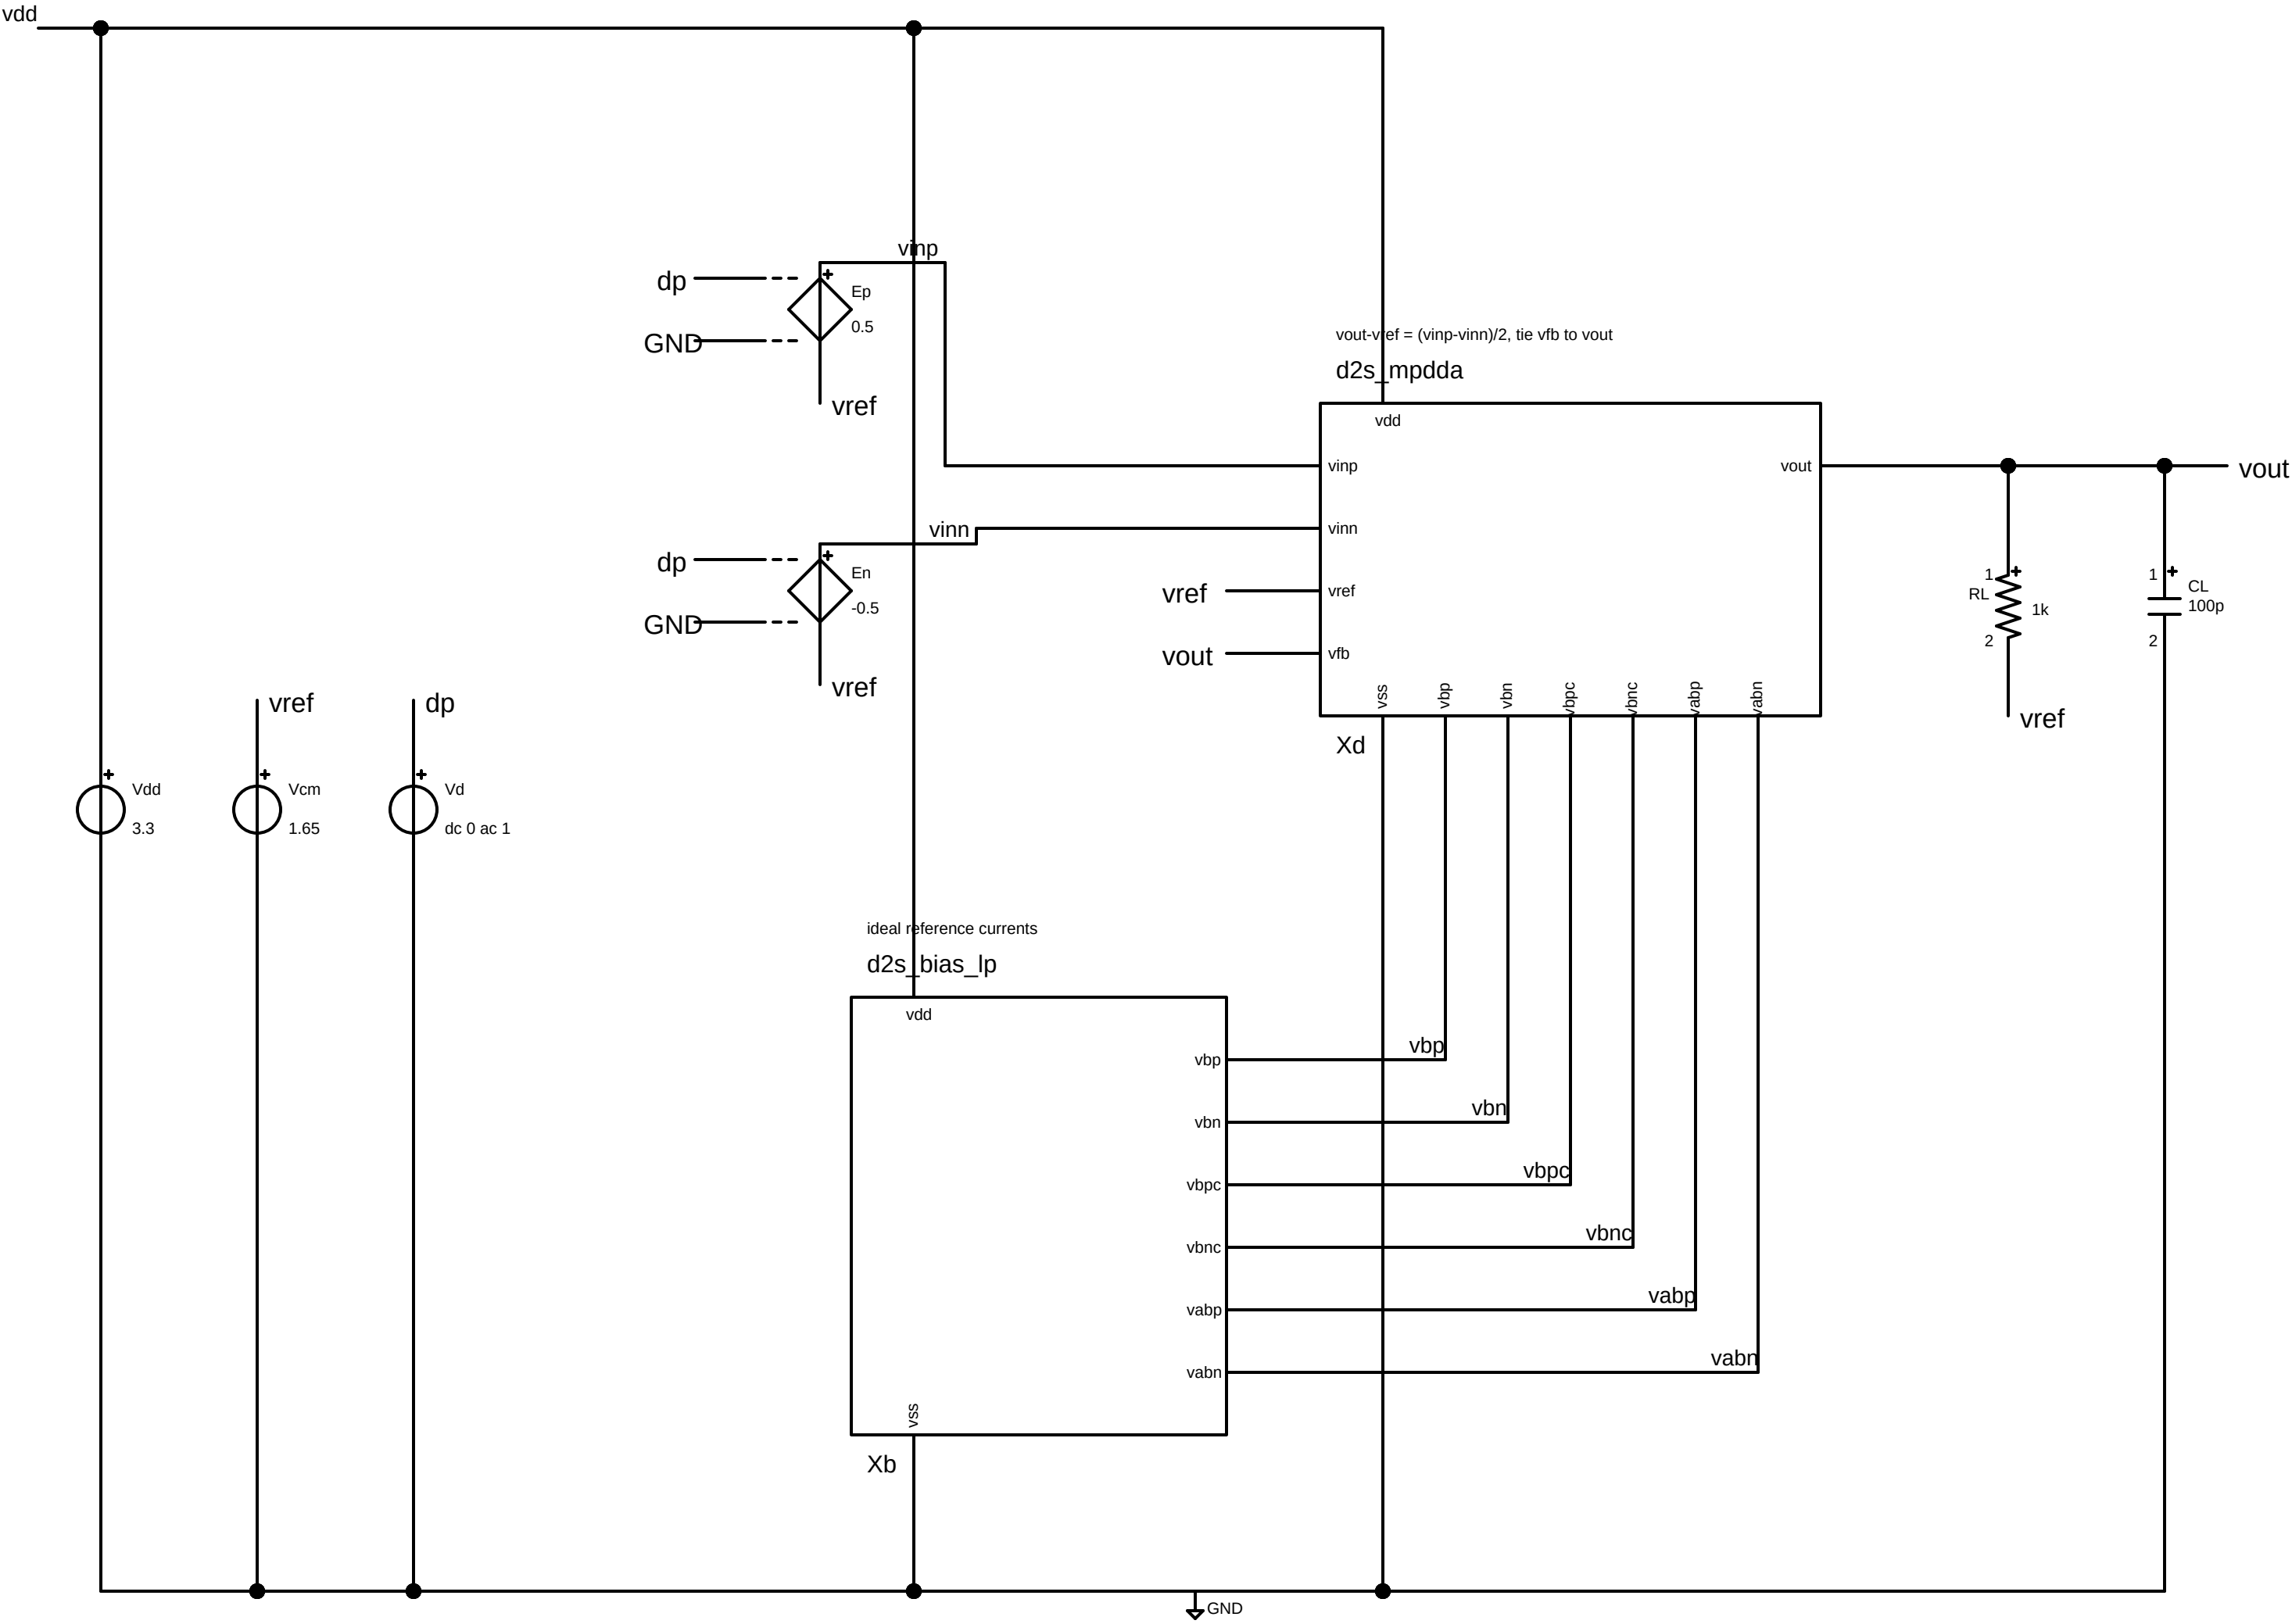

```
s1
.lib cornerM0Shv.lib mos_tt
.lib cornerRES.lib res_typ
.lib cornerCAP.lib cap_typ
.control
* integrated noise first (plots noise1 = spectrum, noise2 = total), then two spot values
noise v(vout) Vd dec 20 10 10meg
setplot noise2
print onoise_total
noise v(vout) Vd lin 1 1k 1k
noise v(vout) Vd lin 1 100k 100k
* a one-point noise run makes only a spectrum plot: noise3 (1 kHz), noise4 (100 kHz)
print noise3.onoise_spectrum noise4.onoise_spectrum
if $?batchmode = 0
    setplot noise1
    plot onoise_spectrum loglog
end
.endc
```