


tb_mpdda_step: step response of d2s_mpdda, vd -0.5 -> +0.5 V (vout vref-0.25 -> vref+0.25 V), tt 27 C

DUT and bias from the schematics in this directory; code block = the deck's .lib/.param/.save lines and its .control section

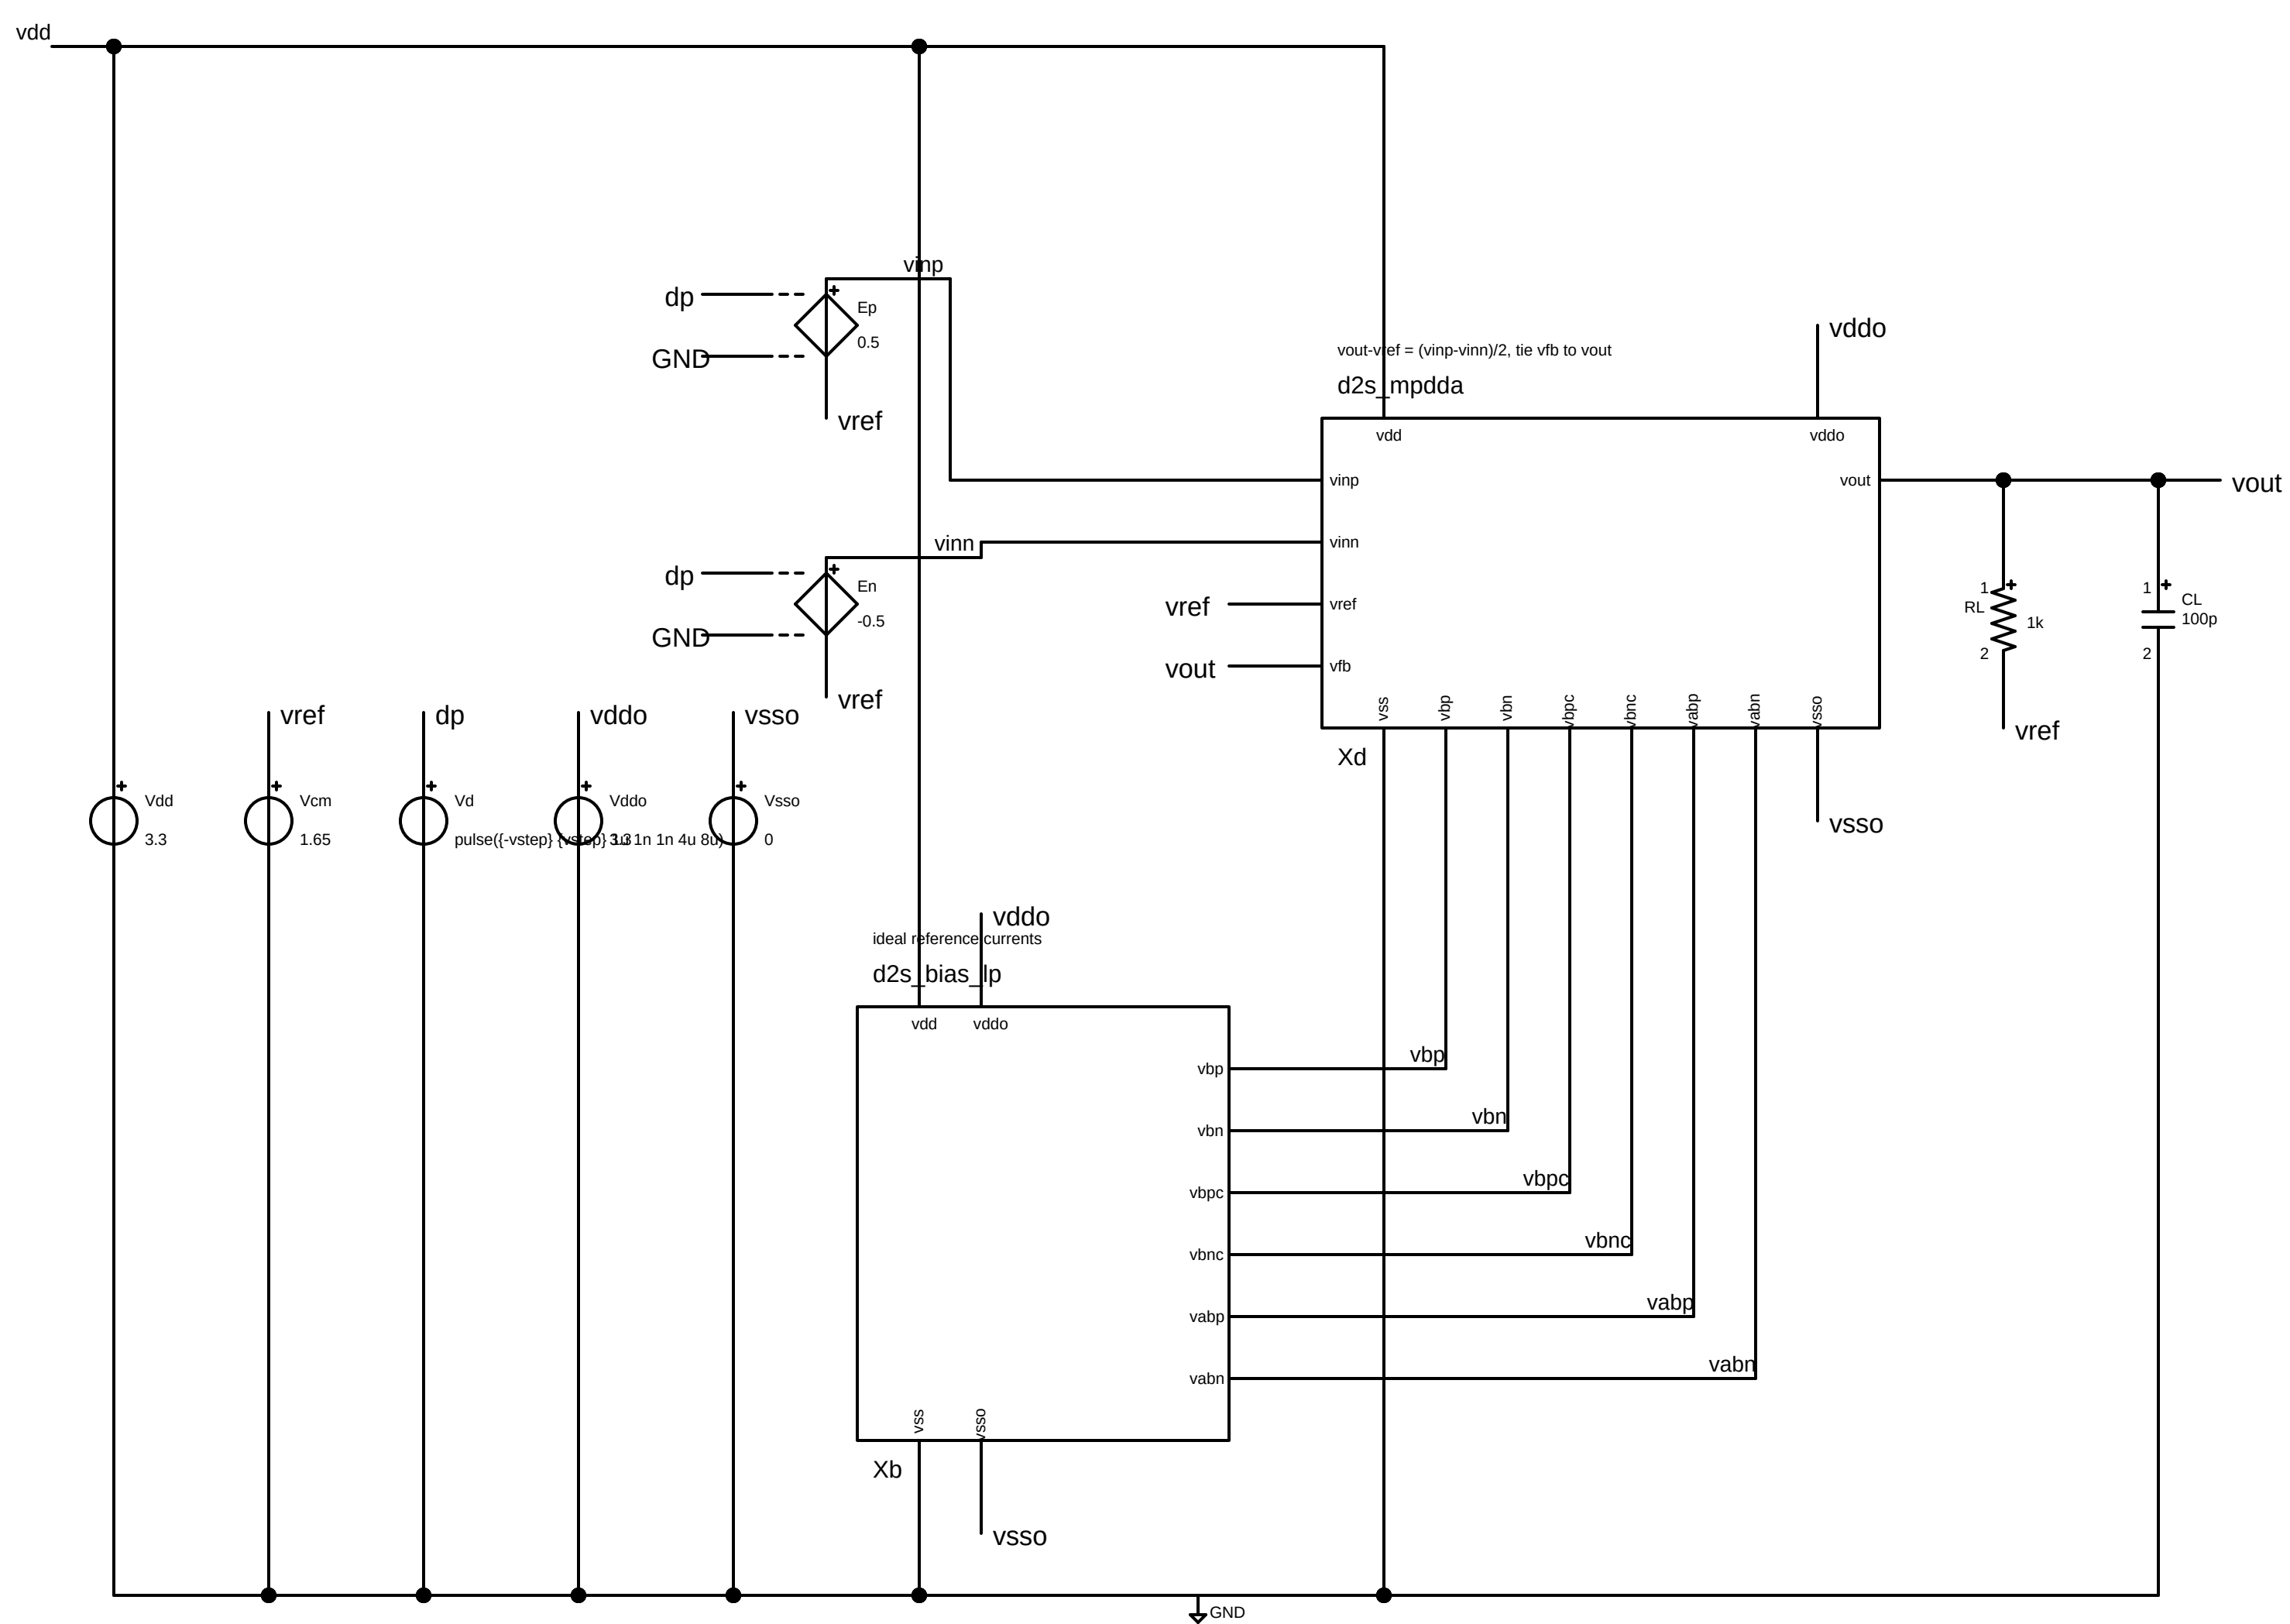

```
s1
.lib cornerM0Shv.lib mos_tt
.lib cornerRES.lib res_typ
.lib cornerCAP.lib cap_typ
.param vstep=0.5
.control
tran 2n 9u
meas tran vlo find v(vout) at=0.99u
meas tran vhi find v(vout) at=4.9u
meas tran vmax max v(vout) from=1u to=5u
let os = 100*(vmax - vhi)/(vhi - vlo)
let v10 = vlo + 0.1*(vhi - vlo)
let v90 = vlo + 0.9*(vhi - vlo)
meas tran t10 when v(vout)=v10 rise=1
meas tran t90 when v(vout)=v90 rise=1
let rate = 0.8*(vhi - vlo)/(t90 - t10)
print vlo vhi os rate
if $?batchmode = 0
    plot v(vout) v(vinp) v(vinn)
end
.endc
```