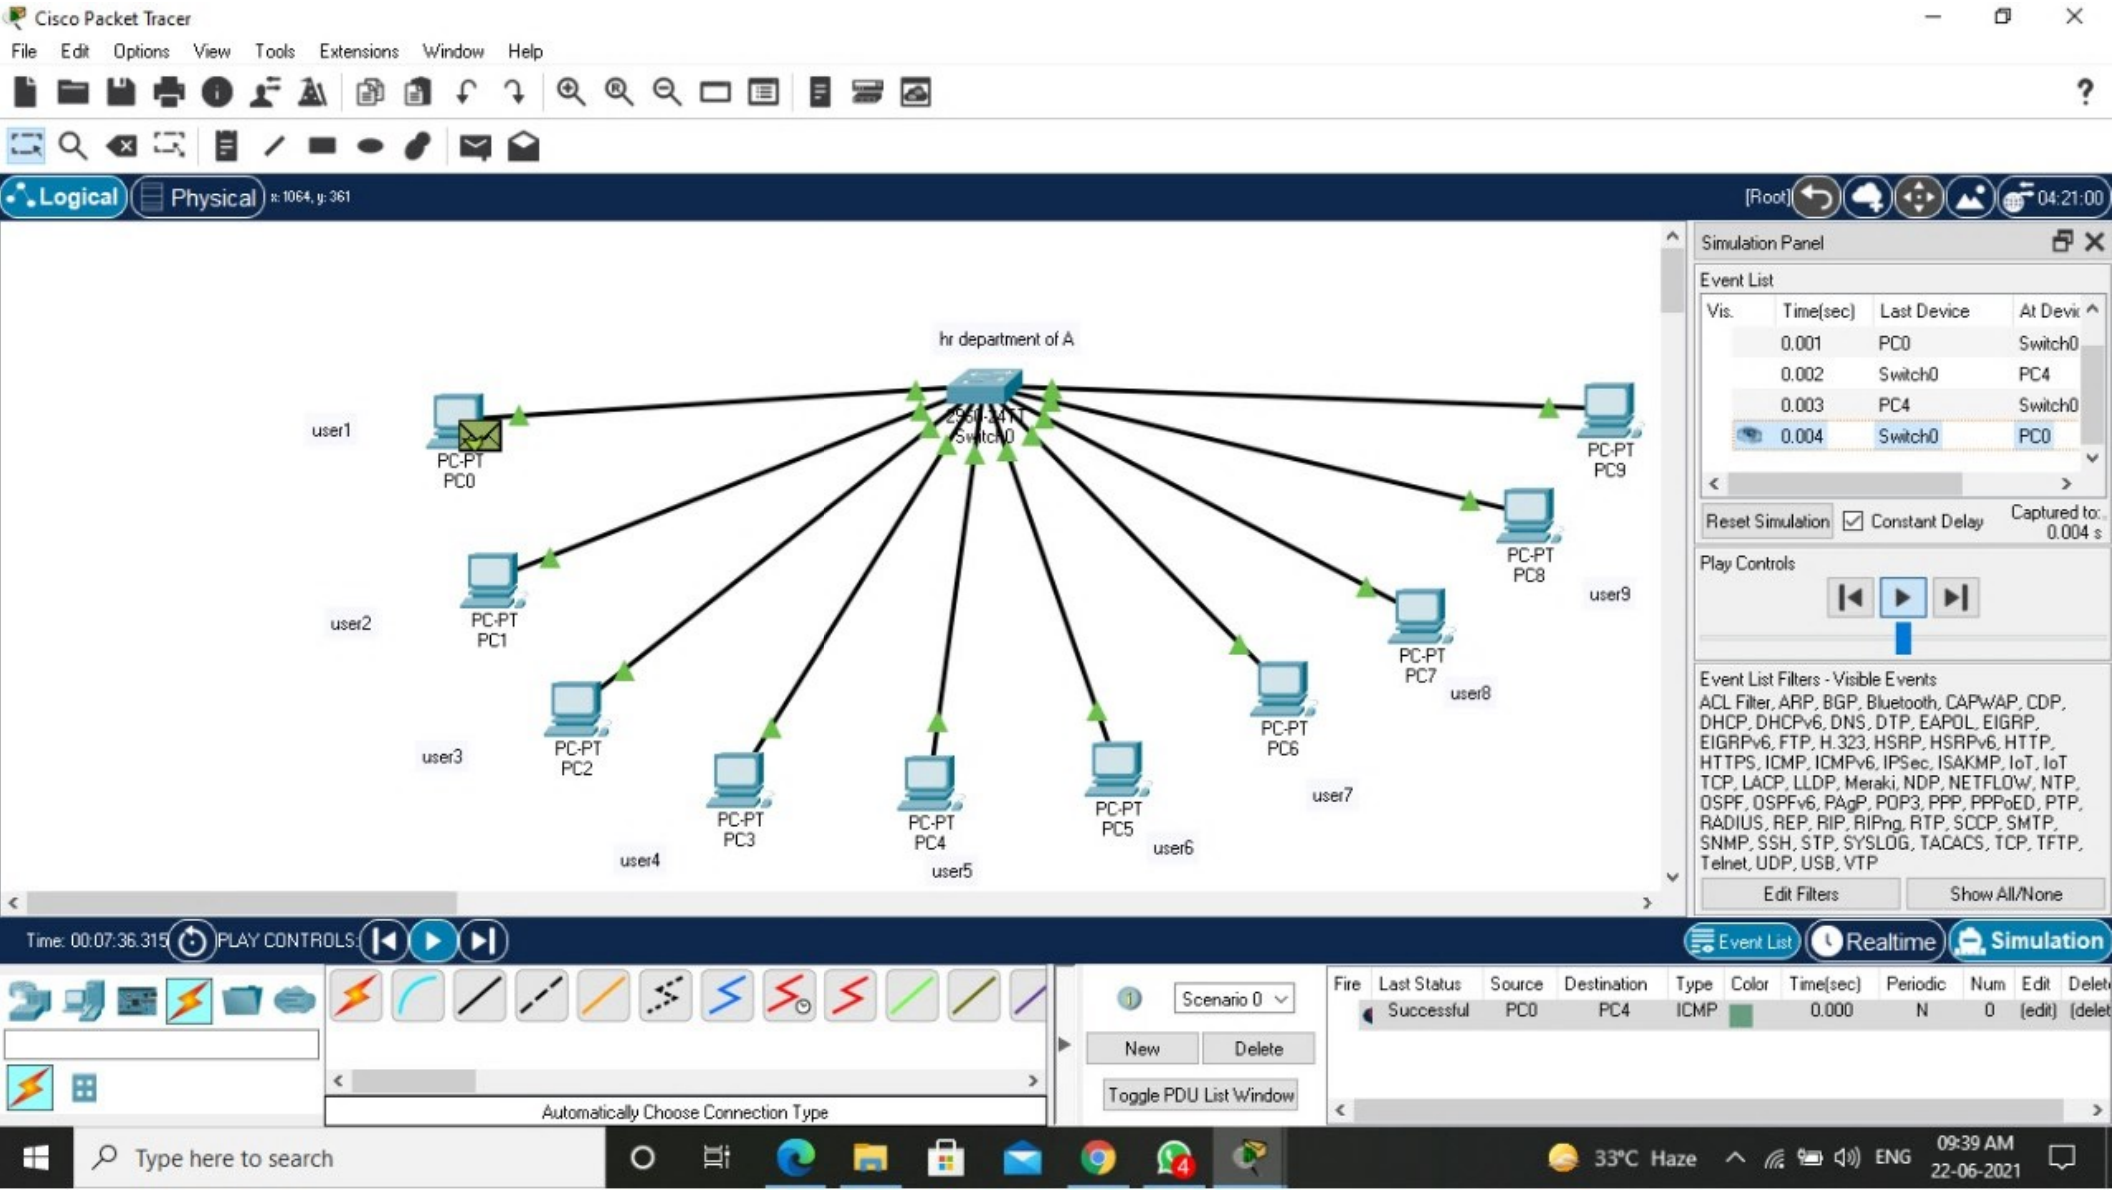
Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
[Root]
04:21:00
hr department of A
Switch0
PC-PT PC0
PC-PT PC1
PC-PT PC2
PC-PT PC3
PC-PT PC4
PC-PT PC5
PC-PT PC6
PC-PT PC7
PC-PT PC8
PC-PT PC9
user1
user2
user3
user4
user5
user6
user7
user8
user9
Simulation Panel
Event List
Vis. Time(sec) Last Device At Devic
0.001 PC0 Switch0
0.002 Switch0 PC4
0.003 PC4 Switch0
0.004 Switch0 PC0
Reset Simulation
Constant Delay
Captured to: 0.004 s
Play Controls
Event List Filters - Visible Events
ACL Filter, ARP, BGP, Bluetooth, CAPWAP, CDP, DHCP, DHCPv6, DNS, DTP, EAPOL, EIGRP, EIGRPv6, FTP, H.323, HSRP, HSRPv6, HTTP, HTTPS, ICMP, ICMPv6, IPSec, ISAKMP, IoT, IoT TCP, LACP, LLDP, Meraki, NDP, NETFLOW, NTP, OSPF, OSPFv6, PAgP, POP3, PPP, PPPoED, PTP, RADIUS, REP, RIP, RIPng, RTP, SCCP, SMTP, SNMP, SSH, STP, SYSLOG, TACACS, TCP, TFTP, Telnet, UDP, USB, VTP
Edit Filters
Show All/None
Time: 00:07:36.315
PLAY CONTROLS:
Event List
Realtime
Simulation
Scenario 0
New
Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delet
Successful PC0 PC4 ICMP 0.000 N 0 (edit) (delet
Automatically Choose Connection Type
Type here to search
33°C Haze
ENG
09:39 AM
22-06-2021

Name:- Mayur Thapliyal
Course:- MCA
Section:- B
Student Id:- 20711087
University Roll no:- 2001088

Q- 1->

Objective:- Understanding of the LAN Network

Description:- How to add connections btw different ~~com~~ computer & other devices in the same network.

Step:-

1. Establishing a switch name to HR Department
2. Establish 10 user for HR Department
3. Connecting user to HR Department

~~Configure Router~~

4) Click on 1st PC, go to Desktop. Open 'IP Config',

5. Write IP address & click on 'Subnet Mask'

6. & Continue step 4 & 5 to get all IP address of 10 PC

IP address created

Step 7: Click on 1st pc go to desktop then click on command prompt then write command.

ping . 192.168.1.5

to show the connection btw 1 & 5th pc

connection showed.