HOME PRO SERIES

Energy Box 1000

Integrated Lithium Power Backup System

A pure sine wave inverter and a 1.28 kWh $LiFePO_4$ battery in one slim, wall-ready enclosure. Energy Box 1000 keeps lights, fans, Wi-Fi and essential appliances running through outages — with no acid, no topping-up and no separate battery trolley.

Pure Sine Wave · $LiFePO_4$ · Bluetooth BMS · Zero Maintenance



5 YEAR BATTERY WARRANTY

3 YEAR INVERTER WARRANTY

1100 VA	900 W	3000 W	1.28 kWh
INVERTER CAPACITY	RATED OUTPUT POWER	SURGE POWER	BATTERY ENERGY

ENGINEERED FOR EVERYDAY RELIABILITY

Pure sine wave output
Clean, grid-quality AC for sensitive electronics, motors and fans.

Low-frequency toroidal design
Robust transformer-based inverter with 3000 W surge headroom for start-up loads.

4-mode Boost & Buck AVR
Automatic voltage regulation corrects both high and low mains voltage.

$LiFePO_4$ chemistry
Thermally stable 12.8 V 100 Ah battery rated for ≥2500 cycles*.

120 A Smart BMS
Cell-level protection with Bluetooth monitoring from your phone.

Zero maintenance
Sealed lithium system — no distilled water, no acid fumes, no terminals to clean.

MADE FOR HOMES & SMALL BUSINESSES

Homes & villas · Shops & showrooms · Small offices · Godowns & warehouses · Clinics & salons

Technical Specifications

Energy Box 1000 · Integrated Lithium Power Backup System

INVERTER

Inverter capacity	1100 VA
Rated output power	900 W
Surge power	3000 W
Output waveform	Pure sine wave
Inverter technology	Low-frequency, toroidal transformer
Voltage stabilisation	Boost & Buck AVR, 4-mode

BATTERY

Battery type	Lithium
Chemistry	$LiFePO_4$ (LFP)
Nominal voltage	12.8 V
Rated capacity	100 Ah
Nominal energy	1280 Wh
Cycle life	≥ 2500 cycles*

CHARGING & BMS

Charging technology	Intelligent charging system
Charging current	20 A
Battery management	120 A Smart BMS
Continuous discharge	100 A
BMS communication	Bluetooth monitoring

PROTECTION

- ✓ Overcharge protection
- ✓ Deep discharge protection
- ✓ Short circuit protection
- ✓ Overload protection
- ✓ Over-temperature protection


INTERFACE & GENERAL

Display	LCD + LED indicators
Maintenance	Maintenance-free
Application	Home, office & shop
Typical use	Essential loads & backup power
Brand / Series	Touch Energy / Home Pro

WARRANTY

Battery	5 years
Inverter	3 years

SYSTEM ARCHITECTURE

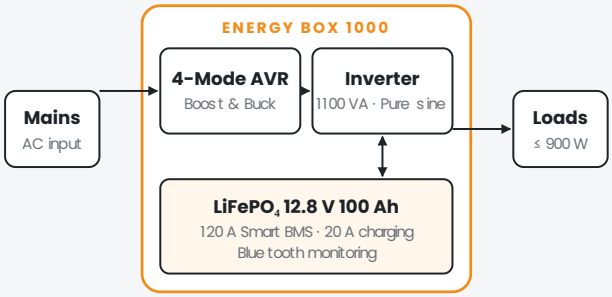

INDICATIVE BACKUP TIME †

LOAD	EXAMPLE	BACKUP
100 W	LED lights, 2 fans, Wi-Fi router	≈ 9 h 50 min
250 W	Lights, fans, TV, laptop	≈ 3 h 55 min
500 W	Lights, fans, TV, small refrigerator	≈ 2 h 00 min
900 W	Full rated load	≈ 1 h 05 min

TECHNICAL NOTES

- Battery energy is based on nominal battery voltage × rated capacity.
- Actual backup time depends on connected load, power factor, battery condition, temperature and operating conditions.
- The integrated system is intended to operate within the specified inverter and battery limits.
- * Cycle life and warranty values are subject to the terms of the Touch Energy commercial warranty.
- † Calculated estimate assuming 90% usable battery energy and 85% conversion efficiency at resistive load; for guidance only.
- Touch Energy reserves the right to change specifications without prior notice.