

LV CURRENT TRANSFORMERS

Widely used in switchboard applications by Engineering, Construction, and Power companies, AGAM series of LV Current Transformers are the result of manufacturing expertise.

AGAM range of Current transformers are Economical, Good Quality, Smaller size & Smaller Weight complying to IEC Standard.

» GENERAL SPECIFICATIONS :

Applicable standard	: IEC 61869, IS16227	Class of accuracy	: 0.2S, 0.5S, 0.2, 0.5, 1
Case	: Engineering grade plastic Nylon/Polycarbonate	Ambient temperature	: -25 Deg. C to +40 Deg. C
Insulation	: Class E (120 Deg. C max)	Storage temperature	: -50 Deg. C to +80 Deg. C
System voltage	: 720V maximum	Thermal short circuit current (Ith)	: 60 x In
Operating frequency	: 50Hz / 60Hz	Dynamic short circuit current (Idyn)	: 2.5 x Ith
Rated Primary rating	: 1A to 3200A	Instrument security factor (FS)	: 5, 10, 15, 20
Rated secondary output	: 5A standard (1A on request)		
Rated burden	: 1, 1.25, 1.5, 2.5, 3.75, 5, 7.5, 10, 12.5, 15, 20VA		

» EXCLUSIVE FEATURES :

- Wide range of system current ratings
- Wire sealable terminal cover
- Wall mounting, Bus-bar mounting & Din rail facility (if required)
- CE & UKCA Engraved
- Engineering grade plastic Nylon/Polycarbonate.
- Removable Secondary terminals - Easy to connect with Ring type Lugs.
- Engraved Arrow Marking to Primary Current Direction Indication.

Limits of current error and phase displacements for measuring current transformers.

Accuracy class	+/- percentage current (ratio) error at percentage of rated current shown				+/- phase displacements at percentage of rated current shown below							
					Minutes				Centiradians			
	5	20	100	120	5	20	100	120	5	20	100	120
0.5	1.5	0.75	0.5	0.5	90	45	30	30	2.7	1.35	0.9	0.9
1.0	3.0	1.5	1.0	1.0	180	90	60	60	5.4	2.7	1.8	1.8


» VA BURDEN GUIDE :

Moving iron ammeter	: 1.0VA
Bimetal instruments (.../5A)	: 3.0VA
Bimetal and Moving iron instruments (.../5A)	: 3.5 VA
Wattmeter	: 3.5...5.5VA
Power factor meter	: 4.0 VA
Current / Power transducer	: 0.5 VA
kWh-meter	: 2.5 VA

AGAM A7W SERIES CURRENT TRANSFORMER



CT Model	A7W
Dimension (mm)	113 x 70x 32 (H x W x Depth)
Primary Current	1A to 60A
Secondary Current	1A , 5A
Accuracy Class	0.5S, 0.2, 0.5 & 1
Mounting Options	Wall Mounting & busbar mounting

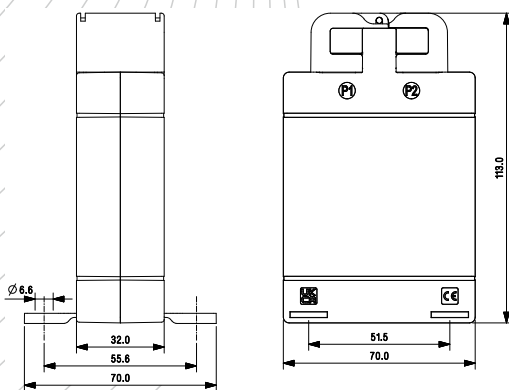


Code No.	Accuracy Class	0.5S	0.2	0.5	1
	Primary Current	Max VA	Max VA	Max VA	Max VA
A7W-1	1A	2.5	1.5	5	7.5
A7W-2.5	2.5A	2.5	1.5	5	7.5
A7W-5	5A	2.5	1.5	5	7.5
A7W-7.5	7.5A	2.5	1.5	5	7.5
A7W-10	10A	2.5	1.5	5	7.5
A7W-15	15A	2.5	1.5	5	7.5
A7W-20	20A	2.5	1.5	5	7.5
A7W-25	25A	2.5	1.5	5	7.5
A7W-30	30A	2.5	1.5	5	7.5
A7W-40	40A	2.5	1.5	5	7.5
A7W-50	50A	2.5	1.5	5	7.5
A7W-60	60A	2.5	1.5	5	7.5

AGAM AS5x SERIES CURRENT TRANSFORMER




CT Model	AS51	AS52	AS53
Cable Hole Dia (Ø)	15mm	21mm	26mm
Max Busbar Size (mm)	—	21 x 11	30.5 x 10.5
Dimension (mm)	72 x 51 x 32 (H x W x Depth)		
Primary Current	100A to 300A	50A to 400A	100A to 600A
Secondary Current	1A, 5A		
Accuracy Class	0.5S, 0.2, 0.5 or 1		
Mounting Options	Wall mounting & Busbar mounting		

AS51

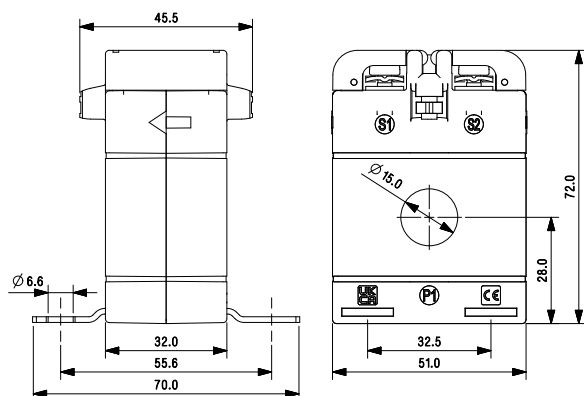


Code No.	Accuracy Class	0.5S	0.2	0.5	1
	Primary Current	Max VA	Max VA	Max VA	Max VA
AS51-100	100A	-	-	1	1.5
AS51-120	120A	-	-	1	2.5
AS51-125	125A	-	-	1.25	2.5
AS51-150	150A	-	-	1.5	3.75
AS51-200	200A	1.5	1	1.75	3.75
AS51-250	250A	1.75	1.25	3.75	5
AS51-300	300A	2.5	1.5	5	5

AS52

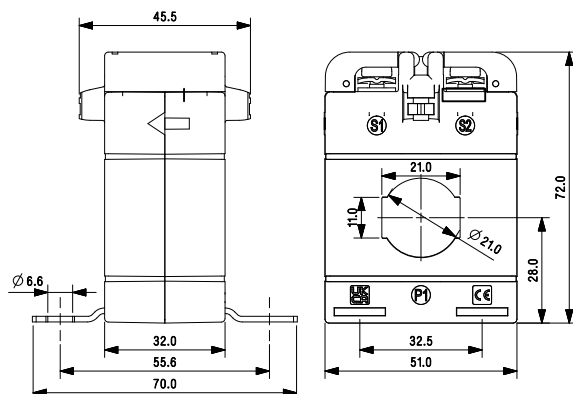

Code No.	Accuracy Class	0.5S	0.2	0.5	1
	Primary Current	Max VA	Max VA	Max VA*	Max VA*
AS52-50	50A	-	-	-	1
AS52-60	60A	-	-	-	1
AS52-75	75A	-	-	-	1.25
AS52-80	80A	-	-	1	1.5
AS52-100	100A	-	-	1.5	1.5 / 2.5
AS52-120	120A	-	-	2.5	1.5 / 2.5
AS52-150	150A	-	-	1 / 2.5	2.5 / 5
AS52-200	200A	-	-	1.5 / 3.75	2.5 / 5
AS52-250	250A	1.25	1	2.5 / 5	3.75 / 5
AS52-300	300A	1.5	1.25	3.75 / 5	5 / 7.5
AS52-400	400A	2.5	1.5	3.75 / 5	5 / 7.5

AS53

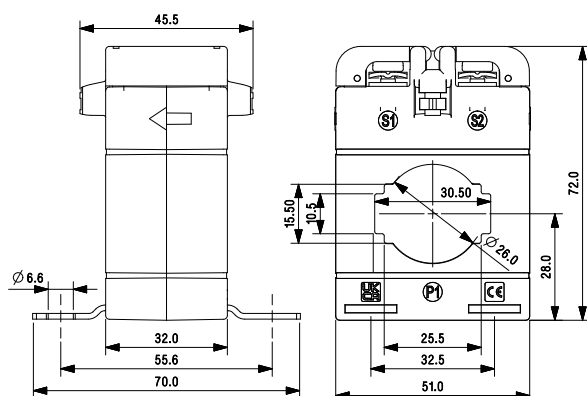

Code No.	Accuracy Class	0.5S	0.2	0.5	1
	Primary Current	Max VA	Max VA	Max VA*	Max VA*
AS53-100	100A	-	-	-	1.5
AS53-120	120A	-	-	1	1 / 1.75
AS53-125	125A	-	-	1	1 / 1.75
AS53-150	150A	-	-	1.5	1.5 / 2.5
AS53-200	200A	-	-	1 / 2.5	2.5 / 3.75
AS53-250	250A	-	-	1.5 / 2.5	2.5 / 5
AS53-300	300A	-	-	5 / 2.5	3.75 / 5
AS53-400	400A	1	1	5 / 3.5	5
AS53-500	500A	1.25	1.25	5 / 3.5	5
AS53-600	600A	1.5	1.5	5 / 3.75	5


*Note : Max VA will be different based on the two different materials used.

AGAM A5x SERIES CURRENT TRANSFORMER




CT Model	A51	A52	A53
Cable Hole Dia (Ø)	15mm	21mm	24mm
Max Busbar Size (mm)	—	21.50 x 14	31 x 11
Dimension (mm)	85 x 50 x 32 (H x W x Depth)		
Primary Current	100A to 300A	50A to 400A	100A to 600A
Secondary Current	1A, 5A		
Accuracy Class	0.5S, 0.2, 0.5 or 1		
Mounting Options	Wall mounting & Busbar mounting		

A51

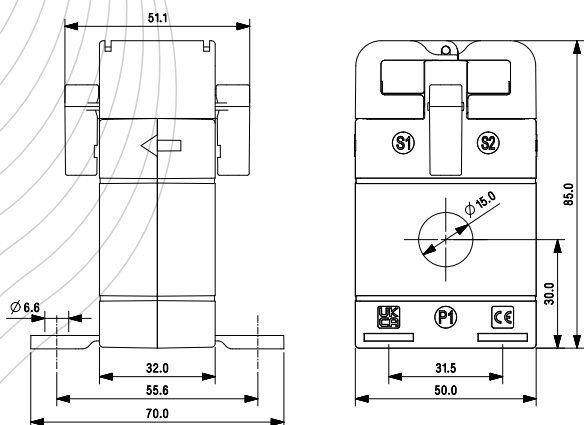


Code No.	Accuracy Class Primary Current	0.5S Max VA	0.2 Max VA	0.5 Max VA	1 Max VA
A51-100	100A	-	-	1	1.5
A51-120	120A	-	-	1	2.5
A51-125	125A	-	-	1.25	2.5
A51-150	150A	-	-	1.5	3.75
A51-200	200A	1.5	1	1.75	3.75
A51-250	250A	1.75	1.25	3.75	5
A51-300	300A	2.5	1.5	5	5

A52

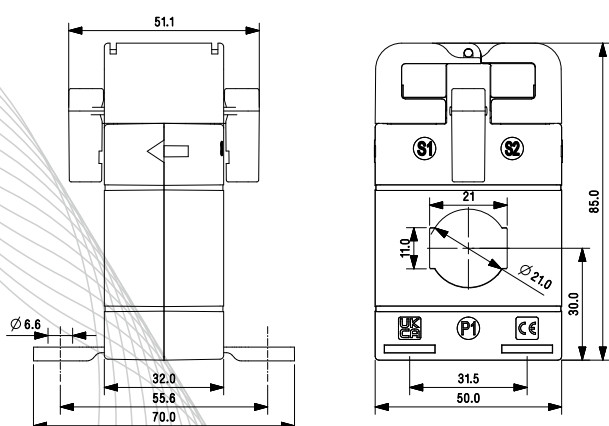

Code No.	Accuracy Class Primary Current	0.5S Max VA	0.2 Max VA	0.5 Max VA*	1 Max VA*
A52-50	50A	-	-	-	1
A52-60	60A	-	-	-	1
A52-75	75A	-	-	-	1.25
A52-80	80A	-	-	1	1.5
A52-100	100A	-	-	1.5	1.5 / 2.5
A52-120	120A	-	-	2.5	1.5 / 2.5
A52-150	150A	-	-	1 / 2.5	2.5 / 5
A52-200	200A	-	-	1.5 / 3.75	2.5 / 5
A52-250	250A	1.25	1	2.5 / 5	3.75 / 5
A52-300	300A	1.5	1.25	3.75 / 5	5 / 7.5
A52-400	400A	2.5	1.5	3.75 / 5	5 / 7.5

A53

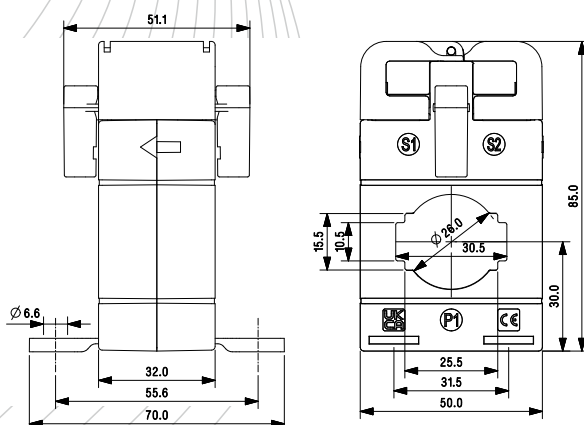

Code No.	Accuracy Class Primary Current	0.5S Max VA	0.2 Max VA	0.5 Max VA*	1 Max VA*
A53-100	100A	-	-	-	1.5
A53-120	120A	-	-	1	1 / 1.75
A53-125	125A	-	-	1	1 / 1.75
A53-150	150A	-	-	1.5	1.5 / 2.5
A53-200	200A	-	-	1 / 2.5	2.5 / 3.75
A53-250	250A	-	-	1.5 / 2.5	2.5 / 5
A53-300	300A	-	-	5 / 2.5	3.75 / 5
A53-400	400A	1	1	5 / 3.5	5
A53-500	500A	1.25	1.25	5 / 3.5	5
A53-600	600A	1.5	1.5	5 / 3.75	5


*Note : Max VA will be different based on the two different materials used.

AGAM A6x SERIES CURRENT TRANSFORMER




CT Model	A62	A63	A64
Cable Hole Dia (Ø)	—	30.5mm	26.00mm
Max Busbar Size (mm)	41.5 x 12.5	41.5 x 11	41.5 x 11
Dimension (mm)	93 x 60 x 32 (H x W x Depth)		
Primary Current	75A to 500A	100A to 800A	100A to 800A
Secondary Current	1A, 5A		
Accuracy Class	0.5S, 0.2, 0.5 or 1		
Mounting Options	Wall mounting & Busbar mounting		

A62

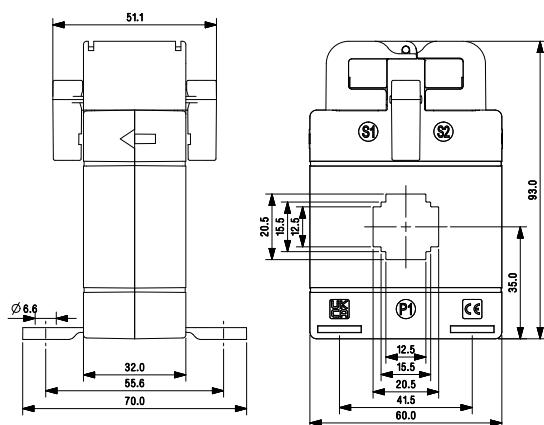


Code No.	Accuracy Class Primary Current	0.5S Max VA	0.2 Max VA	0.5 Max VA*	1 Max VA*
A62-75	75A	-	-	-	1
A62-80	80A	-	-	-	1.5
A62-100	100A	-	-	1	1 / 2.5
A62-120	120A	-	-	2.5	1.25 / 5
A62-125	125A	-	-	2.5	1.25 / 5
A62-150	150A	-	-	1 / 5	2.5 / 5
A62-200	200A	1	-	1.5 / 5	3.75 / 7.5
A62-250	250A	1.25	1	2.5 / 5	5 / 7.5
A62-300	300A	1.5	1.5	3.75 / 6.25	6.25 / 7.5
A62-400	400A	2.5	2.5	5 / 7.5	7.5 / 10
A62-500	500A	3.75	3.75	7.5 / 7.5	10

A63

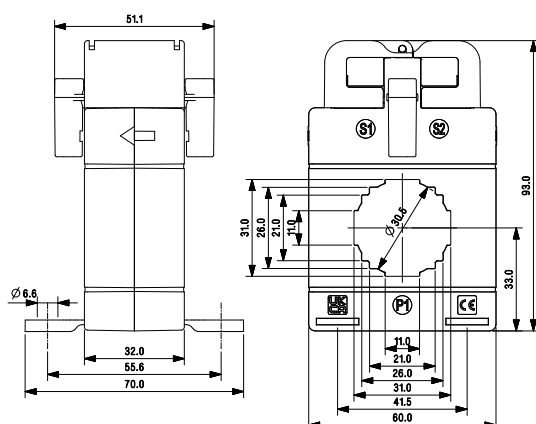

Code No.	Accuracy Class Primary Current	0.5S Max VA	0.2 Max VA	0.5 Max VA	1 Max VA
A63-100	100A	-	-	-	1
A63-120	120A	-	-	-	1.25
A63-125	125A	-	-	-	1.5
A63-150	150A	-	-	1	2.5
A63-200	200A	-	-	1.25	3.75
A63-250	250A	1	-	1.5	3.75
A63-300	300A	1.25	1	2.5	5
A63-400	400A	1.5	1.5	3.75	6.25
A63-500	500A	2.5	2.5	5	7.5
A63-600	600A	3.75	3.75	5	10
A63-750	750A	5	5	7.5	10
A63-800	800A	5	5	7.5	10

A64

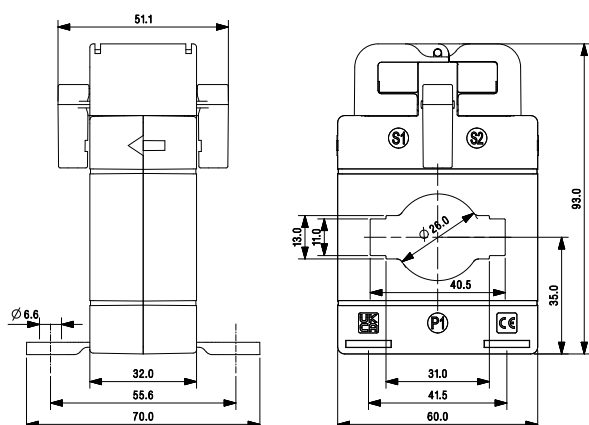

Code No.	Accuracy Class Primary Current	0.5S Max VA	0.2 Max VA	0.5 Max VA	1 Max VA
A64-100	100A	-	-	-	-
A64-150	150A	-	-	-	-
A64-200	200A	-	-	-	2.5
A64-250	250A	-	-	1	2.5
A64-300	300A	1	-	1.5	2.5
A64-400	400A	1.25	1	2.5	5
A64-500	500A	1.5	1.5	5	5
A64-600	600A	2.5	2.5	5	5
A64-750	750A	3.75	3.75	5	5
A64-800	800A	3.75	3.75	5	7.5


*Note : Max VA will be different based on the two different materials used.

AGAM A7x SERIES CURRENT TRANSFORMER




CT Model	A73	A74	A75
Cable Hole Dia (Ø)	31mm	33mm	43mm
Max Busbar Size (mm)	31 x 22	41 x 12.5	51 x 22
Dimension (mm)	113 x 70 x 32 (H x W x Depth)		
Primary Current	100A to 800A	200A to 1000A	250A to 1000A
Secondary Current	1A, 5A		
Accuracy Class	0.2S, 0.5S, 0.2, 0.5 or 1		
Mounting Options	Wall mounting & Busbar mounting		

A73

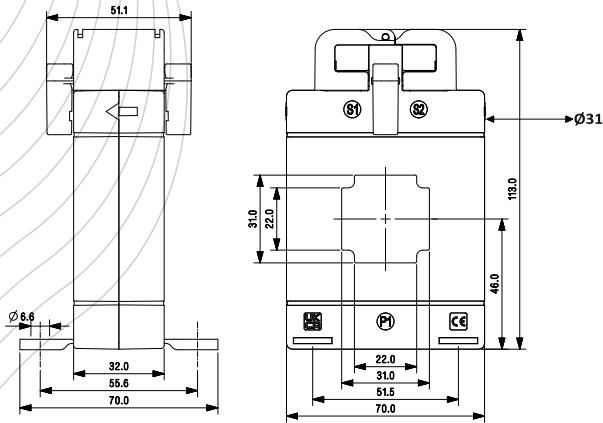


Code No.	Accuracy Class Primary Current	0.2S Max VA	0.5S Max VA	0.2 Max VA	0.5 Max VA	1 Max VA
A73-100	100A	-	-	-	-	1
A73-125	125A	-	-	-	-	1
A73-150	150A	-	-	-	1	2.5
A73-200	200A	-	1.5	-	2.5	5
A73-250	250A	-	2.5	1	3.75	7.5
A73-300	300A	-	3.75	1.5	5	10
A73-400	400A	-	5	2.5	7.5	15
A73-500	500A	-	6.25	5	10	15
A73-600	600A	5	7.5	6.25	10	15
A73-750	750A	5	7.5	7.5	15	15
A73-800	800A	5	7.5	7.5	15	15

A74

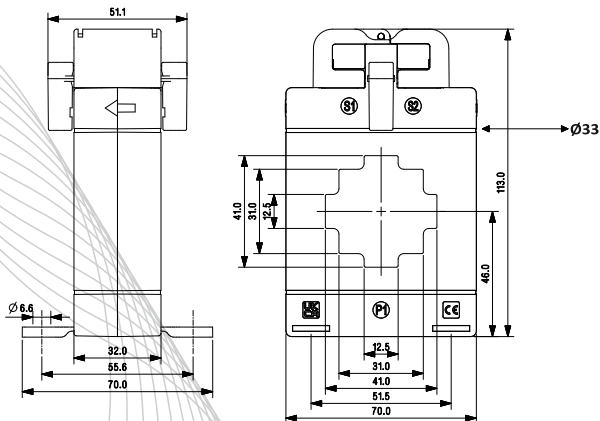

Code No.	Accuracy Class Primary Current	0.2S Max VA	0.5S Max VA	0.2 Max VA	0.5 Max VA	1 Max VA
A74-200	200A	-	-	-	1	2.5
A74-250	250A	-	1	-	1.5	2.5
A74-300	300A	-	1.25	-	3.75	5
A74-400	400A	-	1.5	1.5	5	5
A74-500	500A	-	1.75	1.75	5	7.5
A74-600	600A	-	2.5	2.5	5	7.5
A74-750	750A	-	3.75	3.75	7.5	10
A74-800	800A	-	3.75	3.75	7.5	10
A74-1000	1000A	3.75	5	5	7.5	10

A75

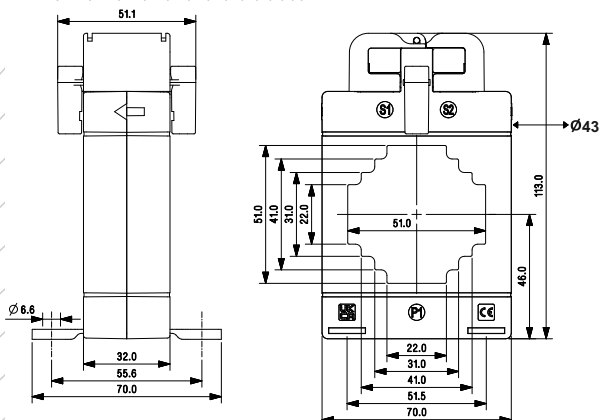


Code No.	Accuracy Class Primary Current	0.2S Max VA	0.5S Max VA	0.2 Max VA	0.5 Max VA	1 Max VA
A75-250	250A	-	-	-	1	2.5
A75-300	300A	-	-	-	1	2.5
A75-400	400A	-	-	-	1	3.75
A75-500	500A	-	1	-	1	3.75
A75-600	600A	-	1.25	1	1	3.75
A75-750	750A	-	1.5	1.25	2.5	5
A75-800	800A	-	1.75	1.5	2.5	5
A75-1000	1000A	-	2.5	2.5	3.75	7.5

AGAM A8x SERIES CURRENT TRANSFORMER




CT Model	A84	A85	A86
Cable Hole Dia (Ø)	36mm	46mm	51mm
Max Busbar Size (mm)	41 x 11	51 x 12.5	61 x 15
Dimension (mm)	125 x 85 x 32 (H x W x Depth)		
Primary Current	120A to 1000A	250A to 1250A	300A to 1600A
Secondary Current	1A, 5A		
Accuracy Class	0.2S, 0.5S, 0.2, 0.5 or 1		
Mounting Options	Wall mounting & Busbar mounting		

A84

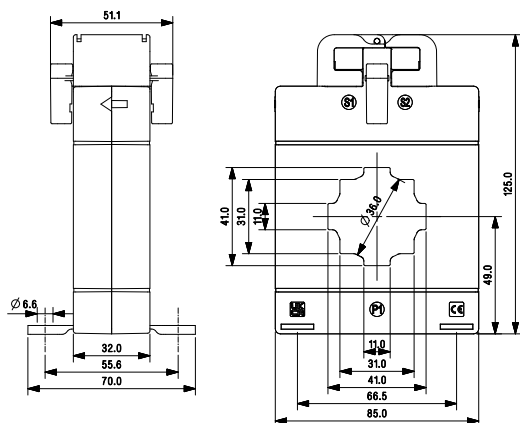


Code No.	Accuracy Class	0.2S	0.5S	0.2	0.5	1
	Primary Current	Max VA	Max VA	Max VA	Max VA	Max VA
A84-120	120A	-	-	-	-	1.5
A84-125	125A	-	-	-	1	1.5
A84-150	150A	-	-	-	1.5	2.5
A84-200	200A	-	-	-	2.5	5
A84-250	250A	-	-	-	3.75	7.5
A84-300	300A	-	-	-	5	7.5
A84-400	400A	-	-	-	7.5	10
A84-500	500A	5	10	10	15	15
A84-600	600A	7.5	10	10	15	15
A84-750	750A	7.5	10	10	15	15
A84-800	800A	10	12.5	12.5	15	20
A84-1000	1000A	15	15	15	20	25

A85

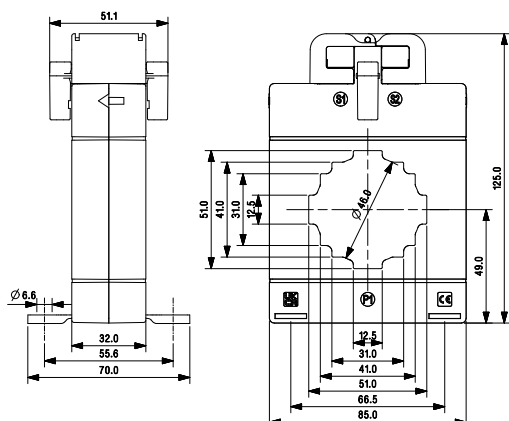


Code No.	Accuracy Class	0.2S	0.5S	0.2	0.5	1
	Primary Current	Max VA	Max VA	Max VA	Max VA	Max VA
A85-250	250A	-	-	-	2.5	5
A85-300	300A	-	-	-	3.75	7.5
A85-400	400A	-	-	-	5	15
A85-500	500A	1	5	3.75	7.5	15
A85-600	600A	2.5	7.5	5	10	15
A85-750	750A	5	7.5	7.5	15	15
A85-800	800A	7.5	10	10	15	20
A85-1000	1000A	10	12.5	12.5	20	20
A85-1200	1200A	10	12.5	12.5	20	20
A85-1250	1250A	10	12.5	12.5	20	20

A86

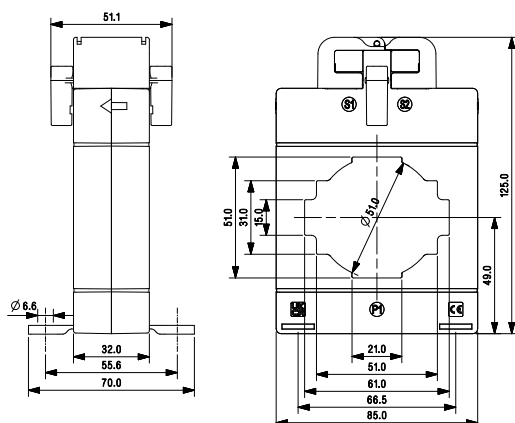


Code No.	Accuracy Class	0.2S	0.5S	0.2	0.5	1
	Primary Current	Max VA	Max VA	Max VA	Max VA	Max VA
A86-300	300A	-	-	-	1.5	3.75
A86-400	400A	-	-	-	3.75	7.5
A86-500	500A	-	2.5	1.5	5	7.5
A86-600	600A	1	5	2.5	7.5	10
A86-750	750A	1.5	6.25	3.75	7.5	10
A86-800	800A	1.75	6.25	3.75	10	10
A86-1000	1000A	3.75	7.5	5	10	15
A86-1200	1200A	5	7.5	7.5	15	15
A86-1250	1250A	5	7.5	7.5	15	15
A86-1500	1500A	5	7.5	7.5	15	15
A86-1600	1600A	7.5	10	10	15	15

AGAM A10x SERIES CURRENT TRANSFORMER

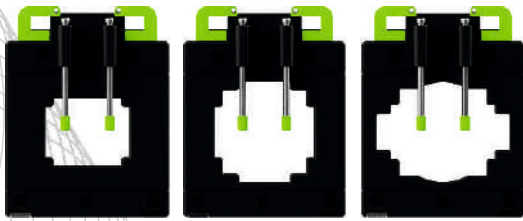


CT Model	A105	A106	A108
Cable Hole Dia (Ø)	40mm	58mm	61mm
Max Busbar Size (mm)	50 x 30	60 x 30	83 x 22
Dimension (mm)	130 x 100 x 32 (H x W x Depth)		
Primary Current	200A to 1600A	200A to 1600A	500A to 2000A
Secondary Current	1A, 5A		
Accuracy Class	0.2S, 0.5S, 0.2, 0.5 or 1		
Mounting Options	Wall mounting & Busbar mounting		

A105

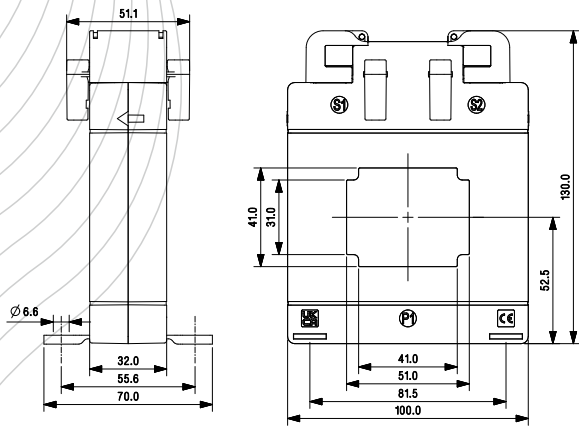


Code No.	Accuracy Class	0.2S	0.5S	0.2	0.5	1
	Primary Current	Max VA	Max VA	Max VA	Max VA	Max VA
A105-200	200A	-	-	-	2.5	5
A105-250	250A	-	-	-	5	7.5
A105-300	300A	-	-	-	7.5	10
A105-400	400A	-	-	-	10	15
A105-500	500A	-	5	3.75	15	15
A105-600	600A	2.5	6.25	5	15	20
A105-750	750A	5	10	7.5	15	20
A105-800	800A	7.5	10	10	20	20
A105-1000	1000A	10	12.5	12.5	20	20
A105-1200	1200A	12.5	15	15	20	20
A105-1250	1250A	12.5	15	15	20	20
A105-1500	1500A	10	12.5	12.5	20	25
A105-1600	1600A	12.5	15	15	20	25

A106

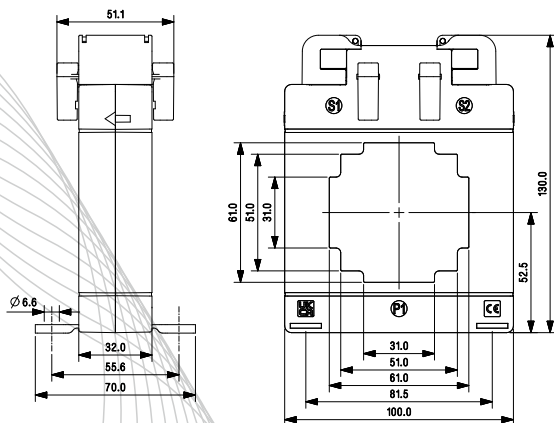


Code No.	Accuracy Class	0.2S	0.5S	0.2	0.5	1
	Primary Current	Max VA	Max VA	Max VA	Max VA	Max VA
A106-200	200A	-	-	-	1	2.5
A106-250	250A	-	-	-	1	2.5
A106-300	300A	-	-	-	2.5	5
A106-400	400A	-	-	-	5	10
A106-500	500A	-	-	-	10	15
A106-600	600A	-	3.75	2.5	15	15
A106-750	750A	-	5	2.5	15	15
A106-800	800A	-	7.5	5	15	15
A106-1000	1000A	5	10	7.5	15	20
A106-1200	1200A	7.5	12.5	10	15	20
A106-1250	1250A	7.5	12.5	10	15	20
A106-1500	1500A	10	12.5	12.5	15	20
A106-1600	1600A	12.5	15	15	15	20

A108

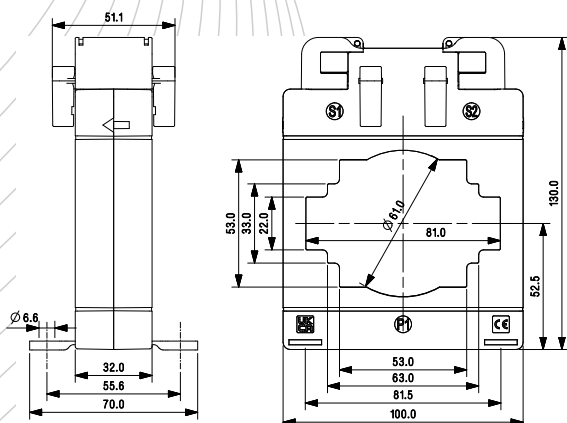


Code No.	Accuracy Class	0.2S	0.5S	0.2	0.5	1
	Primary Current	Max VA	Max VA	Max VA	Max VA	Max VA
A108-500	500A	-	-	-	5	10
A108-600	600A	-	2.5	1.5	5	10
A108-750	750A	-	3.75	1.75	7.5	12.5
A108-800	800A	-	5	2.5	10	15
A108-1000	1000A	-	5	5	10	15
A108-1200	1200A	5	7.5	7.5	10	15
A108-1250	1250A	5	7.5	7.5	10	15
A108-1500	1500A	6.25	10	10	10	15
A108-1600	1600A	7.5	10	10	10	15
A108-2000	2000A	7.5	10	10	10	15

AGAM A13x SERIES CURRENT TRANSFORMER

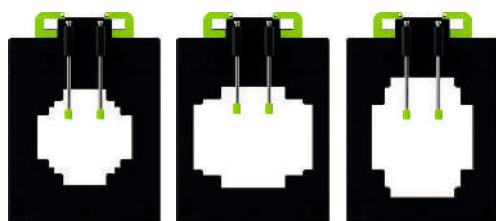


CT Model	A138	A1310H	A1310V
Cable Hole Dia (Ø)	73mm	83mm	83mm
Max Busbar Size (mm)	81 x 36	101 x 55	86 x 54
Dimension (mm)	180 x 130 x 32 (H x W x Depth)		
Primary Current	400A to 2000A	600A to 3200A	600A to 3200A
Secondary Current	1A, 5A		
Accuracy Class	0.2S, 0.5S, 0.2, 0.5 or 1		
Mounting Options	Wall mounting & Busbar mounting		

A138

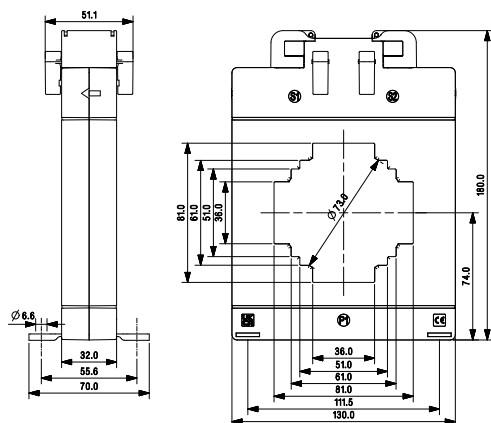


Code No.	Accuracy Class	0.2S	0.5S	0.2	0.5	1
	Primary Current	Max VA	Max VA	Max VA	Max VA	Max VA
A138-400	400A	-	-	-	1.5	5
A138-500	500A	-	-	-	5	7.5
A138-600	600A	-	2.5	1	5	10
A138-630	630A	-	2.5	1	5	10
A138-750	750A	-	3.75	2.5	10	15
A138-800	800A	-	3.75	2.5	10	15
A138-1000	1000A	-	5	3.75	10	15
A138-1250	1250A	-	7.5	5	10	15
A138-1500	1500A	5	10	7.5	10	15
A138-1600	1600A	5	10	7.5	15	20
A138-2000	2000A	7.5	12.5	10	15	20

A1310H

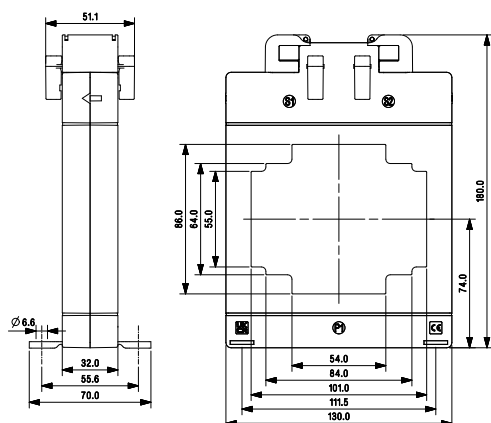

Code No.	Accuracy Class	0.2S	0.5S	0.2	0.5	1
	Primary Current	Max VA	Max VA	Max VA	Max VA	Max VA
A1310H-600	600A	-	-	-	5	10
A1310H-630	630A	-	-	-	5	10
A1310H-750	750A	-	-	-	5	10
A1310H-800	800A	-	-	-	7.5	10
A1310H-1000	1000A	-	2.5	1.5	10	15
A1310H-1250	1250A	-	3.75	2.5	15	15
A1310H-1500	1500A	1.25	5	3.75	15	15
A1310H-1600	1600A	1.75	5	5	15	15
A1310H-2000	2000A	5	6.25	5	15	20
A1310H-2400	2400A	5	6.25	5	15	20
A1310H-2500	2500A	6.25	7.5	6.25	15	20
A1310H-3000	3000A	7.5	10	10	15	20
A1310H-3200	3200A	7.5	10	10	20	20

A1310V

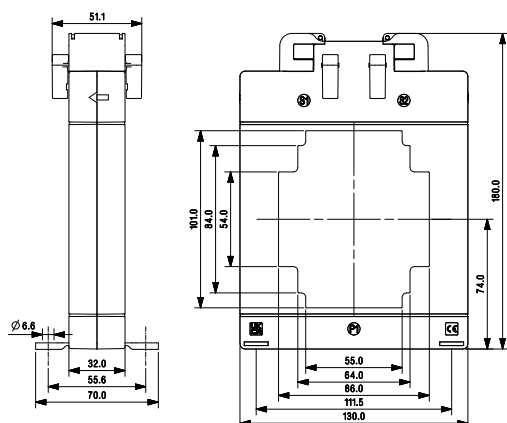

Code No.	Accuracy Class	0.2S	0.5S	0.2	0.5	1
	Primary Current	Max VA	Max VA	Max VA	Max VA	Max VA
A1310V-600	600A	-	-	-	5	10
A1310V-630	630A	-	-	-	5	10
A1310V-750	750A	-	-	-	5	10
A1310V-800	800A	-	-	-	7.5	10
A1310V-1000	1000A	-	2.5	1.5	10	15
A1310V-1250	1250A	-	3.75	2.5	15	15
A1310V-1500	1500A	1.25	5	3.75	15	15
A1310V-1600	1600A	1.75	5	5	15	15
A1310V-2000	2000A	5	6.25	5	15	20
A1310V-2400	2400A	5	6.25	5	15	20
A1310V-2500	2500A	6.25	7.5	6.25	15	20
A1310V-3000	3000A	7.5	10	10	15	20
A1310V-3200	3200A	7.5	10	10	20	20