# TestTool: trend logs

Reading a controller's trend logs from the test tool rather than from the T3000 screens, which is how a fault is confirmed against raw history.

T3 Controller Manual Data Logging Guide

Since the firmware does not support most of the functions on the menu, the T3000 software cannot automatically generate the Trendlog view like products such as the T3-BB. Our newly developed T3-3IIC supports this set of functions. In this case, I can only guide you on how to manually record data using the Test Tool.

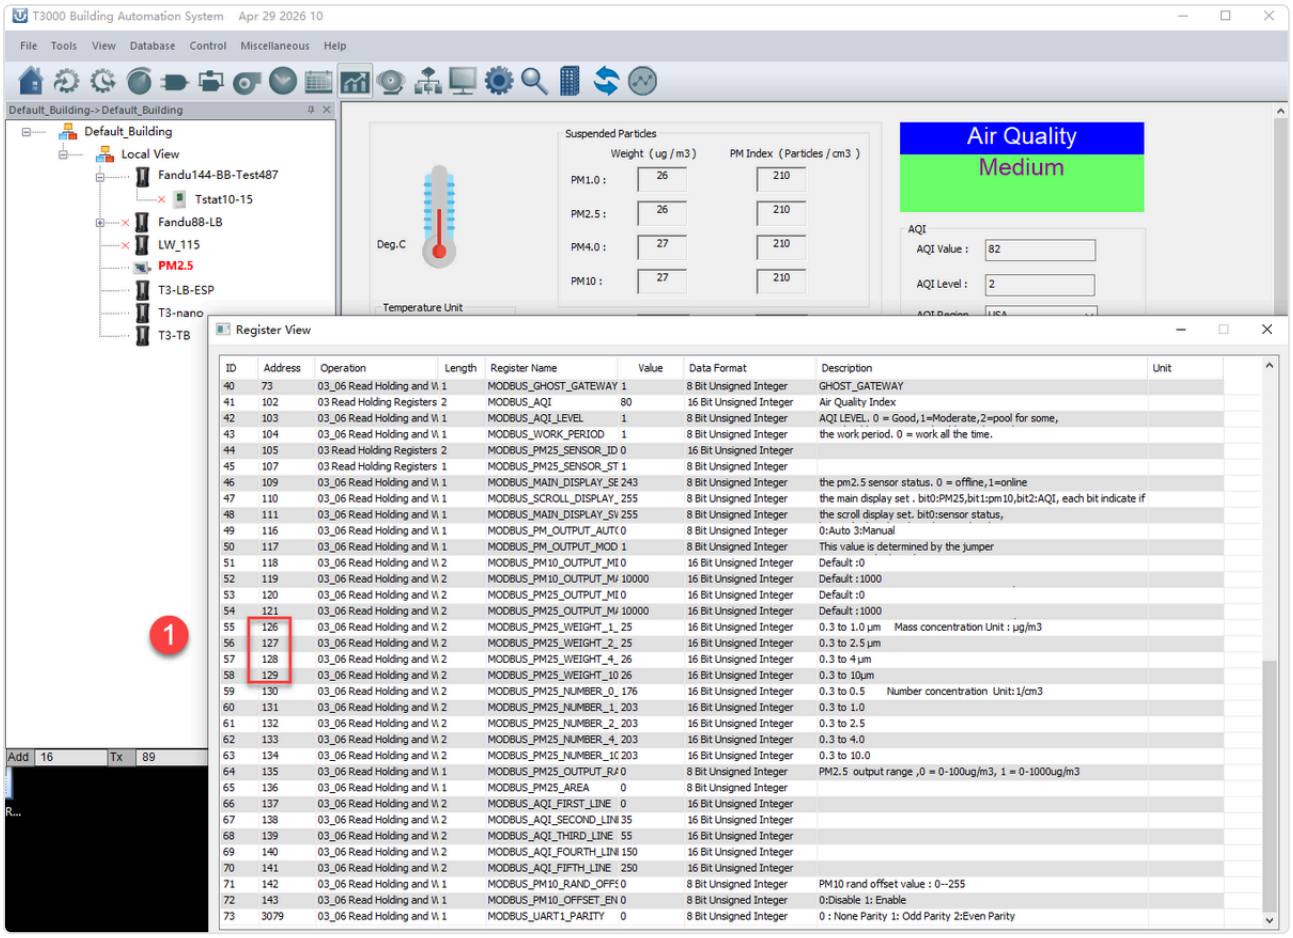
In Tab 1 of the Tool-Register viewer, confirm the registers you want to sample. For example, registers 126, 127, 128, and 129 correspond to PM2.5 values.

Open the TestTool located in the T3000 folder, then select 1.Register Monitor under Function.

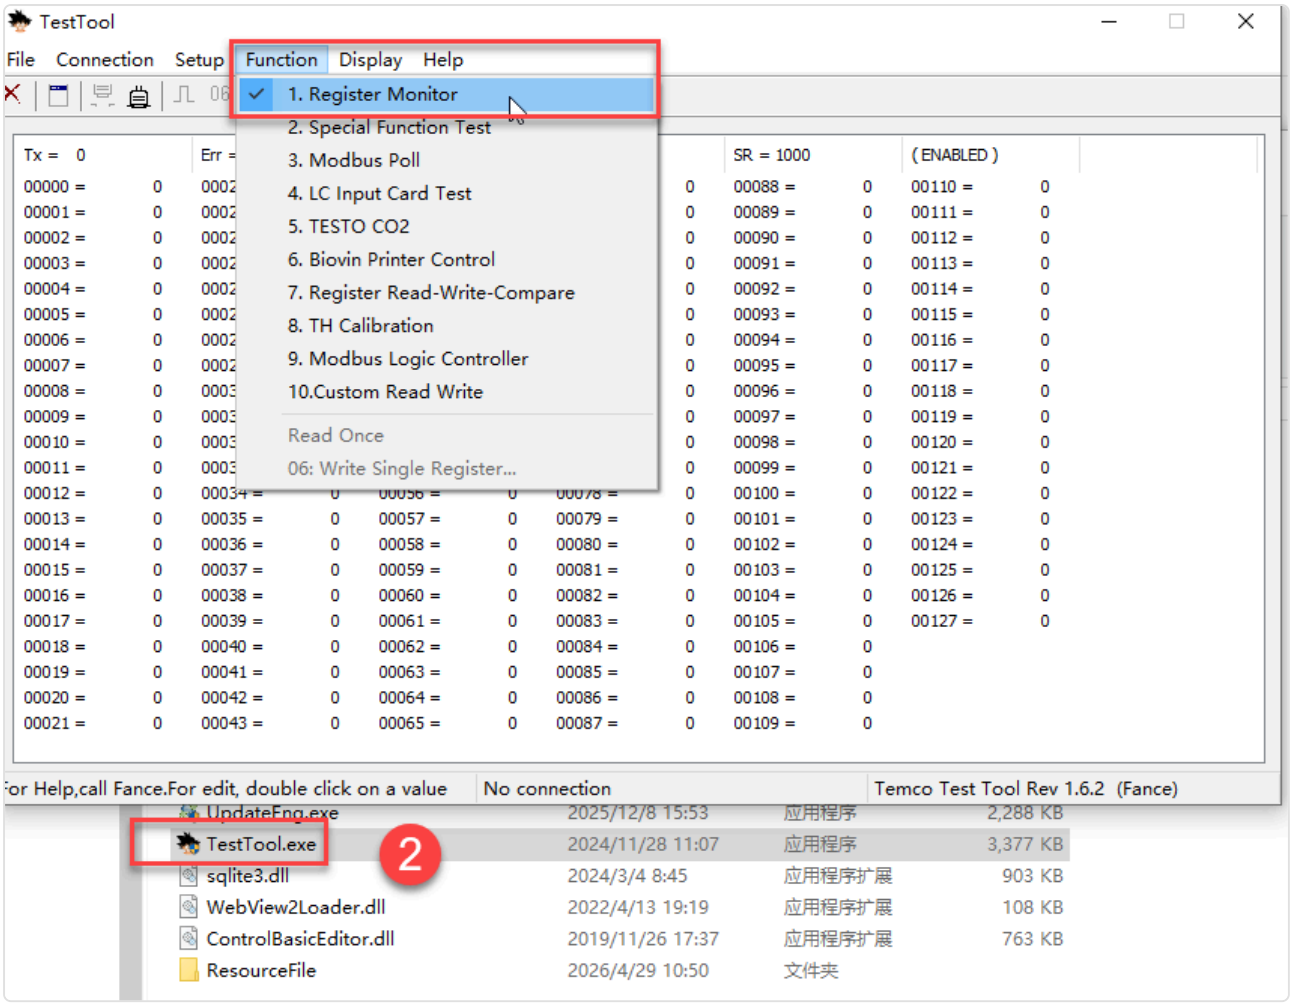
Select the device IP address or COM port in Connection.

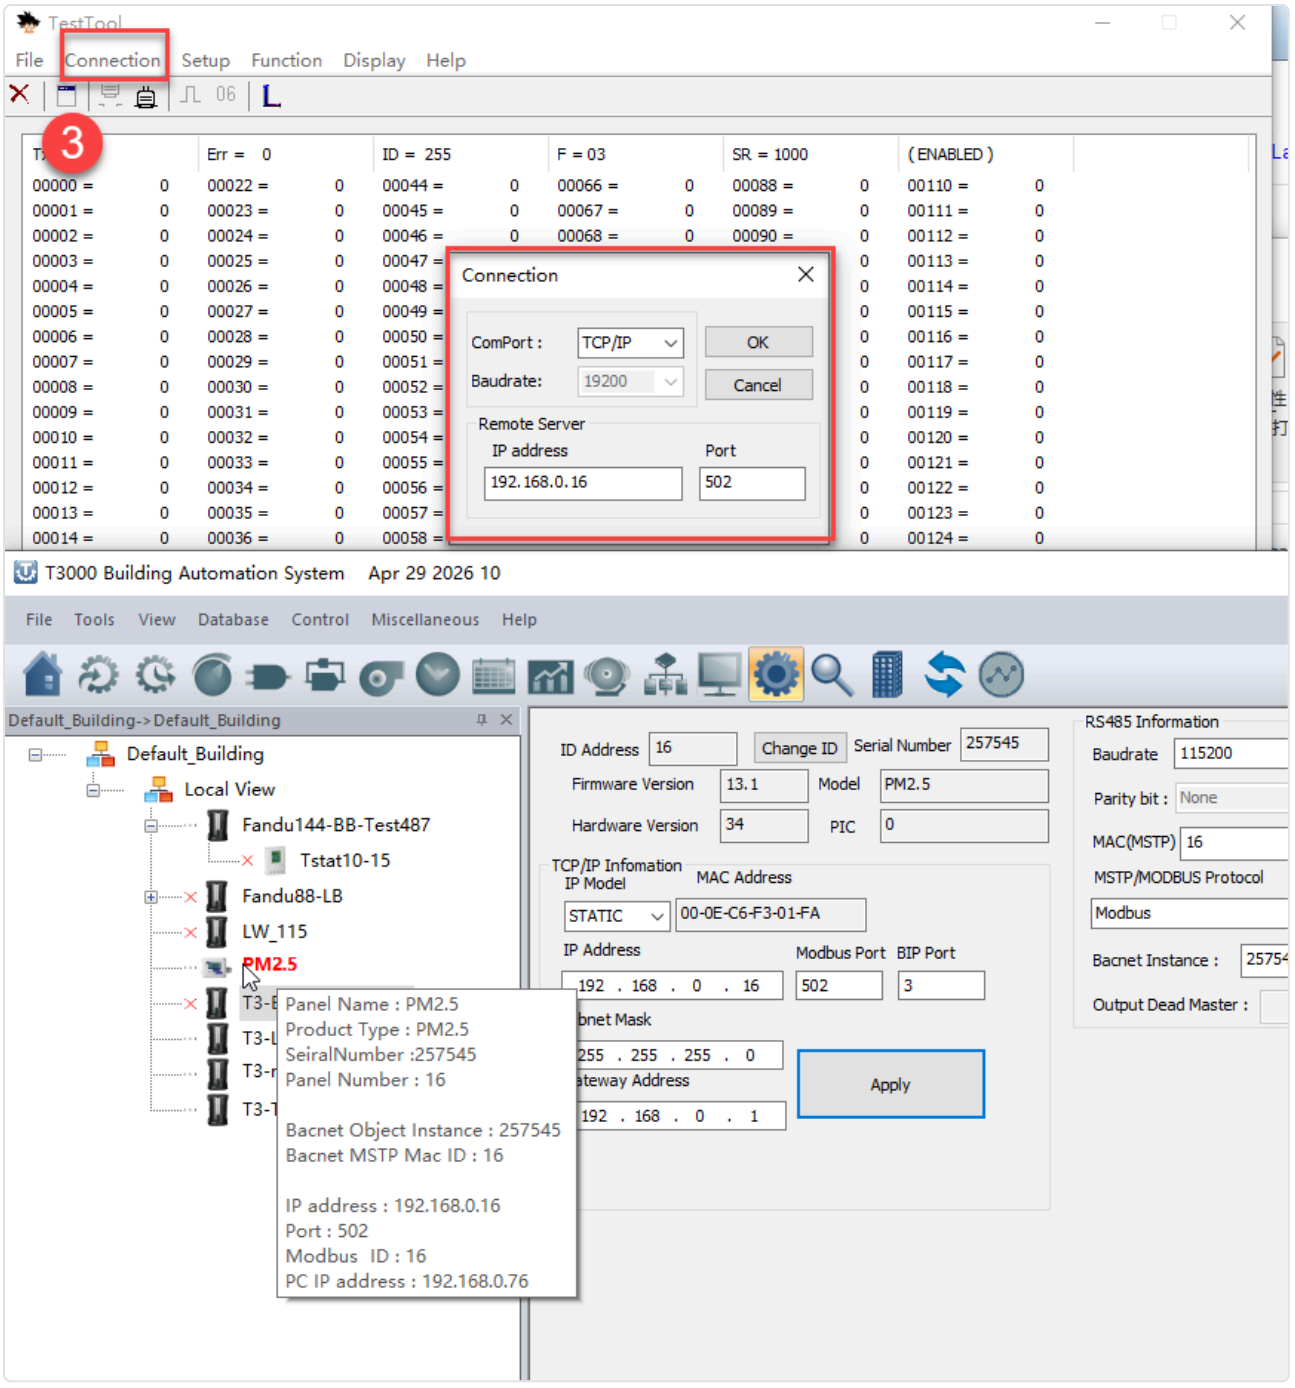
(Note: If using a COM port, please close the T3000 software first)

Enter the target registers and set the sampling interval time, then click the button to start sampling.

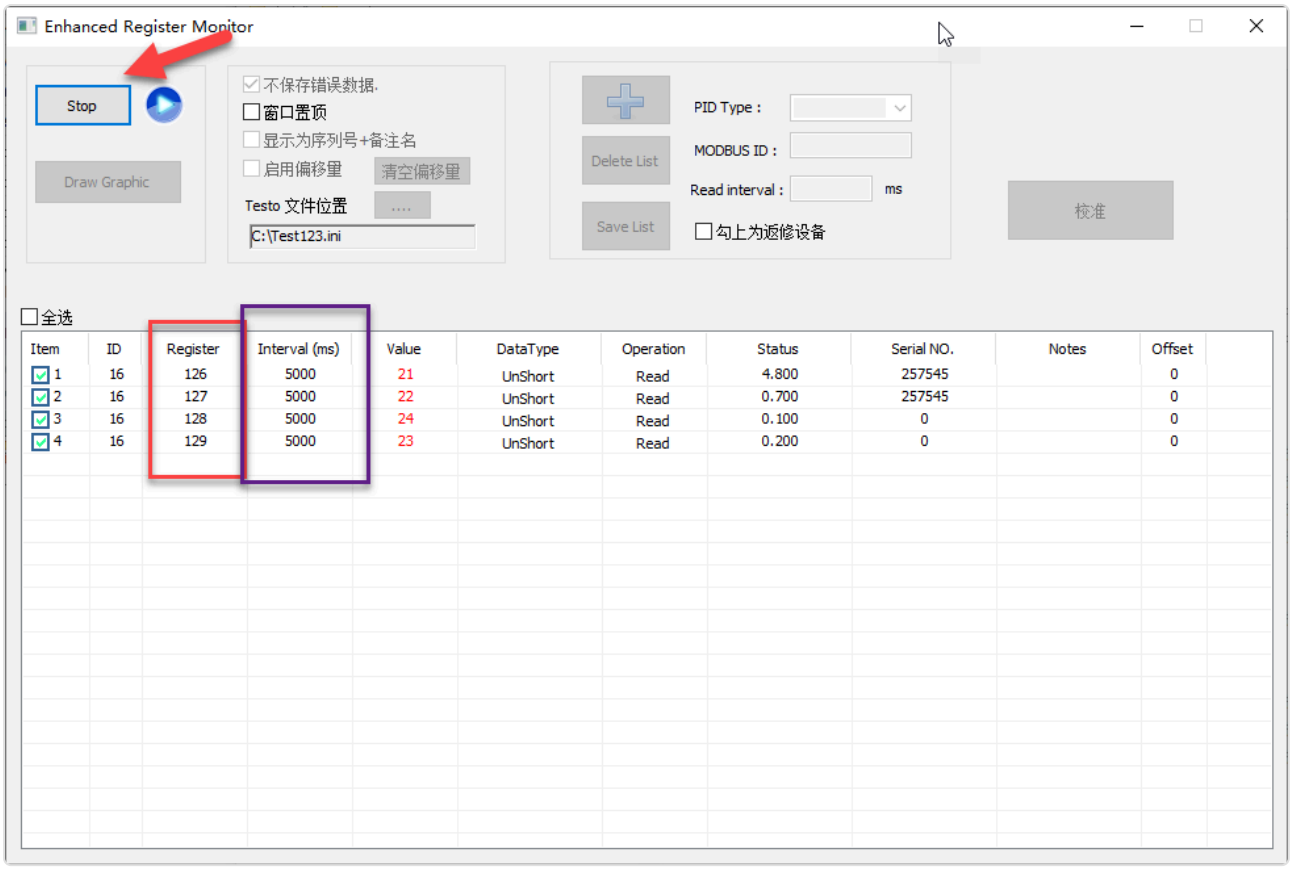


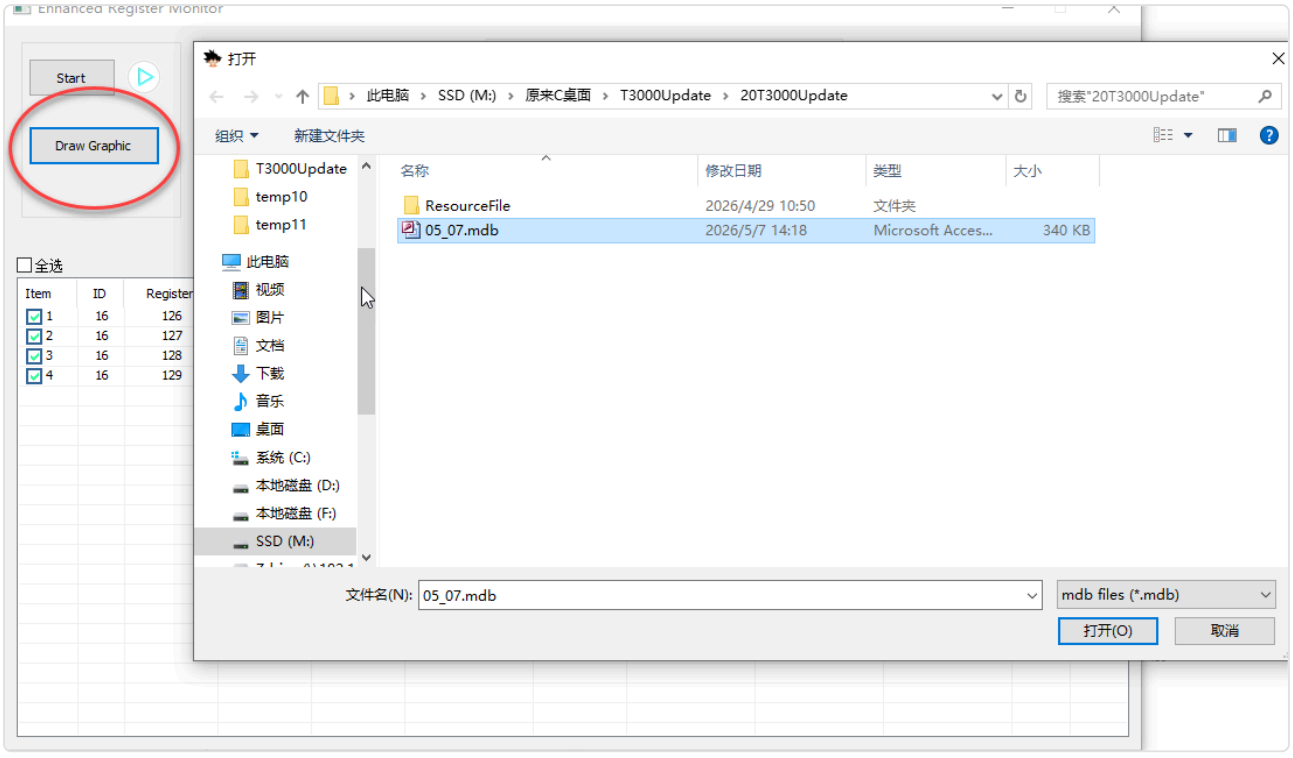

After finishing sampling, you can manually load the data to generate the view. You can also manually open the database file (Windows Office is required to open it normally).

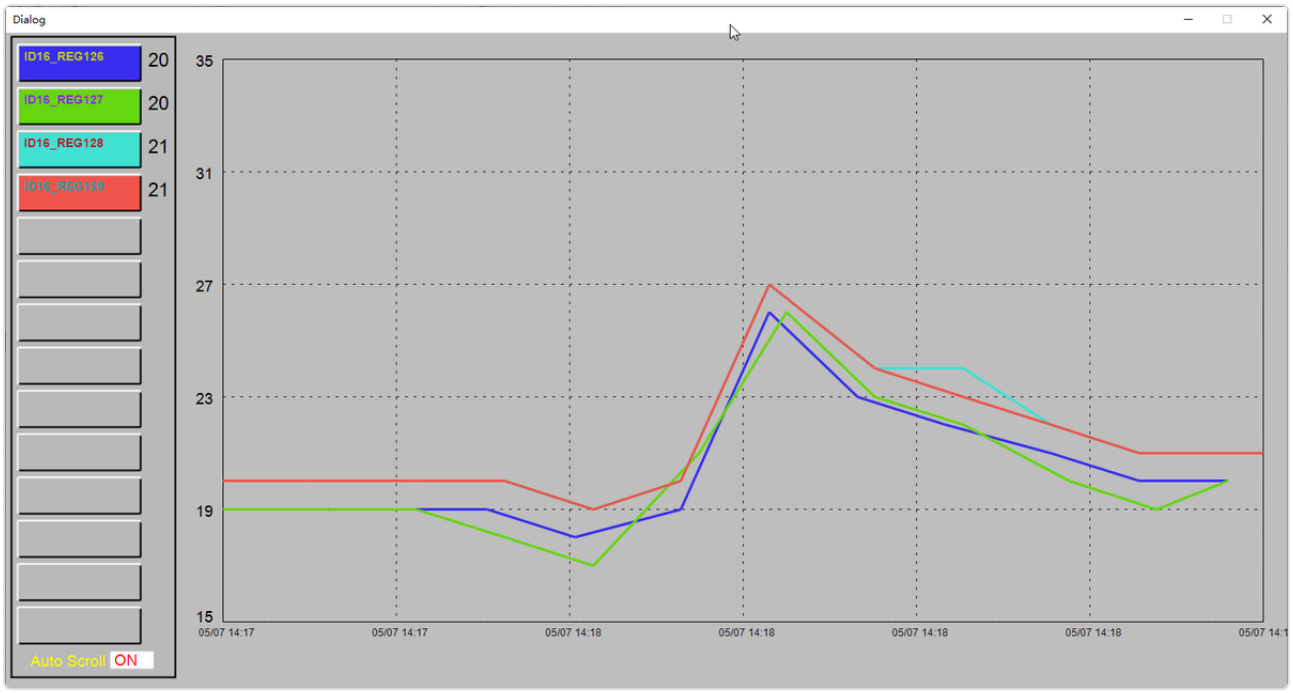

TestTool
File
Connection
Setup
Function
Display
Help
1. Register Monitor
2. Special Function Test
3. Modbus Poll
4. LC Input Card Test
5. TESTO CO2
6. Biovin Printer Control
7. Register Read-Write-Compare
8. TH Calibration
9. Modbus Logic Controller
10.Custom Read Write
Read Once
06: Write Single Register...
Tx = 0
SR = 1000
(ENABLED)
For Help,call Fance.For edit, double click on a value
No connection
Temco Test Tool Rev 1.6.2 (Fance)
UpdateEng.exe
2025/12/8 15:53
应用程序
2,288 KB
TestTool.exe
2024/11/28 11:07
应用程序
3,377 KB
2
sqlite3.dll
2024/3/4 8:45
应用程序扩展
903 KB
WebView2Loader.dll
2022/4/13 19:19
应用程序扩展
108 KB
ControlBasicEditor.dll
2019/11/26 17:37
应用程序扩展
763 KB
ResourceFile
2026/4/29 10:50
文件夹

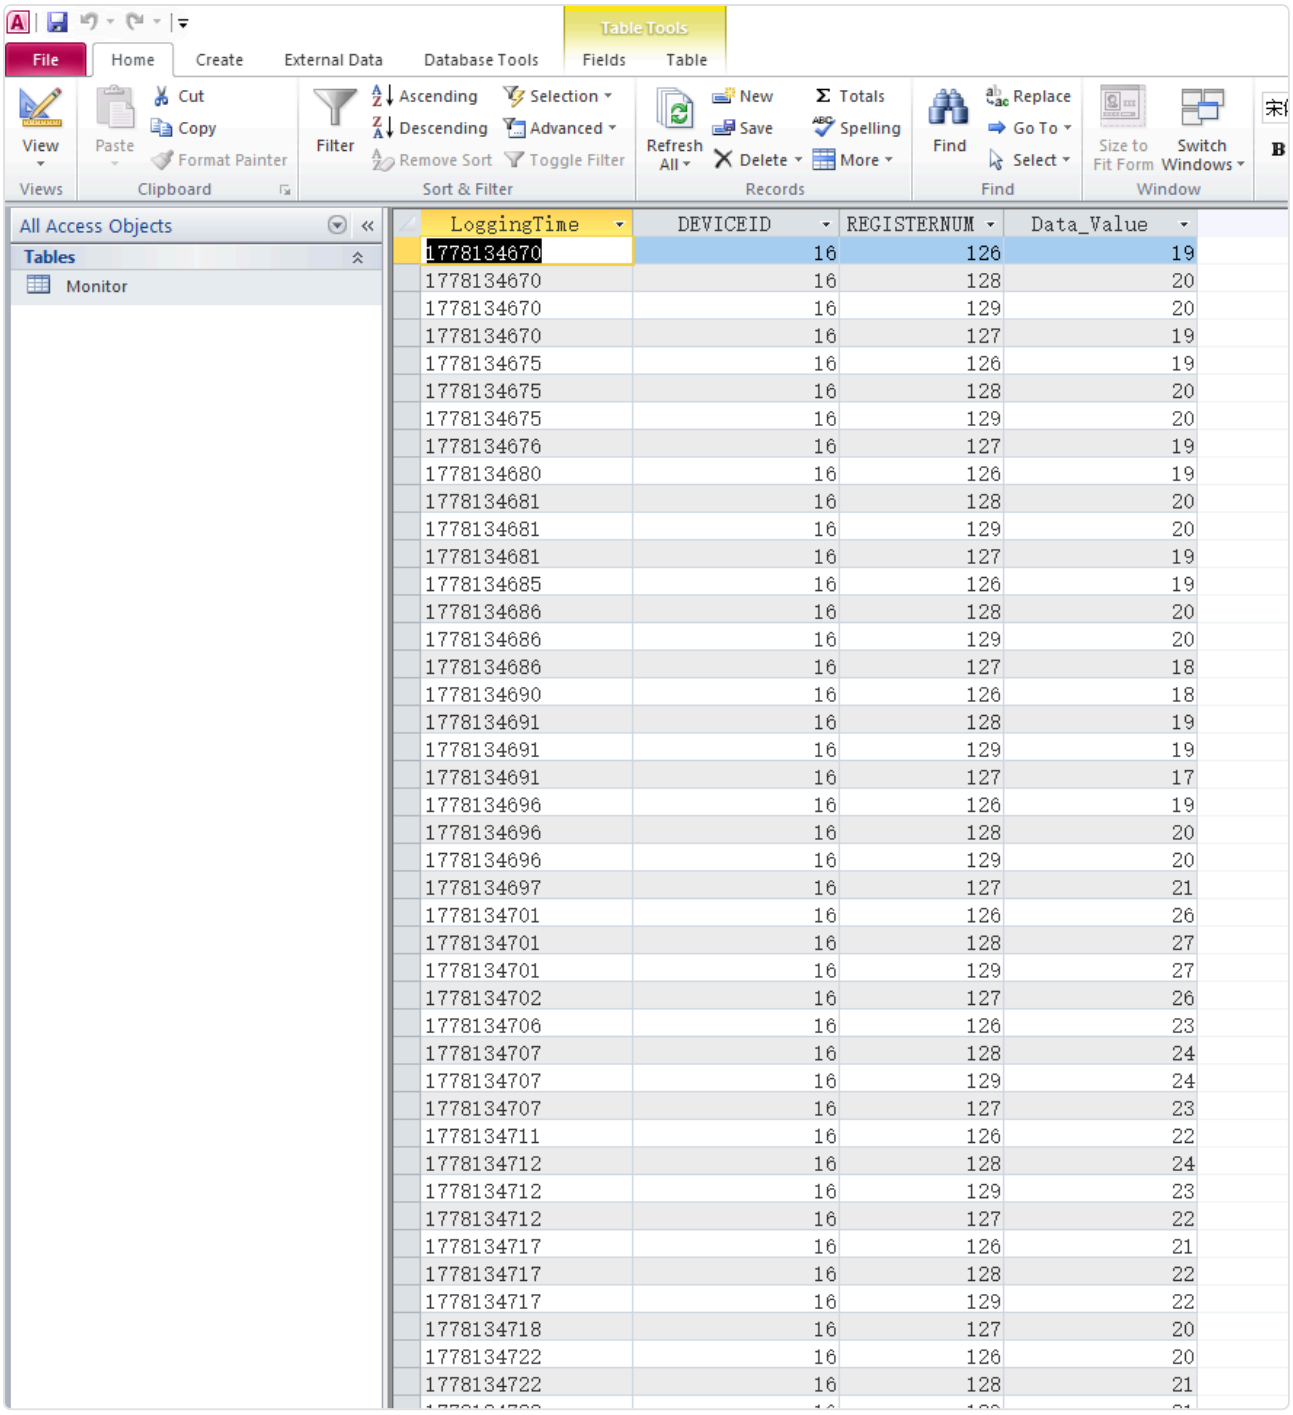

TestTool
File
Connection
Setup
Function
Display
Help
3
Connection
ComPort :
TCP/IP
Baudrate:
19200
OK
Cancel
Remote Server
IP address
192.168.0.16
Port
502


T3000 Building Automation System
Apr 29 2026 10
File
Tools
View
Database
Control
Miscellaneous
Help
Default_Building->Default_Building
Default_Building
Local View
Fandu144-BB-Test487
Tstat10-15
Fandu88-LB
LW_115
PM2.5
Panel Name : PM2.5
Product Type : PM2.5
SeiralNumber :257545
Panel Number : 16
Bacnet Object Instance : 257545
Bacnet MSTP Mac ID : 16
IP address : 192.168.0.16
Port : 502
Modbus ID : 16
PC IP address : 192.168.0.76
ID Address
16
Change ID
Serial Number
257545
Firmware Version
13.1
Model
PM2.5
Hardware Version
34
PIC
0
TCP/IP Infomation
IP Model
MAC Address
STATIC
00-0E-C6-F3-01-FA
IP Address
192 . 168 . 0 . 16
Modbus Port
502
BIP Port
3
255 . 255 . 255 . 0
192 . 168 . 0 . 1
Apply
RS485 Information
Baudrate
115200
Parity bit :
None
MAC(MSTP)
16
MSTP/MODBUS Protocol
Modbus
Bacnet Instance :
Output Dead Master :


Enhanced Register Monitor
Stop
Draw Graphic
不保存错误数据.
窗口置顶
显示为序列号+备注名
启用偏移量
清空偏移量
Testo 文件位置
....
C:\Test123.ini
Delete List
Save List
PID Type :
MODBUS ID :
Read interval :
ms
勾上为返修设备
校准
全选
Item ID Register Interval (ms) Value DataType Operation Status Serial NO. Notes Offset
1 16 126 5000 21 UnShort Read 4.800 257545 0
2 16 127 5000 22 UnShort Read 0.700 257545 0
3 16 128 5000 24 UnShort Read 0.100 0 0
4 16 129 5000 23 UnShort Read 0.200 0 0


Start
Draw Graphic
打开
此电脑 › SSD (M:) › 原来C桌面 › T3000Update › 20T3000Update
搜索"20T3000Update"
组织
新建文件夹
T3000Update
temp10
temp11
此电脑
视频
图片
文档
下载
音乐
桌面
系统 (C:)
本地磁盘 (D:)
本地磁盘 (F:)
SSD (M:)
名称 修改日期 类型 大小
ResourceFile 2026/4/29 10:50 文件夹
05_07.mdb 2026/5/7 14:18 Microsoft Acces... 340 KB
文件名(N): 05_07.mdb
mdb files (*.mdb)
打开(O)
取消


Dialog
ID16_REG126
20
ID16_REG127
20
ID16_REG128
21
ID16_REG129
21
Auto Scroll
ON
35
31
27
23
19
15
05/07 14:17
05/07 14:17
05/07 14:18
05/07 14:18
05/07 14:18
05/07 14:18




| LoggingTime | DEVICEID | REGISTERNUM | Data_Value |
|---|---|---|---|
| 1778134670 | 16 | 126 | 19 |
| 1778134670 | 16 | 128 | 20 |
| 1778134670 | 16 | 129 | 20 |
| 1778134670 | 16 | 127 | 19 |
| 1778134675 | 16 | 126 | 19 |
| 1778134675 | 16 | 128 | 20 |
| 1778134675 | 16 | 129 | 20 |
| 1778134676 | 16 | 127 | 19 |
| 1778134680 | 16 | 126 | 19 |
| 1778134681 | 16 | 128 | 20 |
| 1778134681 | 16 | 129 | 20 |
| 1778134681 | 16 | 127 | 19 |
| 1778134685 | 16 | 126 | 19 |
| 1778134686 | 16 | 128 | 20 |
| 1778134686 | 16 | 129 | 20 |
| 1778134686 | 16 | 127 | 18 |
| 1778134690 | 16 | 126 | 18 |
| 1778134691 | 16 | 128 | 19 |
| 1778134691 | 16 | 129 | 19 |
| 1778134691 | 16 | 127 | 17 |
| 1778134696 | 16 | 126 | 19 |
| 1778134696 | 16 | 128 | 20 |
| 1778134696 | 16 | 129 | 20 |
| 1778134697 | 16 | 127 | 21 |
| 1778134701 | 16 | 126 | 26 |
| 1778134701 | 16 | 128 | 27 |
| 1778134701 | 16 | 129 | 27 |
| 1778134702 | 16 | 127 | 26 |
| 1778134706 | 16 | 126 | 23 |
| 1778134707 | 16 | 128 | 24 |
| 1778134707 | 16 | 129 | 24 |
| 1778134707 | 16 | 127 | 23 |
| 1778134711 | 16 | 126 | 22 |
| 1778134712 | 16 | 128 | 24 |
| 1778134712 | 16 | 129 | 23 |
| 1778134712 | 16 | 127 | 22 |
| 1778134717 | 16 | 126 | 21 |
| 1778134717 | 16 | 128 | 22 |
| 1778134717 | 16 | 129 | 22 |
| 1778134718 | 16 | 127 | 20 |
| 1778134722 | 16 | 126 | 20 |
| 1778134722 | 16 | 128 | 21 |