

# FIRMWARE UPDATES: BATCH LOADING

1.You must find your devices by T3000 , using "Scan"



2 “Load firmware for many devices”

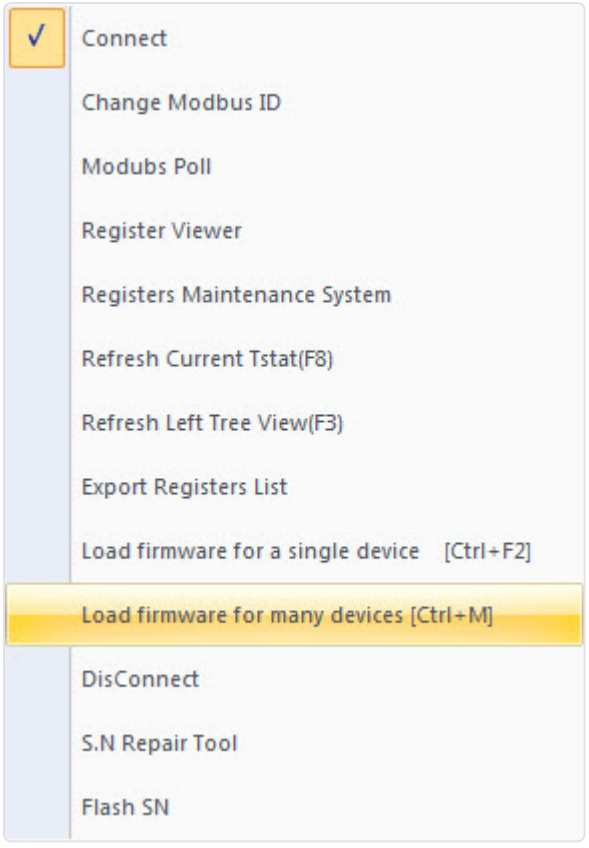

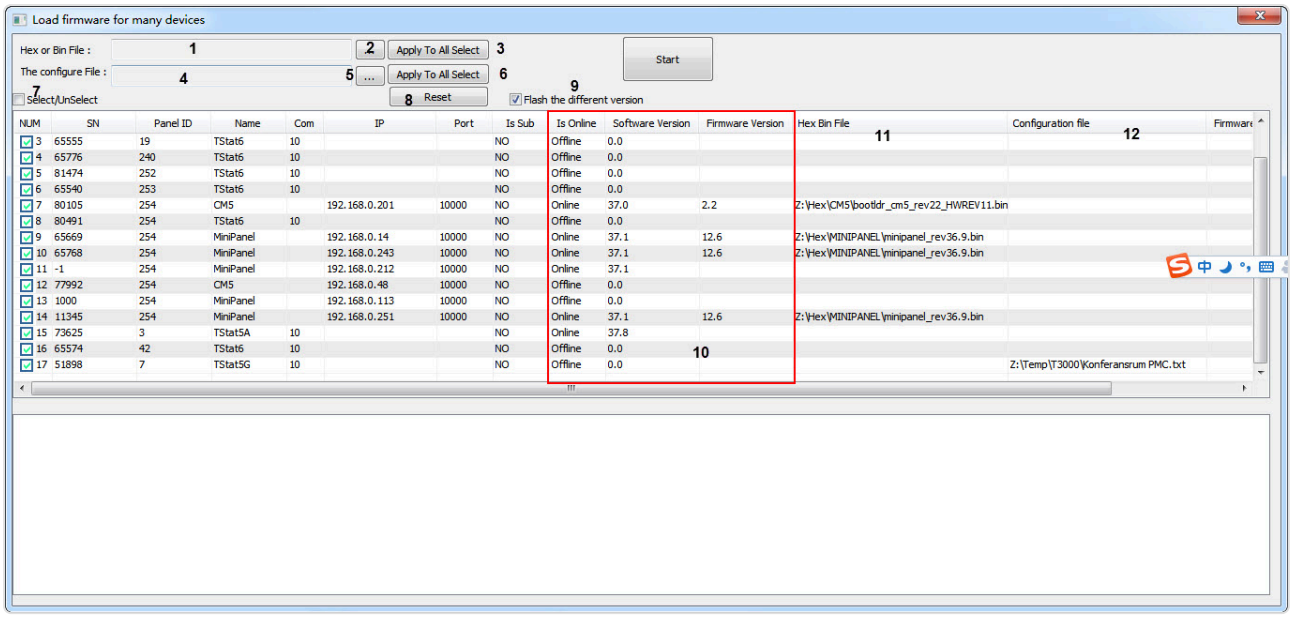


| | |
|---|---|
| 1 | show the path of a hex or bin file |
| 2 | click to select the path of a hex or bin file |
| 3 | "Apply To All Select" ,the path of the hex or bin(1) will automatically fill in the column of "Hex Bin File" , matching with the column of "Name" |
| 4 | show the path of a configuration file |
| 5 | click to select the path of a configuration file |
| 6 | "Apply To All Select" ,the path of the configuration file (4) will automatically fill in the column of "Configuration File" , matching with the column of "Name" |
| 7 | Select/Unselect |
| 8 | Reset ,to clear the column of "Hex Bin File" and the column of "Configuration File" |
| 9 | if selected ,T3000 will compare the "Software Version" with "Firmware Version", Only if the Firmware Version is the latest, T3000 will update . |
| 10 | When you show the window, the tree column will show the values ,automatically. |
| 11 | show the path of a hex or bin matching with the device. clicking the blank to select the file ,the file will be checked whether the file is fit the product or not . |
| 12 | show the path of a configuration file matching with the device. clicking the blank to select the file ,the file will be checked whether the file is fit the product or not . |