

FIRMWARE UPDATES: BATCH LOADING

1.You must find your devices by T3000 , using "Scan"



2 “Load firmware for many devices”

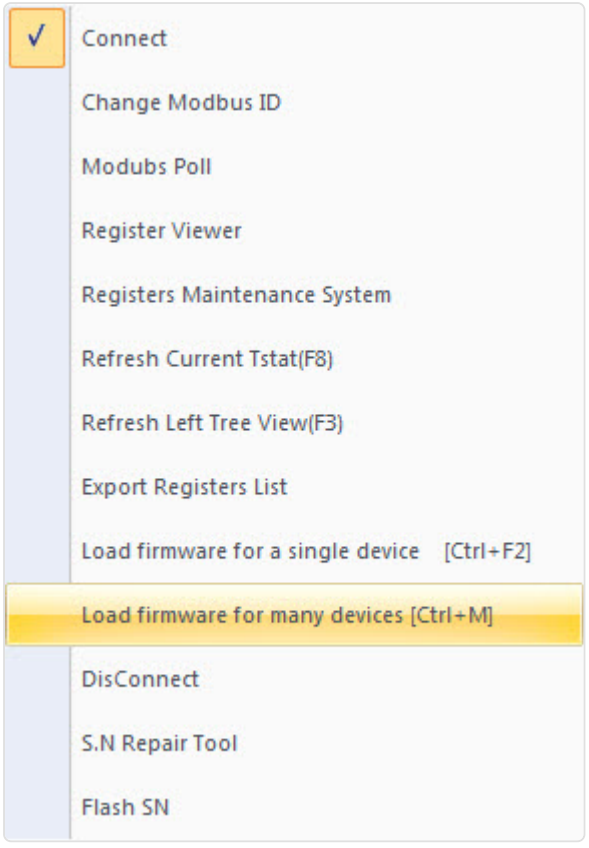

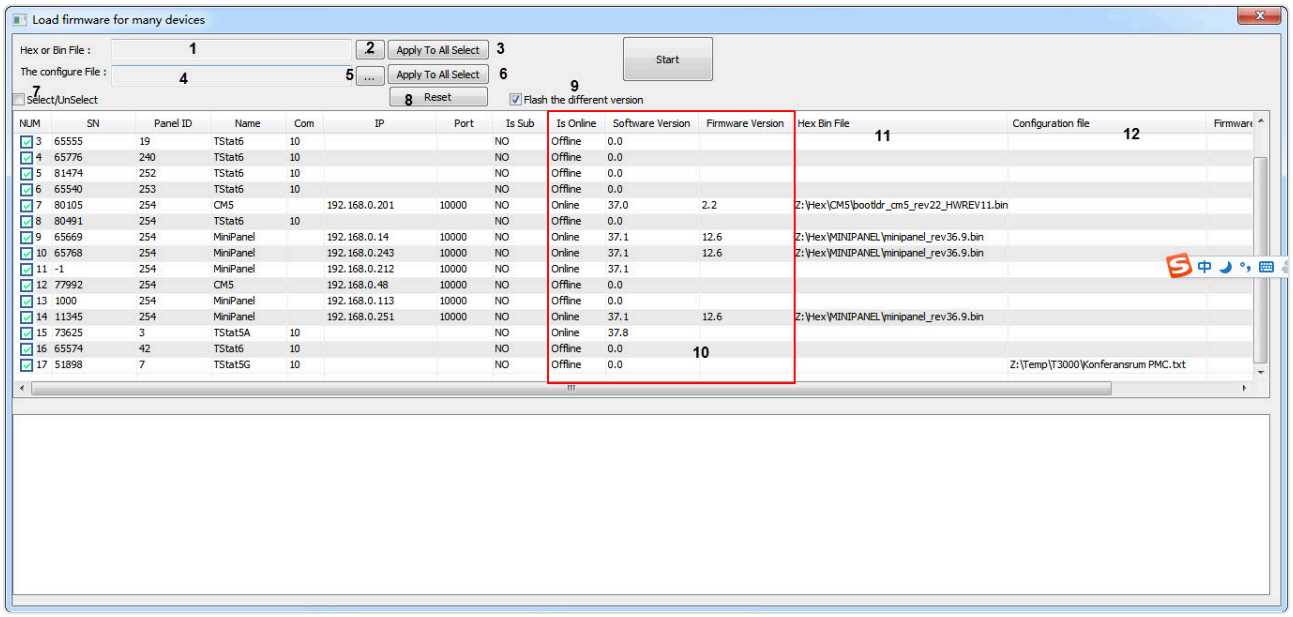

1	show the path of a hex or bin file
2	click to select the path of a hex or bin file
3	"Apply To All Select" ,the path of the hex or bin(1) will automatically fill in the column of "Hex Bin File" , matching with the column of "Name"
4	show the path of a configuration file
5	click to select the path of a configuration file
6	"Apply To All Select" ,the path of the configuration file (4) will automatically fill in the column of "Configuration File" , matching with the column of "Name"
7	Select/Unselect
8	Reset ,to clear the column of "Hex Bin File" and the column of "Configuration File"
9	if selected ,T3000 will compare the "Software Version" with "Firmware Version", Only if the Firmware Version is the latest, T3000 will update .
10	When you show the window, the tree column will show the values ,automatically.
11	show the path of a hex or bin matching with the device. clicking the blank to select the file ,the file will be checked whether the file is fit the product or not .
12	show the path of a configuration file matching with the device. clicking the blank to select the file ,the file will be checked whether the file is fit the product or not .