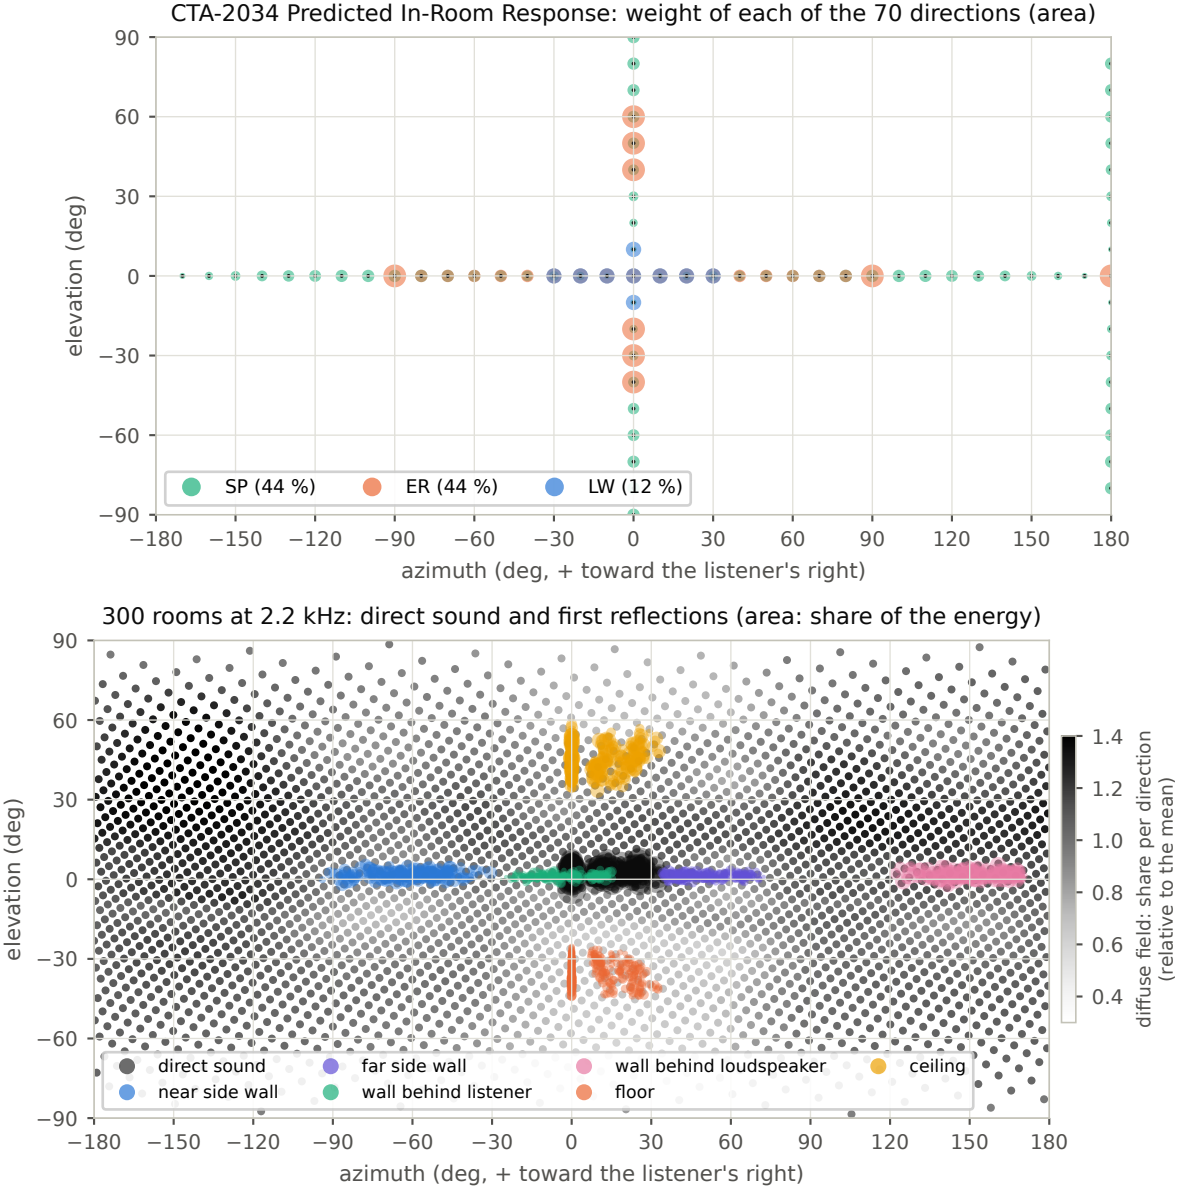

CTA-2034 Predicted In-Room Response: weight of each of the 70 directions (area)
elevation (deg)
azimuth (deg, + toward the listener's right)
SP (44 %)
ER (44 %)
LW (12 %)
300 rooms at 2.2 kHz: direct sound and first reflections (area: share of the energy)
elevation (deg)
azimuth (deg, + toward the listener's right)
direct sound
near side wall
far side wall
wall behind listener
wall behind loudspeaker
floor
ceiling
diffuse field: share per direction (relative to the mean)