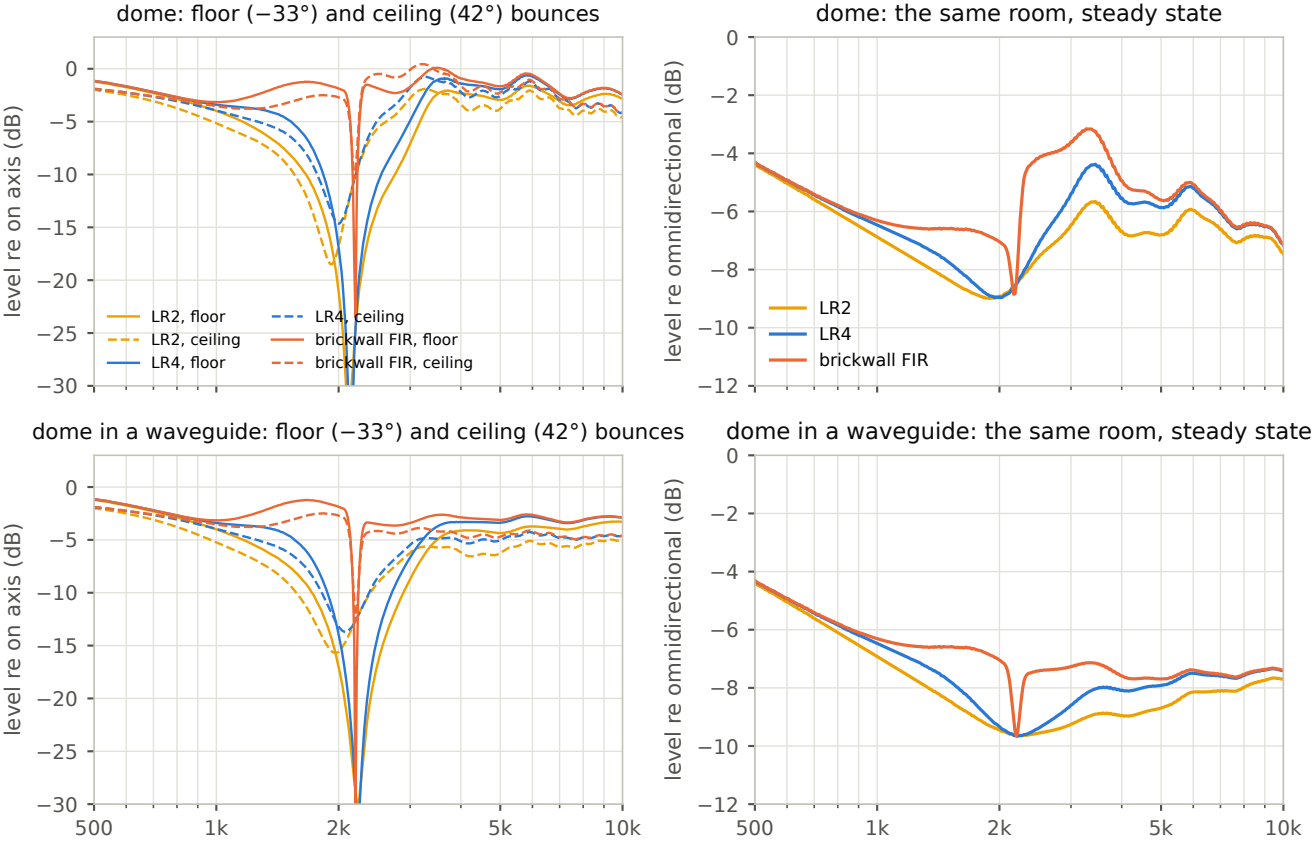
dome: floor (−33°) and ceiling (42°) bounces
level re on axis (dB)
0
−5
−10
−15
−20
−25
−30
LR2, floor
LR2, ceiling
LR4, floor
LR4, ceiling
brickwall FIR, floor
brickwall FIR, ceiling
dome: the same room, steady state
level re omnidirectional (dB)
0
−2
−4
−6
−8
−10
−12
LR2
LR4
brickwall FIR
dome in a waveguide: floor (−33°) and ceiling (42°) bounces
level re on axis (dB)
0
−5
−10
−15
−20
−25
−30
500
1k
2k
5k
10k
dome in a waveguide: the same room, steady state
level re omnidirectional (dB)
0
−2
−4
−6
−8
−10
−12
500
1k
2k
5k
10k