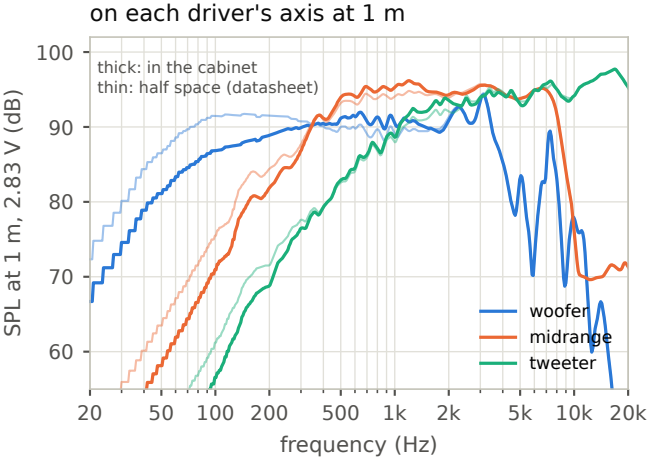
on each driver's axis at 1 m
thick: in the cabinet
thin: half space (datasheet)
SPL at 1 m, 2.83 V (dB)
frequency (Hz)
woofer
midrange
tweeter
100
90
80
70
60
20
50
100
200
500
1k
2k
5k
10k
20k

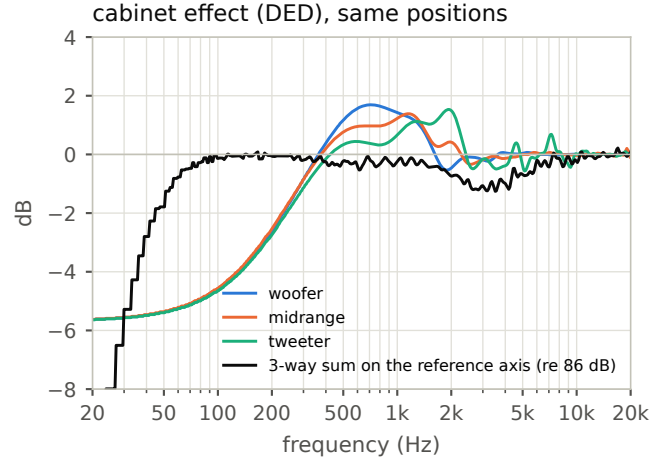
cabinet effect (DED), same positions
dB
frequency (Hz)
woofer
midrange
tweeter
3-way sum on the reference axis (re 86 dB)
4
2
0
−2
−4
−6
−8
20
50
100
200
500
1k
2k
5k
10k
20k