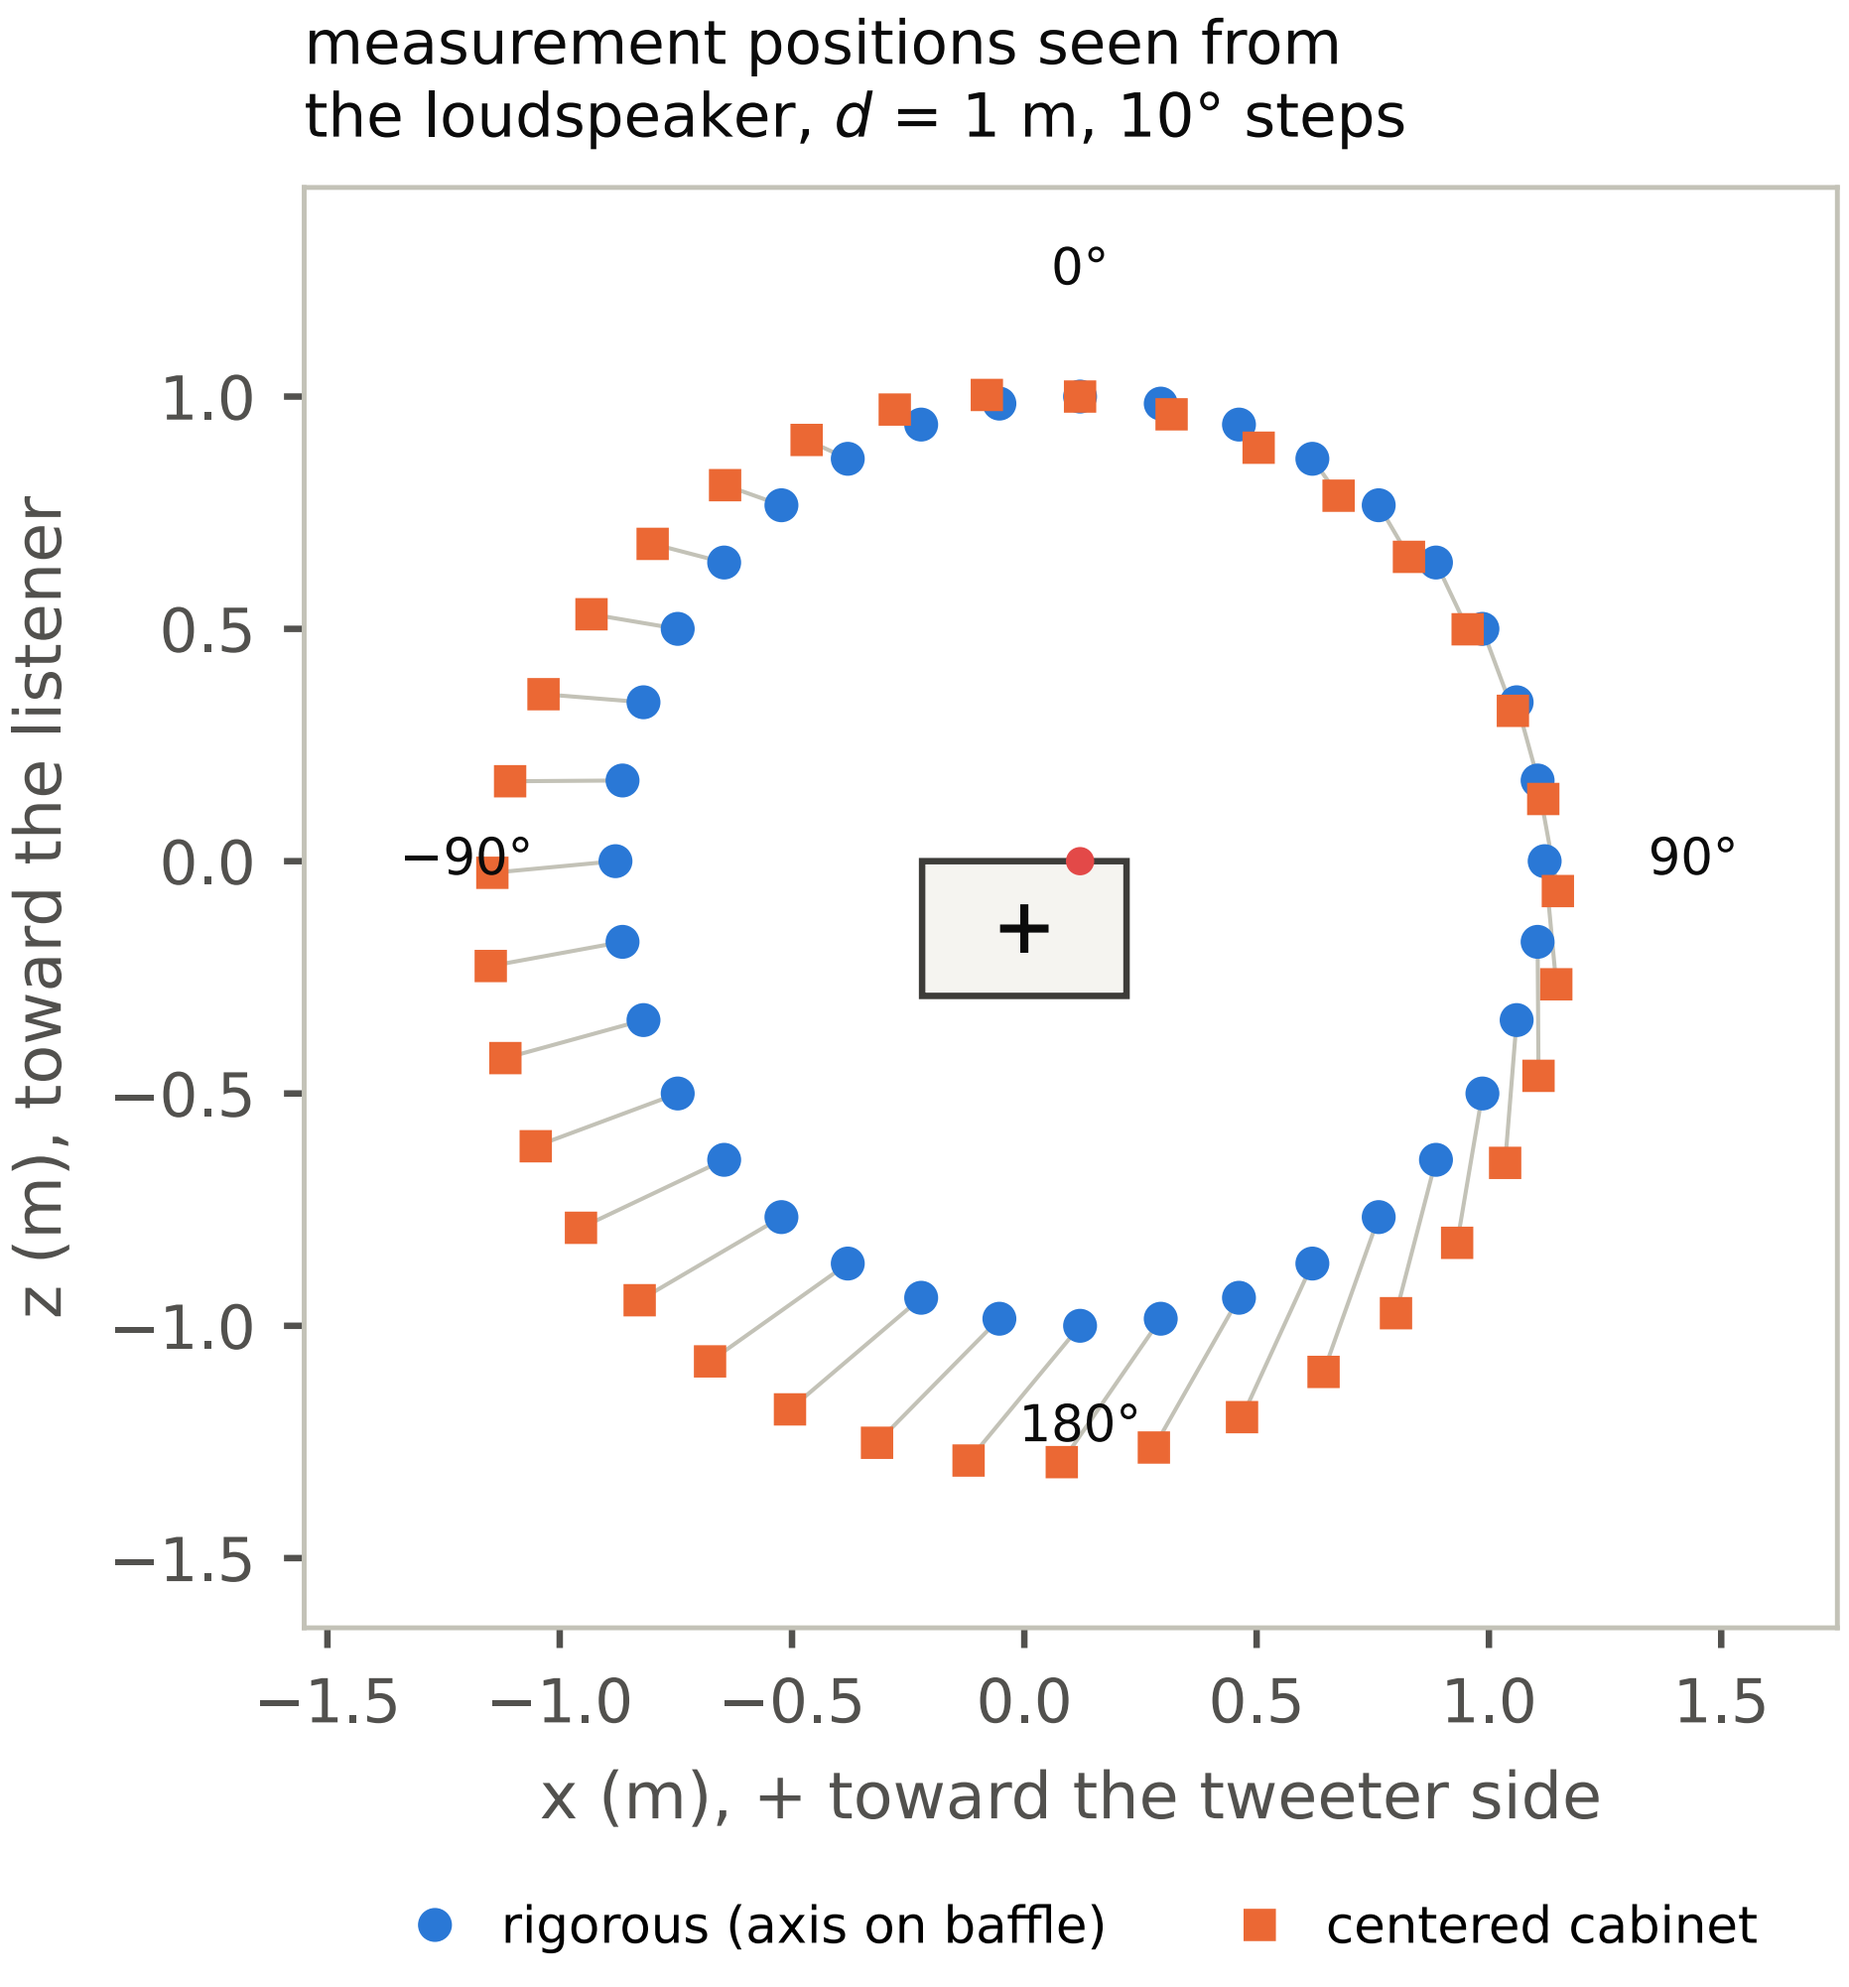
measurement positions seen from
the loudspeaker, d = 1 m, 10° steps
0°
90°
−90°
180°
1.0
0.5
0.0
−0.5
−1.0
−1.5
z (m), toward the listener
−1.5
−1.0
−0.5
0.0
0.5
1.0
1.5
x (m), + toward the tweeter side
rigorous (axis on baffle)
centered cabinet