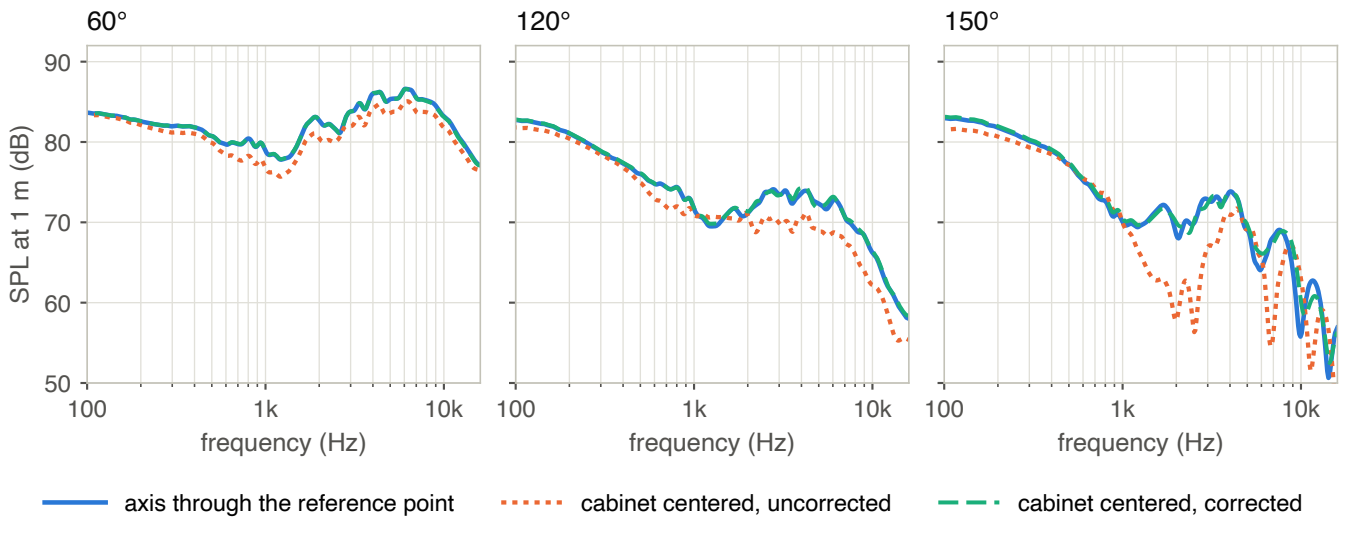
60°
120°
150°
SPL at 1 m (dB)
90
80
70
60
50
100
1k
10k
frequency (Hz)
axis through the reference point
cabinet centered, uncorrected
cabinet centered, corrected