
CLEANING AND OILING

CLEANING MATERIALS:



1. Long handled Brush.
2. Type Cleaning Brush.
3. Wire Brush.
4. Oil Can
5. Touch Oiler
6. Petrol or spirit
7. Hat Pin or sharp pin
8. Duster Cloth
9. Chamois Leather or Polishing Cloth



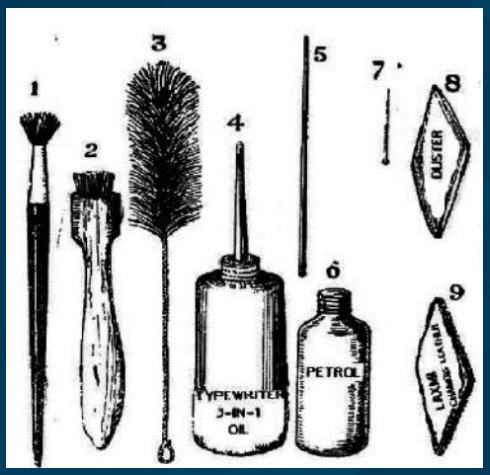

1. Long Handled Brush is used to clean the outer parts (External Parts)of the typewriter.
   (e.g. Carriage, Type bars, type segment and etc.)

2. Type Cleaning Brush is also known as Hard Brush. It is used to clean the type faces by dipping with petrol.

3. Wire Brush is used to clean the inner parts (Interior parts) such as key leavers.

4. Oil can is used for oiling the outer parts. Only Typewriter Oil or three-in-one oil is used for oiling the Typewriter.

5. Touch Oiler is used for oiling the interior parts (the frictional parts)- (like Ribbon gears, pinion wheel, escapement wheel, dogs and etc.)

6. Petrol or Spirit is used for cleaning the rubber parts (Cylinder, feed rolls, type faces, type segment and etc.)

7. Hat Pin or Sharp Pin is used to clean the dirt and dust which is filled in the slots (letters like a,e,o,u,d,g,r,q, and etc.)

8. Duster Cloth is used for cleaning the base board, metal cover and for wiping-out the excess of oil in the carriage way rods.

9. Chamois Leather or Polishing cloth is used to clean the nickel parts.

Type basket
↓
Type bar
Type bar cushion
Segment
Type guide

CARE TAKING OF TYPEWRITER:

1. Should clean the typewriter daily.
2. Should clean the typeface/typehead fortnightly.
3. Should oil the typewriter monthly.
4. Overhauling Should be done once in a year.
5. Rubber parts, type faces should be cleaned with petrol.

UPKEEP AND MAINTENANCE:

1. Typewriter must be closed or covered when it is not in use.
2. It should be handled very carefully.
3. Hard touch must be avoided and light touch should be given

CARE SHOULD BE GIVEN WHILE PACKING:

1. Bring the carriage to the centre.
2. Two marginal stops should be brought to the centre (Close together)
3. Space bar must be tied with frame.
4. Shift Lock should be pressed
5. Cover the machine with metal cover or by good cloth

ALIGNMENT: Forming of letters in a regular line with even space between them is called alignment.

CAUSES FOR BAD ALIGNMENT:

1. Improper use of shift Key.
2. Bend in the type bar.
3. Defective type guide
4. Uneven Touch.

RECTIFICATIONS:

1. The shift Key should be operated properly.
2. The bend in the type bar should removed.
3. The type faces should be properly soldered.

JERKY MOVEMENT OF THE CARRIAGE:

1. No oil in the way rod channel.
2. Worn-out teeth of the escapement wheel.
3. Over tension of the Mainspring.

RECTIFICATIONS:

1. Applying fresh oil
2. Reducing the main spring tension
3. Replacing the worn-out parts with new ones.

SLUGGISH MOVEMENT:

1. Low Tension of the Mainspring.
2. Oil clogs in the way rod channels.
3. Low tension of the Loose dog spring.

RECTIFICATIONS:


1. Excess oil in the way mad should be wiped out.
2. The tension of the Mainspring should be increased.

IRREGULAR LINE SPACING:

1. Worn out tooth of ratchet wheel.
2. Insertion of too many sheets with carbon.


RECTIFICATIONS:

1. Ratchet wheel should replace
2. Only limited number of papers should be inserted
3. Paper release Lever should be placed at original position.

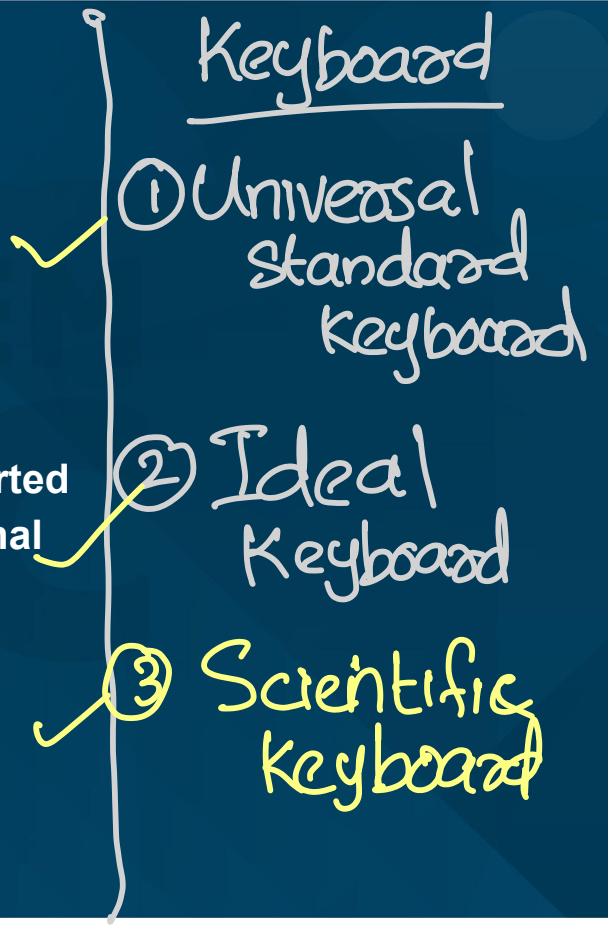

SUDDEN STOPPAGE OF CARRIAGE WHILE TYPING:

1. Sudden decrease in the tension of Mainspring
2. The draw card is torn out.
3. Detective lengthwise movement of ribbon.

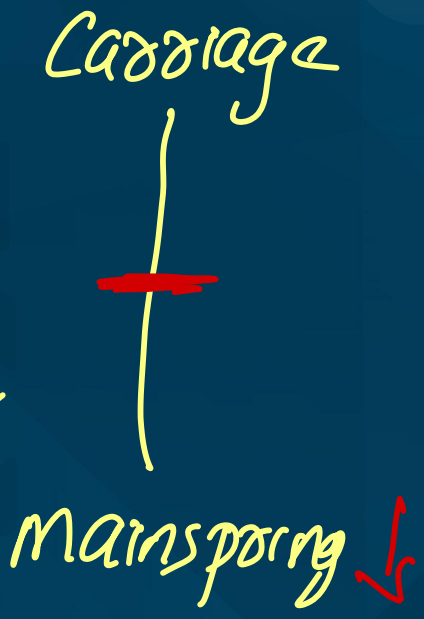

RECTIFICATIONS:

1. The mainspring tension should be increased.
2. The draw card should be replaced with a new one.
3. The ribbon should to fixed.

DUPLICATOR AND ITS MECHANISM

HISTORY OF DUPLICATOR

- The duplicating Machine was first invented by James Watt in 1780.
- Duplicator is otherwise called 'Multi Copier'
- stencil duplicating means taking a large number of copies.

① Hard cylinder
② Medium
③ Soft

1000 Copies (PYQ)

STENCIL PAPER

- The special paper on which we cut matter to be multi Copies is called the 'Stencil Paper'.
- There are two kinds of "Stencil Paper"

(1) Wax
(2) Waxless

- WAX: It is used for writing purposes and Drawing Sketches.
- WAXLESS: It is used for typing purposes only.
- The two popular duplicators are (1) Gestetner (2) R.R.R

cylinder
↓
Hardened India Rubber/
Medium Hardened rubber

ADVANTAGES

1. Hundreds of copies can be prepared.
2. Much time and energy is saved.
3. All the copies appear like original.

Q) ____ is used to type on ruled paper
a) Tabulator
b) Paper release lever
c) Paper guide
d) Variable line spacer


chemical equations, Mathematical equation

HOW TO CUT STENCIL


- Before cutting stencil the types should be cleaned Thoroughly using petrol.
- Before cutting stencil bring the colour indicator to the WHITEDOT.
- Adjust the stencil as per the scale marked in the stencil.
- Type with a firm and steady touch slightly heavier.
- Enclosed characters should not be struck too hard.
- When cutting is complete, remove the Stencil Paper using paper releaser.

There are three ways of making correction in the Stencil Paper

(1) Using Correcting fluid
(2) Using Gum Strip
(3) Grafting.

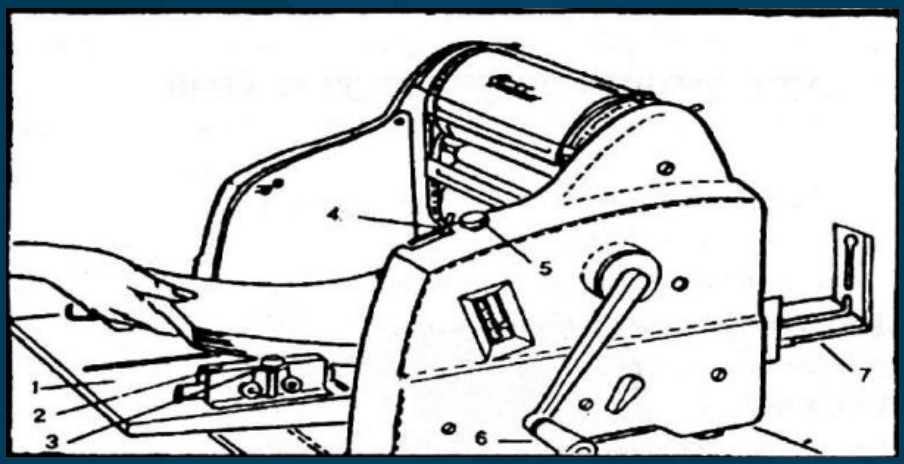

1. Paper Tray
2. Paper Side Guide
3. Adjustable Knob
4. Operating Lever
5. Printing Screw (Up&Down)
6. Handle
7. Paper Receiving Tray

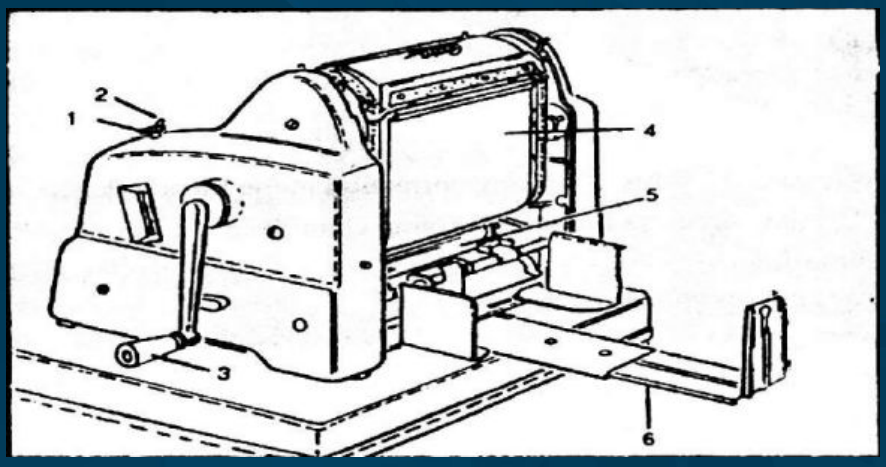

1. Printing Screw (Up & Down)
2. Operating Lever
3. Handle
4. Silk Carrier
5. Impression Roller
6. Receiving Tray

IMPORTANT PARTS OF DUPLICATOR:

1. FEEDING TRAY
2. RECEIVING TRAY
3. OPERATING LEVER
   OFF/ON LEAVER
4. HANDLE
5. SILK CLOTH
6. IMPRESSION ROLLER
7. BACKING SHEET LEVER.
8. CYLINDRICAL DRUM
9. MARGIN ADJUSTING KNOBS
10. SIDE MARGIN PLATE
11. PRINTING SCREW
12. WAVE ROLLER.

FEEDING TRAY : Feed Tray is also called as Paper Table. It is used to keep impression papers to fed into the duplicator one by one.

RECEIVING TRAY: It is at the back of the duplicator. To receive the Roneoed copies at the Receiving tray.

HANDLE: Handle is used for rotating the cylinders. It is always rotated in the clockwise direction. (Right side)

OPERATING LEVER OFF / ON LEVER : Operating lever is otherwise called Impression lever or Off / On lever or Pressure lever. The Operating lever should be kept in the 'ON position when copies are taken. But the operating lever should be kept in the 'OFF' Position when the duplicator is not in use
(Copies cannot be taken).

SILK CLOTH OR SILK CARRIER: On which the typed stencil sheet is fixed and through which ink is supplied to the stencil sheet. It is fixed on the cylinder Drum.

FEED ROLLER: It is used to feed the paper one by one to receive impression on the paper.

IMPRESSION ROLLER: A Rubber Roller just placed under the cylinder Drum to feed the impression paper for taking copies.

MARGIN ADJUSTING KNOBS: To adjust the Marginal Side Plates for getting Left and Right margins on the Impression paper.

CYLINDRICAL DRUM: To fix the /silk /cloth sheet and to hold the typed stencil sheet over them.

PRINTING SCREW: The printing screw helps to ;adjust top and bottom margin.