




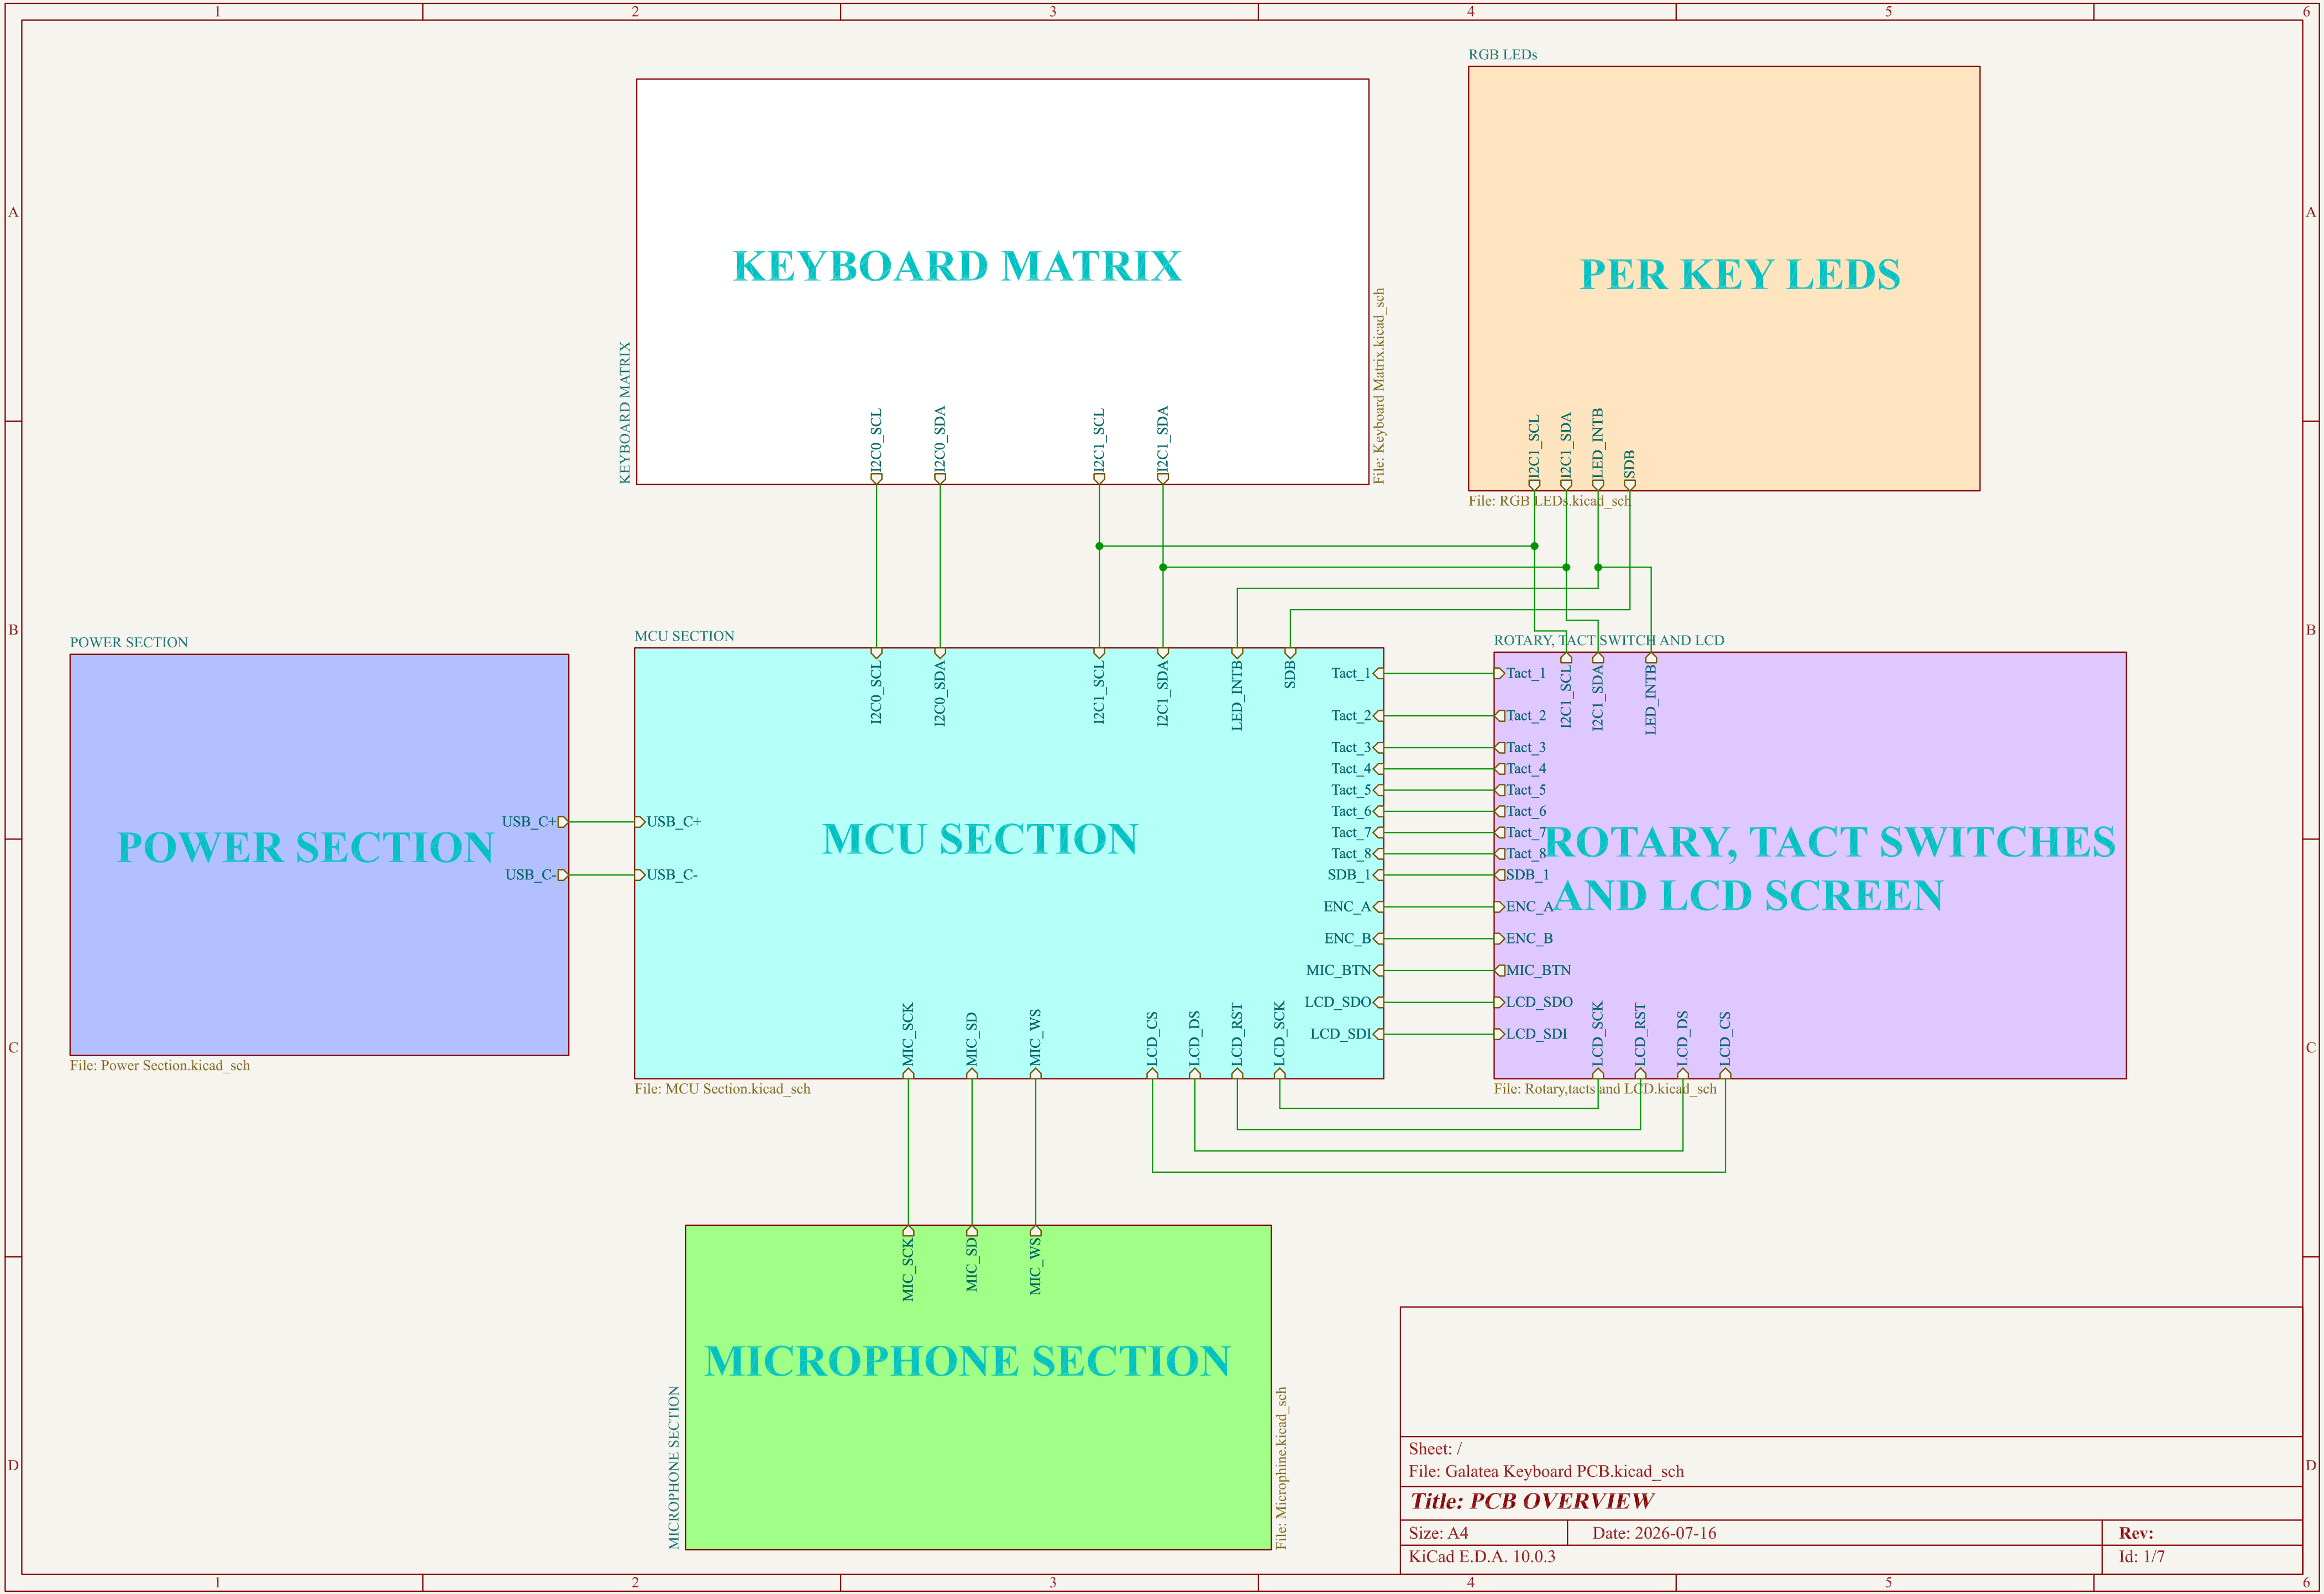


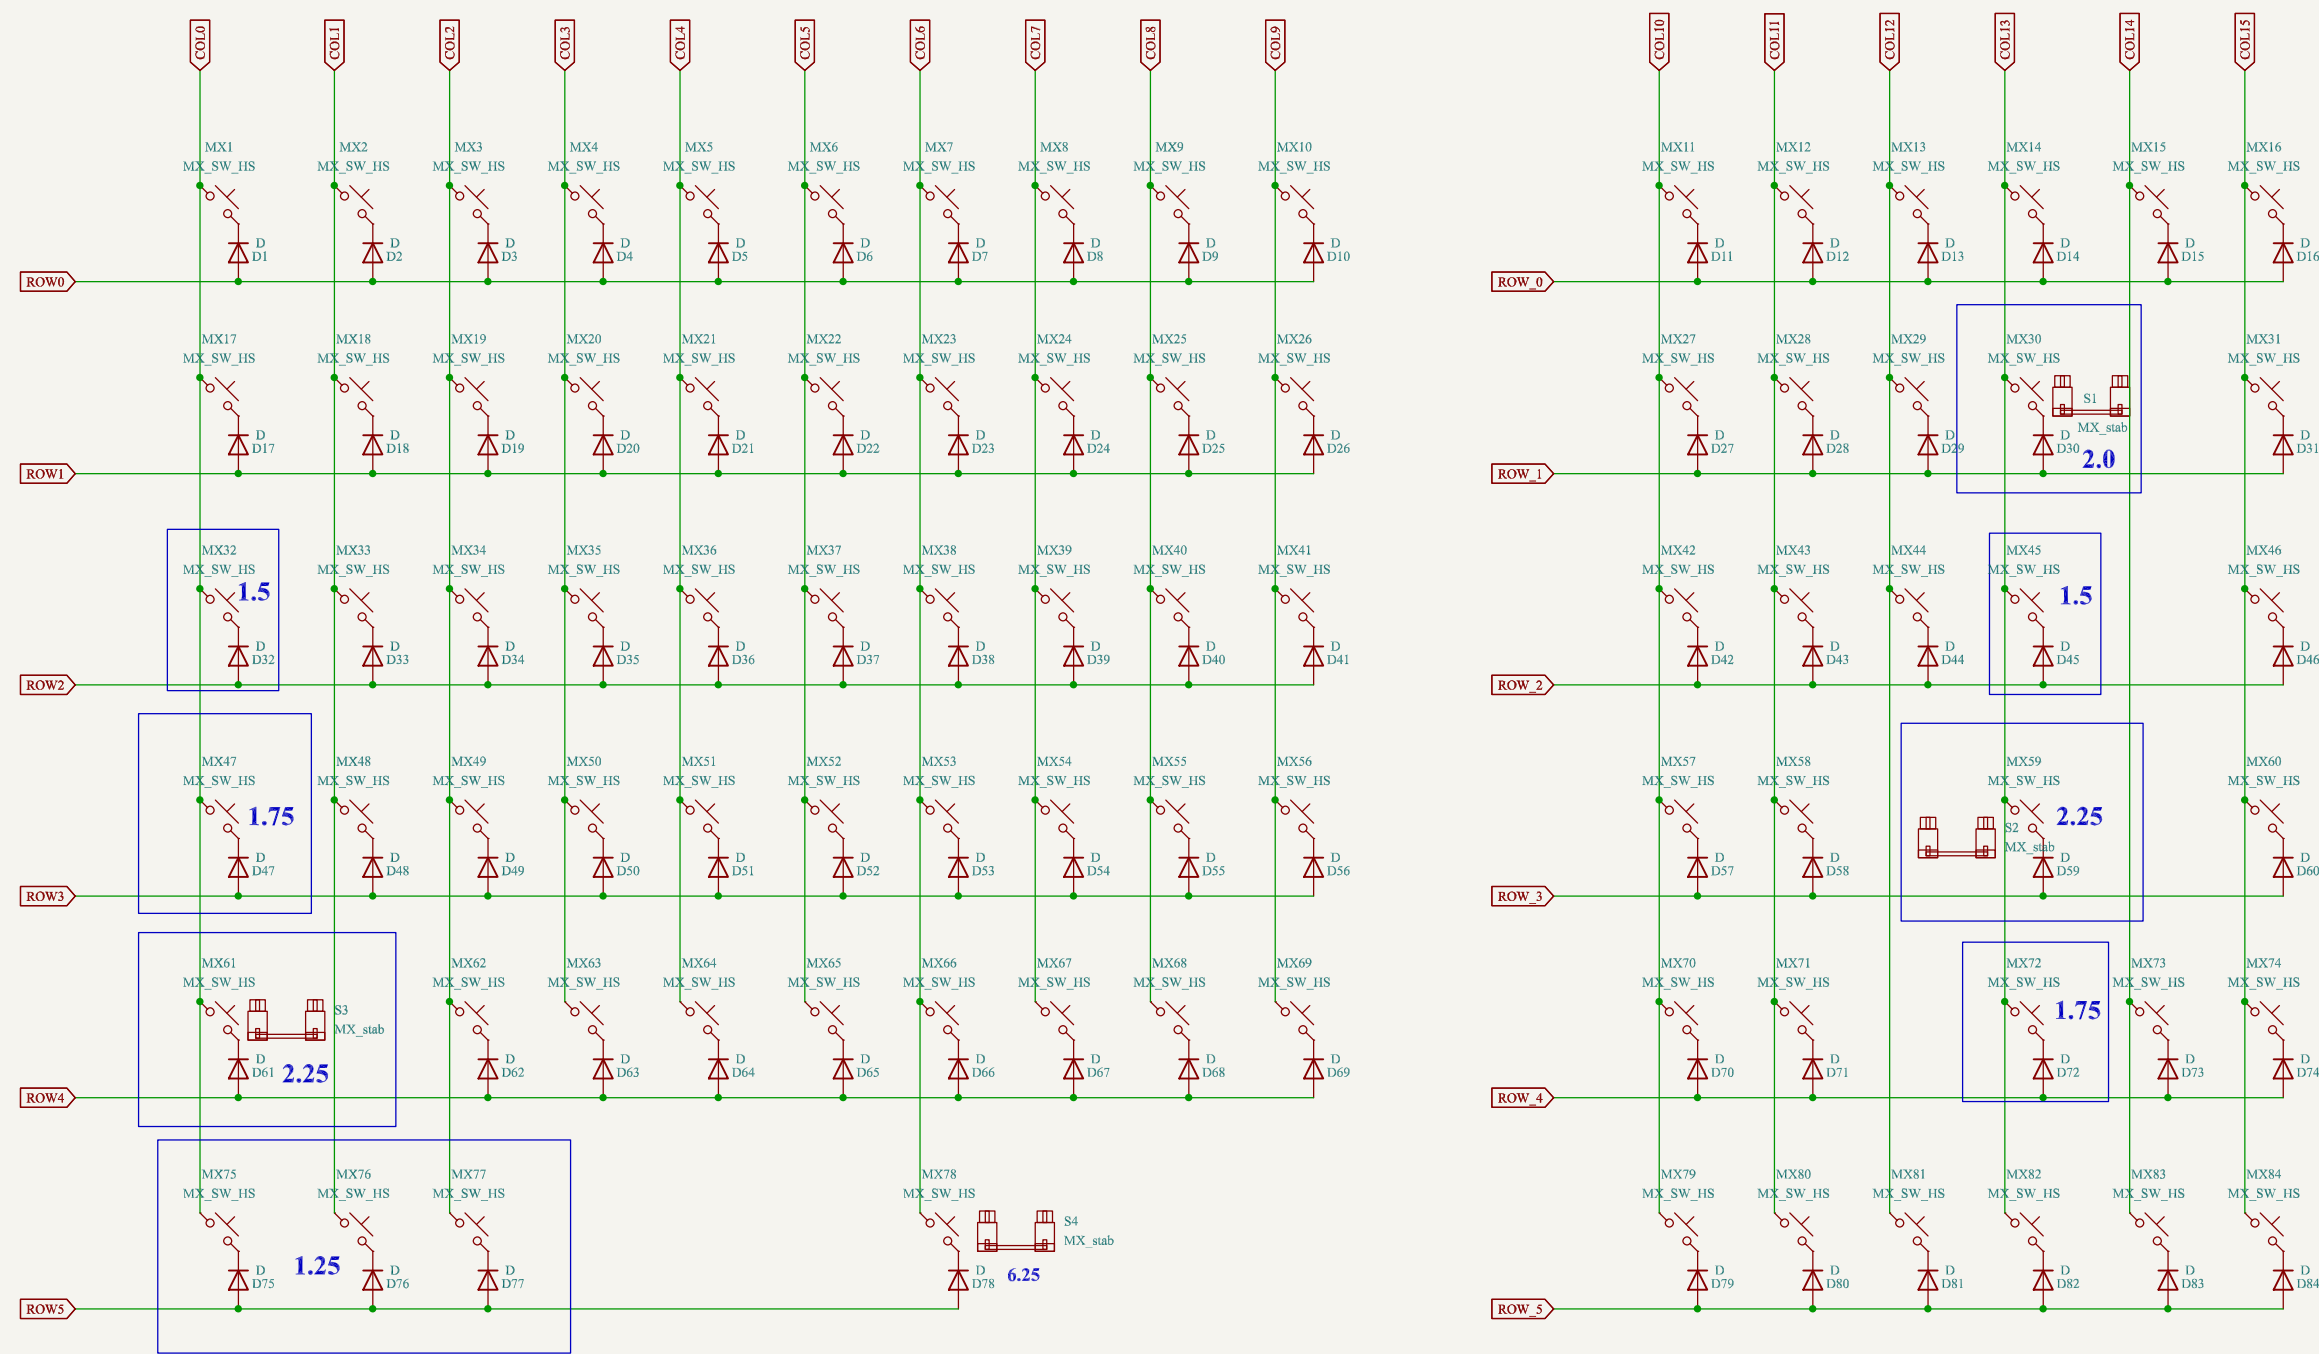




I²C-controlled keyboard scan IC


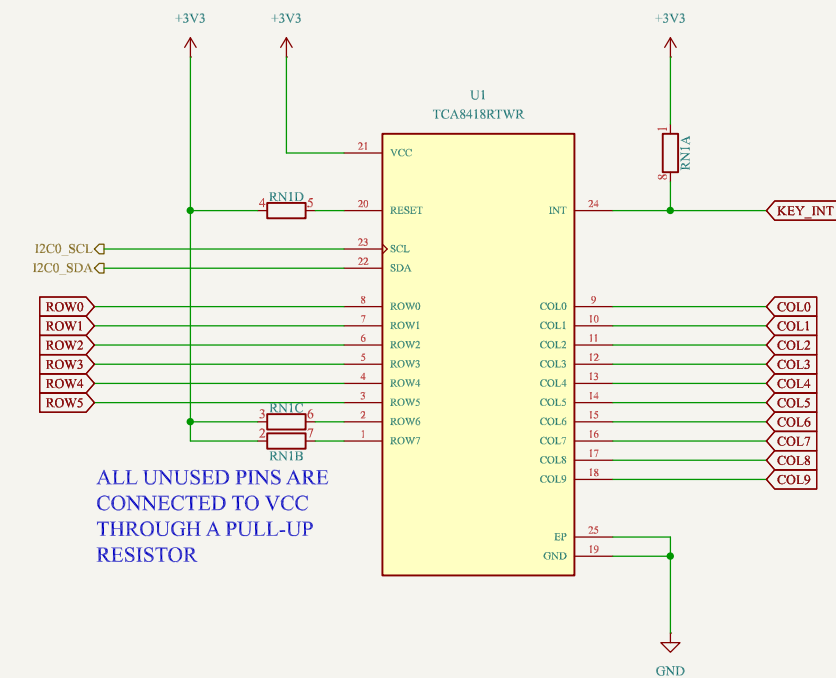


I²C-controlled keyboard scan IC

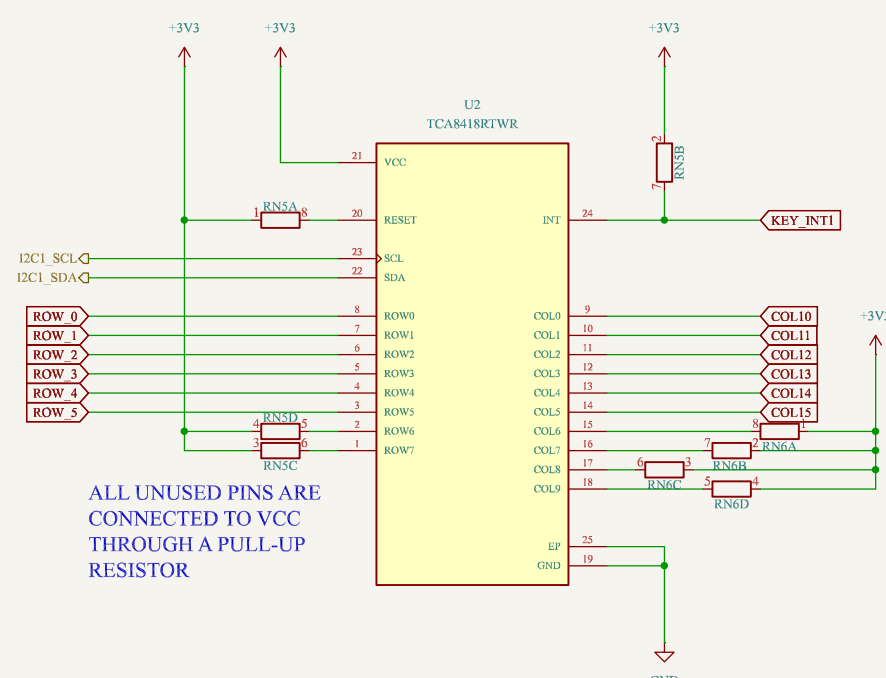


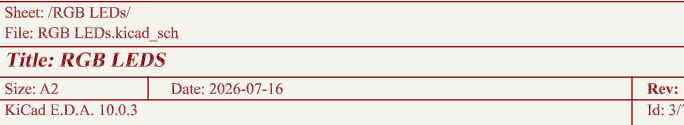

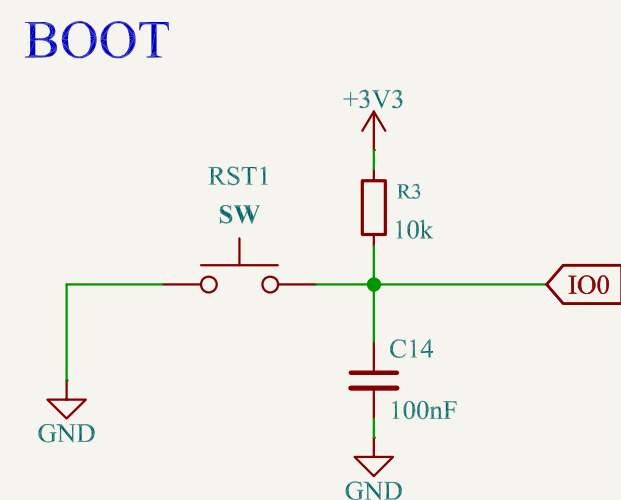
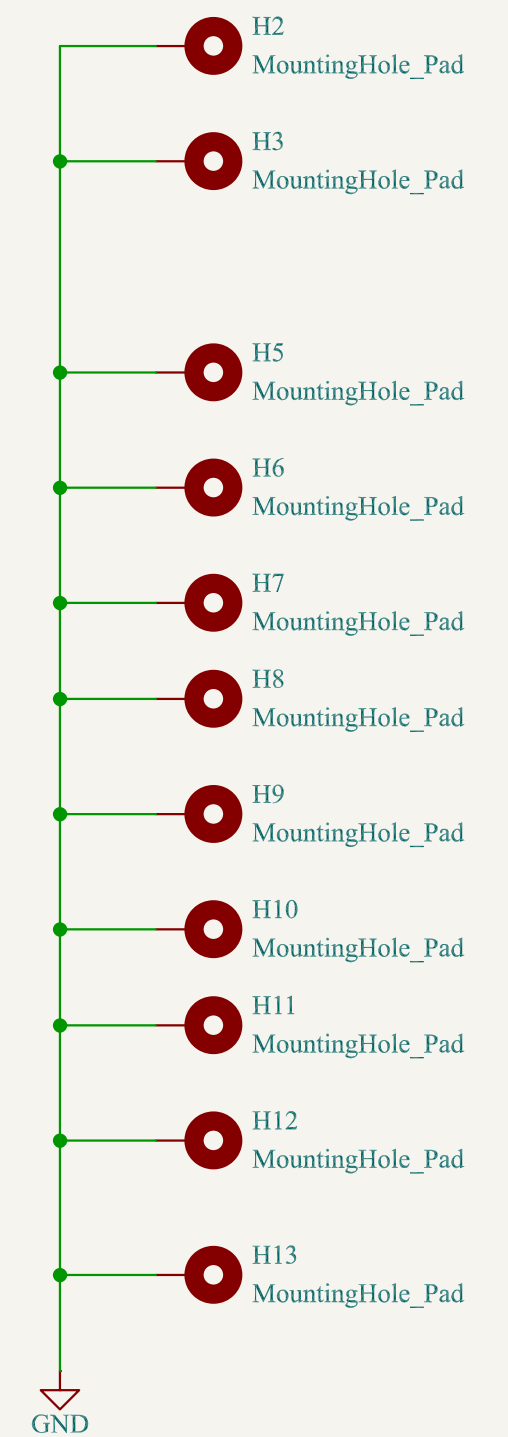


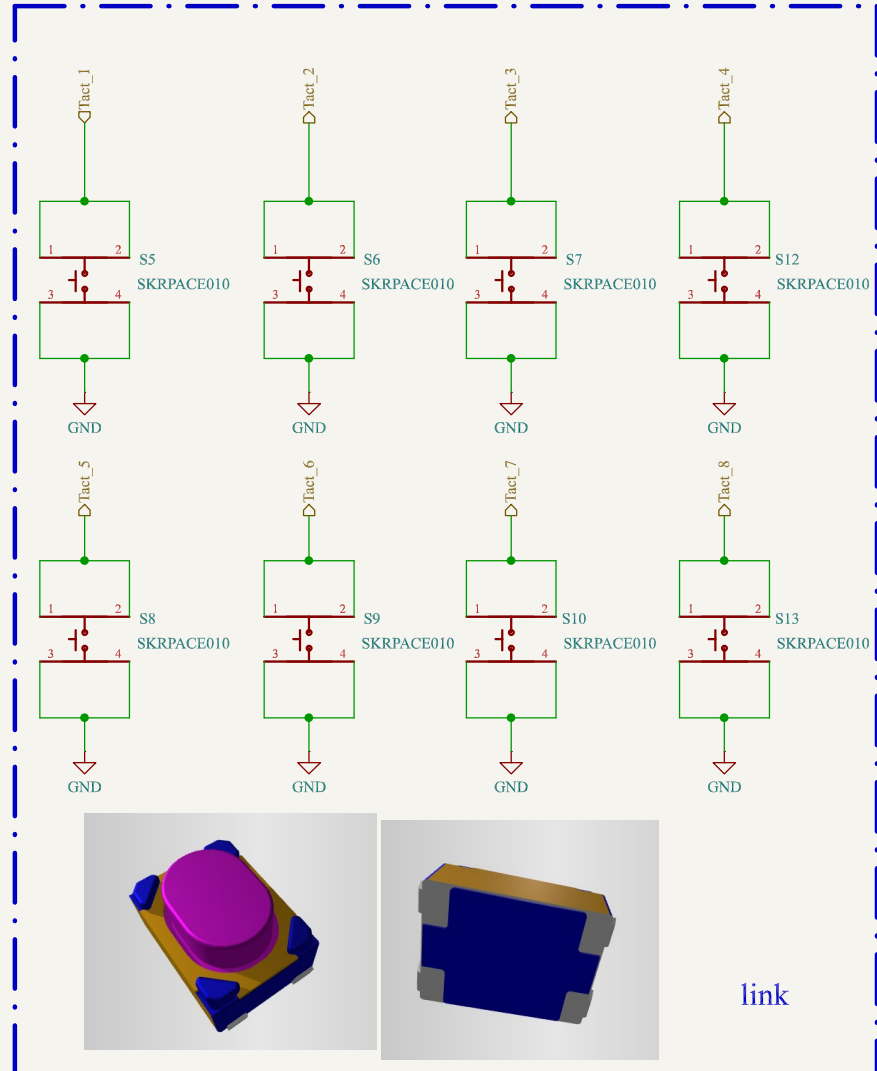

Pin Definition		
Number	Pin Label	Description
1	VCC	[V3.3V] power input
2	GND	Ground
3	CS	LCD chip select signal, low level enable
4	RESET	LCD reset signal, low level reset
5	DCRS	LCD register / data selection signal, high level: register, low level: data
6	SDI(MOSI)	SPI bus write data signal
7	SCK	SPI bus clock signal
8	LED	Backlight control, high level lighting, if not controlled, connect 2.2V always bright
9	SDO(MISO)	SPI bus read data signal, if you do not need to the read function, you can not connect it
(The following is the touch screen signal line wiring, if you do not need to touch function or the module itself does not have touch function, you can not connect them)		
10	T_CLK	Touch SPI bus clock signal
11	T_CS	Touch screen chip select signal, low level enable
12	T_DIN	Touch SPI bus input
13	T_DO	Touch SPI bus output
14	T_IRQ	Touch screen interrupt signal, low level when touch is detected

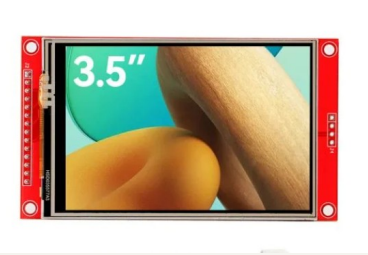

link

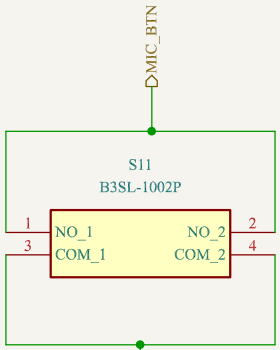

LINK

